




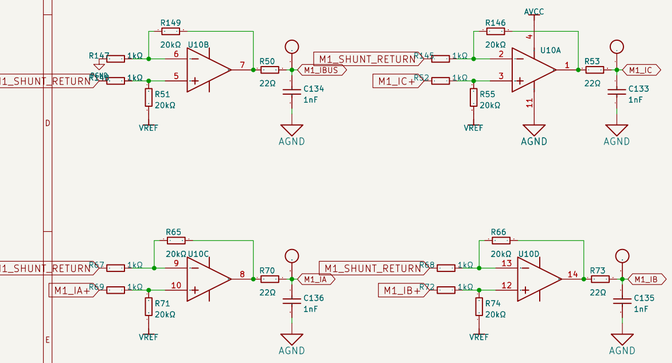


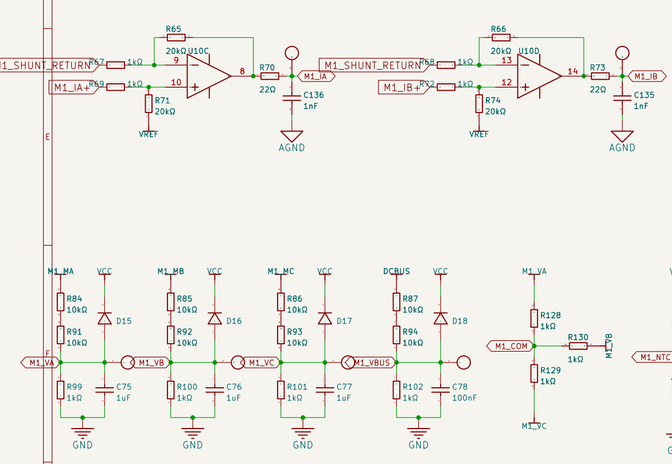

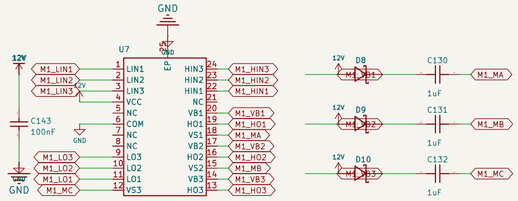

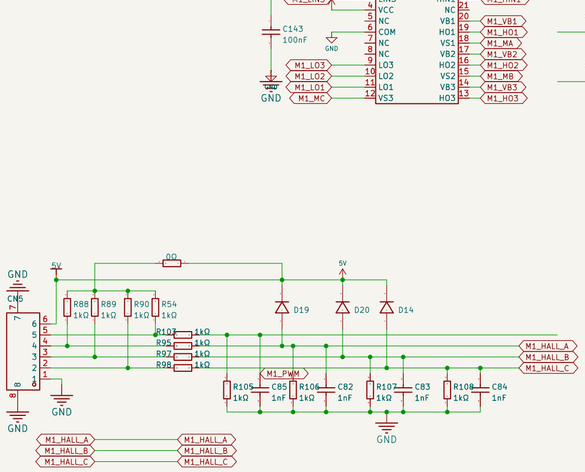

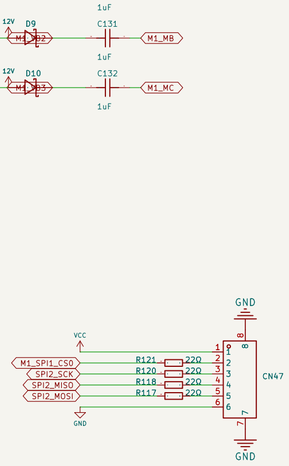

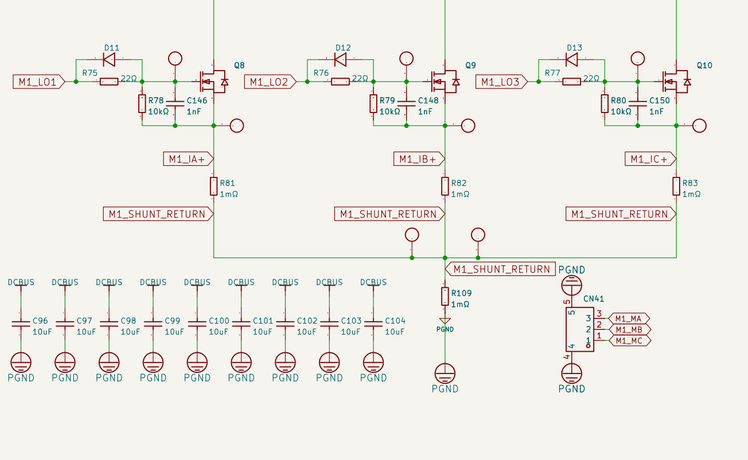



MOTOR 1: Independent gate drive, six MOSFETs, phase shunts and bus shunt.
All motor signals M1_*. Common DCBUS / 12V / 5V / VCC / AVCC / VREF.
PGND is common AFTER the dedicated bus shunt; phase-shunt return remains local.
Reference values and footprints require engineering review; no rating verification.

VA/VB/VC, COM, IBUS, NTC and auxiliary PWM are retained reference interfaces.
Only nets explicitly connected on MCU sheet are MCU functions.
FD6288Q has no dedicated EN pin; hardware gate-input pulldowns are provided.
BRKIN requires external fault generation; software must initialize PWM disabled.

Sheet: /FOC_M1/	
File: FOC_M1.kicad_sch	
Title:	
Size: A2	Date:
KiCad E.D.A. 10.0.6-87-gae6d8f40c4	Id: 4/6