Chapter 21

Network Layer: Address Mapping, Error Reporting, and Multicasting


21-1 ADDRESS MAPPING

The delivery of a packet to a host or a router requires two levels of addressing: logical and physical. We need to be able to map a logical address to its corresponding physical address and vice versa. This can be done by using either static or dynamic mapping.


Topics discussed in this section:

Mapping Logical to Physical Address Mapping Physical to Logical Address

Figure 21.1 ARP operation

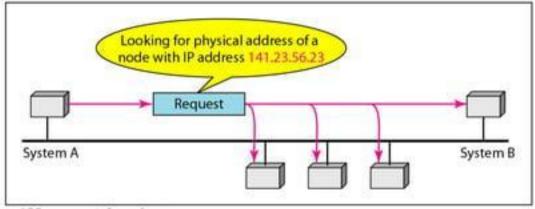

a. ARP request is broadcast

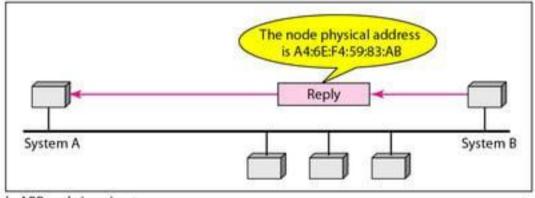

b. ARP reply is unicast

Figure 21.2 ARP packet

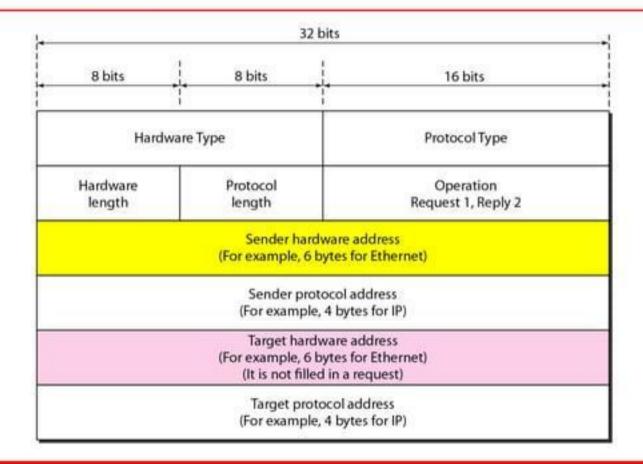


Figure 21.3 Encapsulation of ARP packet



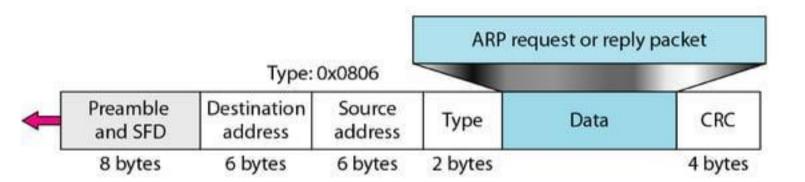



Figure 21.4 Four cases using ARP

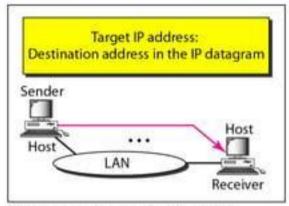


Case 1. A host has a packet to send to another host on the same network.

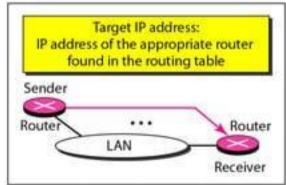

Case 3. A router receives a packet to be sent to a host on another network. It must first be delivered to the appropriate router.

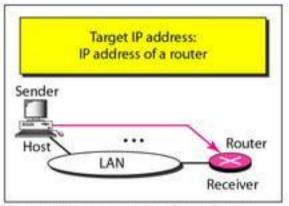

Case 2. A host wants to send a packet to another host on another network. It must first be delivered to a router.

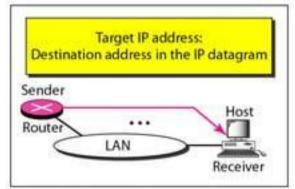

Case 4. A router receives a packet to be sent to a host on the same network.



An ARP request is broadcast; an ARP reply is unicast.

Example 21.1

A host with IP address 130.23.43.20 and physical address B2:34:55:10:22:10 has a packet to send to another host with IP address 130.23.43.25 and physical address A4:6E:F4:59:83:AB. The two hosts are on the same Ethernet network. Show the ARP request and reply packets encapsulated in Ethernet frames.

Solution

Figure 21.5 shows the ARP request and reply packets. Note that the ARP data field in this case is 28 bytes, and that the individual addresses do not fit in the 4-byte boundary. That is why we do not show the regular 4-byte boundaries for these addresses.

Figure 21.5 Example 21.1, an ARP request and reply

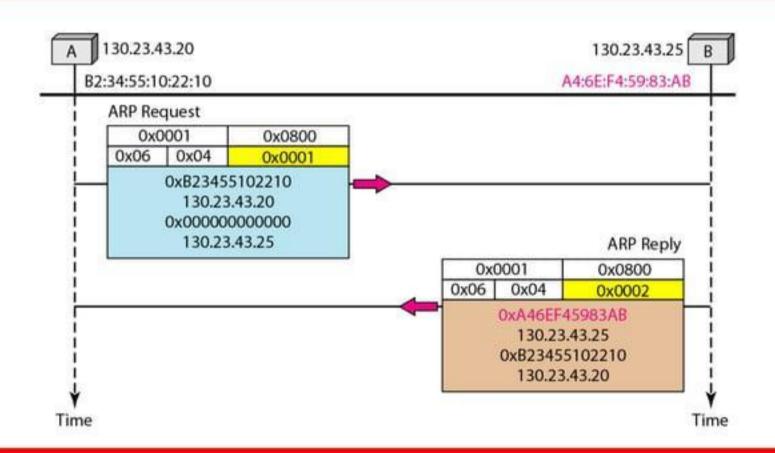


Figure 21.6 Proxy ARP



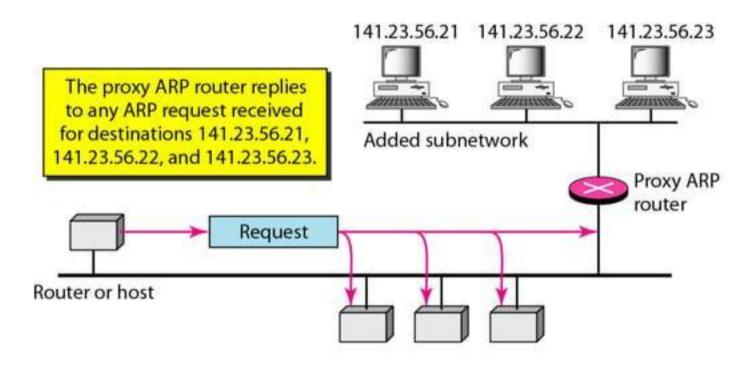


Figure 21.7 BOOTP client and server on the same and different networks

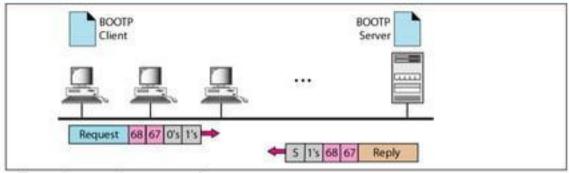

a. Client and server on the same network

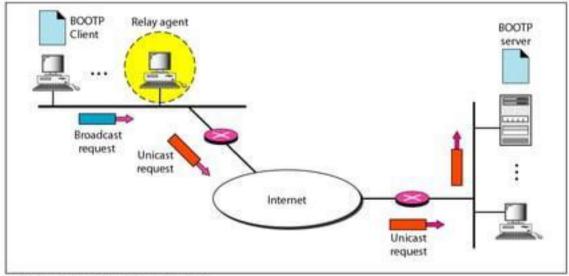

b. Client and server on different networks

Note

DHCP provides static and dynamic address allocation that can be manual or automatic.


21-2 ICMP

The IP protocol has no error-reporting or error-correcting mechanism. The IP protocol also lacks a mechanism for host and management queries. The Internet Control Message Protocol (ICMP) has been designed to compensate for the above two deficiencies. It is a companion to the IP protocol.

Topics discussed in this section:

Types of Messages
Message Format
Error Reporting and Query
Debugging Tools

Figure 21.8 General format of ICMP messages

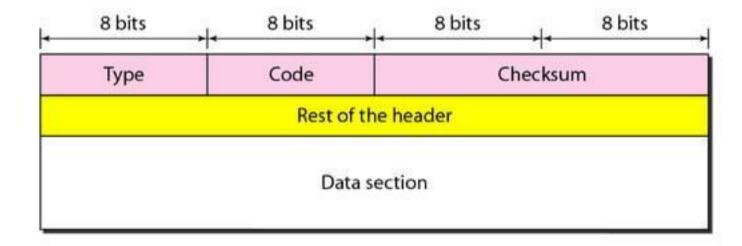




Note

ICMP always reports error messages to the original source.

Figure 21.9 Error-reporting messages

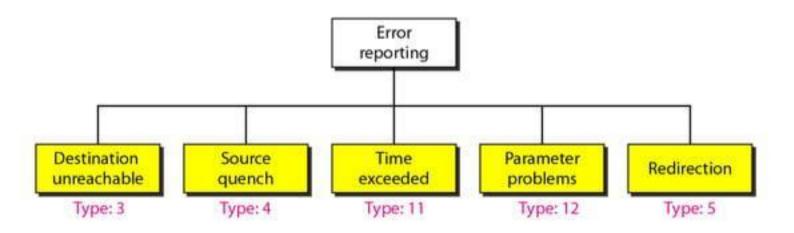



Important points about ICMP error messages:

- No ICMP error message will be generated in response to a datagram carrying an ICMP error message.
- No ICMP error message will be generated for a fragmented datagram that is not the first fragment.
- No ICMP error message will be generated for a datagram having a multicast address.
- No ICMP error message will be generated for a datagram having a special address such as 127.0.0.0 or 0.0.0.0.

Figure 21.10 Contents of data field for the error messages

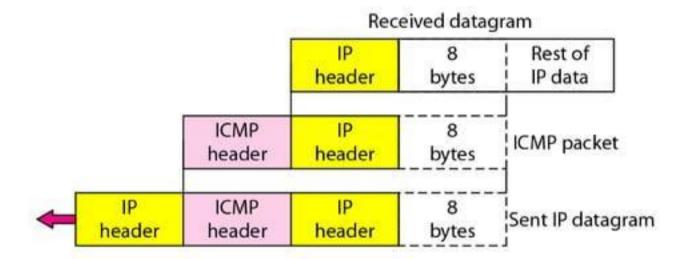


Figure 21.11 Redirection concept

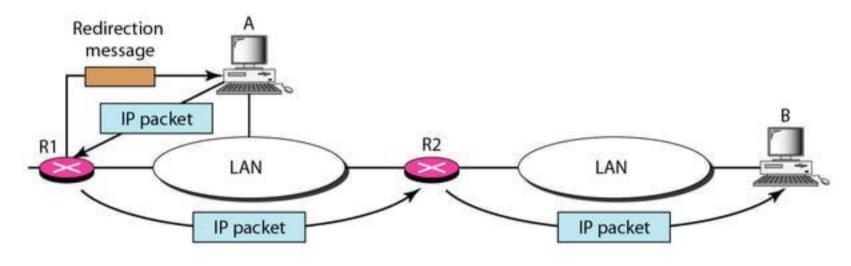


Figure 21.12 Query messages

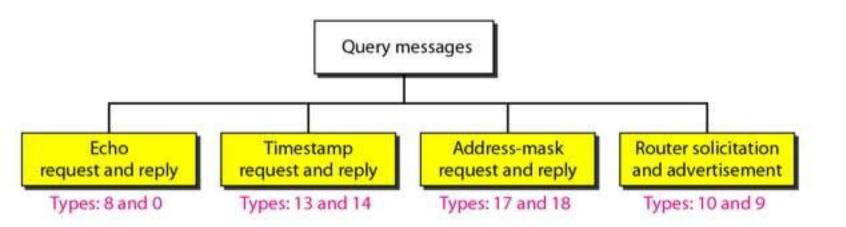


Figure 21.13 Encapsulation of ICMP query messages


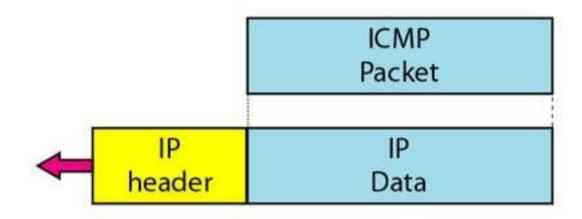




Figure 21.14 shows an example of checksum calculation for a simple echo-request message. We randomly chose the identifier to be 1 and the sequence number to be 9. The message is divided into 16-bit (2-byte) words. The words are added and the sum is complemented. Now the sender can put this value in the checksum field.

Figure 21.14 Example of checksum calculation

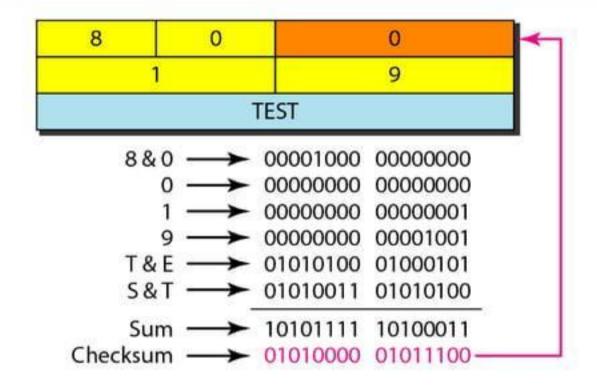


Example 21.3

We use the ping program to test the server fhda.edu. The result is shown on the next slide. The ping program sends messages with sequence numbers starting from 0. For each probe it gives us the RTT time. The TTL (time to live) field in the IP datagram that encapsulates an ICMP message has been set to 62. At the beginning, ping defines the number of data bytes as 56 and the total number of bytes as 84. It is obvious that if we add 8 bytes of ICMP header and 20 bytes of IP header to 56, the result is 84. However, note that in each probe ping defines the number of bytes as 64. This is the total number of bytes in the ICMP packet (56 + 8).

Example 21.3 (continued)

\$ ping fhda.edu		
PING fhda.edu (153.18.8.1) 56 (84) bytes of data.		
64 bytes from tiptoe.fhda.edu (153.18.8.1): icmp_seq=0	ttl=62	time=1.91 ms
64 bytes from tiptoe.fhda.edu (153.18.8.1): icmp_seq=1	ttl=62	time=2.04 ms
64 bytes from tiptoe.fhda.edu (153.18.8.1): icmp_seq=2	ttl=62	time=1.90 ms
64 bytes from tiptoe.fhda.edu (153.18.8.1): icmp_seq=3	ttl=62	time=1.97 ms
64 bytes from tiptoe.fhda.edu (153.18.8.1): icmp_seq=4	ttl=62	time=1.93 ms
64 bytes from tiptoe.fhda.edu (153.18.8.1): icmp_seq=5	ttl=62	time=2.00 ms
64 bytes from tiptoe.fhda.edu (153.18.8.1): icmp_seq=6	ttl=62	time=1.94 ms
64 bytes from tiptoe.fhda.edu (153.18.8.1): icmp_seq=7	ttl=62	time=1.94 ms
64 bytes from tiptoe.fhda.edu (153.18.8.1): icmp_seq=8	ttl=62	time=1.97 ms
64 bytes from tiptoe.fhda.edu (153.18.8.1): icmp_seq=9	ttl=62	time=1.89 ms
64 bytes from tiptoe.fhda.edu (153.18.8.1): icmp_seq=10	ttl=62	time=1.98 ms
fhda.edu ping statistics		
11 packets transmitted, 11 received, 0% packet loss, time of the rtt min/avg/max = 1.899/1.955/2.041 ms	10103ms	

Figure 21.15 The traceroute program operation

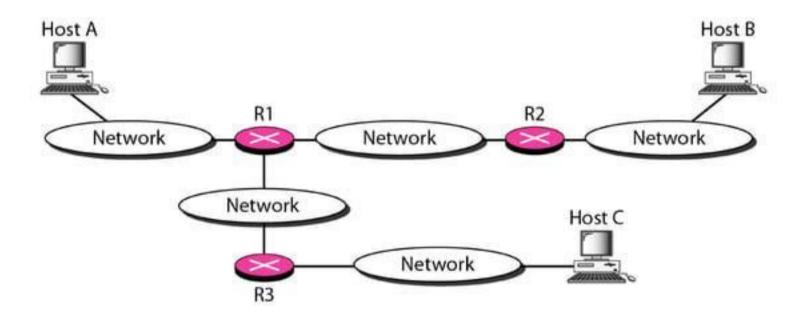

Example 21.4

We use the traceroute program to find the route from the computer voyager.deanza.edu to the server fhda.edu. The following shows the result:

\$ traceroute fhda.edu traceroute to fhda.edu (153.18.8.1), 30 hops max, 38 byte packets				
1 Dcore.fhda.edu	(153.18.31.254)	0.995 ms	0.899 ms	0.878 ms
2 Dbackup.fhda.edu	(153.18.251.4)	1.039 ms	1.064 ms	1.083 ms
3 tiptoe.fhda.edu	(153.18.8.1)	1.797 ms	1.642 ms	1.757 ms

The unnumbered line after the command shows that the destination is 153.18.8.1. The packet contains 38 bytes: 20 bytes of IP header, 8 bytes of UDP header, and 10 bytes of application data. The application data are used by traceroute to keep track of the packets.

Example 21.4 (continued)

The first line shows the first router visited. The router is named Dcore.fhda.edu with IP address 153.18.31.254. The first round-trip time was 0.995 ms, the second was 0.899 ms, and the third was 0.878 ms. The second line shows the second router visited. The router is named Dbackup.fhda.edu with IP address 153.18.251.4. The three round-trip times are also shown. The third line shows the destination host. We know that this is the destination host because there are no more lines. The destination host is the server fhda.edu, but it is named tiptoe, fhda.edu with the IP address 153.18.8.1. The three round-trip times are also shown.

Example 21.5

In this example, we trace a longer route, the route to xerox.com (see next slide). Here there are 17 hops between source and destination. Note that some round-trip times look unusual. It could be that a router was too busy to process the packet immediately.

Example 21.5 (continued)

\$ traceroute xerox.con	1			
traceroute to xerox.com	n (13.1.64.93), 30 hops	s max, 38 byte	packets	
1 Dcore.fhda.edu	(153.18.31.254)	0.622 ms	0.891 ms	0.875 ms
2 Ddmz.fhda.edu	(153.18.251.40)	2.132 ms	2.266 ms	2.094 ms
3 Cinic.fhda.edu	(153.18.253.126)	2.110 ms	2.145 ms	1.763 ms
4 cenic.net	(137.164.32.140)	3.069 ms	2.875 ms	2.930 ms
5 cenic.net	(137.164.22.31)	4.205 ms	4.870 ms	4.197 ms

14 snfc21.pbi.net	(151.164.191.49)	7.656 ms	7.129 ms	6.866 ms
15 sbcglobal.net	(151.164.243.58)	7.844 ms	7.545 ms	7.353 ms
16 pacbell.net	(209.232.138.114)	9.857 ms	9.535 ms	9.603 ms
17 209.233.48.223	(209.233.48.223)	10.634 ms	10.771 ms	10.592 ms
18 alpha.Xerox.COM	(13.1.64.93)	11.172 ms	11.048 ms	10.922 ms

21-3 IGMP

The IP protocol can be involved in two types of communication: unicasting and multicasting. The Internet Group Management Protocol (IGMP) is one of the necessary, but not sufficient, protocols that is involved in multicasting. IGMP is a companion to the IP protocol.

Topics discussed in this section:

Group Management
IGMP Messages and IGMP Operation
Encapsulation
Netstat Utility

Figure 21.16 IGMP message types

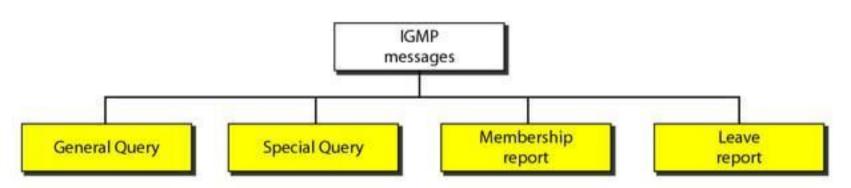


Figure 21.17 IGMP message format


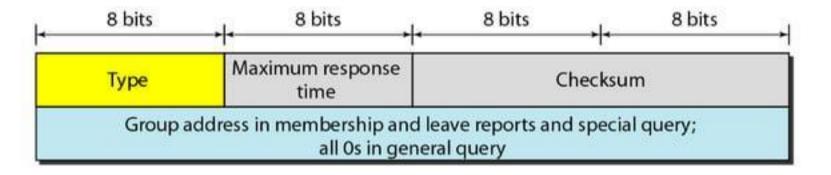


Table 21.1 IGMP type field

Туре	Value		
General or special query	0x11	or	00010001
Membership report	0x16	or	00010110
Leave report	0x17	or	00010111

Figure 21.18 IGMP operation

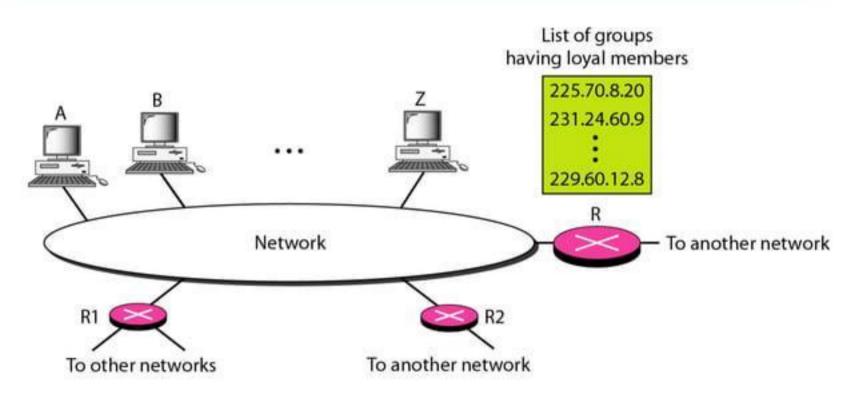

Note

In IGMP, a membership report is sent twice, one after the other.



Note

The general query message does not define a particular group.

Imagine there are three hosts in a network, as shown in Figure 21.19. A query message was received at time 0; the random delay time (in tenths of seconds) for each group is shown next to the group address. Show the sequence of report messages.

Solution

The events occur in this sequence:

a. Time 12: The timer for 228.42.0.0 in host A expires, and a membership report is sent, which is received by the router and every host including host B which cancels its timer for 228.42.0.0.

Example 21.6 (continued)

- b. Time 30: The timer for 225.14.0.0 in host A expires, and a membership report is sent which is received by the router and every host including host C which cancels its timer for 225.14.0.0.
- c. Time 50: The timer for 238.71.0.0 in host B expires, and a membership report is sent, which is received by the router and every host.
- d. Time 70: The timer for 230.43.0.0 in host C expires, and a membership report is sent, which is received by the router and every host including host A which cancels its timer for 230.43.0.0.

Figure 21.19 Example 21.6


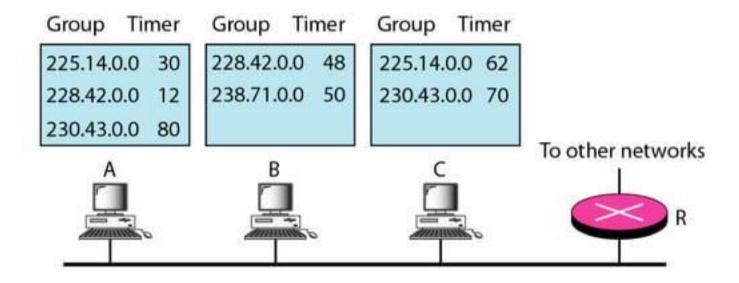


Figure 21.20 Encapsulation of IGMP packet



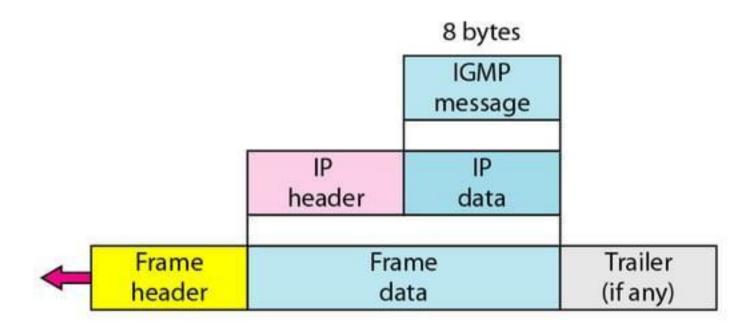


The IP packet that carries an IGMP packet has a value of 1 in its TTL field.

Table 21.2 Destination IP addresses

Туре	IP Destination Address	
Query	224.0.0.1 All systems on this subnet	
Membership report	The multicast address of the group	
Leave report	224.0.0.2 All routers on this subnet	

Figure 21.21 Mapping class D to Ethernet physical address

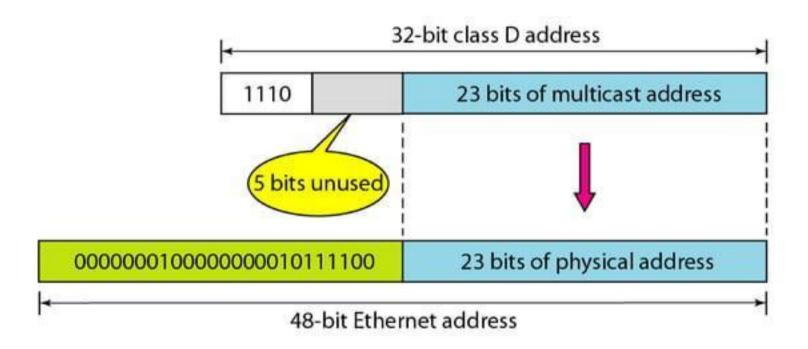



Note

An Ethernet multicast physical address is in the range

01:00:5E:00:00:00 to 01:00:5E:7F:FF:FF.

Change the multicast IP address 230.43.14.7 to an Ethernet multicast physical address.

Solution

We can do this in two steps:

a. We write the rightmost 23 bits of the IP address in hexadecimal. This can be done by changing the rightmost 3 bytes to hexadecimal and then subtracting 8 from the leftmost digit if it is greater than or equal to 8. In our example, the result is 2B:0E:07.

Example 21.7 (continued)

b. We add the result of part a to the starting Ethernet multicast address, which is 01:00:5E:00:00:00. The result is

01:00:5E:2B:0E:07

Change the multicast IP address 238.212.24.9 to an Ethernet multicast address.

Solution

- a. The rightmost 3 bytes in hexadecimal is D4:18:09. We need to subtract 8 from the leftmost digit, resulting in 54:18:09.
- b. We add the result of part a to the Ethernet multicast starting address. The result is

01:00:5E:54:18:09

Figure 21.22 Tunneling

Multicast IP datagram



Unicast IP datagram

We use netstat (see next slide) with three options: -n, -r, and -a. The -n option gives the numeric versions of IP addresses, the -r option gives the routing table, and the -a option gives all addresses (unicast and multicast). Note that we show only the fields relative to our discussion. "Gateway" defines the router, "Iface" defines the interface.

Note that the multicast address is shown in color. Any packet with a multicast address from 224.0.0.0 to 239.255.255.255 is masked and delivered to the Ethernet interface.

Example 21.9 (continued)

\$ netstat -nra Kernel IP routing table						
Destination	Gateway	Mask	Flags	Iface		
153.18.16.0	0.0.0.0	255.255.240.0	U	eth0		
169.254.0.0	0.0.0.0	255.255.0.0	U	eth0		
127.0.0.0	0.0.0.0	255.0.0.0	U	lo		
224.0.0.0	0.0.0.0	224.0.0.0	U	eth0		
0.0.0.0	153.18.31.254	0.0.0.0	UG	eth0		

21-4 ICMPv6

We discussed IPv6 in Chapter 20. Another protocol that has been modified in version 6 of the TCP/IP protocol suite is ICMP (ICMPv6). This new version follows the same strategy and purposes of version 4.

Topics discussed in this section:

Error Reporting Query

Figure 21.23 Comparison of network layers in version 4 and version 6

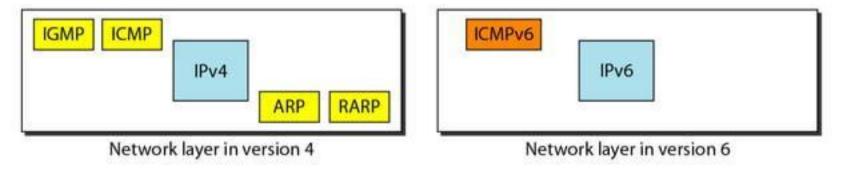


Table 21.3 Comparison of error-reporting messages in ICMPv4 and ICMPv6

Type of Message	Version 4	Version 6
Destination unreachable	Yes	Yes
Source quench	Yes	No
Packet too big	No	Yes
Time exceeded	Yes	Yes
Parameter problem	Yes	Yes
Redirection	Yes	Yes

Table 21.4 Comparison of query messages in ICMPv4 and ICMPv6

Type of Message	Version 4	Version 6
Echo request and reply	Yes	Yes
Timestamp request and reply	Yes	No
Address-mask request and reply	Yes	No
Router solicitation and advertisement	Yes	Yes
Neighbor solicitation and advertisement	ARP	Yes
Group membership	IGMP	Yes