


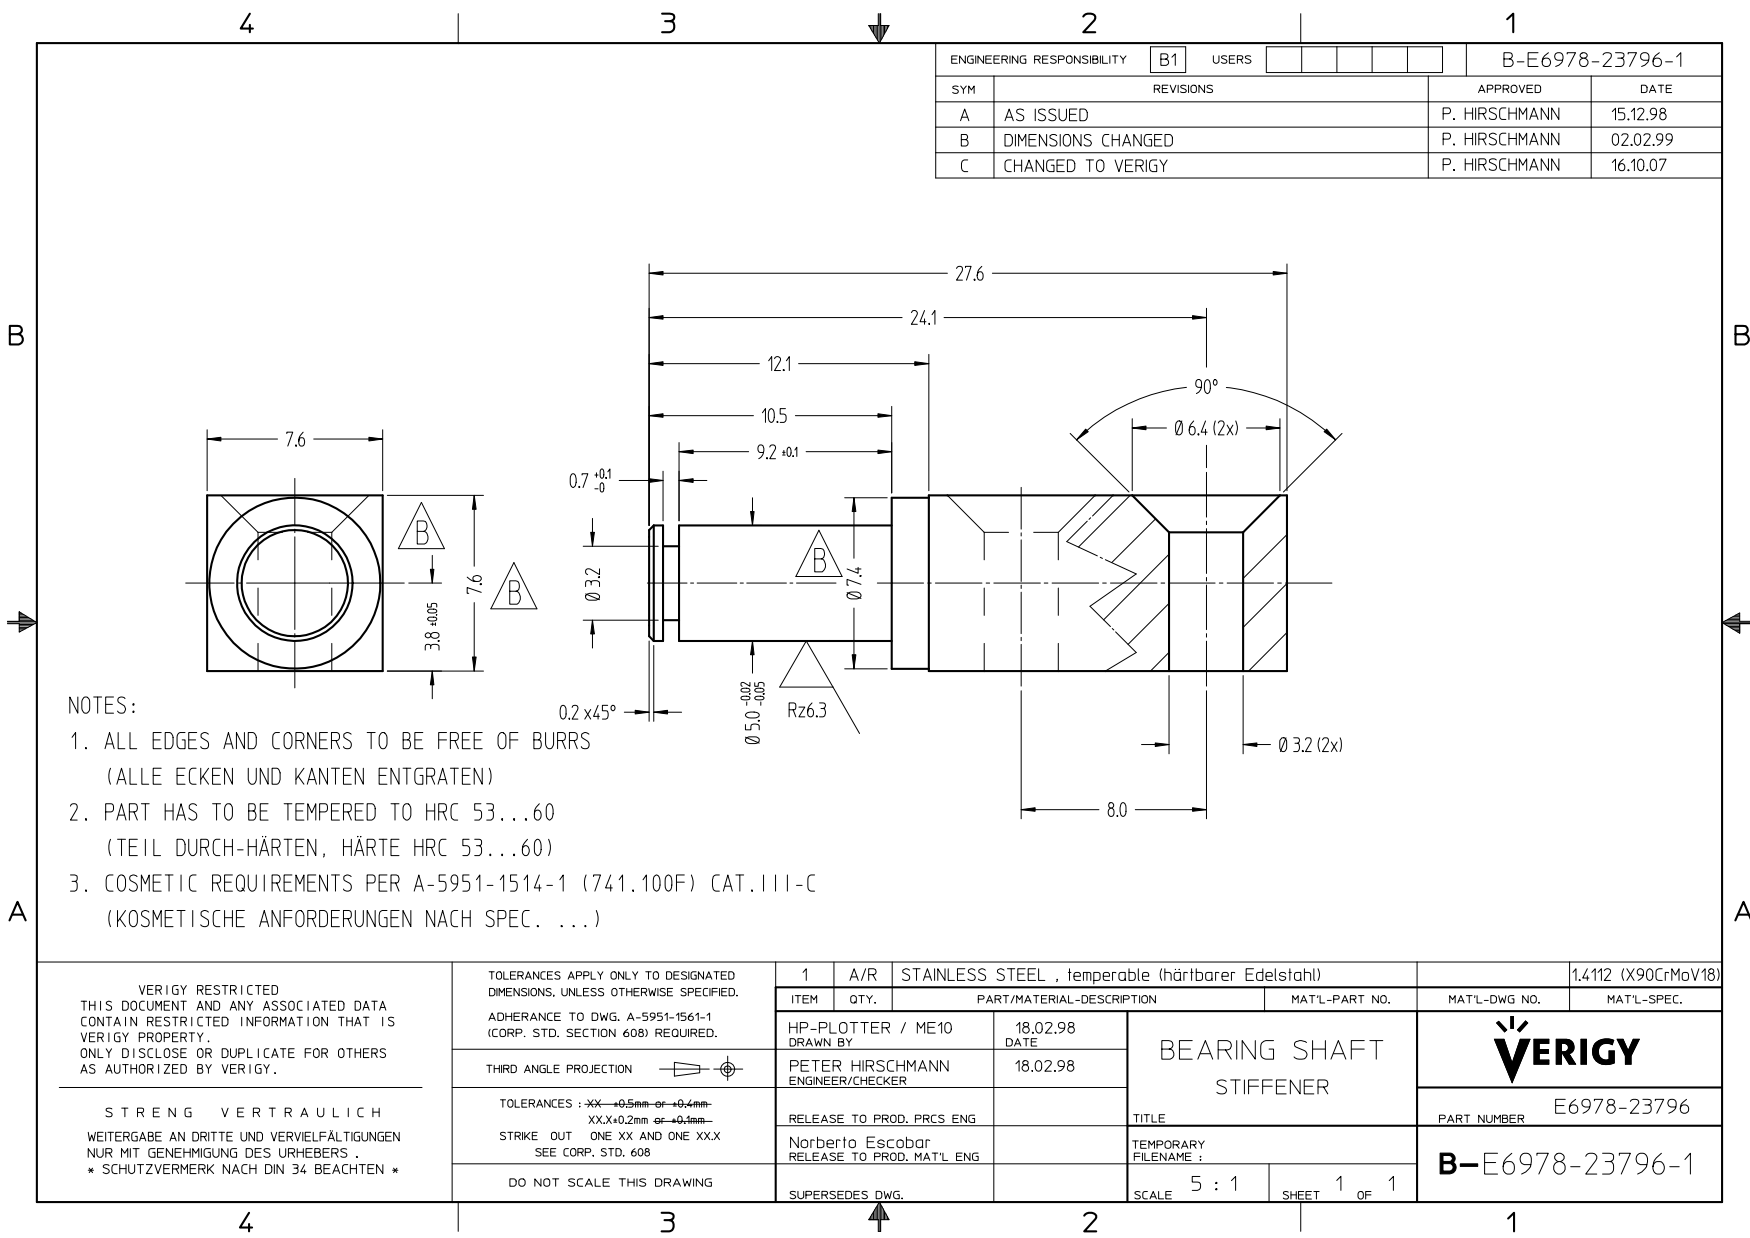

NOTES:

1. ALL EDGES AND CORNERS TO BE FREE OF BURRS
(ALLE ECKEN UND KANTEN ENTGRATEN)
2. PART HAS TO BE TEMPERED TO HRC 53...60
(TEIL DURCH-HÄRTEN, HÄRTE HRC 53...60)
3. COSMETIC REQUIREMENTS PER A-5951-1514-1 (741.100F) CAT.III-C
(KOSMETISCHE ANFORDERUNGEN NACH SPEC. ...)

VERIGY RESTRICTED
THIS DOCUMENT AND ANY ASSOCIATED DATA
CONTAIN RESTRICTED INFORMATION THAT IS
VERIGY PROPERTY.
ONLY DISCLOSE OR DUPLICATE FOR OTHERS
AS AUTHORIZED BY VERIGY.

STRENG VERTRAULICH
WEITERGABE AN DRITTE UND VERVIELFÄLTIGUNGEN
NUR MIT GENEHMIGUNG DES URHEBERS .
* SCHUTZVERMERK NACH DIN 34 BEACHTEN *

TOLERANCES APPLY ONLY TO DESIGNATED
DIMENSIONS, UNLESS OTHERWISE SPECIFIED.
ADHERANCE TO DWG. A-5951-1561-1
(CORP. STD. SECTION 608) REQUIRED.

THIRD ANGLE PROJECTION

TOLERANCES : XX $\pm 0.5mm$ or $\pm 0.4mm$
XX.X $\pm 0.2mm$ or $\pm 0.1mm$
STRIKE OUT ONE XX AND ONE XX.X
SEE CORP. STD. 608

DO NOT SCALE THIS DRAWING

1	A/R	STAINLESS STEEL , temperable (härtbarer Edelstahl)			1.4112 (X90CrMoV18)
ITEM	QTY.	PART/MATERIAL-DESCRIPTION		MAT'L-PART NO.	MAT'L-SPEC.
HP-PLOTTER / ME10 DRAWN BY	18.02.98 DATE	BEARING SHAFT STIFFENER			
PETER HIRSCHMANN ENGINEER/CHECKER	18.02.98				
RELEASE TO PROD. PRCS ENG		TITLE		PART NUMBER E6978-23796	
Norberto Escobar RELEASE TO PROD. MAT'L ENG		TEMPORARY FILENAME :		B-E6978-23796-1	
SUPERSEDES DWG.		SCALE 5 : 1	SHEET 1 OF 1		