
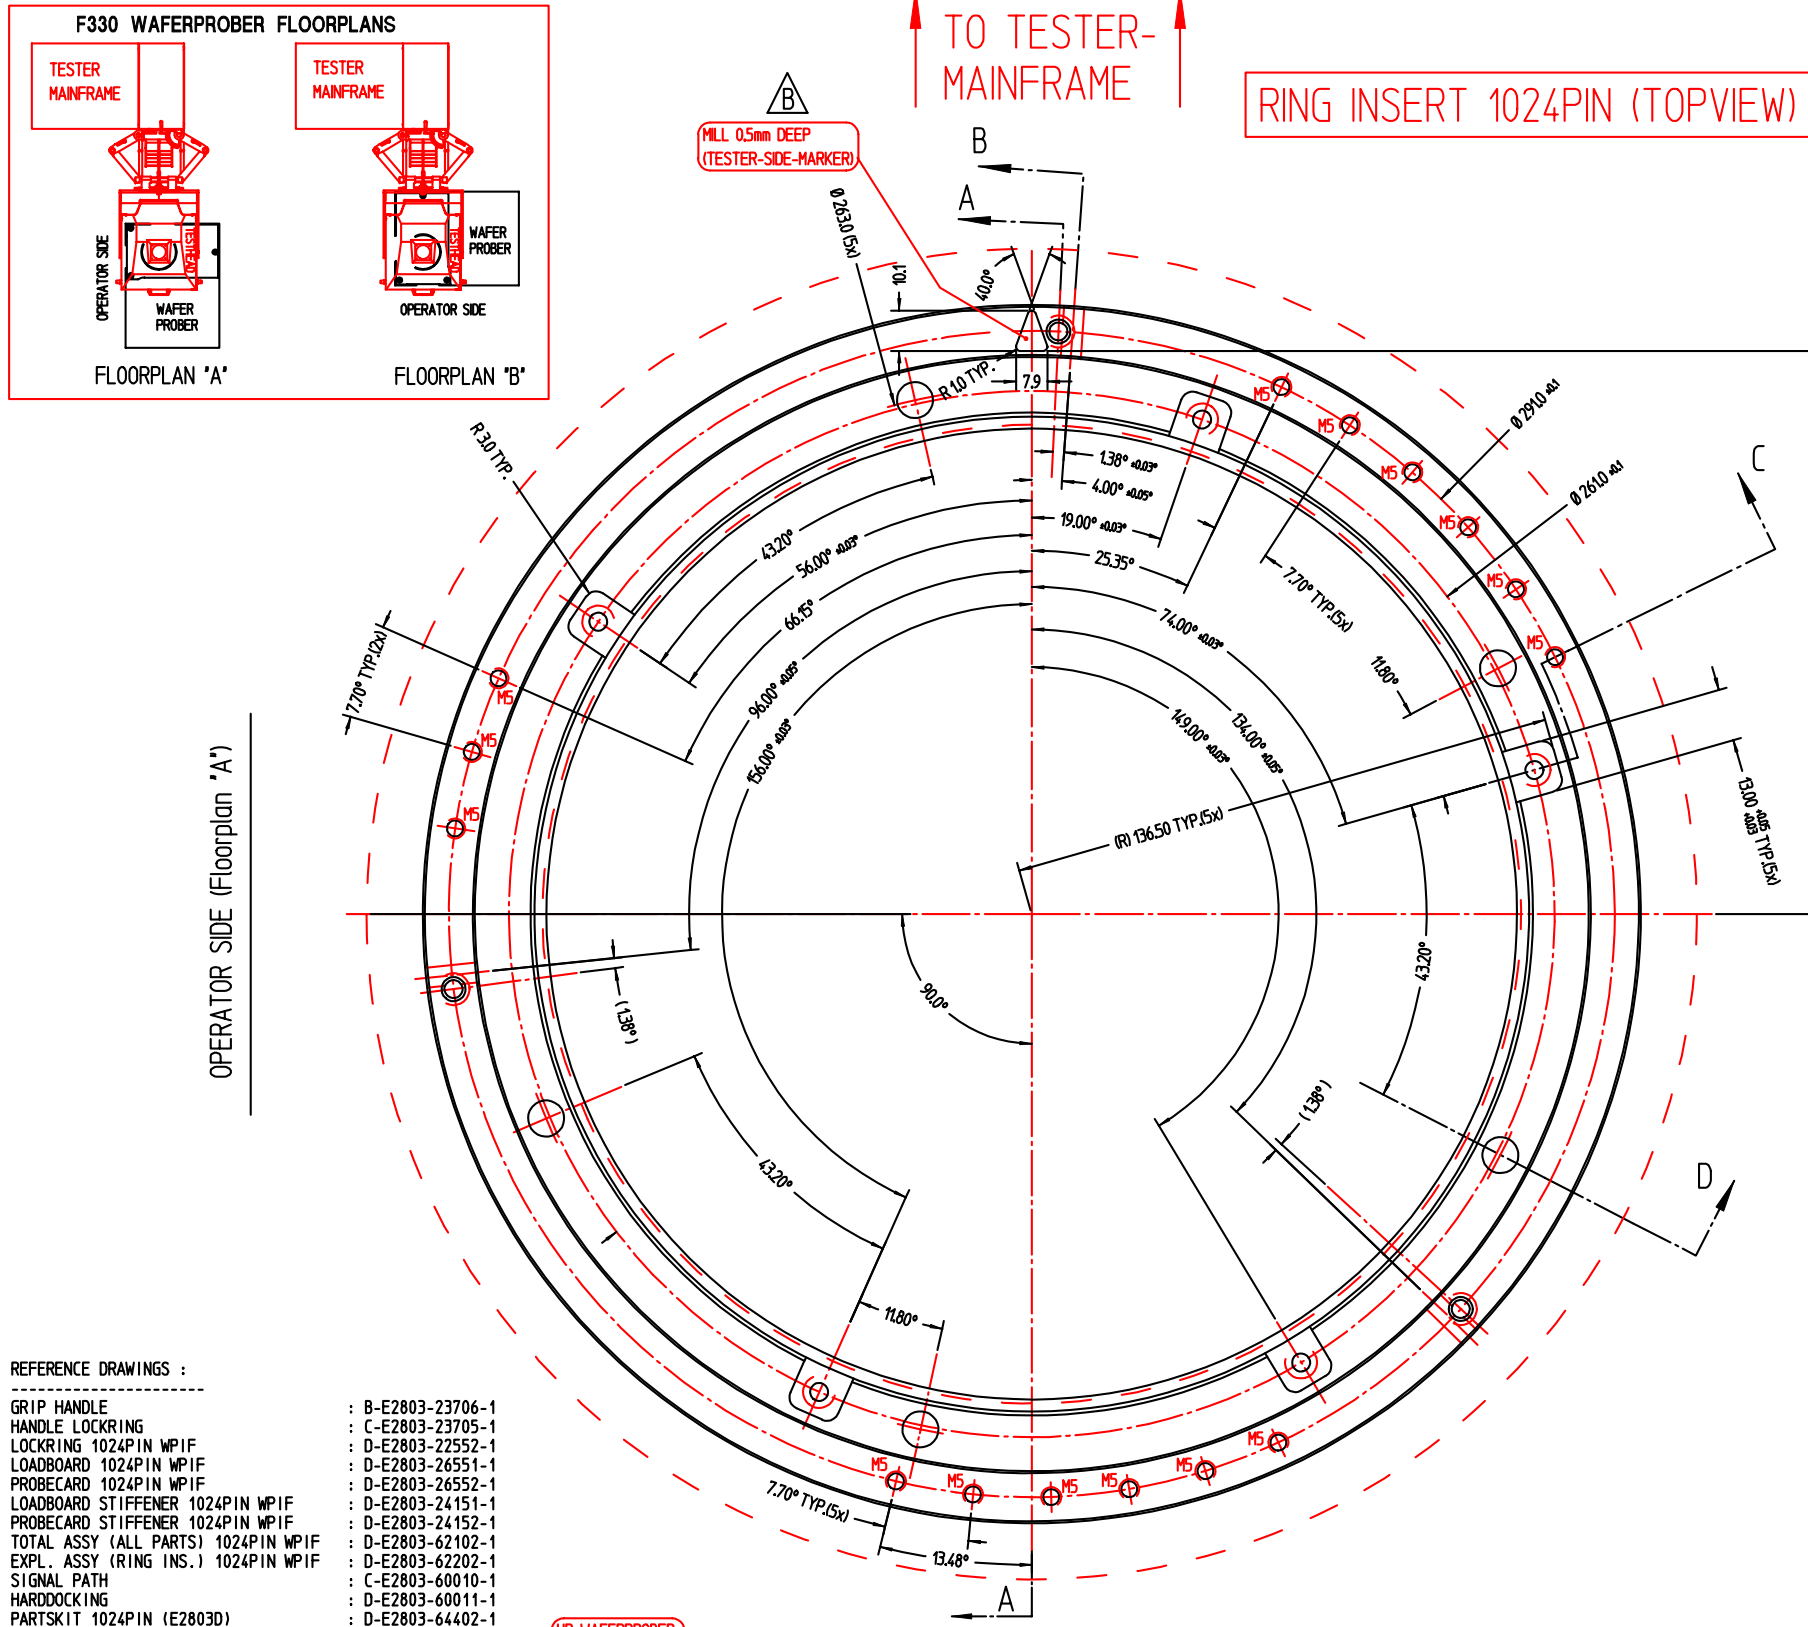


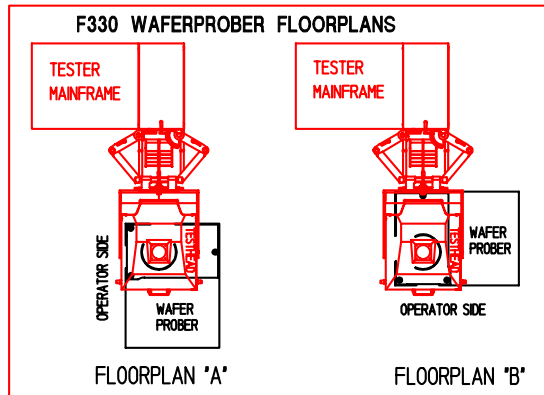

ENGINEERING RESPONSIBILITY		X	USERS	D-E2803-22560-1	
SYN	REVISIONS			APPROVED	DATE
A	AS ISSUED			P. HIRSCHMANN	21.04.94
B	TESTER-SIDE-MARKER ADDED			P. HIRSCHMANN	21.06.94
C	Update to Verigy			Jochen Zaiser	09.03.2006

- NOTES:
- INTERNAL SHAPE OF RING-INSERT TO BE MACHINED WITH SHOWN DIMENSIONS
 - OUTSIDE SHAPE OF RING-INSERT TO BE DESIGNED FOR EACH SPECIFIC PROBER BASE PLATE (RING CARRIER)
 - PROBER SUPPORT PLANE AND PROBEBOARD SUPPORT PLANE HAVE TO BE MILLED IN SAME FIXTURE ($\pm 0.05\text{mm}$ parallelity)
 - ALL EDGES AND CORNERS TO BE FREE OF BURRS
 - PART HAS TO BE ANODIZED BLACK
 - FOR LOCKING PARTS, BEARINGS AND SCREWS USE HP-PARTSKIT 1024PIN (E2803D)
 - POSITION OF THETA DRIVE CAM DEPENDS ON FLOORPLAN/OPERATOR-POSITION !!!
 - ANGLE TOLERANCE $\pm 0.1^\circ$ UNLESS OTHERWISE SPECIFIED

VERIGY RESTRICTED
THIS DOCUMENT AND ANY ASSOCIATED DATA
CONTAIN RESTRICTED INFORMATION THAT IS
VERIGY PROPERTY.
ONLY DISCLOSE OR DUPLICATE FOR OTHERS
AS AUTHORIZED BY VERIGY.

STRENG VERTRAULICH
WEITERGABE AN DREITE UND Vervielfältigungen
NUR MIT GENEHMIGUNG DES URHEBERS
= SCHUTZVERMERK NACH DIN 34 BEACHTEN =

TOLERANCES APPLY ONLY TO DESIGNATED
DIMENSIONS, UNLESS OTHERWISE SPECIFIED.

ADHERANCE TO DWG. A-5951-561-1
(CORP. STD. SECTION 608) REQUIRED.

THIRD ANGLE PROJECTION

TOLERANCES ± 0.1 - ± 0.05 - ± 0.025 -
 ± 0.015 - ± 0.01 - ± 0.005 -
STRIKE OUT ONE 10X AND ONE 10X
SEE CORP. STD. 608

DO NOT SCALE THIS DRAWING

1	A/R	Aluminium, anodizable (eloxierbar)			
ITEM	QTY.	PART/MATERIAL-DESCRIPTION	MATL-PART NO.	MATL-DWG NO.	AlCuMg2 F40_50
HP-PLOTTER / ME10 DRAWN BY	21.04.94 DATE				
PETER HIRSCHMANN ENGINEER/CHECKER	21.04.94				
RELEASE TO PROD. PRCS ENG					
RELEASE TO PROD. MATL ENG					
SUPERSEDES DWG.					
		RING INSERT 1024PIN INTERNAL DIMENSIONS		VERIGY	
		TITLE		PART NUMBER E2803-22560	
		TEMPORARY FILENAME		D-E2803-22560-1	
		SCALE 1:1		SHEET 1 OF 1	