


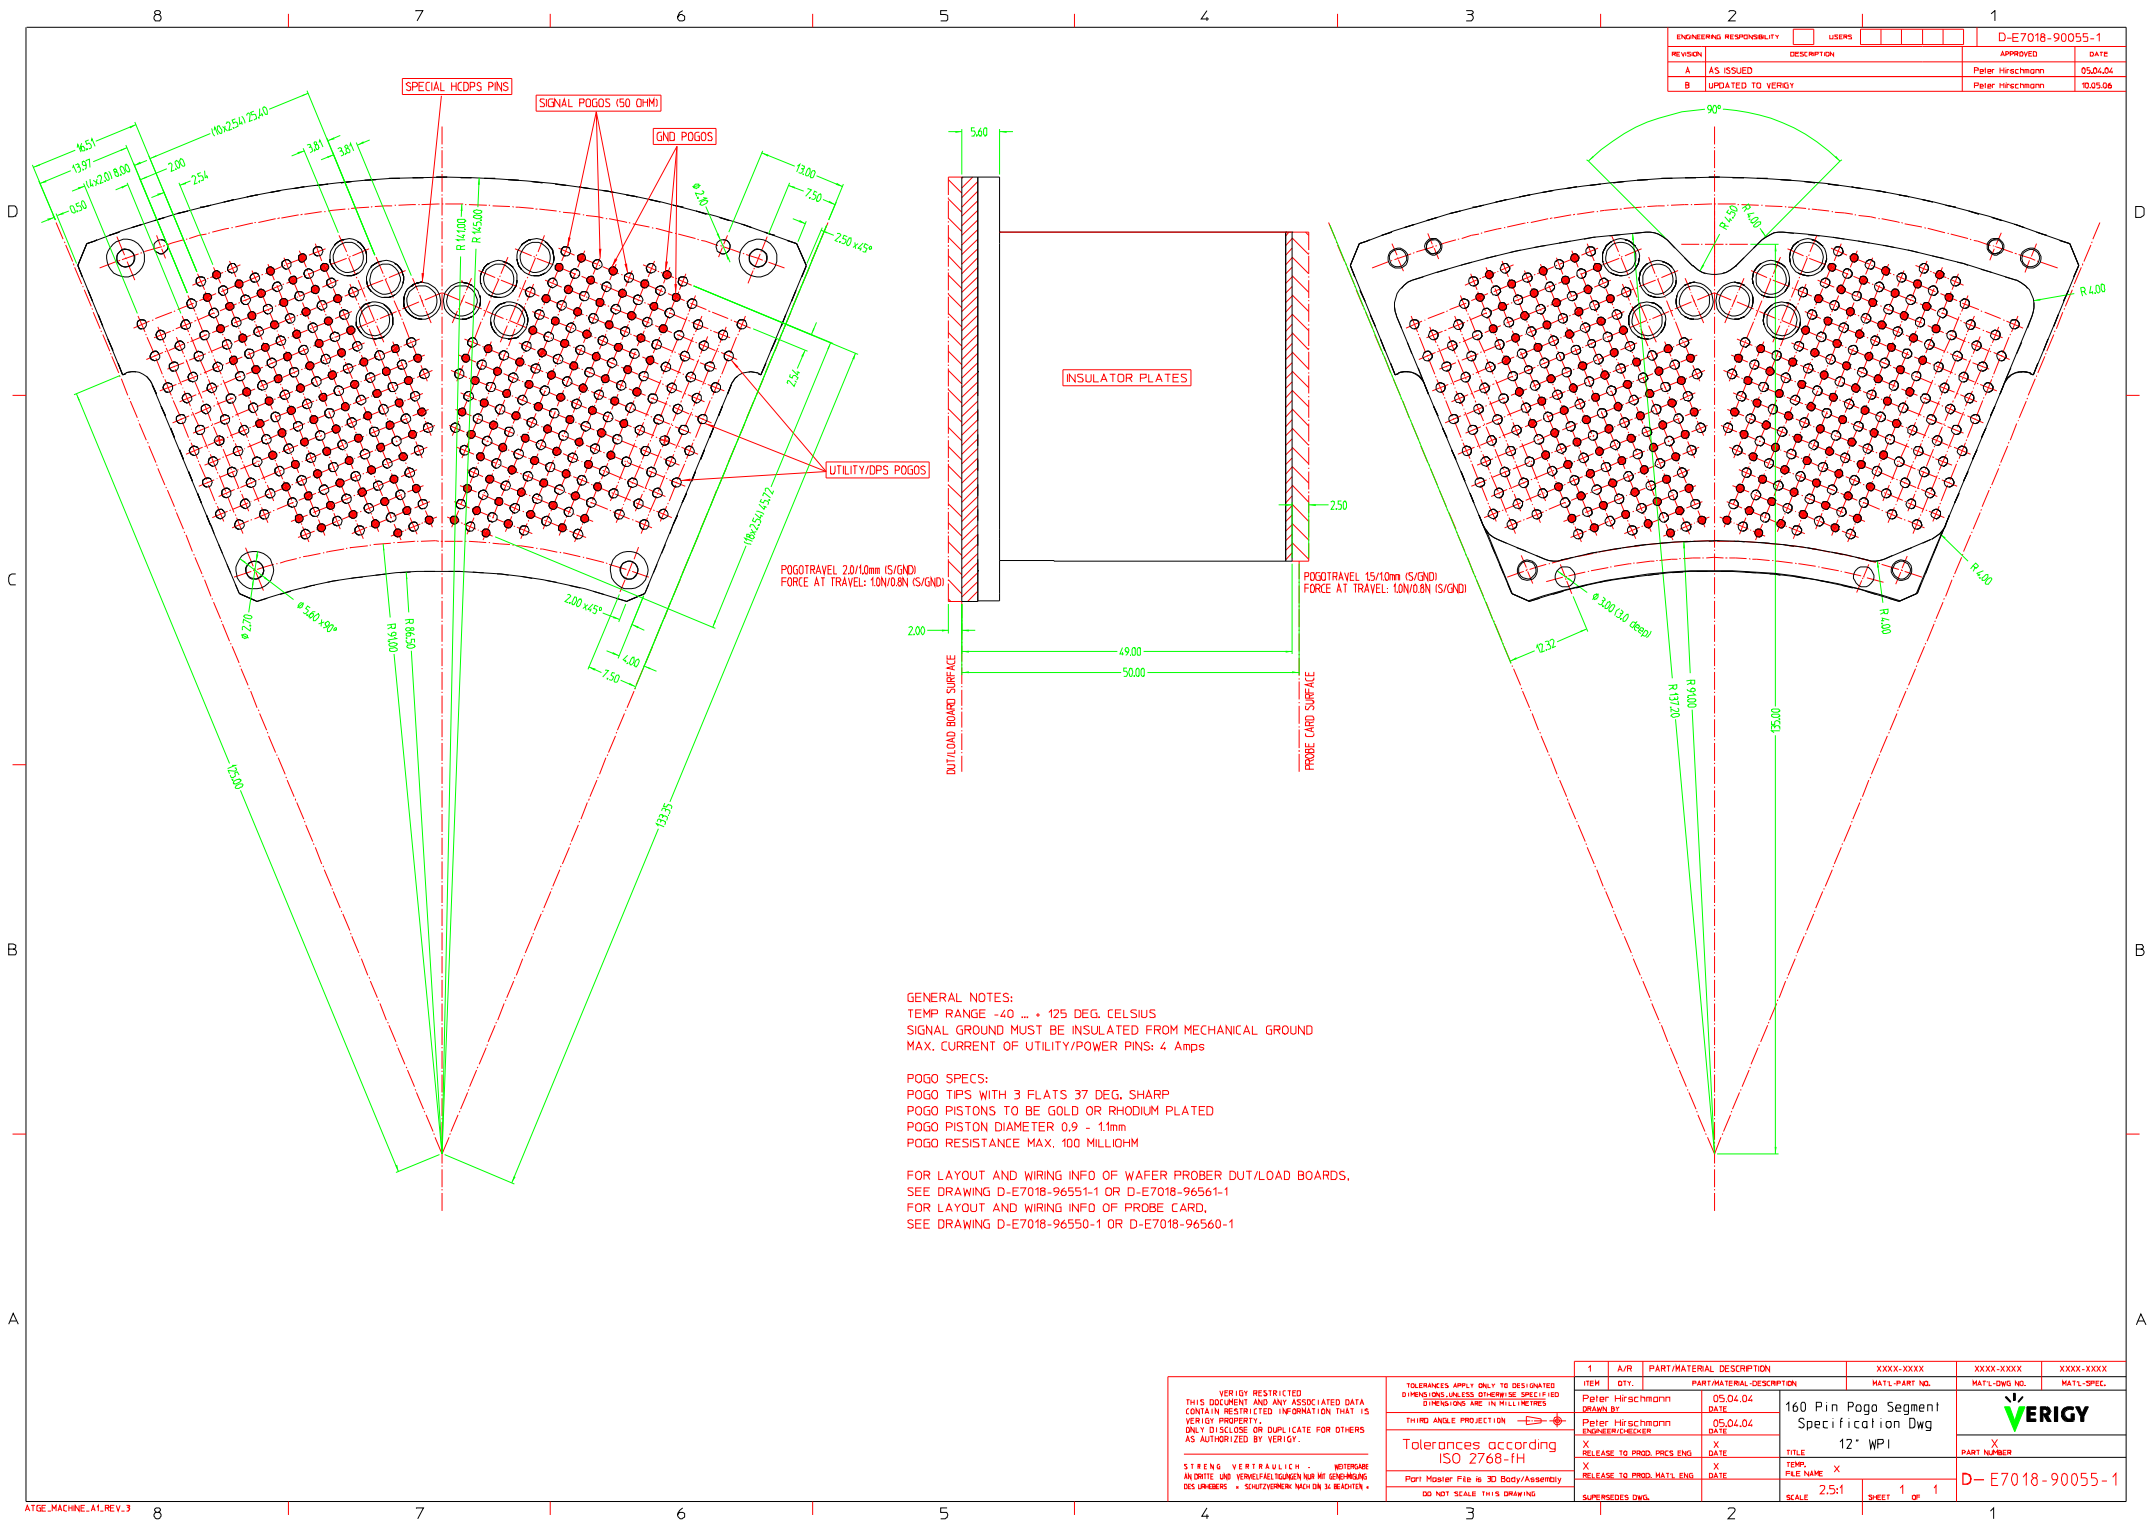

ENGINEERING RESPONSIBILITY		USERS		D-E7018-90055-1	
REVISION	DESCRIPTION	APPROVED	DATE		
A	AS ISSUED	Peter Hirschmann	05.04.04		
B	UPDATED TO VERIGY	Peter Hirschmann	10.05.06		

GENERAL NOTES:
TEMP RANGE -40 ... + 125 DEG. CELSIUS
SIGNAL GROUND MUST BE INSULATED FROM MECHANICAL GROUND
MAX. CURRENT OF UTILITY/POWER PINS: 4 Amps

POGO SPECS:
POGO TIPS WITH 3 FLATS 37 DEG. SHARP
POGO PISTONS TO BE GOLD OR RHODIUM PLATED
POGO PISTON DIAMETER 0.9 - 1.1mm
POGO RESISTANCE MAX. 100 MILLIOHM

FOR LAYOUT AND WIRING INFO OF WAFER PROBER DUT/LOAD BOARDS,
SEE DRAWING D-E7018-96551-1 OR D-E7018-96561-1
FOR LAYOUT AND WIRING INFO OF PROBE CARD,
SEE DRAWING D-E7018-96550-1 OR D-E7018-96560-1

VERIGY RESTRICTED
THIS DOCUMENT AND ANY ASSOCIATED DATA
CONTAIN RESTRICTED INFORMATION THAT IS
VERIGY PROPERTY.
ONLY DISCLOSE OR DUPLICATE FOR OTHERS
AS AUTHORIZED BY VERIGY.

STRENGE VERTRAULICH - NOTIGKEIT
AN DERTE UND VERGEBER ZUGELASSEN NUR MIT EINGEMANG
DES UNTERS - SCHUTZVEREIN NACH UN 34 BEACHTEN -

TOLERANCES APPLY ONLY TO DESIGNATED
DIMENSIONS UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN MILLIMETRES

THIRD ANGLE PROJECTION

Tolerances according
ISO 2768-fH

Port Mosier File is 3D Body/Assembly
DO NOT SCALE THIS DRAWING

1	A/R	PART/MATERIAL DESCRIPTION	XXXX-XXXX	XXXX-XXXX	XXXX-XXXX
ITEM	QTY.	PART/MATERIAL DESCRIPTION	MATL-PART NO.	MATL-DWG NO.	MATL-SPEC.
Peter Hirschmann	05.04.04	DATE	160 Pin Pogo Segment Specification Dwg 12" WPI		
Peter Hirschmann	05.04.04	DATE			
ENGINEER/DESIGNER			X PART NUMBER		
X	X	RELEASE TO PROD. PRCS ENG	X	X	X
X	X	RELEASE TO PROD. MATL ENG	X	X	X
SUPERSEDES DWG.			SCALE	2.5:1	SHEET 1 OF 1

VERIGY

D-E7018-90055-1