


ENGINEERING RESPONSIBILITY		B1	USERS						
SYM	REVISIONS						APPROVED		DATE(dd/mm/yy)
A	AS ISSUED						Jochen Zaiser		19.05.00
B	CONVERTED TO VERIGY						Jochen Zaiser		27.03.2006

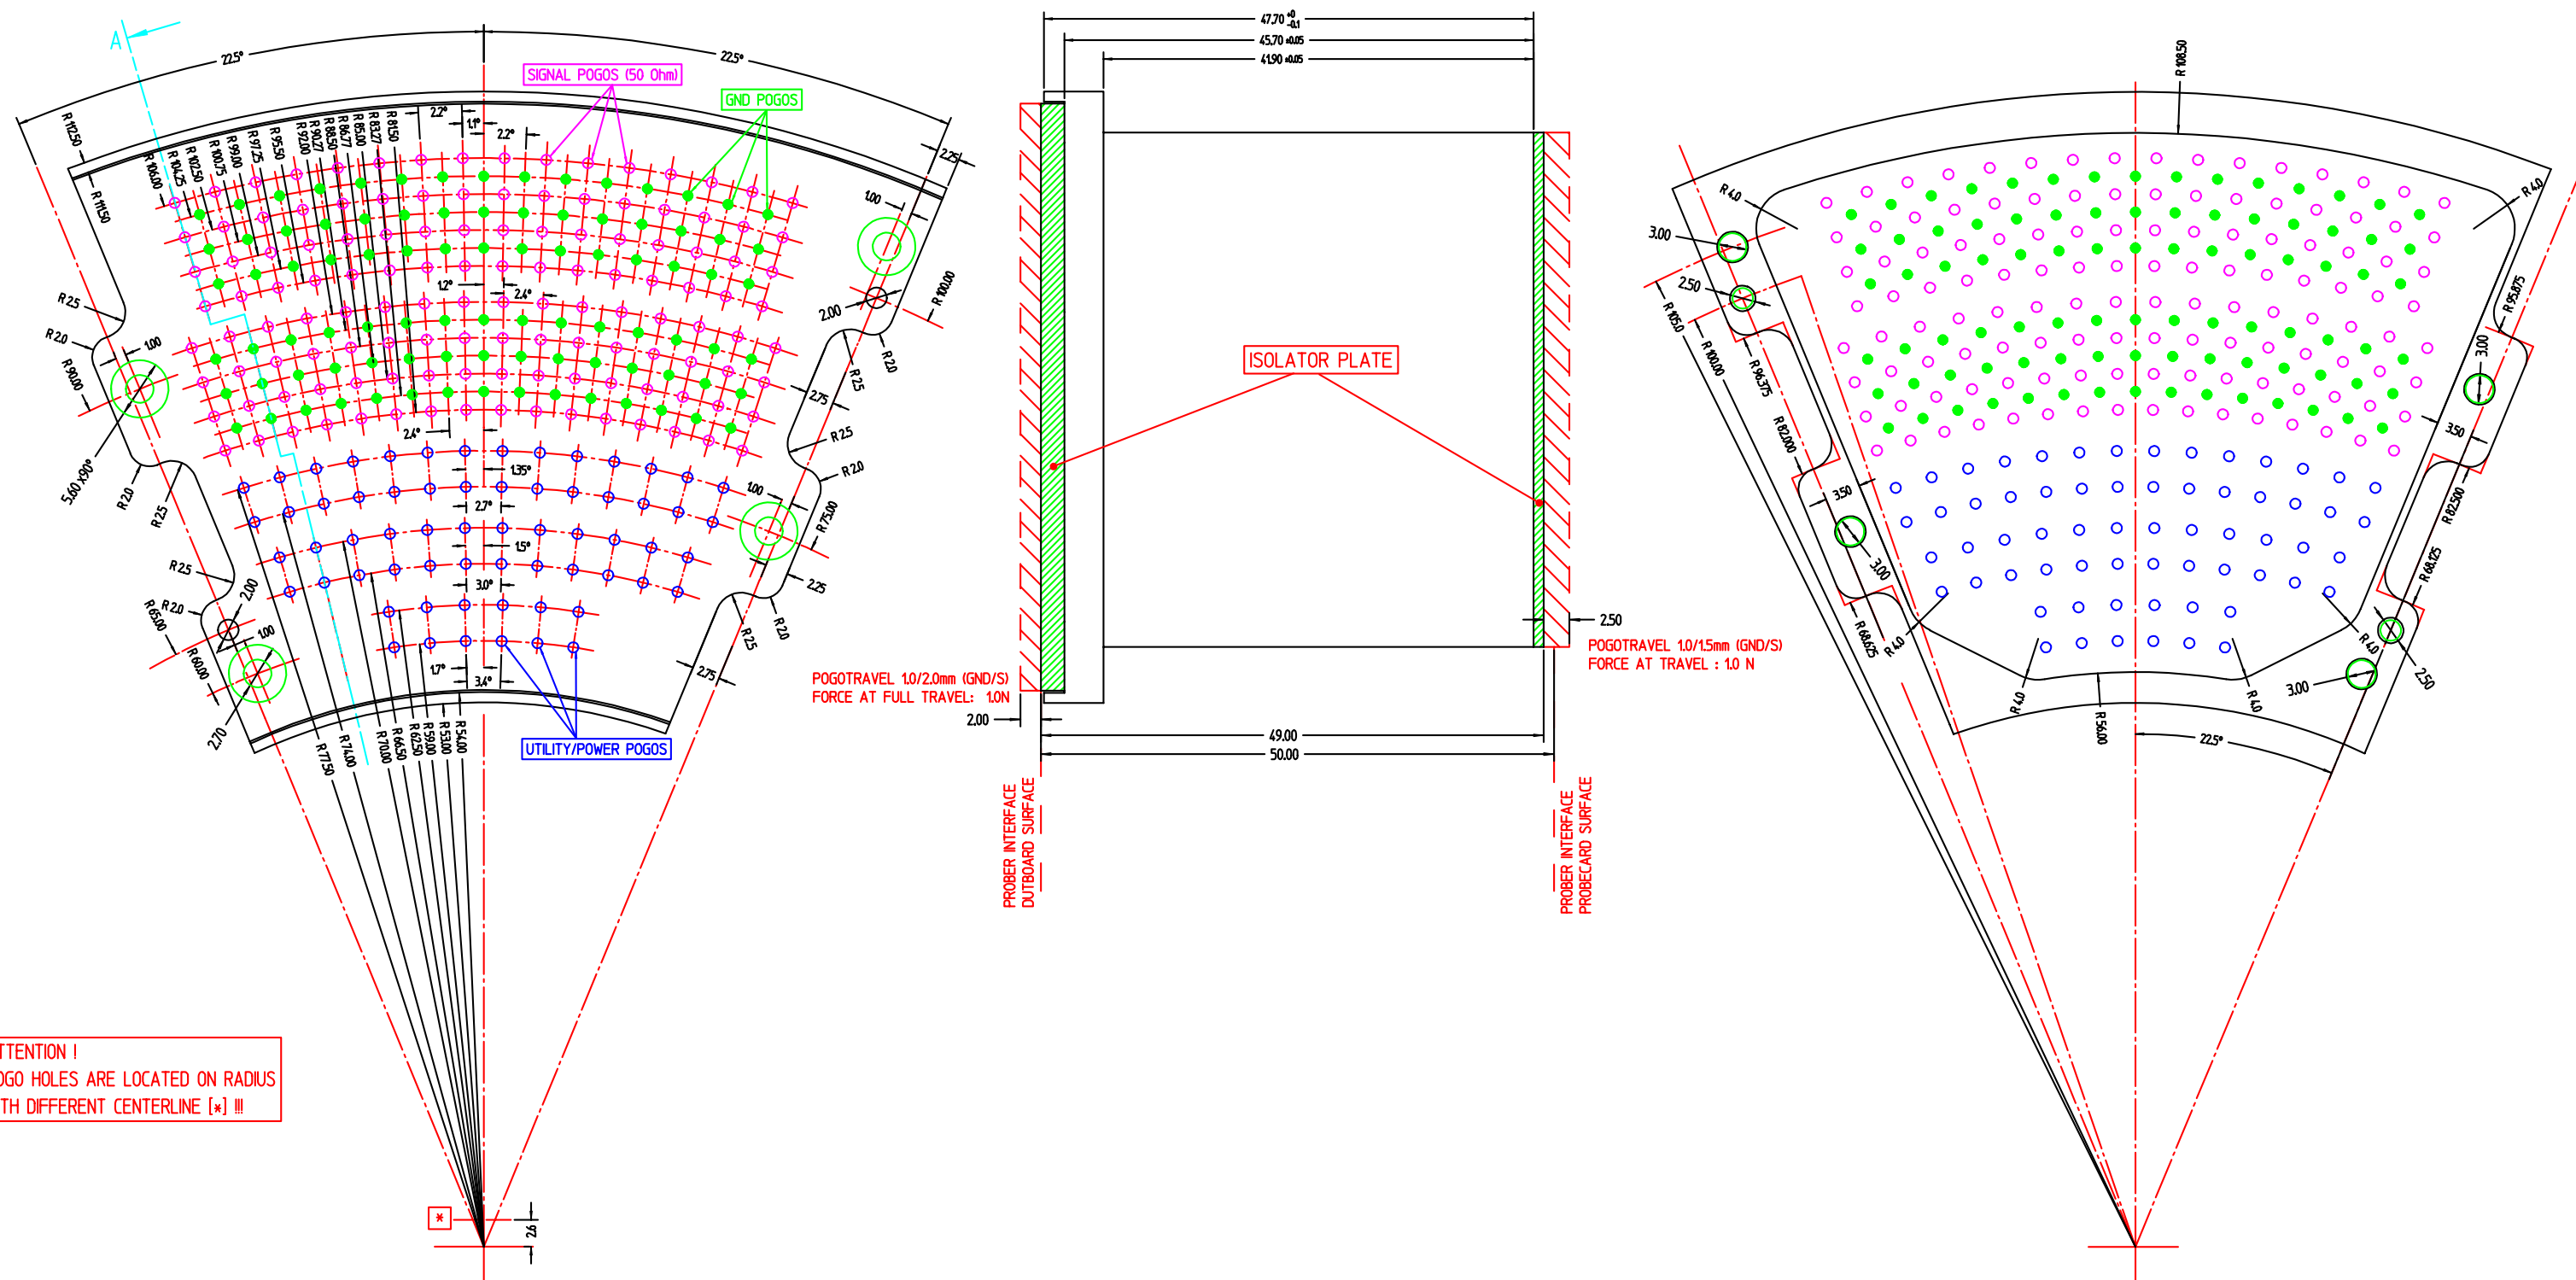

GENERAL NOTES :

TEMP RANGE -40 + 125 DEG. CELSIUS

SIGNAL GROUND MUST BE ISOLATED FROM MECHANICAL GROUND

MAX. CURRENT OF UTILITY/POWER PINS :3Amps.

POGO SPECS :
POGO TIPS WITH 3 FLATS 37DEG, SHARP
POGO PISTONS TO BE GOLD OR RHODIUM PLATED
POGO PISTON DIAMETER 0.9 - 1.1mm
POGO RESISTANCE MAX. 100 MILLIOHM

FOR LAYOUT AND WIRING INFO OF WAFER PROBER DUT BOARD
SEE DRAWING D-E7018-96501-1 OR D-E7018-96504-1
FOR LAYOUT AND WIRING INFO OF PROBE CARD
SEE DRAWING D-E7018-96502-1

VERIGY RESTRICTED THIS DOCUMENT AND ANY ASSOCIATED DATA CONTAIN RESTRICTED INFORMATION THAT IS VERIGY PROPERTY. ONLY DISCLOSE OR DUPLICATE FOR OTHERS AS AUTHORIZED BY VERIGY.	TOLERANCES APPLY ONLY TO DESIGNATED DIMENSIONS, UNLESS OTHERWISE SPECIFIED.		1X X		X		X		X		
	ADHERENCE TO DWG. A-5951-556-1 (CORP. STD. SECTION 6089 REQUIRED).		ITEM QTY.		PART/MATERIAL-DESCRIPTION		MATL-PART NO.		PART-DWG NO.		
	TOLERANCES : XX +0.5mm XXX+0.2mm		Jochen Zaiser DRAWN BY		10.11.99 DATE(dd/mm/yyyy)		E7018 POGO SEGMENT SPECIFICATION 128 PIN SEGMENT				
			Jochen Zaiser ENGINEER/CHECKER		10.11.99						
STRENG VERTRAULICH WEITERGABE AN DRITTE UND Vervielfältigungen NUR MIT GENEHMIGUNG DES URBERS * SCHUTZVERMERK NACH DIN 34 BEACHTEN *	THIRD ANGLE PROJECTION 		RELEASE TO PROD. PRCS ENG		X RELEASE TO PROD. MATL. ENG		TEMPORARY X FILENAME : 1		PART NUMBER		
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETRES		DO NOT SCALE THIS DRAWING				SCALE 3 : 1		SHEET 1 OF 1		
			SUBSEQUENT DWG						D-E7018-94105-1		
	STRENG VERTRAULICH WEITERGABE AN DRITTE UND Vervielfältigungen NUR MIT GENEHMIGUNG DES URBERS * SCHUTZVERMERK NACH DIN 34 BEACHTEN *										