
ENGINEERING RESPONSIBILITY	X	USERS						D-E7018-96502-1
SYM	REVISIONS						APPROVED	DATE
A	AS ISSUED (CHANGED NOTES)						Jochen Zaiser	06.10.99
B	CORRECTED UTILITIES (UW/URW), RENAMED SMPU WITH HPMU						Jochen Zaiser	25.09.00
C	CONVERTED TO VERIGY						Jochen Zaiser	27.03.2006

MECH. DIMENSIONS OF 9.5" – 512/1024PIN PROBE CARD FOR SOC WAFER PROBER INTERFACE (VIEW FROM WAFER SIDE)

CABLE OUTLET SIDE OF TESTHEAD


OPTIONAL HOLES MUST BE PROVIDED, TO ALLOW ATTACHING OF PROBE CARD TO POGO TOWER WITHOUT WAFER PROBER.

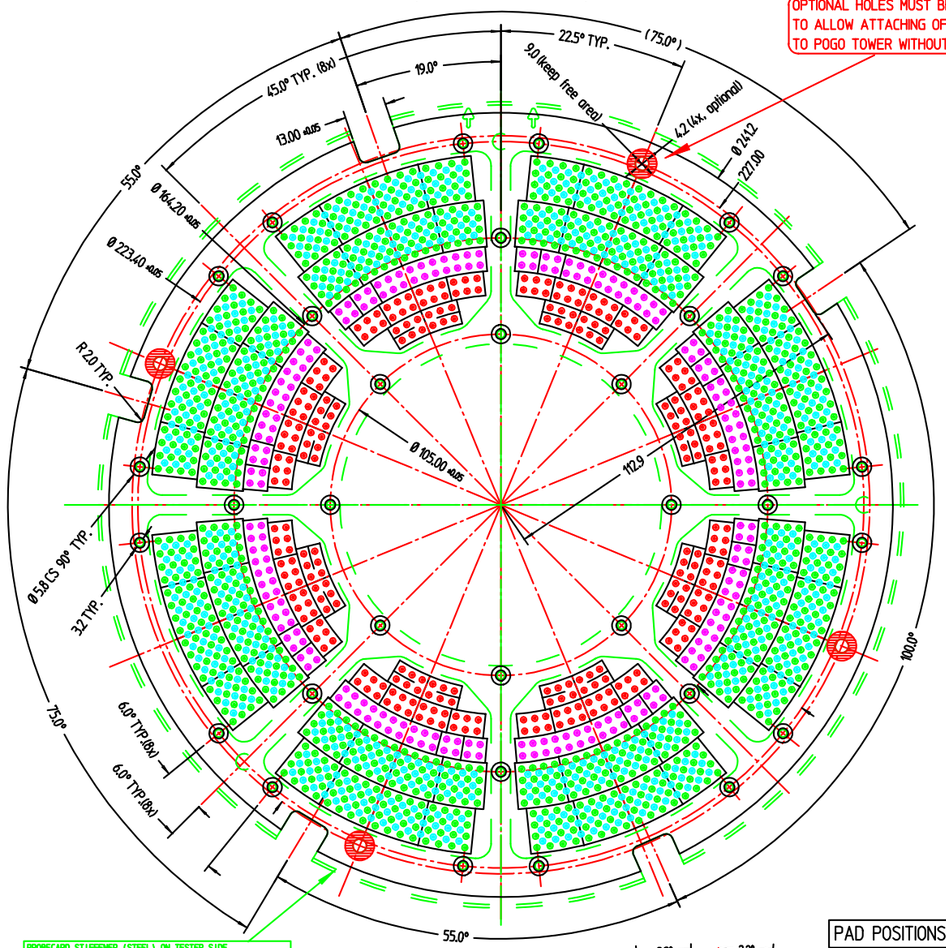


PROBECARD STIFFENER (STEEL) ON TESTER SIDE (FOR DIMENSIONS SEE DWG. D-E7018-24102-1)

NO SURFACE TRACES ALLOWED IN PROBE CARD STIFFENER AREA. SILKSCREEN HATCHING RECOMMENDED IN STIFFENER AREA.


CHANNEL / UTILITY AND DPS BLOCKS ON PROBE CARD (VIEW FROM WAFER SIDE)

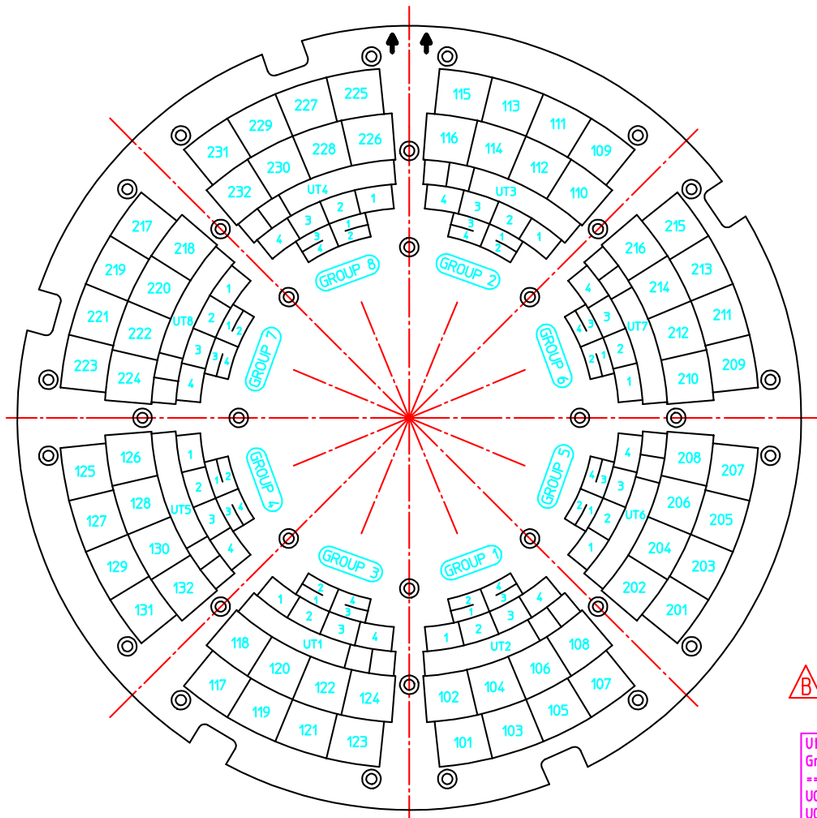

CHANNEL / UTILITY AND DPS POSITIONS ON SEGMENT
SCALE 3:1 (VIEW FROM WAFER SIDE)

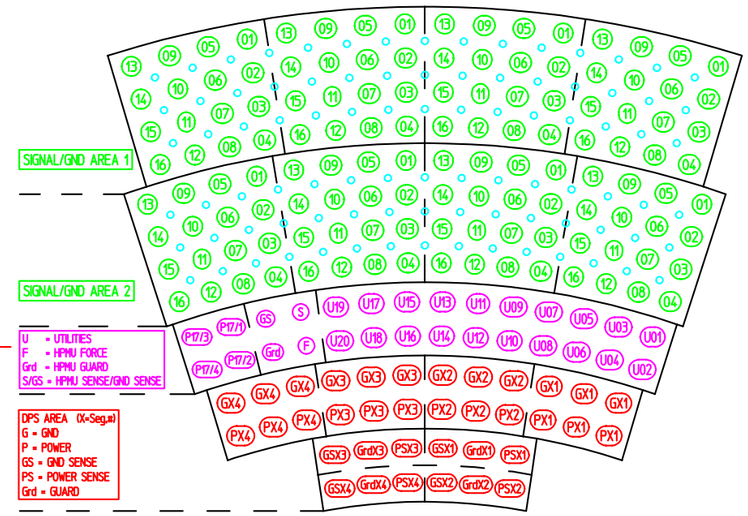

PAD POSITIONS PER SEGMENT, SCALE 4:1

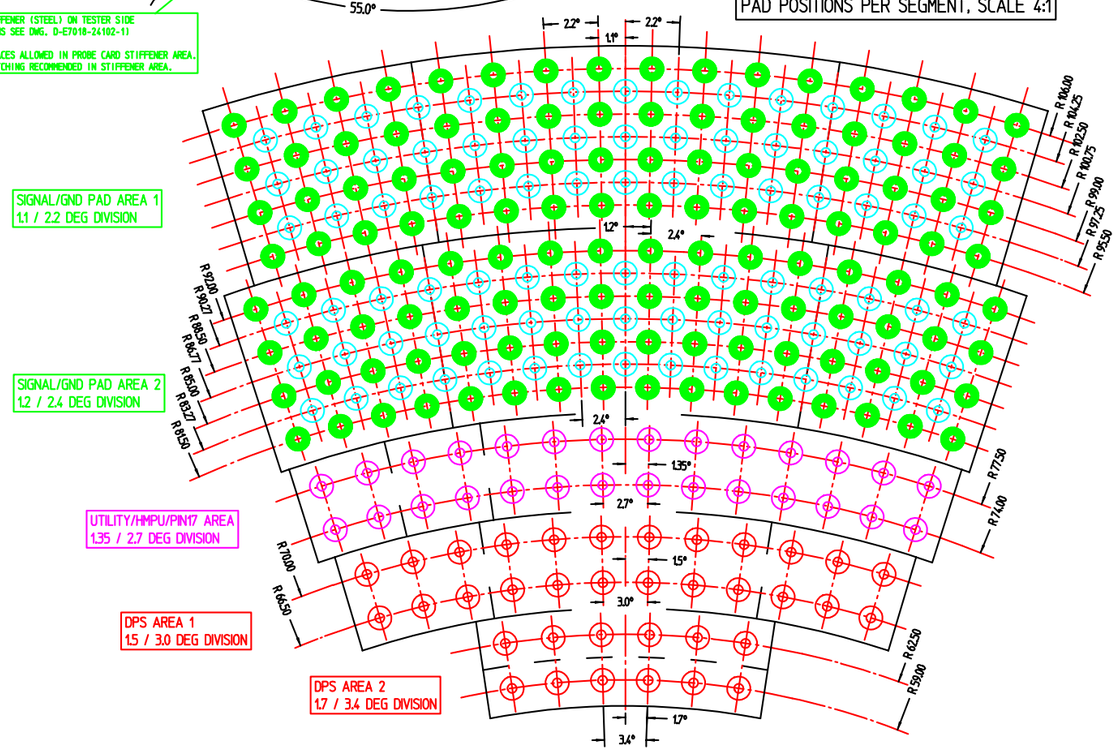

GENERAL NOTES:

1. POGO LANDING SPECS FOR PROBE CARD :
 POGO LANDING PADS : Ø 1.4 ... 1.8mm, GOLD PLATED
 POGO LANDING HOLES : Ø 0.7mm max. FHS
 FOR BEST HIGH SPEED PERFORMANCE USE LOW CAPACITANCE PAD DESIGN
2. PC-BOARD THICKNESS OF PROBE CARD : 3.5mm min. / 6.5mm max.
3. VIAS AND PCB SURFACE TRACES ARE ONLY ALLOWED IN SPARED STIFFENER AREAS
4. UNUSED TESTER CHANNELS SHOULD HAVE PADS WITH OR WITHOUT HOLES
5. MAXIMUM ALLOWED CURRENT FOR SIGNAL/DPS-POGO VIA POGO TOWER : 3 Amps.
6. ASSIGNMENT OF DPS AND UTILITY CHANNELS IS VALID FOR HP GENERAL PURPOSE WAFERPROBER DUT BOARD E7018AA (512 PIN) AND E7018AB (1024PIN) AND MAY BE MODIFIED FOR CUSTOMIZED WAFER PROBER DUT BOARD.
7. FOR INFORMATION ABOUT HP GENERAL PURPOSE WAFER PROBER DUT BOARD SEE DRAWINGS D-E7018-96501-1 (1024PIN) AND D-E7018-96504-1 (512 PIN).
8. HP 1024 PIN PROBE CARD STIFFENER IS AVAILABLE AS PART NUMBER 'E7018DA', FOR MORE INFORMATION ABOUT PROBE CARD STIFFENER SEE DRAWINGS : D-E7018-64102-1, D-E7018-24102-1, B-E7018-24901-1

B

UTILITY / HPMU / PIN17 ASSIGNMENT

512 PIN TESTHEAD

Utility	UT1	UT2	UT3	UT4
Group	3	1	2	8
U01	UG	UG	UG	UG
U02	URW00	UW00	UW00	UW00
U03	URW01	UW01	UW01	UW01
U04	URW02	UW02	UW02	UW02
U05	URW03	UW03	UW03	UW03
U06	URW04	UW04	UW04	UW04
U07	5V	5V	5V	5V
U08	5V	5V	5V	5V
U09	URW05	UW05	UW05	UW05
U10	URW06	UW06	UW06	UW06
U11	UW07	UW07	UW07	UW07
U12	UW08	UW08	UW08	UW08
U13	UG	UG	UG	UG
U14	UW09	UW09	UW09	UW09
U15	UW10	UW10	UW10	UW10
U16	UW11	UW11	UW11	UW11
U17	UW12	UW12	UW12	UW12
U18	UW13	UW13	UW13	UW13
U19	URW14	UW14	UW14	UW14
U20	URW15	UW15	UW15	UW15
HIGH PRECISION PMU POSITIONS (HPMU):				
S	12	21	22	11
F	12	21	22	11
GS	12	21	22	11
Grd	12	21	22	11
WIRED PIN 17's :				
P17/1	121	105	113	229
P17/2	122	106	114	230
P17/3	123	107	115	231
P17/4	124	108	116	232

1024 PIN TESTHEAD

Utility	UT1	UT2	UT3	UT4	UT5	UT6	UT7	UT8
Group	3	1	2	8	4	5	6	7
U01	UG	UG	UG	UG	UG	UG	UG	UG
U02	URW00	URW00	UW00	URW00	UW00	URW00	UW00	URW00
U03	URW01	URW01	UW01	URW01	UW01	URW01	UW01	URW01
U04	URW02	URW02	UW02	URW02	UW02	URW02	UW02	URW02
U05	URW03	URW03	UW03	URW03	UW03	URW03	UW03	URW03
U06	URW04	URW04	UW04	URW04	UW04	URW04	UW04	URW04
U07	5V	5V	5V	5V	5V	5V	5V	5V
U08	5V	5V	5V	5V	5V	5V	5V	5V
U09	URW05	URW05	UW05	URW05	UW05	URW05	UW05	URW05
U10	URW06	URW06	UW06	URW06	UW06	URW06	UW06	URW06
U11	UW07	UW07	UW07	UW07	UW07	UW07	UW07	UW07
U12	UW08	UW08	UW08	UW08	UW08	UW08	UW08	UW08
U13	UG	UG	UG	UG	UG	UG	UG	UG
U14	UW09	UW09	UW09	UW09	UW09	UW09	UW09	UW09
U15	UW10	UW10	UW10	UW10	UW10	UW10	UW10	UW10
U16	UW11	UW11	UW11	UW11	UW11	UW11	UW11	UW11
U17	UW12	UW12	UW12	UW12	UW12	UW12	UW12	UW12
U18	UW13	UW13	UW13	UW13	UW13	UW13	UW13	UW13
U19	URW14	UW14	UW14	UW14	UW14	UW14	UW14	URW14
U20	URW15	UW15	UW15	UW15	UW15	UW15	UW15	URW15
HIGH PRECISION PMU POSITIONS (HPMU):								
S	12	21	22	11	42	31	32	41
F	12	21	22	11	42	31	32	41
GS	12	21	22	11	42	31	32	41
Grd	12	21	22	11	42	31	32	41
WIRED PIN 17's :								
P17/1	121	105	113	229	129	205	213	221
P17/2	122	106	114	230	130	206	214	222
P17/3	123	107	115	231	131	207	215	223
P17/4	124	108	116	232	132	208	216	224

NOTE : FOR 512 PIN TESTHEAD UT2/3/4 HAVE ONLY WRITE FUNCTIONALITY !!!

VERIGY RESTRICTED
THIS DOCUMENT AND ANY ASSOCIATED DATA CONTAIN RESTRICTED INFORMATION THAT IS VERIGY PROPERTY.
ONLY DISCLOSE OR DUPLICATE FOR OTHERS AS AUTHORIZED BY VERIGY.

STRENG VERTRAULICH
WEITERGABE AN DRITTE UND VERVIELFÄLTIGUNGEN NUR MIT GENEHMIGUNG DES URHEBERS.
» SCHUTZVERMERK NACH DIN 34 BEACHTEN «

TOLERANCES APPLY ONLY TO DESIGNATED DIMENSIONS, UNLESS OTHERWISE SPECIFIED.
ADHERANCE TO DWG. A-5951-7561-1 (CORP. STD. SECTION 608) REQUIRED.
THIRD ANGLE PROJECTION
TOLERANCES : XX= ±0.5mm or ±0.4mm XX.X=±0.2mm or ±0.1mm
STRIKE OUT ONE XX AND ONE XX.X SEE CORP. STD. 608
DO NOT SCALE THIS DRAWING

ITEM	QTY.	PART/MATERIAL-DESCRIPTION	MAT'L-PART NO.	MAT'L-DWG NO.	MAT'L-SPEC.
1	1	PC-BOARD, GOLD PLATED 3.5mm THK min.			

HP-ME10 DRAWN BY — 15.03.99 DATE
Jochen Zaiser ENGINEER/CHECKER — 15.03.99
RELEASE TO PROD. PRCS ENG
RELEASE TO PROD. MAT'L ENG
SUPERSEDES DWG.

PROBE CARD 9.5"
512 / 1024 PIN
SOC WAFER PROBER INTERFACE
TITLE
TEMPORARY FILENAME !
SCALE 1 : 1 SHEET 1 OF 1

VERIGY
PART NUMBER X
D-E7018-96502-1