
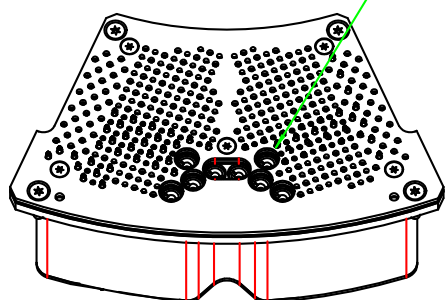
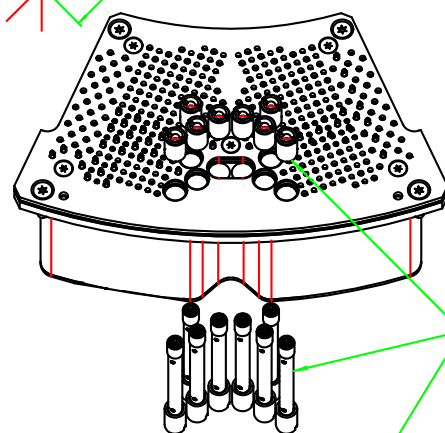
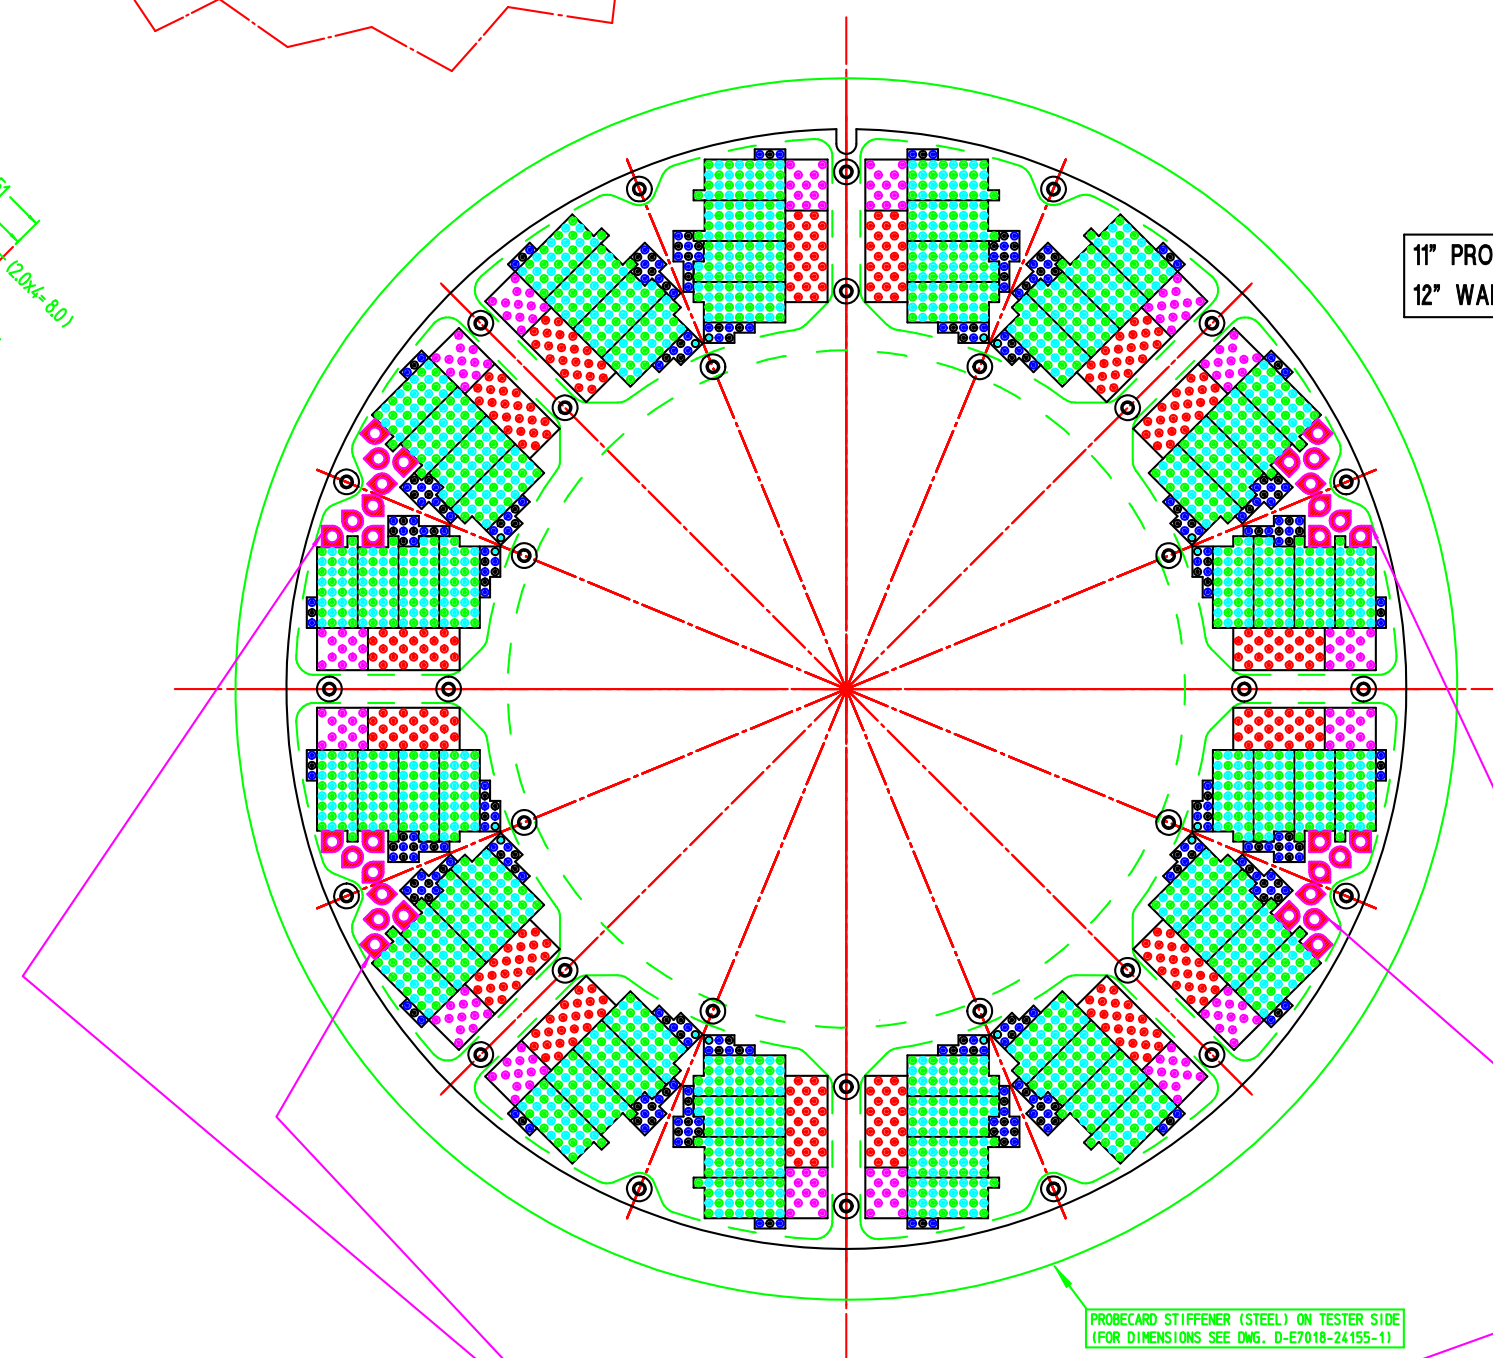
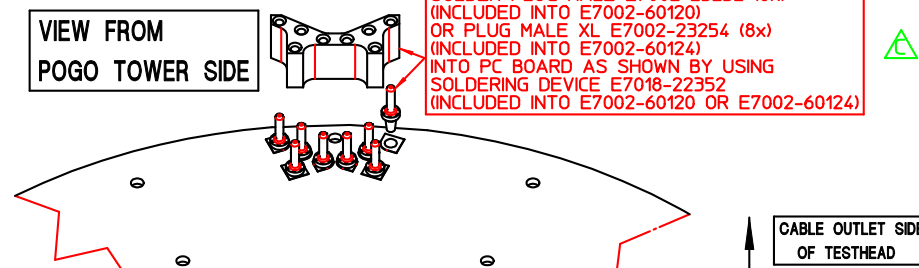


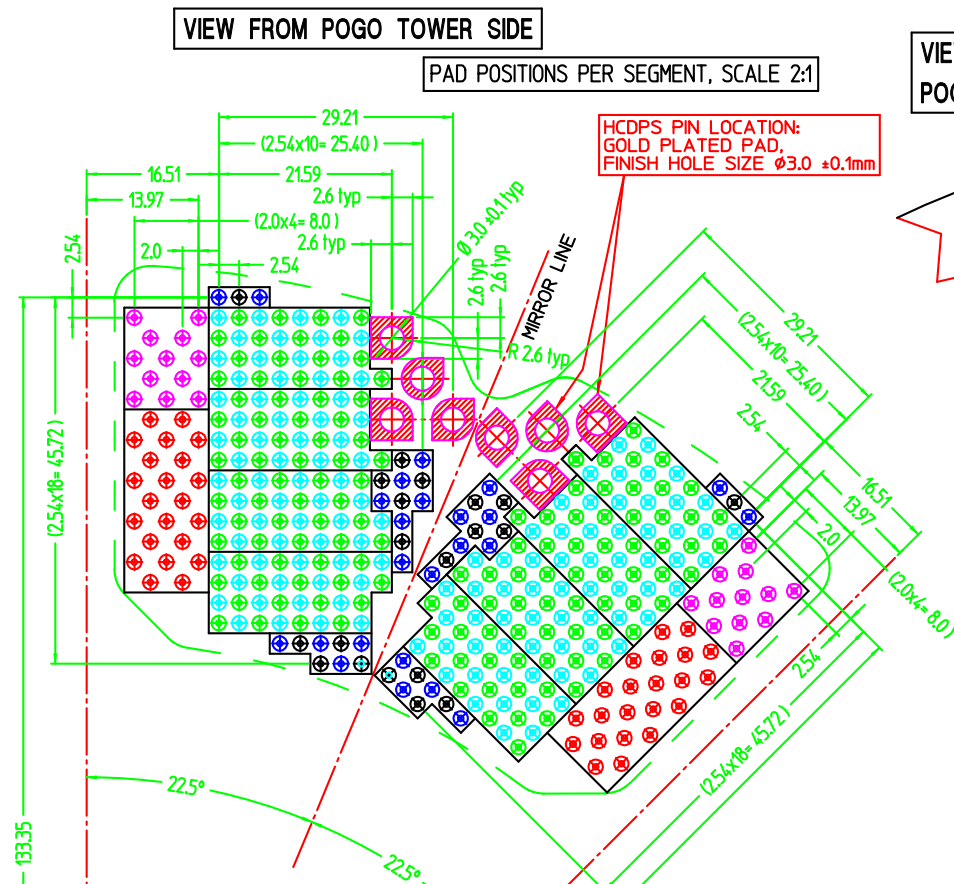

INSTALLATION OF E7018HC INTO E7018KB:
UNSCREW NUT ON ONE SIDE OF THE HCDPS PLUG ASSY (8x),
PUT IN THE HCDPS PLUG ASSY (8x) INTO 12" POGO SEGMENT, AS SHOWN.
SCREW IN NUT ON THE HCDPS PLUG ASSY (8x) WITH FLAT SCREWDRIVER (2x),
BE CAREFUL, NOT TO MUCH FORCE FOR AVOIDING DAMAGING OF THE SLOTS OF
THE NUTS

RECOMMENDED HCDPS PIN LOCATION:
TO AVOID INTERFERENCE WITH THE POGO BLOCK
OF THE DUT INTERFACE, USE HCDPS PIN LOACTIONS
AS SHOWN

- GENERAL NOTES:

1. FOR MORE DETAILED INFORMATION ABOUT PROBE CARD, SEE DRAWINGS D-E7018-96550-1 AND D-E7018-96560-1
2. FOR MORE DETAILED INFORMATION ABOUT LOAD BOARD, SEE DRAWINGS D-E7018-96551-1 AND D-E7018-96561-1
3. PC-BOARD THICKNESS FOR HCDCPS PINS: 4.5mm +/-0.5mm
4. PC-BOARD THICKNESS FOR HCDCPS PINS XL: 8.5mm +/-0.5mm

VERIGY RESTRICTED
THIS DOCUMENT AND ANY ASSOCIATED DATA
CONTAIN RESTRICTED INFORMATION THAT IS
VERIGY PROPERTY.
ONLY DISCLOSE OR DUPLICATE FOR OTHERS
AS AUTHORIZED BY VERIGY.

STRENG VERTRAULICH
WEITERGABE AN DRITTE UND VERVIELFÄLTIGUNGEN
NUR MIT GENEHMIGUNG DES URHEBERS .
* SCHUTZVERMERK NACH DIN 34 BEACHTEN *

TOLERANCES APPLY ONLY TO DESIGNATED DIMENSIONS, UNLESS OTHERWISE SPECIFIED

ADHERANCE TO DWG. A-5951-1561-1
(CORP. STD. SECTION 608) REQUIRED.

THIRD ANGLE PROJECTION

TOLERANCES - ±0.4mm

STRIKE OUT ONE XX AND ONE XXX
SEE CORR. STD. 408

SEE CORP. STD. 600

1	1	PC-BOARD, GOLD PLATED 5.0mm +/- 0.5 THK				
ITEM	QTY.	PART/MATERIAL-DESCRIPTION		MATL-PART NO.	MATL-DWG NO.	MATL-SPEC.
Peter Hirschmann DRAWN BY		13.04.05 DATE	11" PROBE CARD HCDPS PIN LOCATION 12" WAFER PROBER IF			
Peter Hirschmann ENGINEER/CHECKER		13.04.05				
RELEASE TO PROD. PRCS ENG				TITLE	PART NUMBER X	
RELEASE TO PROD. MAT'L ENG				TEMPORARY FILENAME 1	D-E7018-96556-1	
SUPERSEDES DWG			SCALE 1 : 1 SHEET 1 OF 1			