
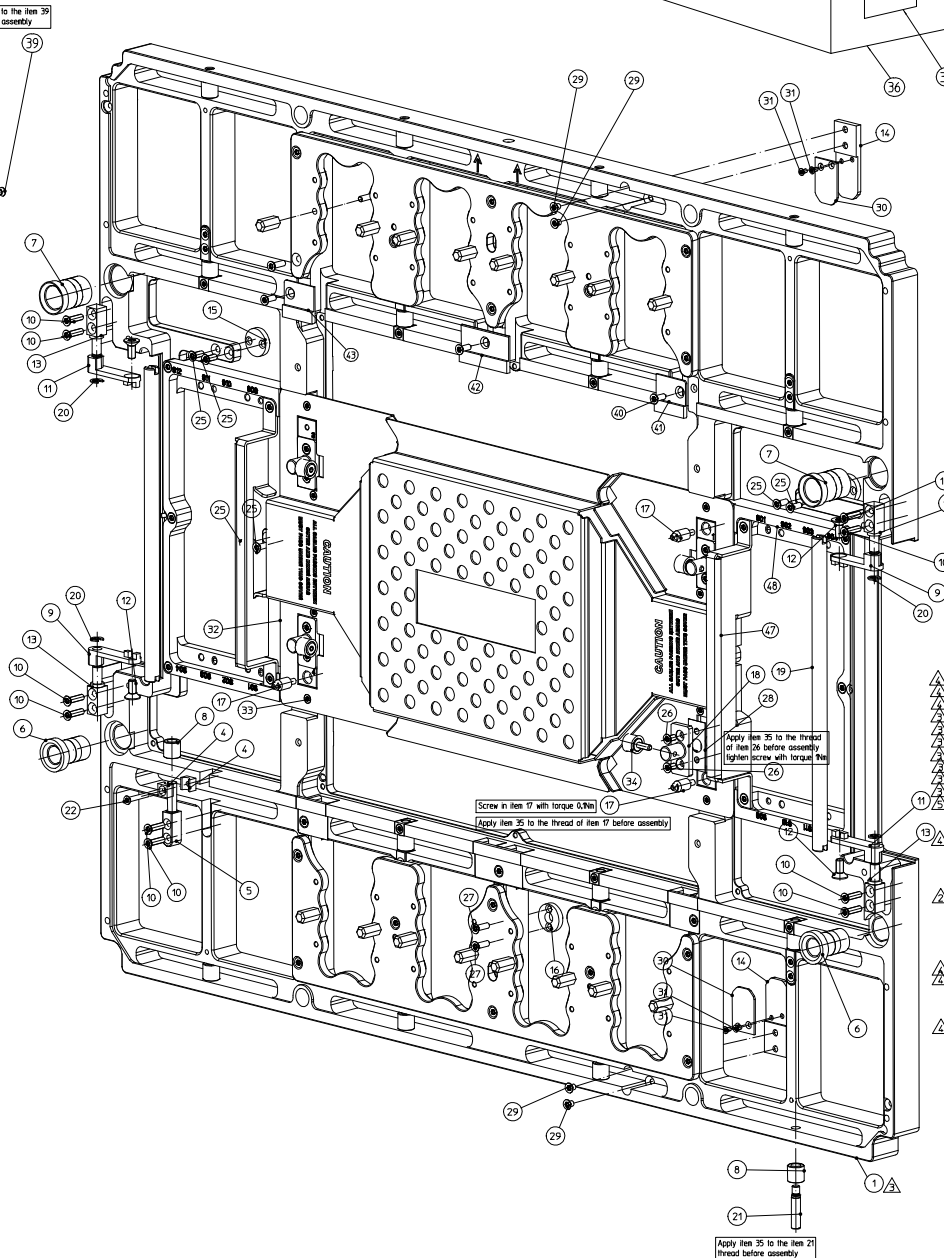


REV	REVISION	REVISOR	DATE
1	NO DESIGN CHANGE	ZHAN ZHANG	2021-02-01
2	DESIGN CHANGE ON ITEM 32	ZHAN ZHANG	2021-02-23
3	ADD ITEM 43, 41, 42, 43, 44, 45, 46. UPDATE ITEM 1, UPDATE QTY. OF ITEM 27. CHANGED ENGRAVING.	ZHAN ZHANG	2021-02-23
4	ADD ITEM 47, 48, 49. DELETE ITEM 39. UPDATE QTY OF ITEM 26, 27, 36. REPLACE ITEM 22 WITH 0515-2216	ZHAN ZHANG	2021-03-04
5	UPDATE BOM (ITEM 39)	MAX NEUMELER	2021-03-05

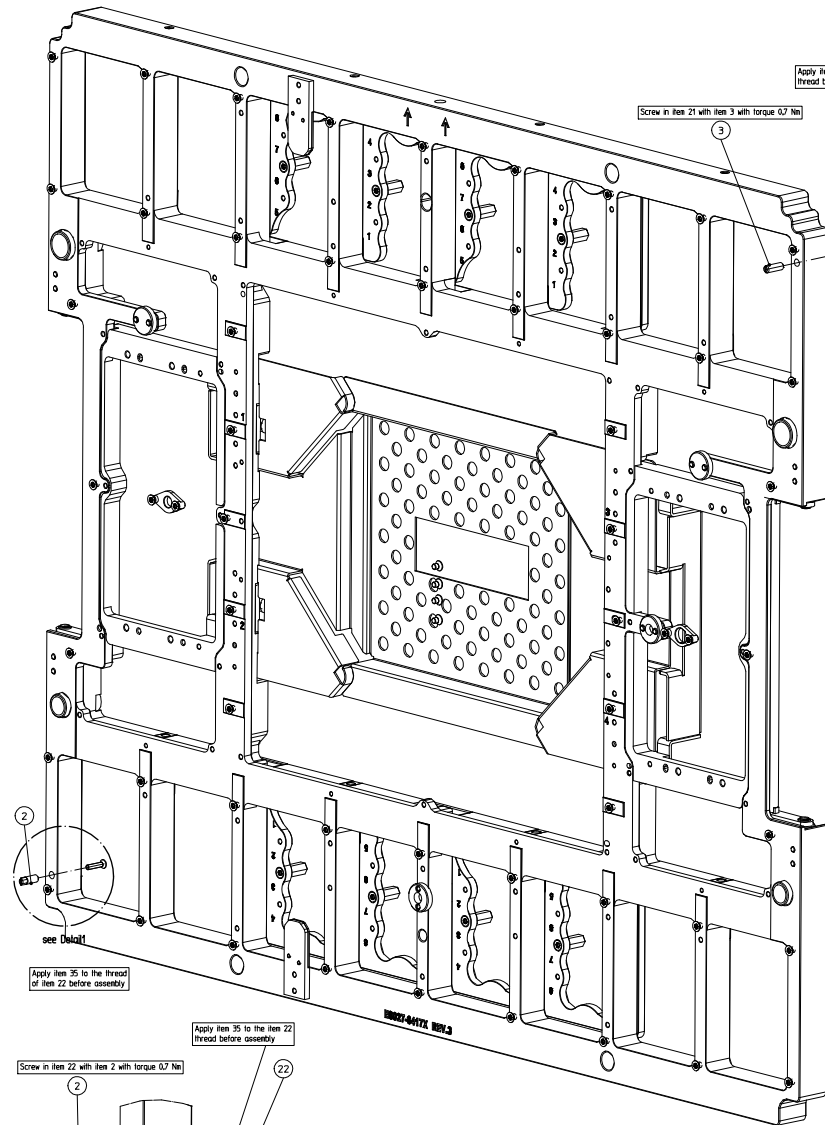

- Notes: Unless otherwise specified:
1. Use Shim Item 29 if required.
 2. Measurement protocol for flatness and height must be included with the package Stiffener.
 3. Packaging box has to be labelled with Data Matrix Label Item 37 according to Label spec: 0815-9002-5.
 4. Package all of item 36, 23, 24, 27 (2x) and 26 (4x) into the item 38. Each bag must be labelled according to Spec: 0815-9002-5.
 5. Apply item 49 on item 6 and 7, before insert item into item 1.

49	A/R Locite 638	0470-0901	-	-
48	RF ID for DP Stiffener W5 mCC	E8028-65271	-	-
47	Foot RF DP Stiffener	N2360-03070	-	-
46	PN-DIA 3MM DIA 12MM LONG	1480-1905	-	-
45	WSPM Bracket Holder Stiffener Distance	E8027-22311	-	-
44	WSPM BRACKET HOLDER STIFFENER BODY	E8027-22310	-	-
43	CABLE COVER LEFT TWINNING PHWAVE RF	E8027-22301	-	-
42	CABLE COVER MIDDLE TWINNING PHWAVE RF	E8027-22302	-	-
41	CABLE COVER RIGHT TWINNING PHWAVE RF	E8027-22303	-	-
40	SCREW M3X8	0515-1902	-	-
39	SCREW-MACH M2.5 X 0.45 10MM-LG	0515-2680	-	-
38	ESD BAG 1000/50MM	9223-1573	-	-
37	DATA MATRIX LABEL	5090-2886	-	-
36	PACKAGING	E7018-68320	-	-
35	A/R BLUE LOCITE 243	0470-3094	-	-
34	CAP follower, 3mm diameter, stainless steel, hexagon hole, crowned outer ring	1410-4953	-	-
33	SCREW-MACH M2.5 X 0.45 8MM-LG	0515-2028	-	-
32	CABLE COVER - PERFORATED	E8028-04171	-	-
31	COUNTERSINK SCREW 10X4mm ISO 10581, TORX, Stainless Steel A2 with Patch Lock	0515-5300	-	-
30	Foot Insulator Direct Probe Twinning	E8028-25471	-	-
29	SCREW-MACH M3 X 0.5 0MM-LG 90 DEG-FLHD	0515-2146	-	-
28	NP-STIFFENER-INTER-AGE	0380-5101	-	-
27	SCREW-MACH M3 X 0.5 10MM-LG	0515-2033	-	-
26	SCREW-MACH M3 X 0.5 0MM-LG 90 DEG-FLHD	0515-1946	-	-
25	SCREW-MACH M3 X 0.5 0MM-LG 90 DEG-FLHD	0515-2032	-	-
24	Guide Bushing 8mm SHD SECON SACC	N2360-20711	-	-
23	Guide Bushing 6mm SECON SACC	N2360-20710	-	-
22	FLATHEAD SCREW M2.5, L=10MM DIN965	0515-2218	-	-
21	Bearing Shaft	E8028-23752	-	-
20	RETAINER-RING C RD XSECT-EXT	0515-1665	-	-
19	Handle Grab	N2360-21009	-	-
18	Universal CAM Bracket Post	N2360-21070	-	-
17	Guide Pin Universal	N2360-21097	-	-
16	SACC Foot Hollow 3.5mm	N2360-21096	-	-
15	SACC Foot 3.5mm	N2360-21073	-	-
14	SACC Foot Direct Probe Twinning	E8028-21071	-	-
13	BEARING-SHAFT STP	E8028-23796	-	-
12	SCREW-MACH M3 X 0.7 10MM-LG	0515-2044	-	-
11	Flip Arm Left	N2360-21007	-	-
10	SCREW-MACH M3 X 0.5 10MM-LG	0515-2034	-	-
9	Flip Arm Right	N2360-21008	-	-
8	ROLLER-BALL 9MM-40 5-1MM-DIA-SHFT	1410-4501	-	-
7	Stiffener bushing dia 19mm glued	E8028-21053	-	-
6	Stiffener Bushing dia 10mm glued	E8028-21054	-	-
5	Bearing Shaft	E8028-23751	-	-
4	Holder Bearing Shaft	E8028-22351	-	-
3	Guide Pin dia 4mm	E8028-26151	-	-
2	Diamond Pin dia 4mm	E8028-26152	-	-
1	Direct Probe Rings Twinning Stiffener Frame E8027-24173		-	-

Contact Tab Planarity & CAM Follower Height Inspection Requirements

View for Tester/Bottom
Side of Stiffener

