
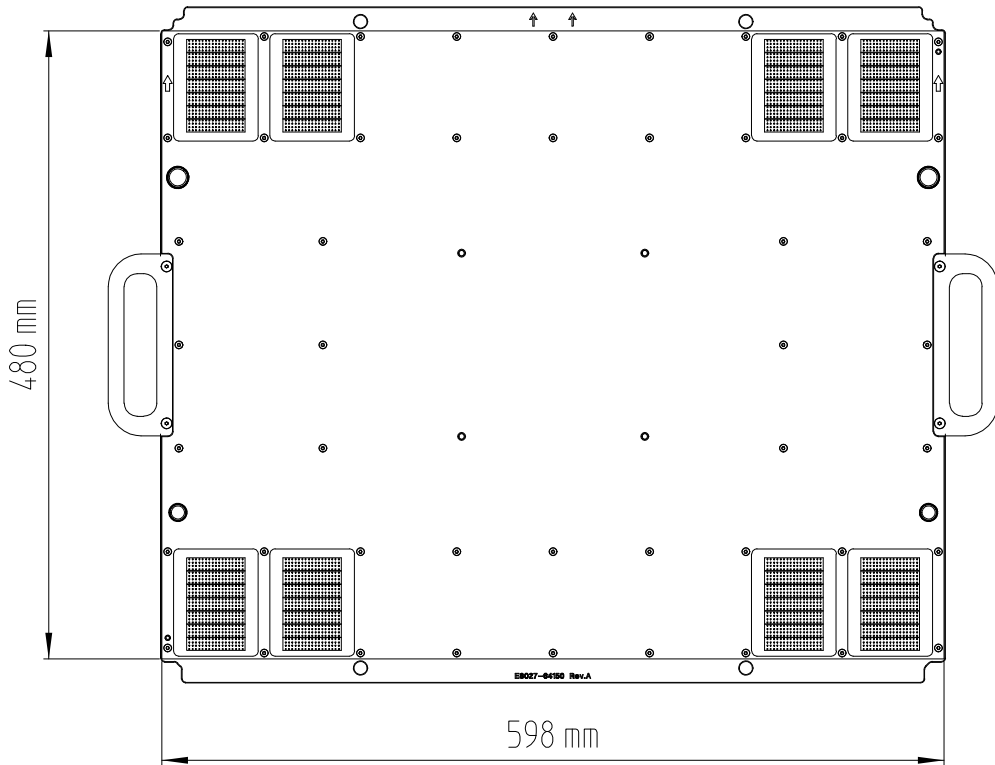


V93000 WAVESCALE MILLIMETER DUT BOARD SPECIFICATIONS

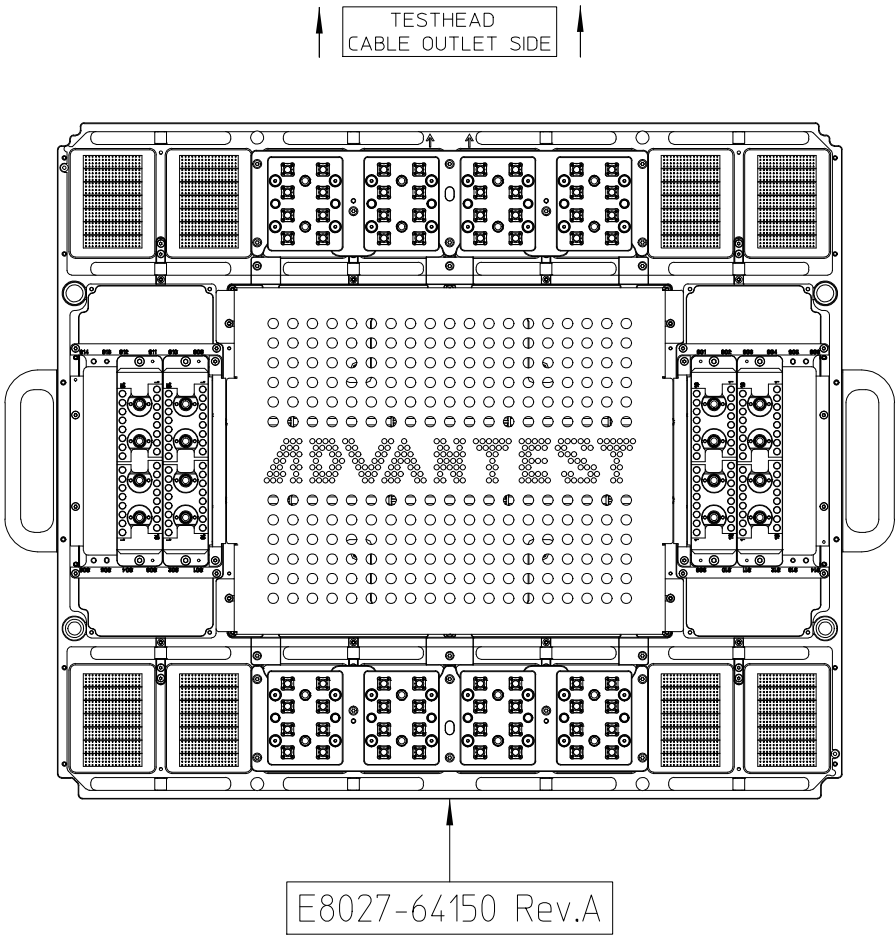

MINIMUM PCB THICKNESS = 3.5mm

VIEW FROM DUT SIDE

TESTHEAD
CABLE OUTLET SIDE

ARROW SILKSCREEN ON TOP LAYER OF PCB
FOR ORIENTATION PURPOSE

ARROW SILKSCREEN ON TOP LAYER OF PCB
FOR ORIENTATION PURPOSE

MOUNTING HOLES (4x),
ONLY NECESSARY FOR HANDLER APPLICATION.
MAY VARY FOR DIFFERENT HANDLER MODELS.

- NOTE:
1. PCB THICKNESS MIN 3.5mm
 2. HANDLER SPECIFIC REQUIREMENTS NOT SHOWN
 3. STIFFENER INLAY SPECIFIC REQUIREMENTS NOT SHOWN
 4. KOZ WSMM RELATED, SEE SHEET 4


PCB OUTLINE

STANDARD TOLERANCES UNLESS OTHERWISE SPECIFIED LINEAR: ±0.1 mm ANGULAR: ±0.5°		Matthias Feyerabend DRAWN BY DATE 2018-08-31		V93000 WAVESCALE MILLIMETER DUT BOARD SPECIFICATION		ADVANTEST. PART NUMBER E8027-96550 DOCUMENT NUMBER
WORKPIECE EDGES ON ISO 13715 		Jose Moreira ENGINEER/CHECKER DATE 2018-08-31		TITLE DATE DATE 2018-08-31		
DO NOT SCALE THIS METRIC DRAWING		ISO 1001 & ISO 5459		2 OF 8 SHEET		8
UNLESS OTHERWISE SPECIFIED * DIMENSIONS ARE IN MILLIMETERS * THIRD ANGLE PROJECTION * ADHERENCE TO DWS A-5995-054-1 COMPANY STD. SECTION 6.88 AND A-5995-0743-1 (308) IS REQUIRED		1:1 SCALE		A0 SIZE		

ADVANTEST.

TESTHEAD
CABLE OUTLET SIDE

VIEW FROM DUT SIDE
HATCHED SURFACES REFER TO PCB BOTTOM SIDE

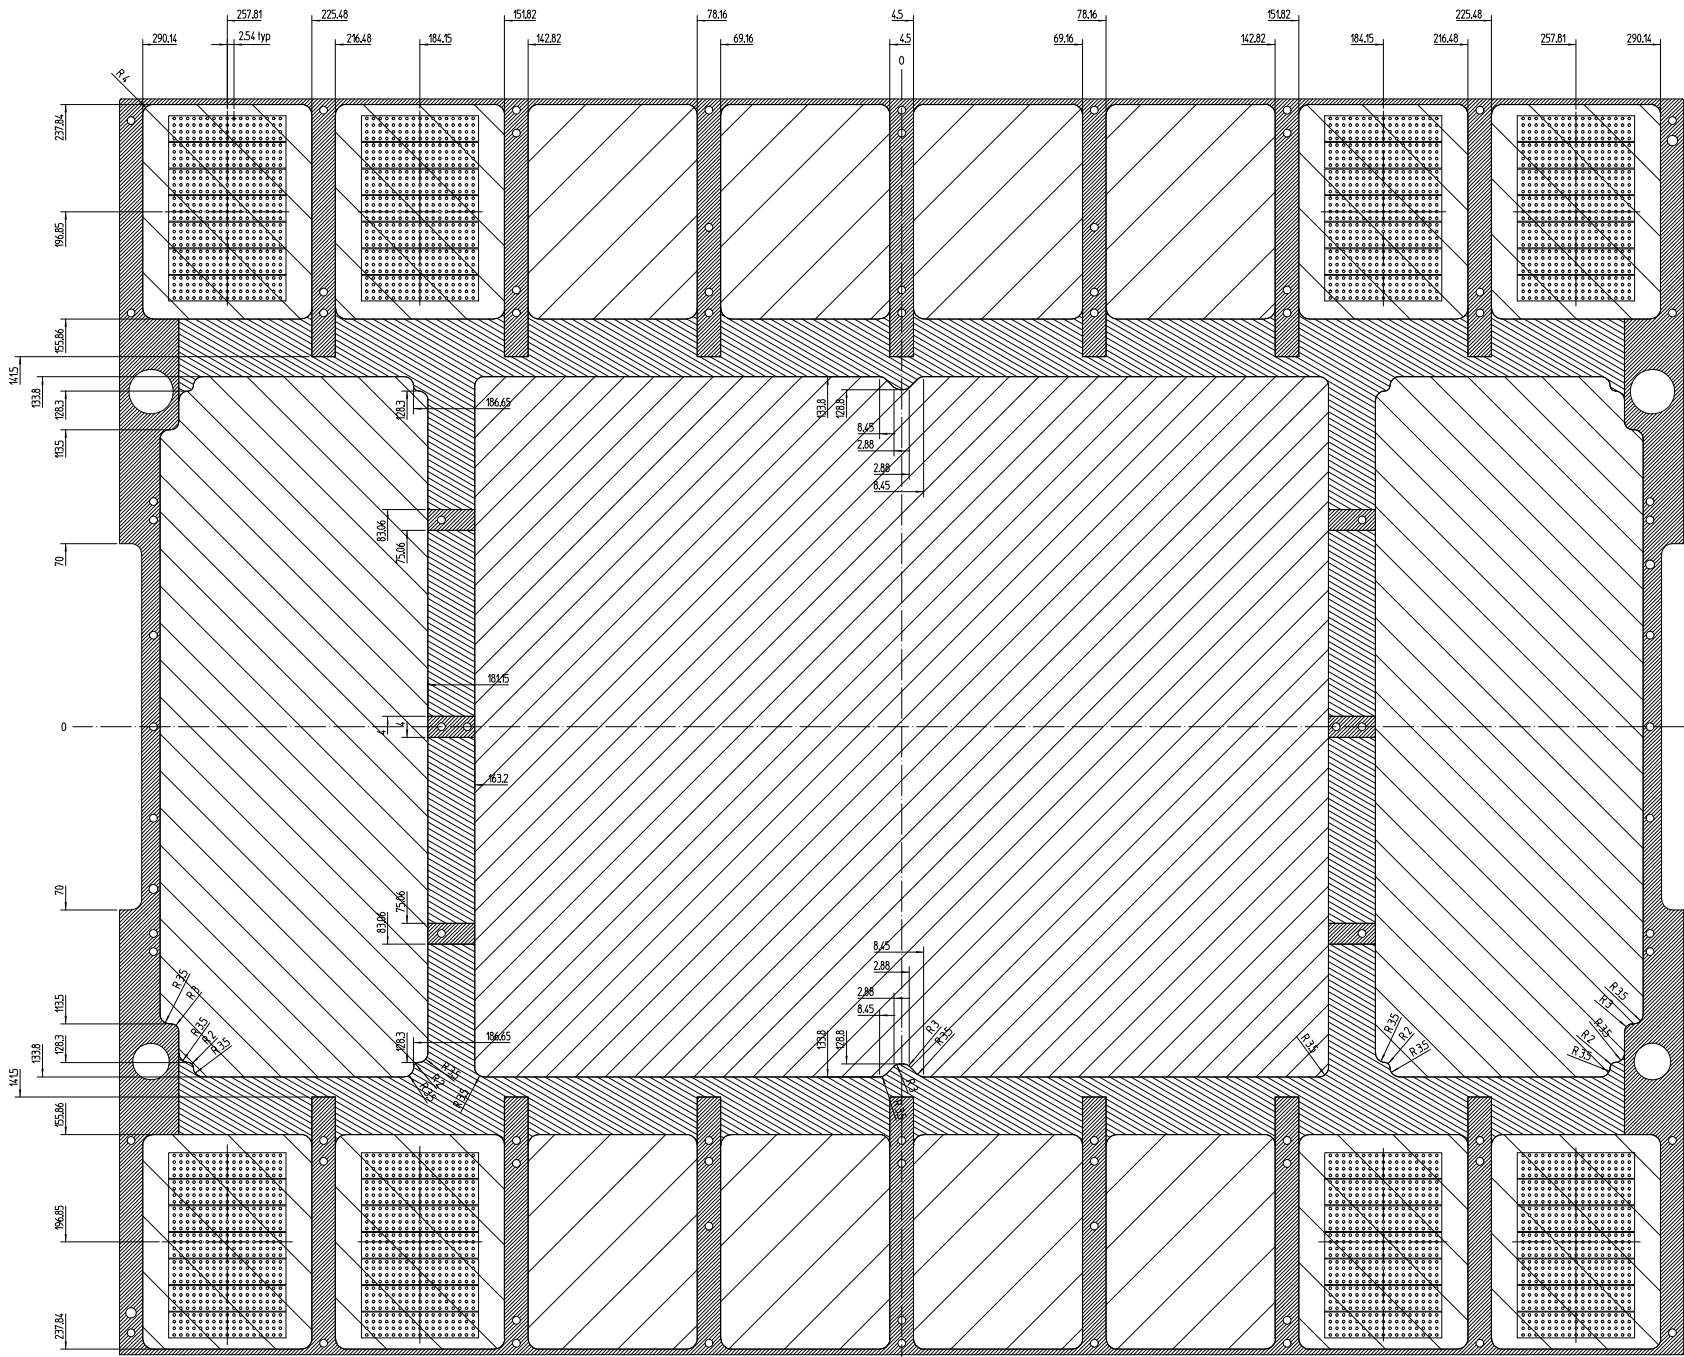


- STIFFENER FRAME AREA**
NO COMPONENTS ALLOWED
VIAS AND PADS ARE NOT ALLOWED
- STIFFENER FRAME AREA**
RESERVED FOR POGO SEGMENTS
NO COMPONENTS ALLOWED
VIAS AND PADS ARE ALLOWED
- STIFFENER FRAME AREA**
RESERVED FOR 1.85mm CABLE AREA
NO COMPONENTS ALLOWED
VIAS AND PADS ARE ALLOWED
- STIFFENER FRAME AREA**
0.5mm CLEARANCE TO STIFFENER
NO COMPONENTS ALLOWED
VIAS AND PADS ARE ALLOWED
- COMPONENT AREA, CENTER AREA**
COMPONENT AREA MAY VARY IF RF BRACKETS, PMUX INTERPOSER OR OUTER STIFFENER INLAYS ARE USED
MAX COMPONENT HEIGHT 20mm, MAY LIMITED IF RF BRACKETS, PMUX INTERPOSER OR OUTER STIFFENER INLAYS ARE USED
KOZ WSRF RELATED, SEE SHEET 4
- COMPONENT AREA, CENTER AREA**
COMPONENT AREA, STIFFENER INLAY NOT SHOWN, MAY VARY IF STIFFENER INLAY (STANDARD AND CUSTOMIZED VERSIONS) IS USED
MAX COMPONENT HEIGHT 20mm, MAY LIMITED IF STIFFENER INLAY (STANDARD AND CUSTOMIZED VERSIONS) IS USED
KOZ WSRF RELATED, SEE SHEET 4

GENERAL NOTES FOR POGO LANDING PADS/VIAS:
1. POGO LANDING PADS: ϕ 1.4mm ... 1.5mm HARD GOLD PLATED
POGO LANDING HOLES: ϕ 0.7mm FHS MAX (FINISH HOLE SIZE)
2. FOR MORE SPECIFIC INFORMATION, SEE TDC TOPIC 247077

KOZ (KEEP OUT ZONE)
PCB BOTTOM SIDE

TESTHEAD
CABLE OUTLET SIDE

VIEW FROM DUT SIDE
HATCHED SURFACES REFER TO PCB TOPSIDE

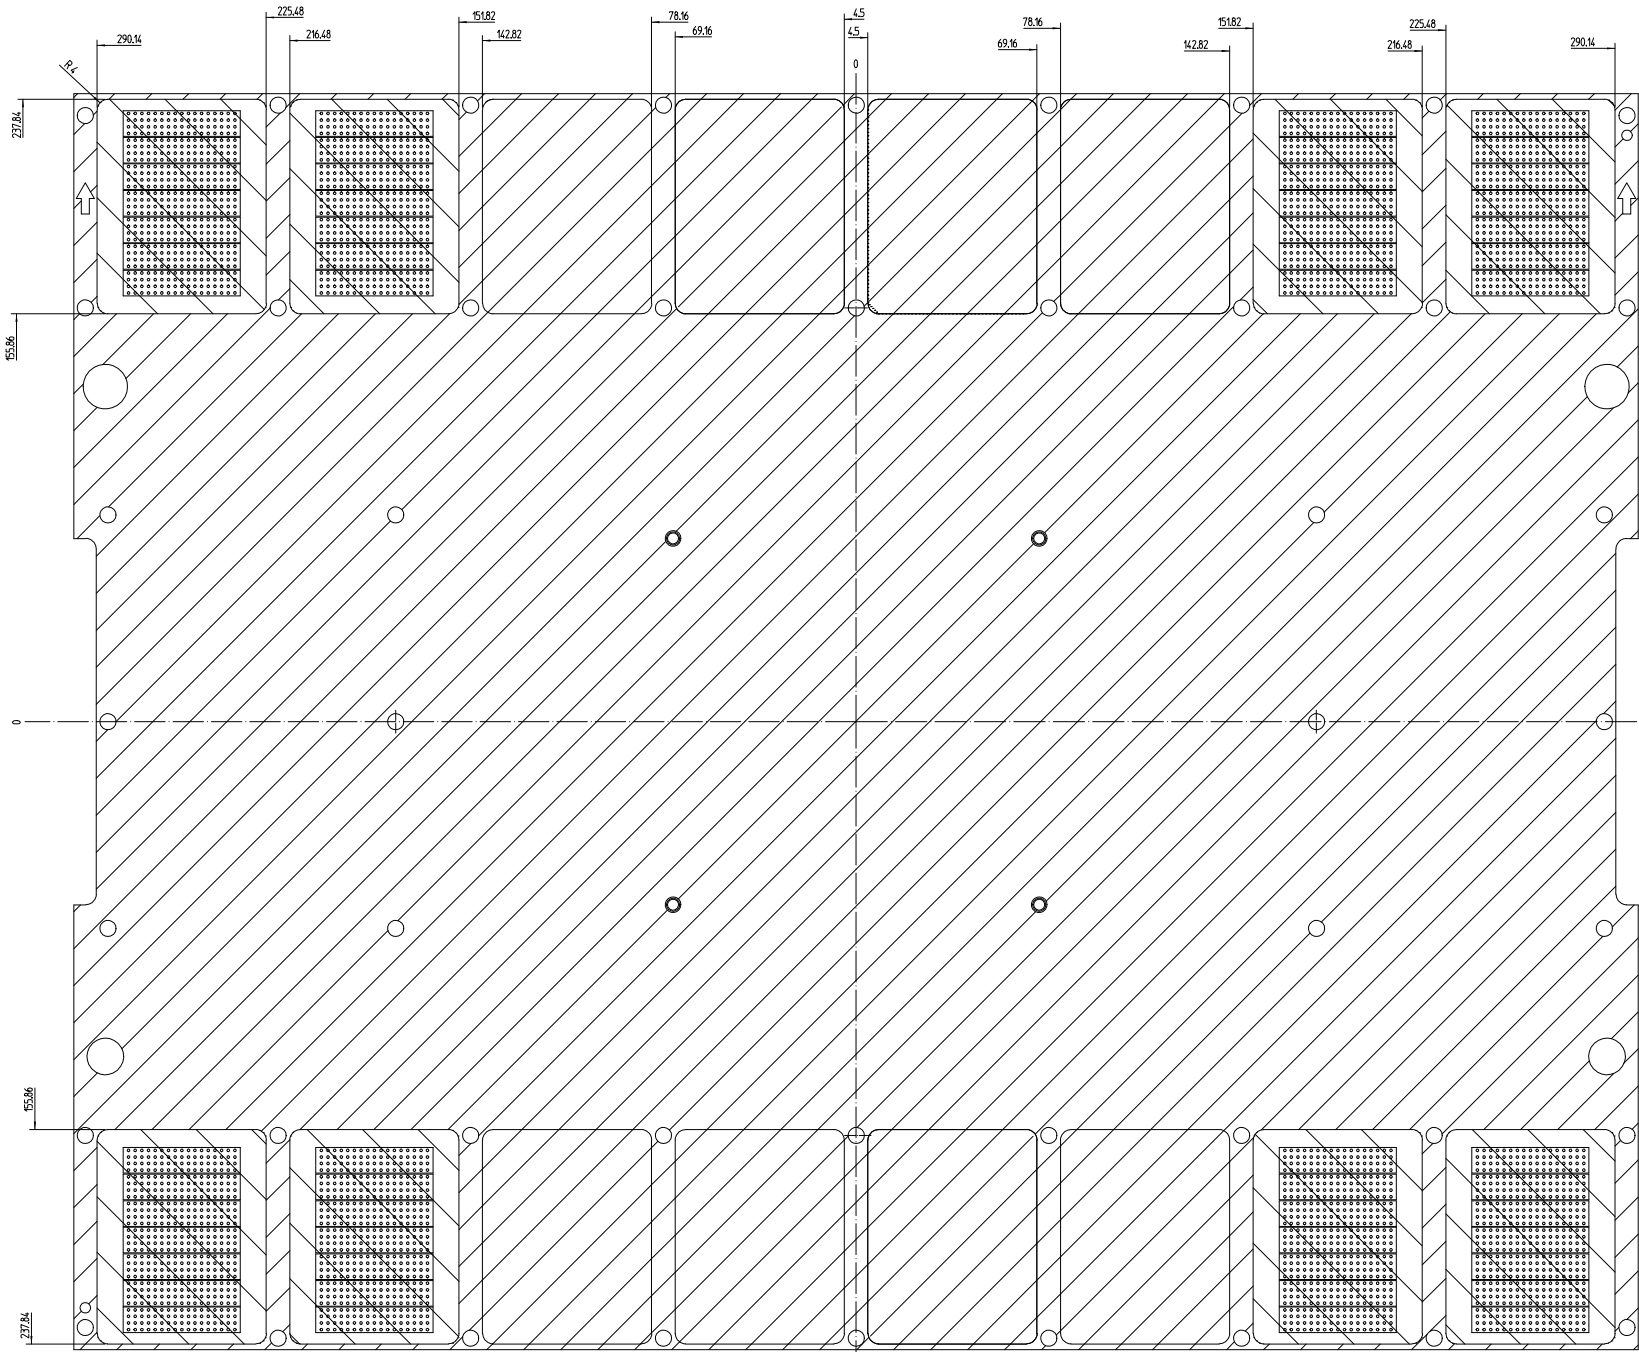


POGO SEGMENT AREA
RESERVED FOR POGO SEGMENTS
NO COMPONENTS ALLOWED
VIAS AND PADS ARE ALLOWED

COMPONENT AREA
COMPONENT AREA, LIMITED BY HANDLER INTERFACE
MAX COMPONENT HEIGHT LIMITED BY HANDLER INTERFACE

KOZ (KEEP OUT ZONE)
PCB TOPSIDE

TESTHEAD
CABLE OUTLET SIDE

VIEW FROM DUT SIDE
HATCHED SURFACES REFER TO PCB BOTTOMSIDE

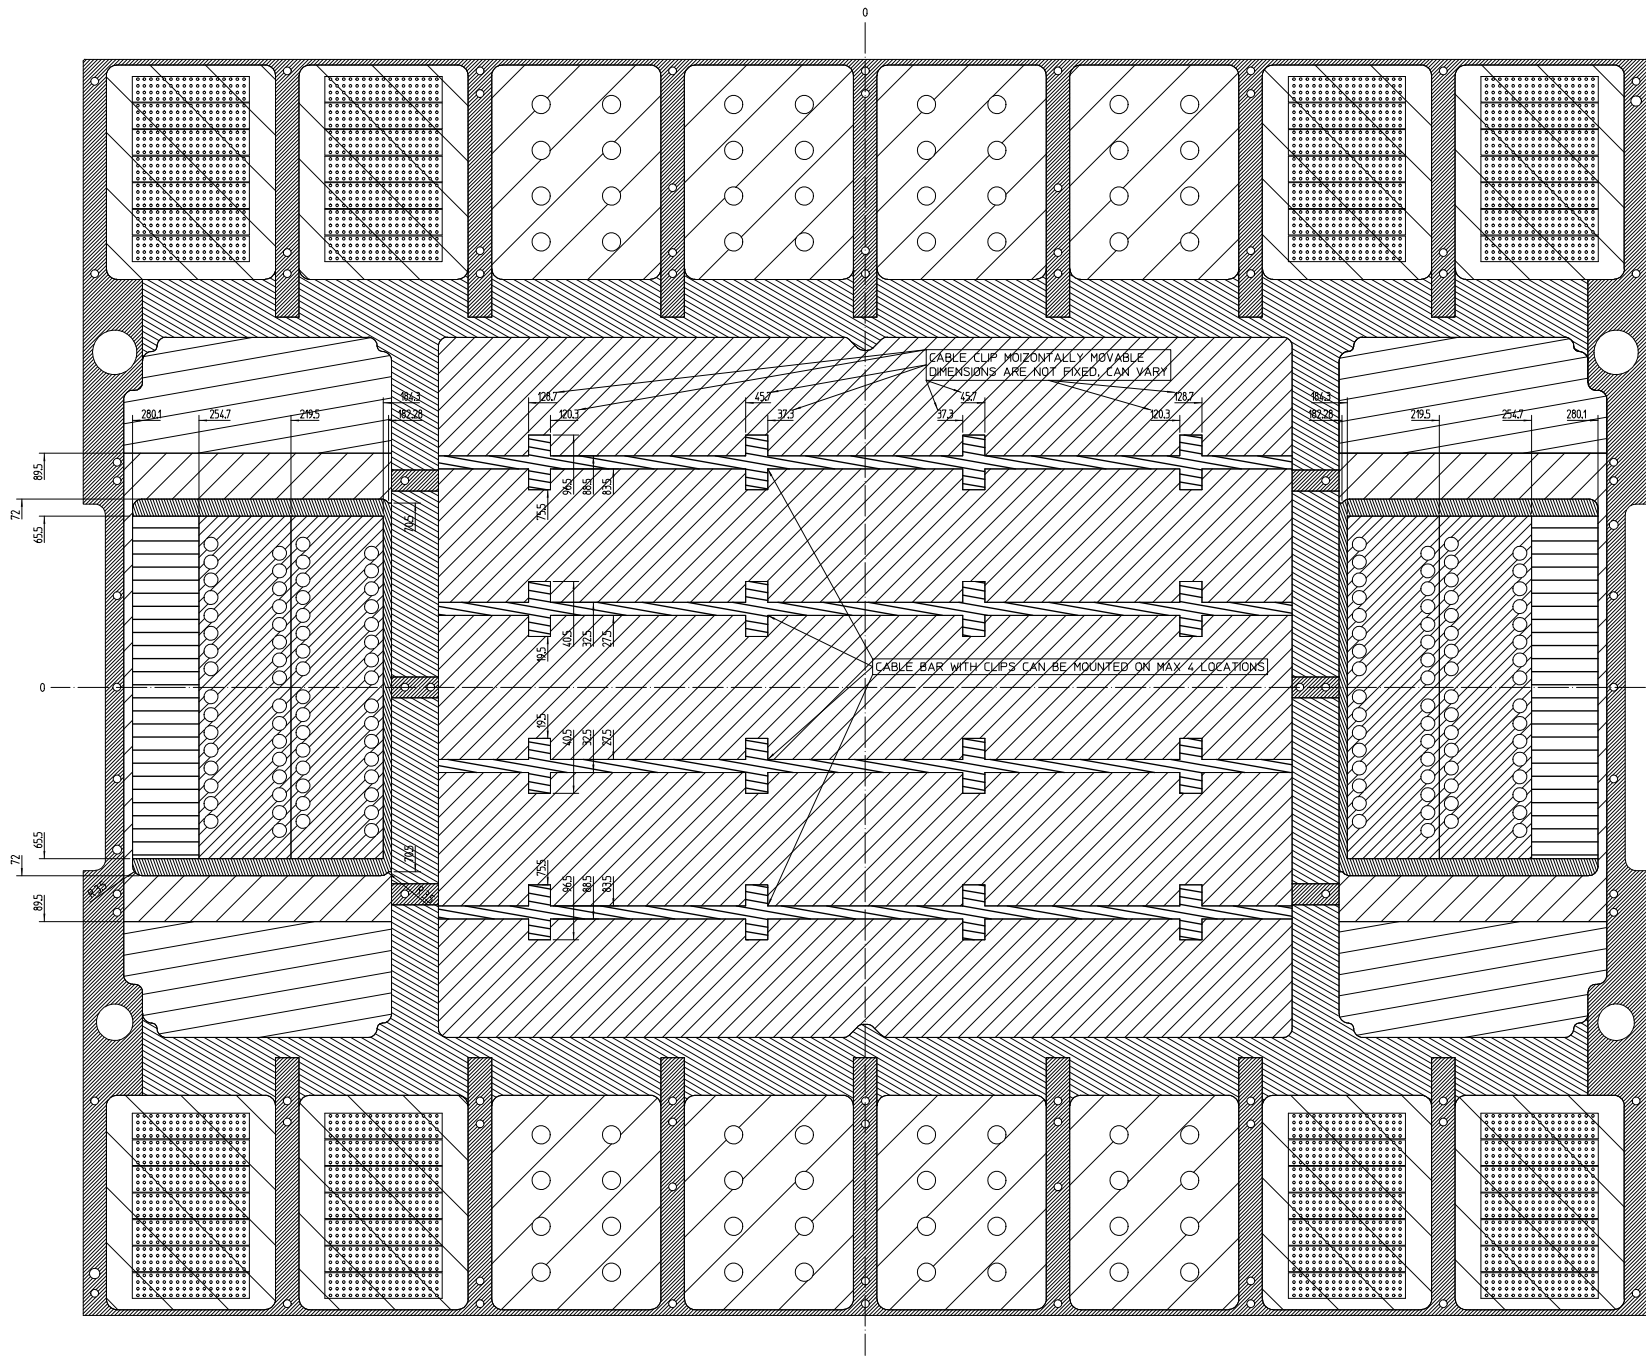

STIFFENER FRAME AREA
NO COMPONENTS ALLOWED
VIAS AND PADS ARE NOT ALLOWED

STIFFENER FRAME AREA
RESERVED FOR POGO SEGMENTS
NO COMPONENTS ALLOWED
VIAS AND PADS ARE ALLOWED

STIFFENER FRAME AREA
RESERVED FOR 185mm CABLE AREA
NO COMPONENTS ALLOWED
VIAS AND PADS ARE ALLOWED

STIFFENER FRAME AREA
0.5mm CLEARANCE TO STIFFENER
NO COMPONENTS ALLOWED
VIAS AND PADS ARE ALLOWED

RF ADAPTER BRACKET AREA, OUTER AREA
0.5mm CLEARANCE TO STIFFENER
NO COMPONENTS ALLOWED
VIAS AND PADS ARE ALLOWED

RF ADAPTER BRACKET AREA, OUTER AREA
0.5mm CLEARANCE TO STIFFENER
NO COMPONENTS ALLOWED
VIAS AND PADS ARE ALLOWED

COMPONENT AREA, OUTER AREA
MAX COMPONENT HEIGHT 12mm
IF RF CONNECTOR BRACKETS AND RF CABLES ARE NOT POPULATED
MAX COMPONENT HEIGHT 20mm

COMPONENT AREA, OUTER AREA
MAX COMPONENT HEIGHT 20mm

COMPONENT AREA, OUTER AREA
MAX COMPONENT HEIGHT 20mm

COMPONENT AREA, CENTER AREA
MAX COMPONENT HEIGHT 32mm

COMPONENT AREA, CENTER AREA
12mm CLEARANCE TO RF CABLE ROUTING BARS
AND 9mm CLEARANCE TO RF CABLE ROUTING CLIPS
MAX COMPONENT HEIGHT 8mm
IF RF CABLE ROUTING BARS AND CLIPS ARE NOT POPULATED, MAX. COMPONENT HEIGHT 20mm
STIFFENER INLAY NOT SHOWN, MAY VARY IF STIFFENER INLAY (STANDARD OR CUSTOMIZED VERSION) IS USED

NOTE:
KOZ FOR ALL GENERIC AREAS, SEE SHEET 2

KOZ (KEEP OUT ZONE)
WSMM RELATED
PCB BOTTOM SIDE

STANDARD TERMINALS UNLESS OTHERWISE SPECIFIED
LINEAR: ±0.1mm ANGULAR: ±0.5°
WORKPIECE EDGES ON ISO 13715
DO NOT SCALE THIS DRAWING
METRIC
DRAWING

Matthias Feyerabend
DRAWN BY
Jose Moreira
ENGINEER/CHECKER
UNLESS OTHERWISE SPECIFIED
* DIMENSIONS ARE IN MILLIMETERS
* THIRD ANGLE PROJECTION - 3RD ANGLE
* ADHERENCE TO DWS A-5951-041-1
COMPANY STL SECTION 4.08 AND
A-5951-043-1 (0308) IS REQUIRED

2018-08-31
DATE (YYYY-MM-DD)
2018-08-31
DATE

V93000 WAVESCALE
MILLIMETER DUT BOARD
SPECIFICATION
5 OF 8
SHEET


ADVANTEST.
PART NUMBER
E8027-96550
DOCUMENT NUMBER

VIEW FROM DUT SIDE
HATCHED SURFACES REFER TO PCB BOTTOMSIDE

TESTHEAD
CABLE OUTLET SIDE


ECH BLOCK USES THE
HD PIN NUMBERING

Detail 1
Scale 2:1




EXCEPT BLOCKS ASSIGNED TO UTILITY RESOURCES
WHICH USE THE UTILITY NUMBERING
(BLOCK ASSIGNMENT IS DEFINED BY THE FAMILY BOARD)

UTILITY BLOCK




see Detail 1

KOZ (KEEP OUT ZONE)
PORT ALLOCATION AND
PIN NUMBERING
PCB TOPSIDE

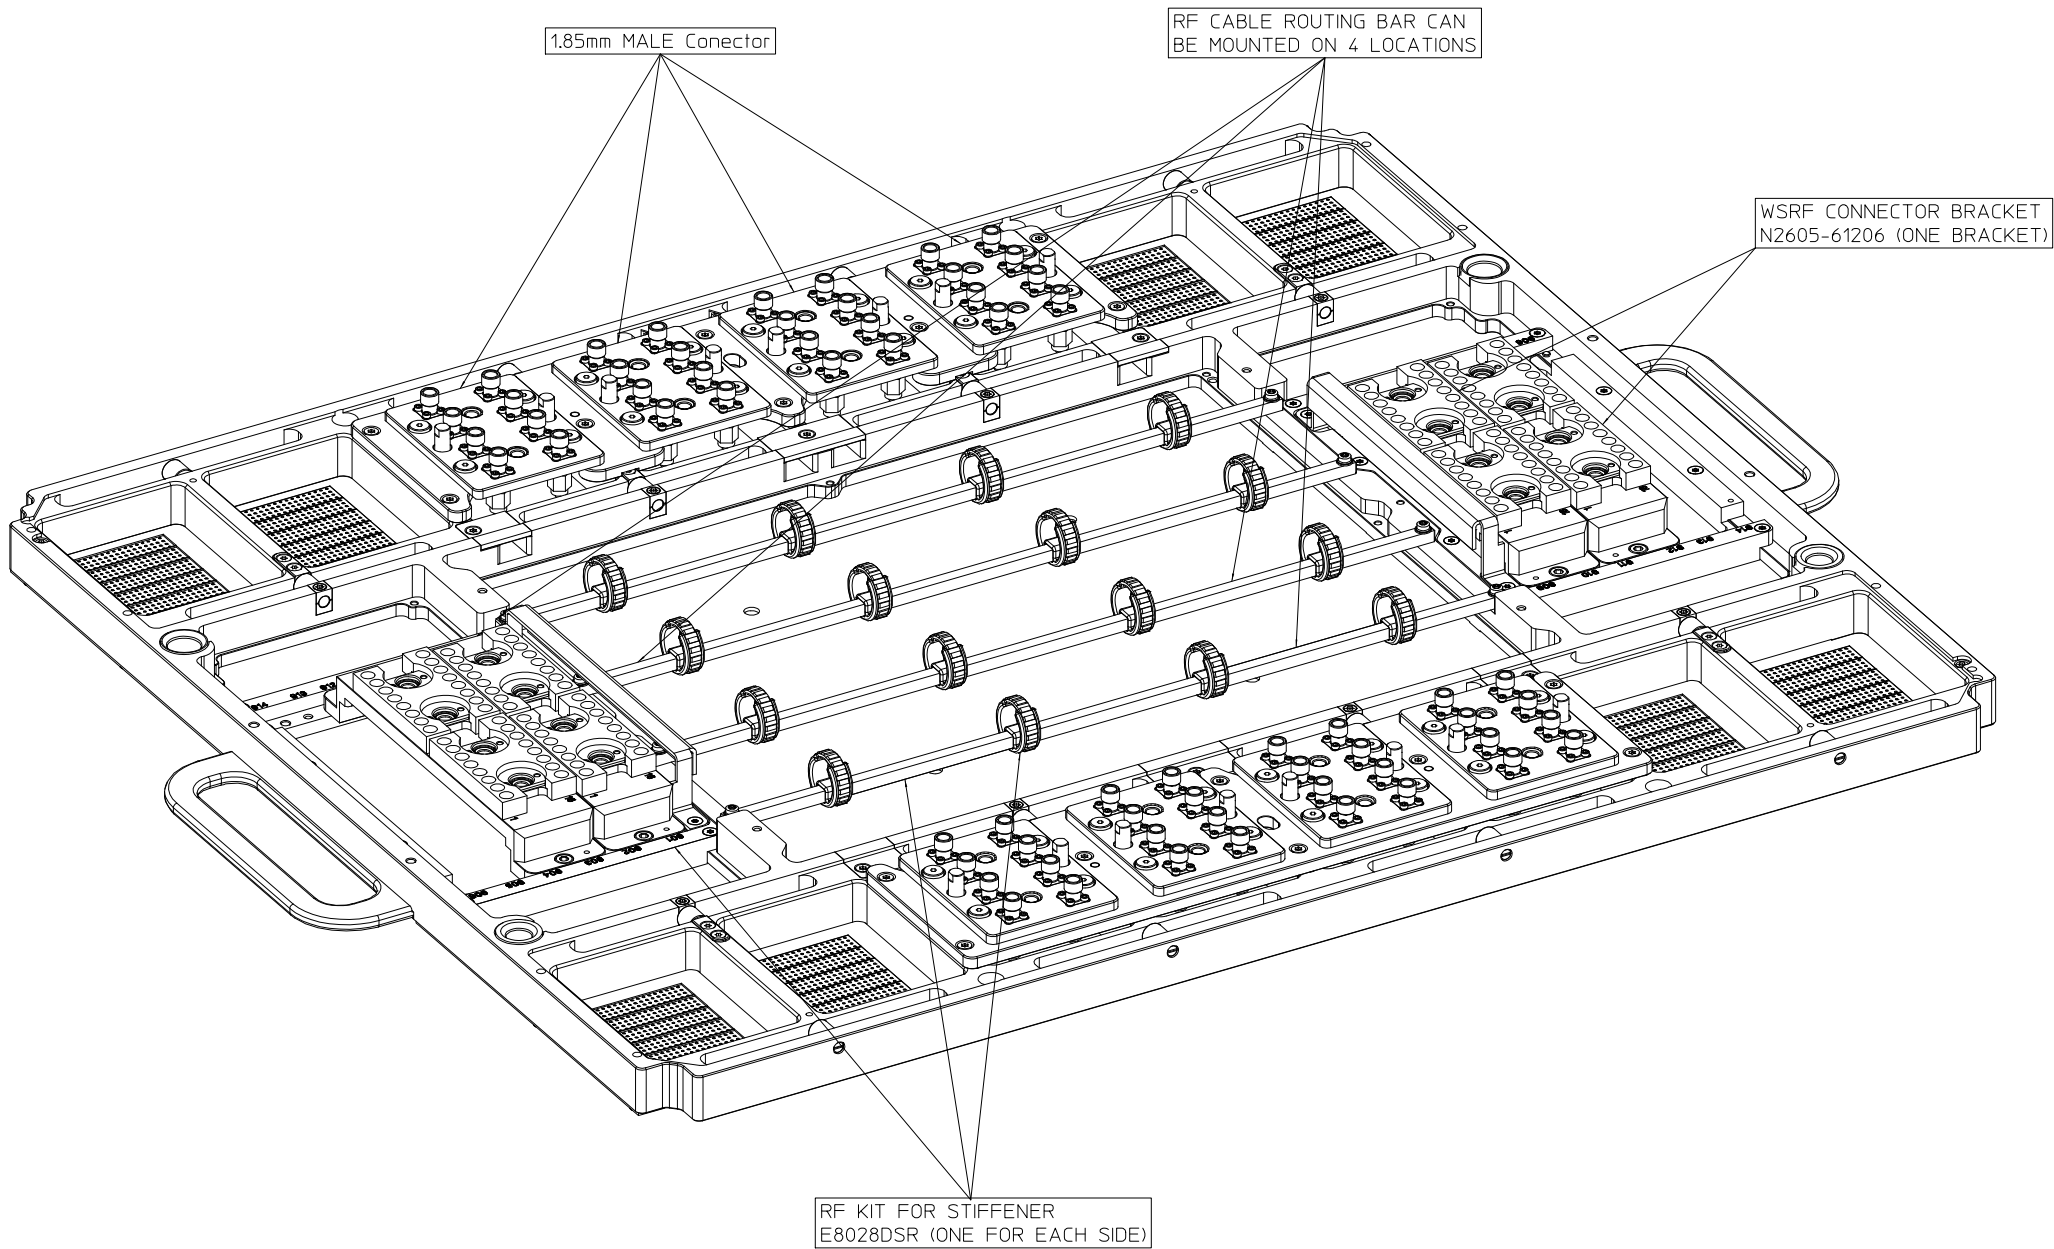

NOTE:
- STIFFENER INLAY NOT SHOWN
- CABLE COVER NOT SHOWN
- HANDLER INTERFACE NOT SHOWN

MMCC APPLICATION

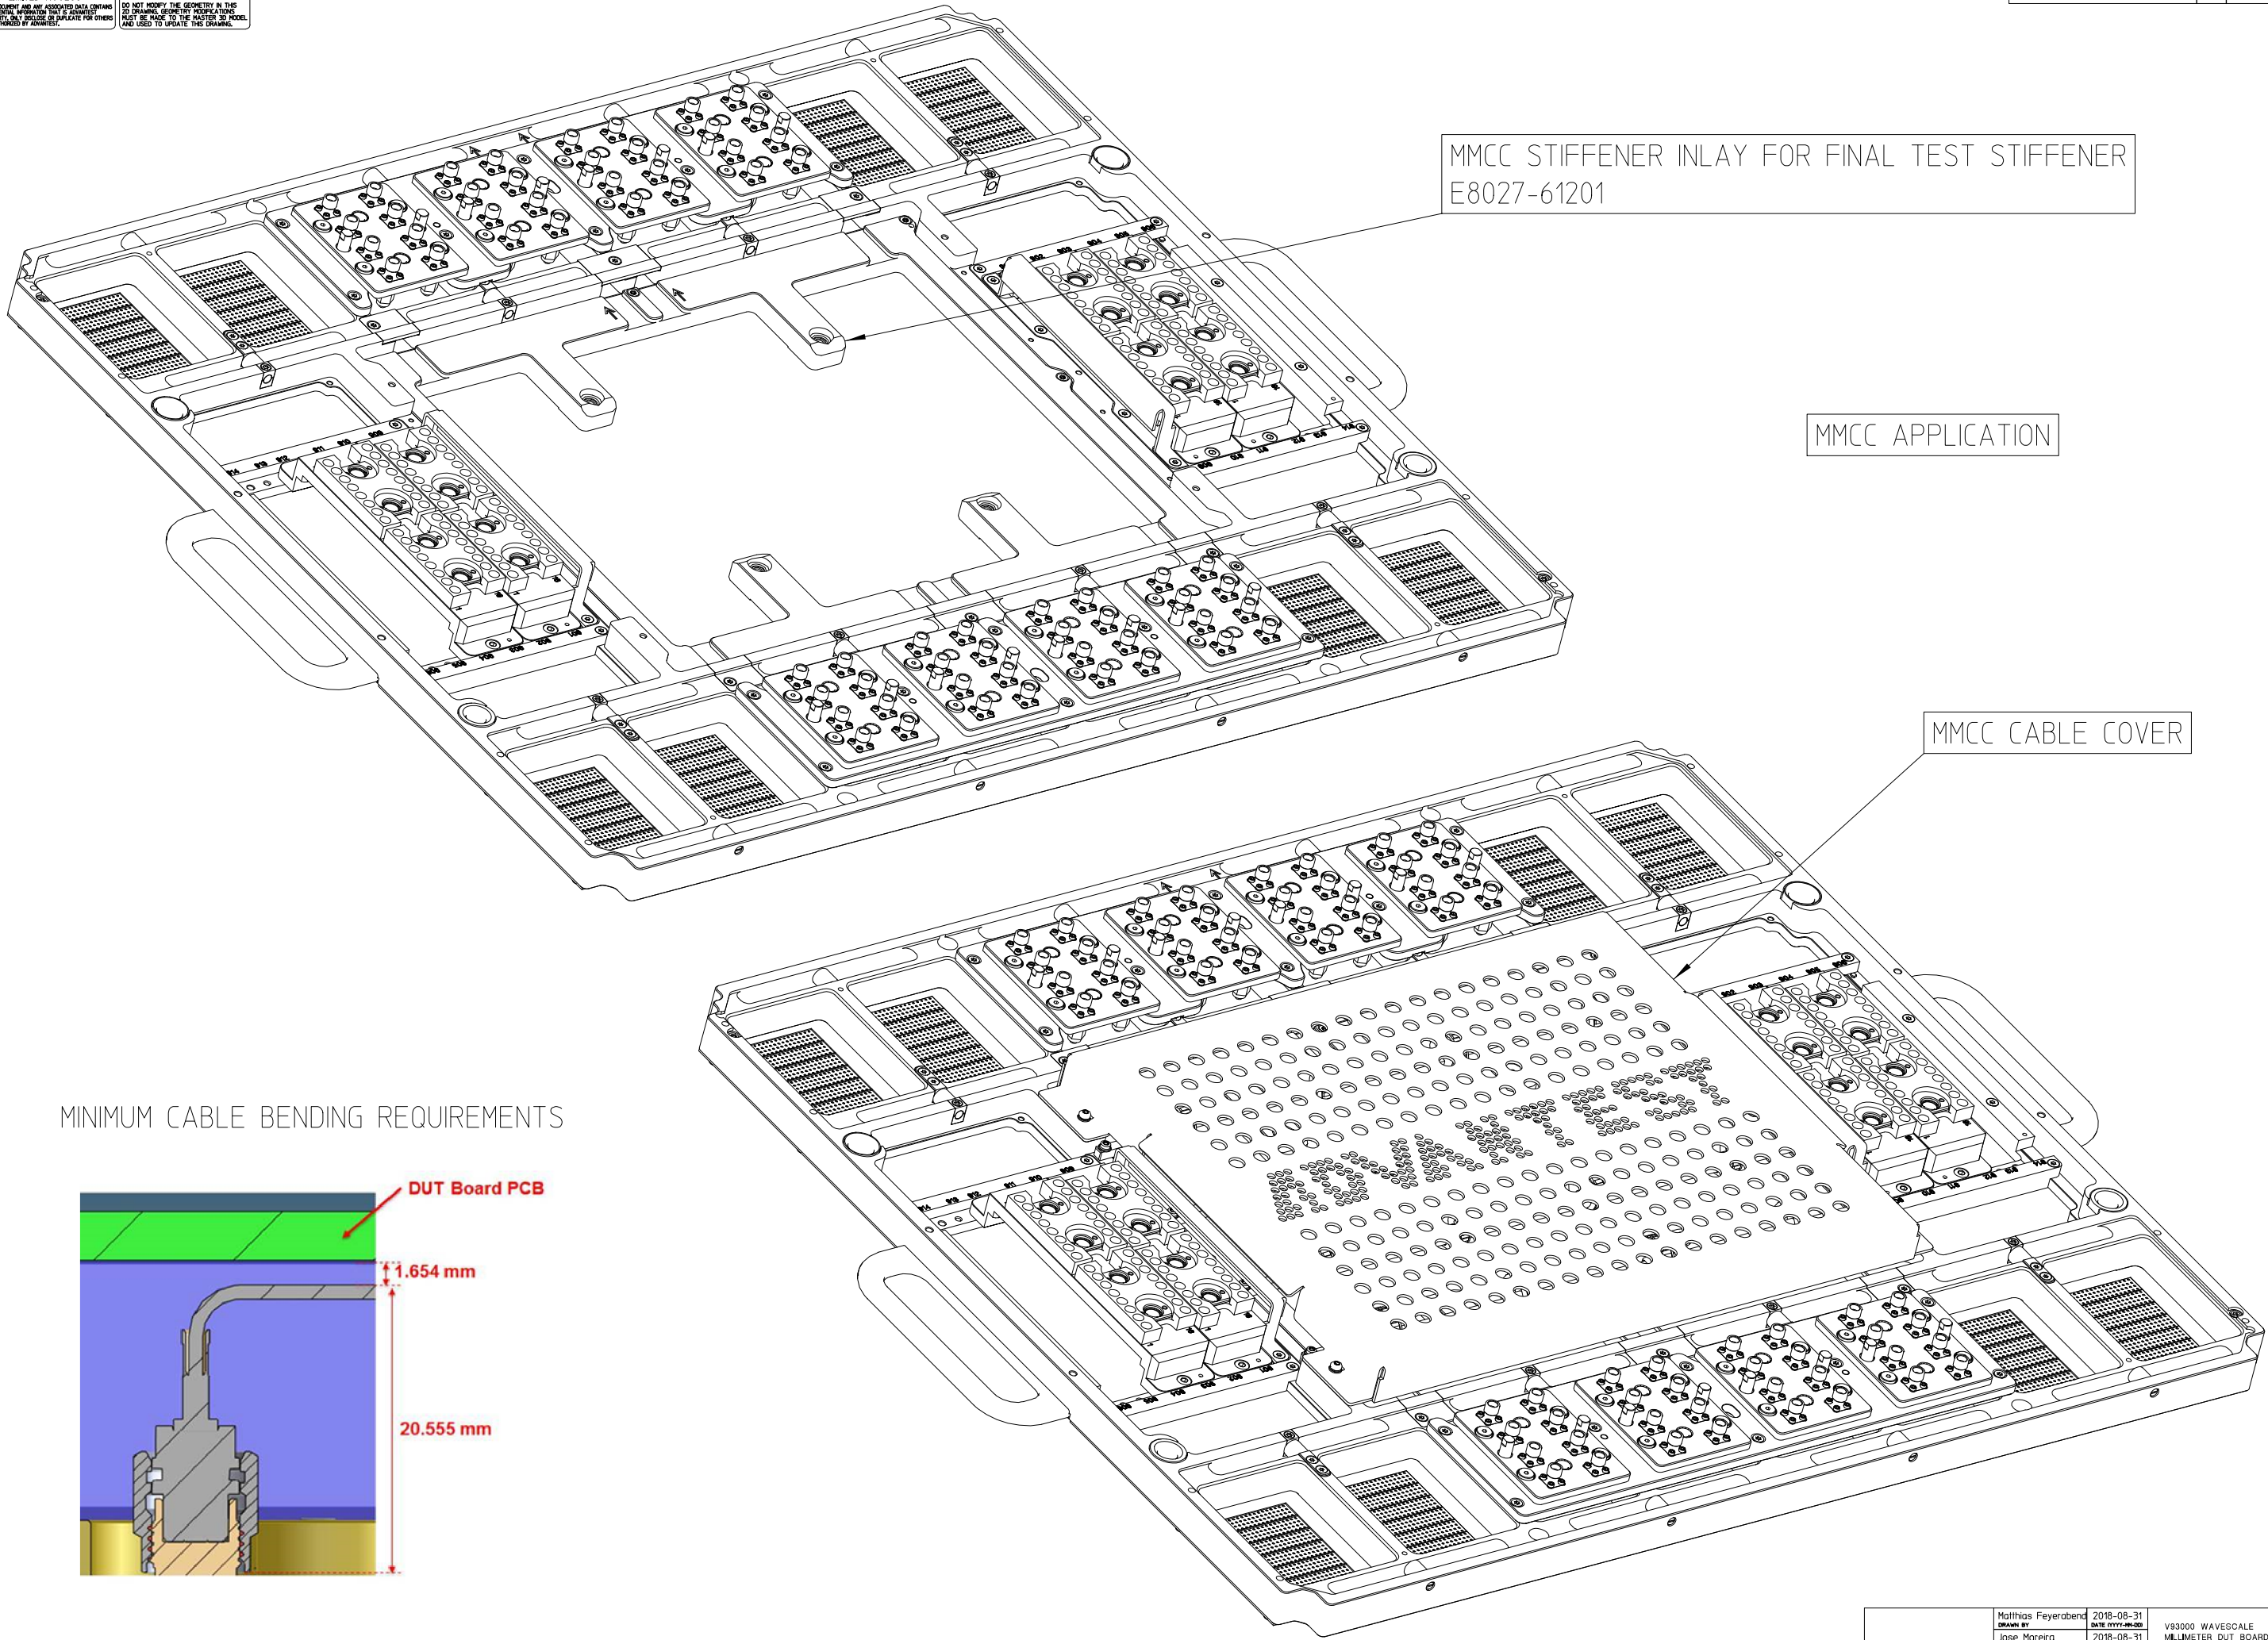

MMCC STIFFENER INLAY FOR FINAL TEST STIFFENER
E8027-61201

MMCC APPLICATION

MMCC CABLE COVER

MINIMUM CABLE BENDING REQUIREMENTS

