



THIS DOCUMENT AND ANY ASSOCIATED DATA CONTAINS
CONFIDENTIAL INFORMATION THAT IS ADVANTEST
PROPERTY. ONLY DISCLOSE OR DUPLICATE FOR OTHERS
AS AUTHORIZED BY ADVANTEST.

SPECIFICATION SUMMARY
FOR DETAILS, SEE DRAWING VIEWS

1. ALLOWABLE PROBE HEIGHT = SEE PROBER SPEC.
2. ALLOWABLE PCB THICKNESS = 3.5 TO 8.00MM.
3. CONTACT TAB PLANNARITY CONDITION = 0.03MM.
4. CAM HEIGHT CONDITION = 13.00 +/- 0.05MM.
5. MAX WEIGHT =12.5KG.

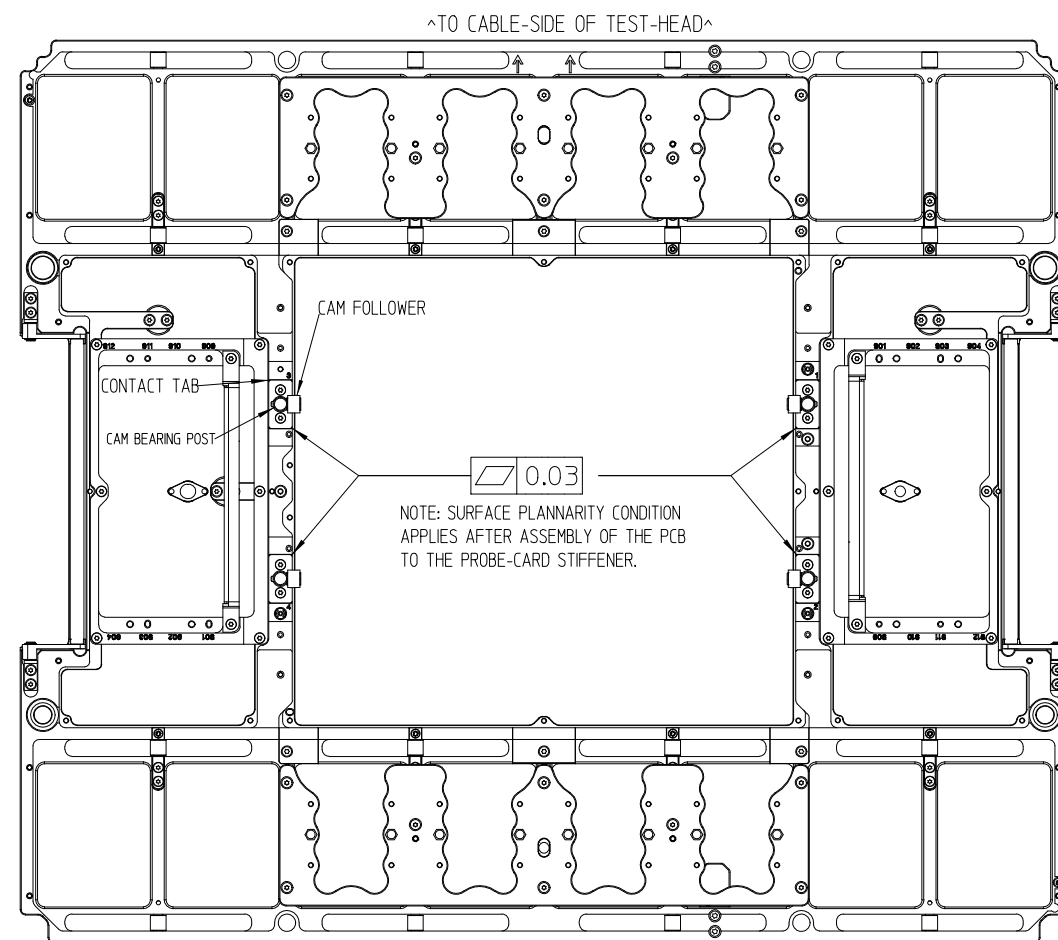


CAM HEIGHT CONDITION
NOTE: CAM HEIGHT IS PREPENDICULAR HEIGHT
FROM THE TOP OF EACH INDIVIDUAL CONTACT
TAB TO THE TANGENTIAL TOP OF ITS ASSOCIATED
CAM FOLLOWER.

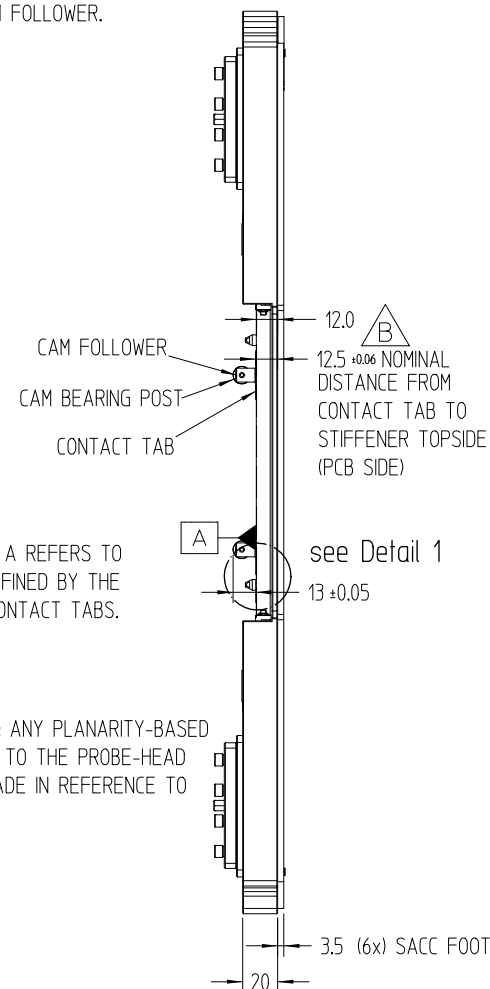


NOTE: DATUM A REFERS TO
PLANE AS DEFINED BY THE
TOP OF 4X CONTACT TABS.

RECOMMENDED: ANY PLANARITY-BASED
ADJUSTMENTS TO THE PROBE-HEAD
SHOULD BE MADE IN REFERENCE TO
DATUM A.




Detail 1
Scale 1.5:1

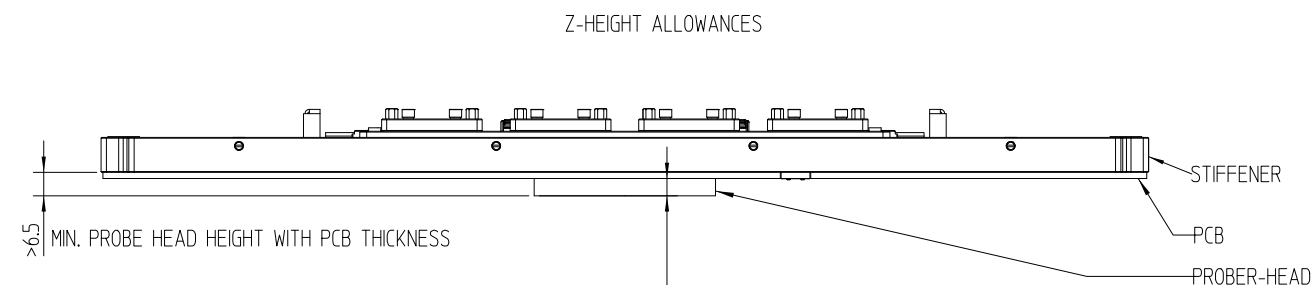

PREFER TO PROBER SPECIFICATIONS
FOR ALLOWABLE PROBE HEAD DEPTH
NOTE: ALLOWABLE PROBE HEAD DEPTH
MAY VARY FROM PROBER TO PROBER.
(++edited++)

FILE NAME E8027-96570.ami		REVISION B	STORE DATE 2019-04-09	DOCUMENT NUMBER E8027-96570	
SYM	REVISIONS			REVISED BY	DATE
A	AS ISSUED			Matthias Feyerabend	2018-07-25
B	TOLERANCE ADDED ON SHEET 1			Peter Hirschmann	2019-03-28

V93000 WAVESCALE MILLIMETER DIRECT DOCK PROBE CARD SPECIFICATIONS

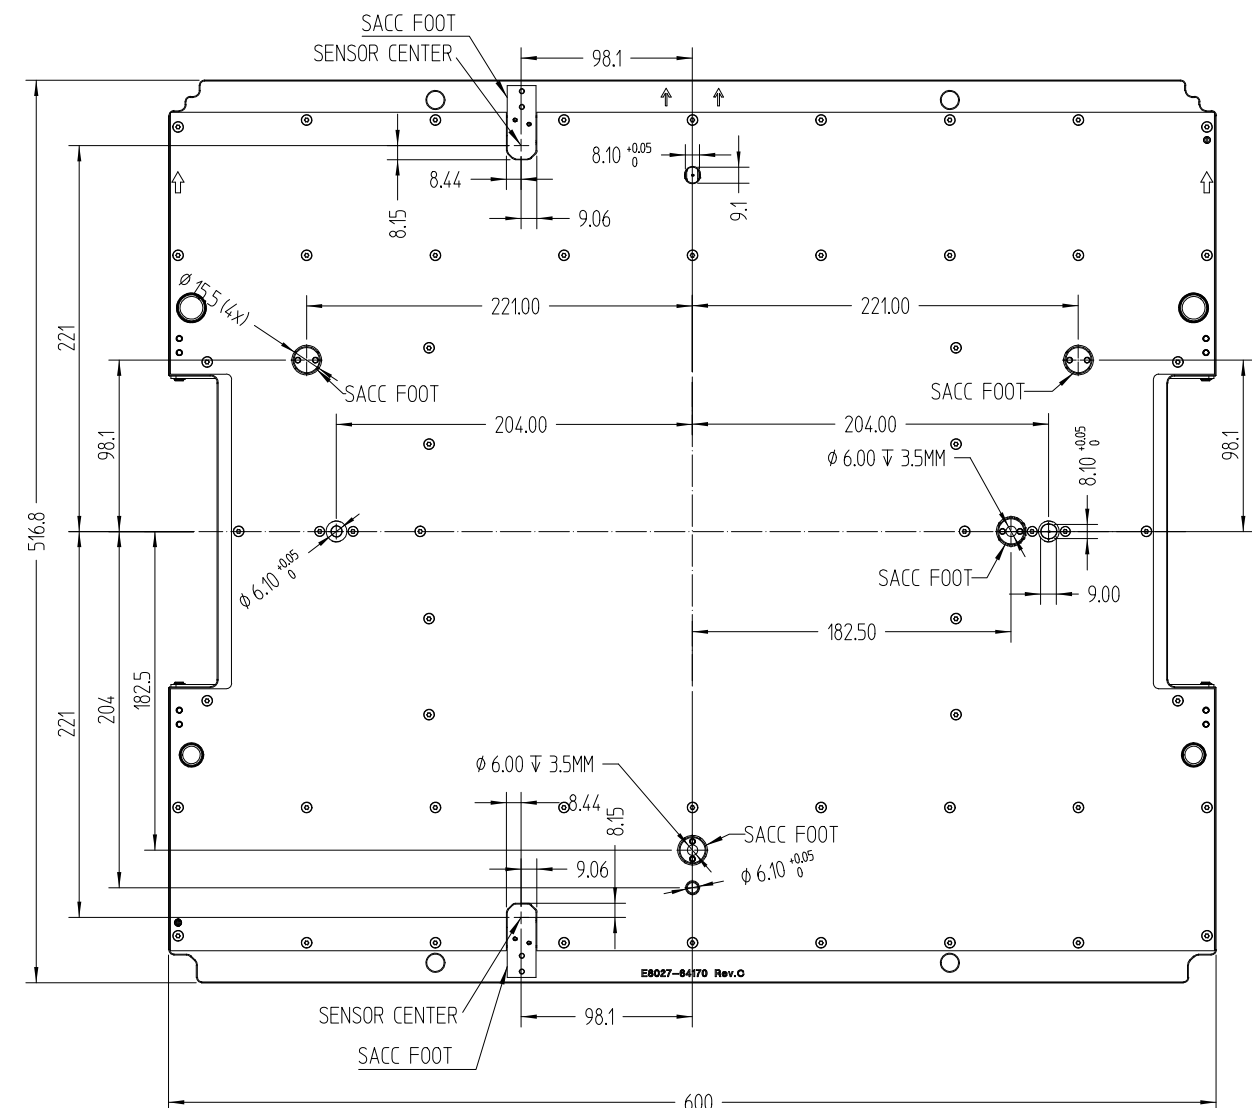

STANDARD TOLERANCES (UNLESS OTHERWISE SPECIFIED) LINEAR: ±0.1 mm ANGULAR: ±0.5°		Matthias Feyerabend DRAWN BY		2019-04-09 DATE (YYYY-MM-DD)		V93000 WAVESCALE MILLIMETER DIRECT DOCK PROBE CARD SPECIFICATIONS			ADVANTEST®	
WORKPIECE EDGES DIN ISO 13715 		Jose Moreira ENGINEER/CHECKER		2019-04-09 DATE		TITLE 1 OF 8 SHEET			PART NUMBER E8027-96570 DOCUMENT NUMBER	
DO NOT SCALE THIS METRIC DRAWING		UNLESS OTHERWISE SPECIFIED • DIMENSIONS ARE IN MILLIMETERS • THIRD ANGLE PROJECTION  • ADHERENCE TO DWG A-5951-1561-1 (COMPANY STD. SECTION 608) AND A-5951-1745-1 (GSE) IS REQUIRED		FRAME DATE: 2006-06-01 1:3 SCALE						

TEST HEAD
CABLE OUTLET SIDE

2X $\varnothing 4.02^{+0.03}_{-0.01}$ THRU
— NOTE: RECOMMEND TO DRILL GUIDE
HOLES DURING SAME PROCESS
AS TESTER RESOURCE VIAS.

8X Ø 3.6 THRU

4X Ø 4.2 THRU ALL
✓ Ø 5.60 X 90°

Ø 8.0 $^{+0.2}_0$ THRU

GD&T SYMBOLOGY
PER
ISO 1101 & ISO 5459

2019-04-09
DATE


DATE: 2006-06-01

A2 SIZE

E8027-96570
DOCUMENT NUMBER

TEST HEAD
CABLE OUTLET SIDE

VIEW FROM DUT/PROBE SIDE
HATCHED SURFACES REFER TO PCB BOTTOM SIDE

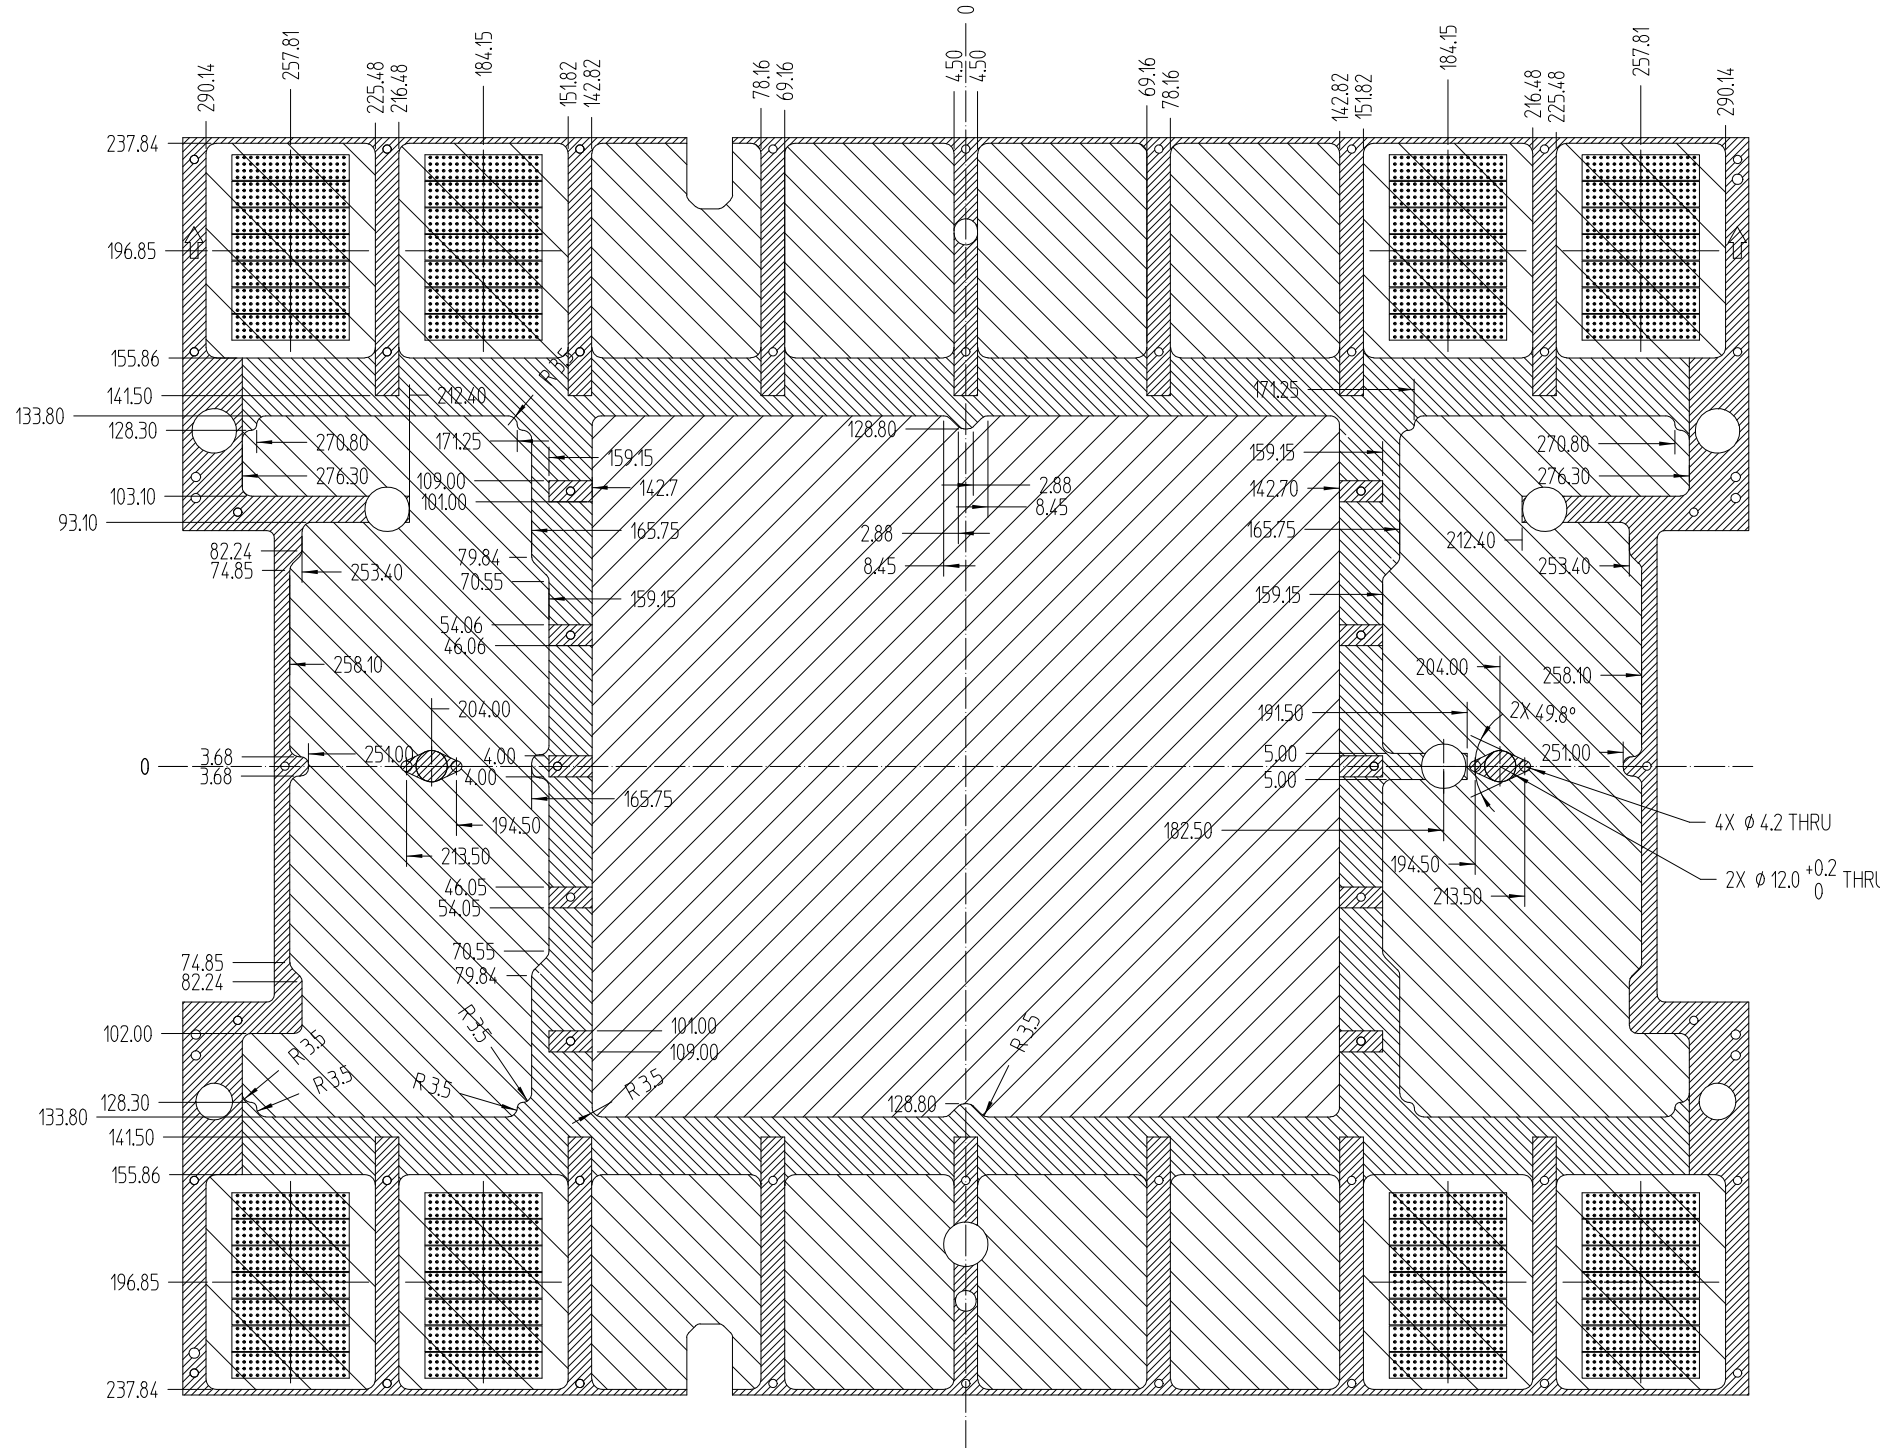

STIFFENER FRAME AREA
NO COMPONENTS ALLOWED.
VIAS AND PADS ARE NOT ALLOWED.

STIFFENER FRAME AREA
RESERVED FOR POGO SEGMENTS.
NO COMPONENTS ALLOWED.
VIAS AND PADS ARE ALLOWED.

STIFFENER FRAME AREA
0.5mm CLEARANCE TO STIFFENER.
NO COMPONENTS ALLOWED.
VIAS AND PADS ARE ALLOWED.

COMPONENT AREA, CENTER AREA
COMPONENT AREA LIMITED BY WSMM BRIDGE BEAM
SEE SHEET 5.

COMPONENT AREA, OUTER AREA
COMPONENT AREA LIMITED BY WSMM BRIDGE BEAM
SEE SHEET 5.

1.85mm CABLE AREA
0.5mm CLEARANCE TO STIFFENER

GENERAL NOTES FOR POGO LANDING PADS/VIAS:
1. POGO LANDING PADS: $\phi 1.4\text{mm}$... 1.5mm HARD GOLD PLATED
POGO LANDING HOLES: $\phi 0.7\text{mm}$ FHS MAX (FINISH HOLE SIZE).
2. FOR MORE SPECIFIC INFORMATION, SEE TDC TOPIC 247077

STANDARD TOLERANCES (UNLESS OTHERWISE SPECIFIED): LINEAR: $\pm 0.1\text{mm}$ ANGULAR: $\pm 0.5^\circ$	
WORKPIECE EDGES DIN ISO 13715	
DO NOT SCALE THIS DRAWING	GD&T SYMBOLS PER ISO 1101 & ISO 5459

Matthias Feyerabend DRAWN BY	2019-04-09 DATE (YYYY-MM-DD)
Jose Moreira ENGINEER/CHECKER	2019-04-09 DATE
UNLESS OTHERWISE SPECIFIED • DIMENSIONS ARE IN MILLIMETERS • THIRD ANGLE PROJECTION	
• ADHERENCE TO DWG A-5951-1541-1 (COMPANY STD. SECTION 608) AND A-5951-1745-1 (GSE) IS REQUIRED	

KOZ PCB BOTTOM SIDE		ADVANTEST	
TITLE		PART NUMBER	
3 OF 8 SHEET	1:2 SCALE	A2 SIZE	E8027-96570 DOCUMENT NUMBER

ADVANTEST CONFIDENTIAL
LIMITED ACCESS

THIS DOCUMENT AND ANY ASSOCIATED DATA CONTAINS
CONFIDENTIAL INFORMATION THAT IS ADVANTEST
PROPERTY. ONLY DISCLOSE OR DUPLICATE FOR OTHERS
AS AUTHORIZED BY ADVANTEST.

FILE NAME
E8027-96570.ami


REVISION
B

STORE DATE
2019-04-09

DOCUMENT NUMBER
E8027-96570

VIEW FROM DUT/PROBE SIDE
HATCHED SURFACES REFER TO PCB TOPSIDE

TESTHEAD
CABLE OUTLET SIDE

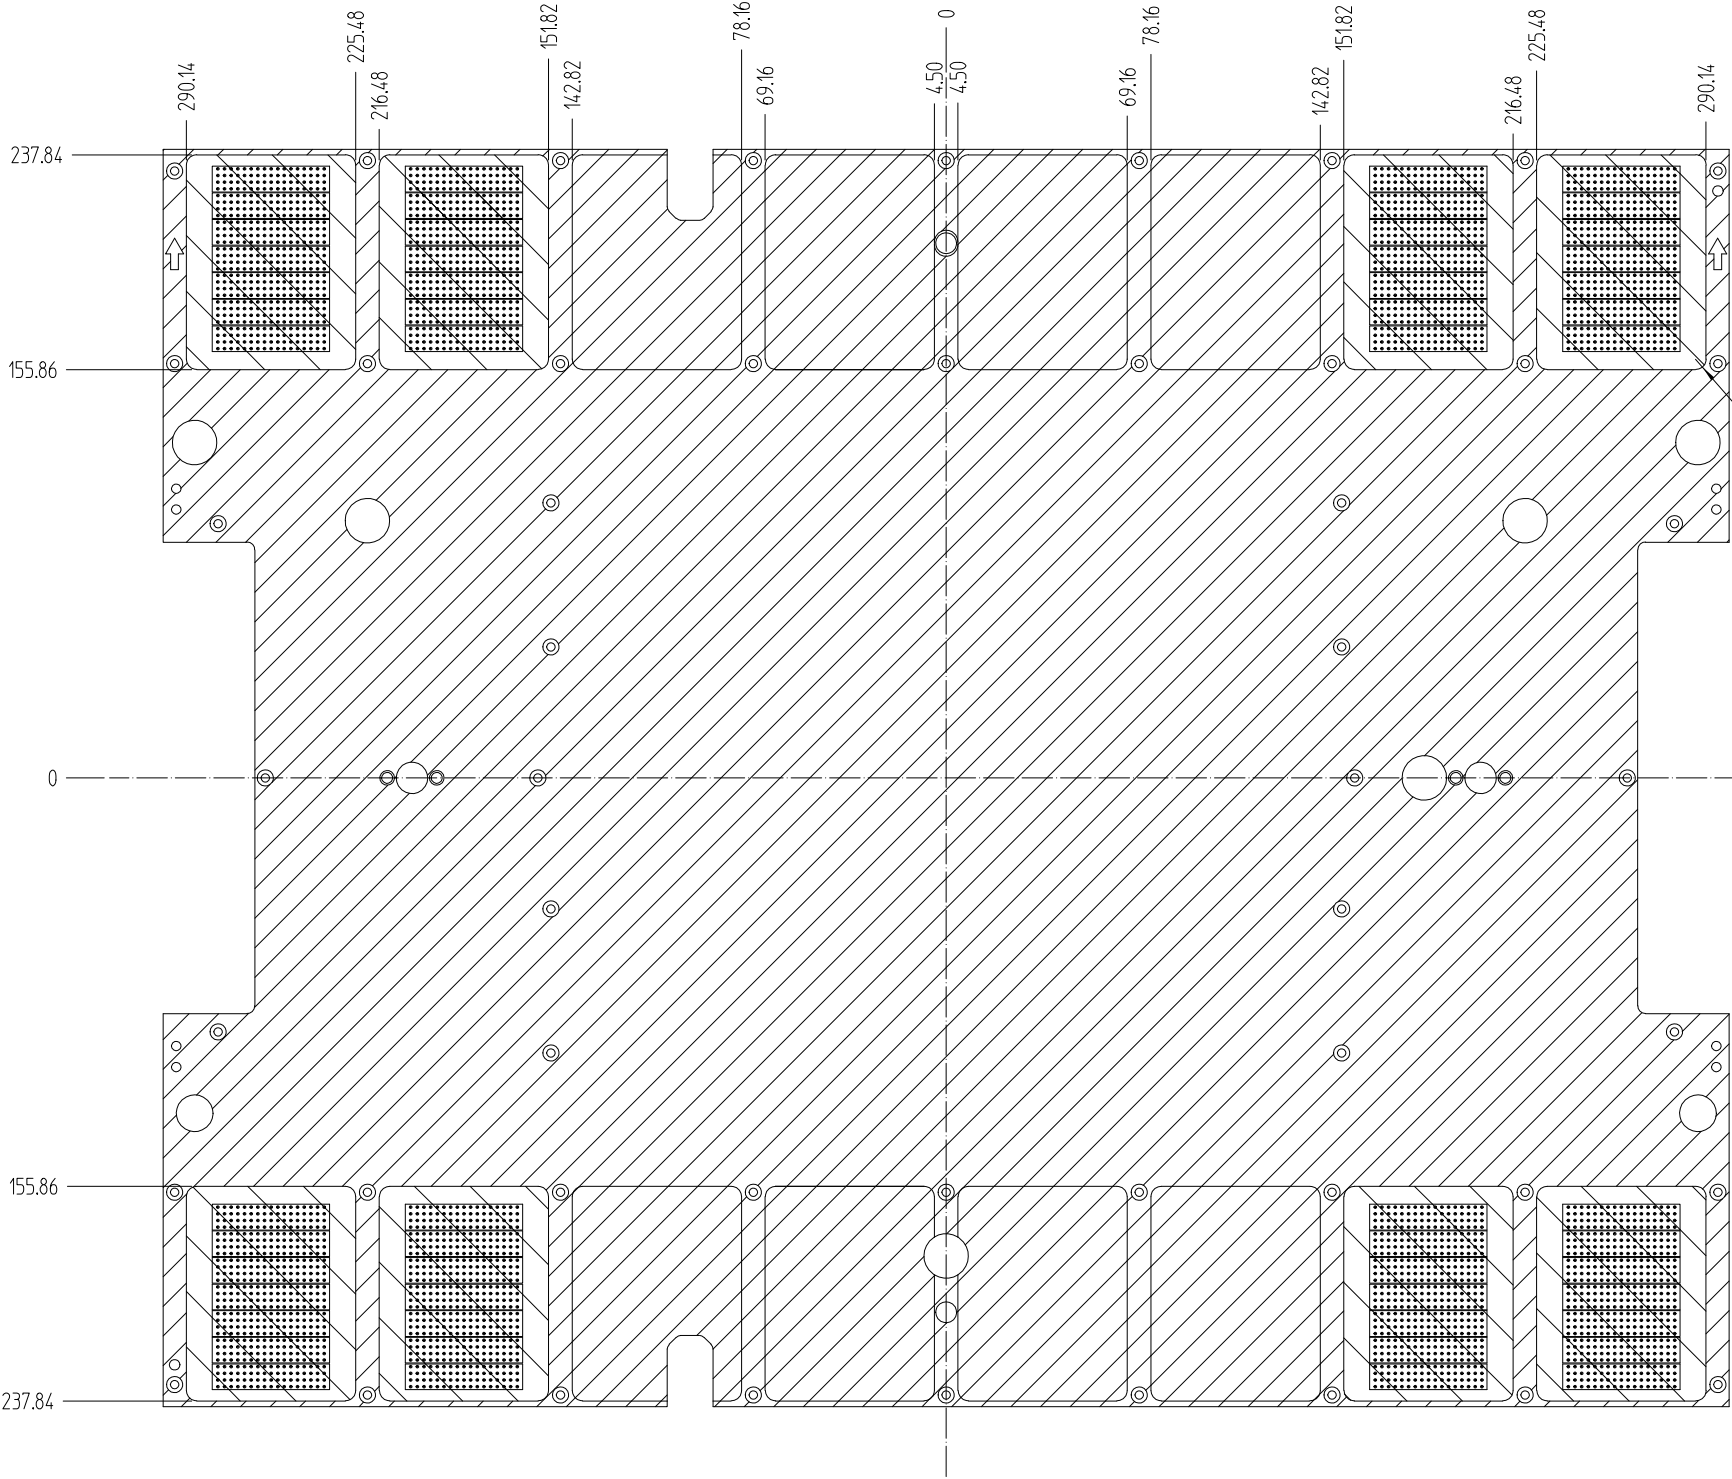

POGO SEGMENT AREA
RESERVED FOR POGO SEGMENTS.
NO COMPONENTS ALLOWED.
VIAS AND PADS ARE ALLOWED.



COMPONENT AREA
MAX COMPONENT AREA, REDUCED BY PROBE SACC.
MAX COMPONENT HEIGHT DEFINED BY PROBE SACC AND PROBE HEAD HEIGHT.

STANDARD TOLERANCES (UNLESS OTHERWISE SPECIFIED)
LINEAR: ± 0.1 mm ANGULAR: $\pm 0.5^\circ$

WORKPIECE EDGES DIN ISO 13715



DO NOT SCALE THIS
DRAWING
METRIC

GD&T SYMBOLOGY
PER
ISO 1101 & ISO 5459

Matthias Feyerabend
DRAWN BY

Jose Moreira
ENGINEER/CHECKER

UNLESS OTHERWISE SPECIFIED
• DIMENSIONS ARE IN MILLIMETERS
• THIRD ANGLE PROJECTION
• ADHERENCE TO DWG A-5951-1561-1
(COMPANY STD. SECTION 608) AND
A-5951-1745-1 (GSE) IS REQUIRED

2019-04-09
DATE (YYYY-MM-DD)

2019-04-09
DATE

**KOZ
PCB TOPSIDE**

TITLE

4 OF 8
SHEET

1:2
SCALE



A2
SIZE

ADVANTEST.


PART
NUMBER

E8027-96570
DOCUMENT NUMBER

VIEW FROM DUT/PROBE SIDE
HATCHED SURFACES REFER TO PCB BOTTOM SIDE

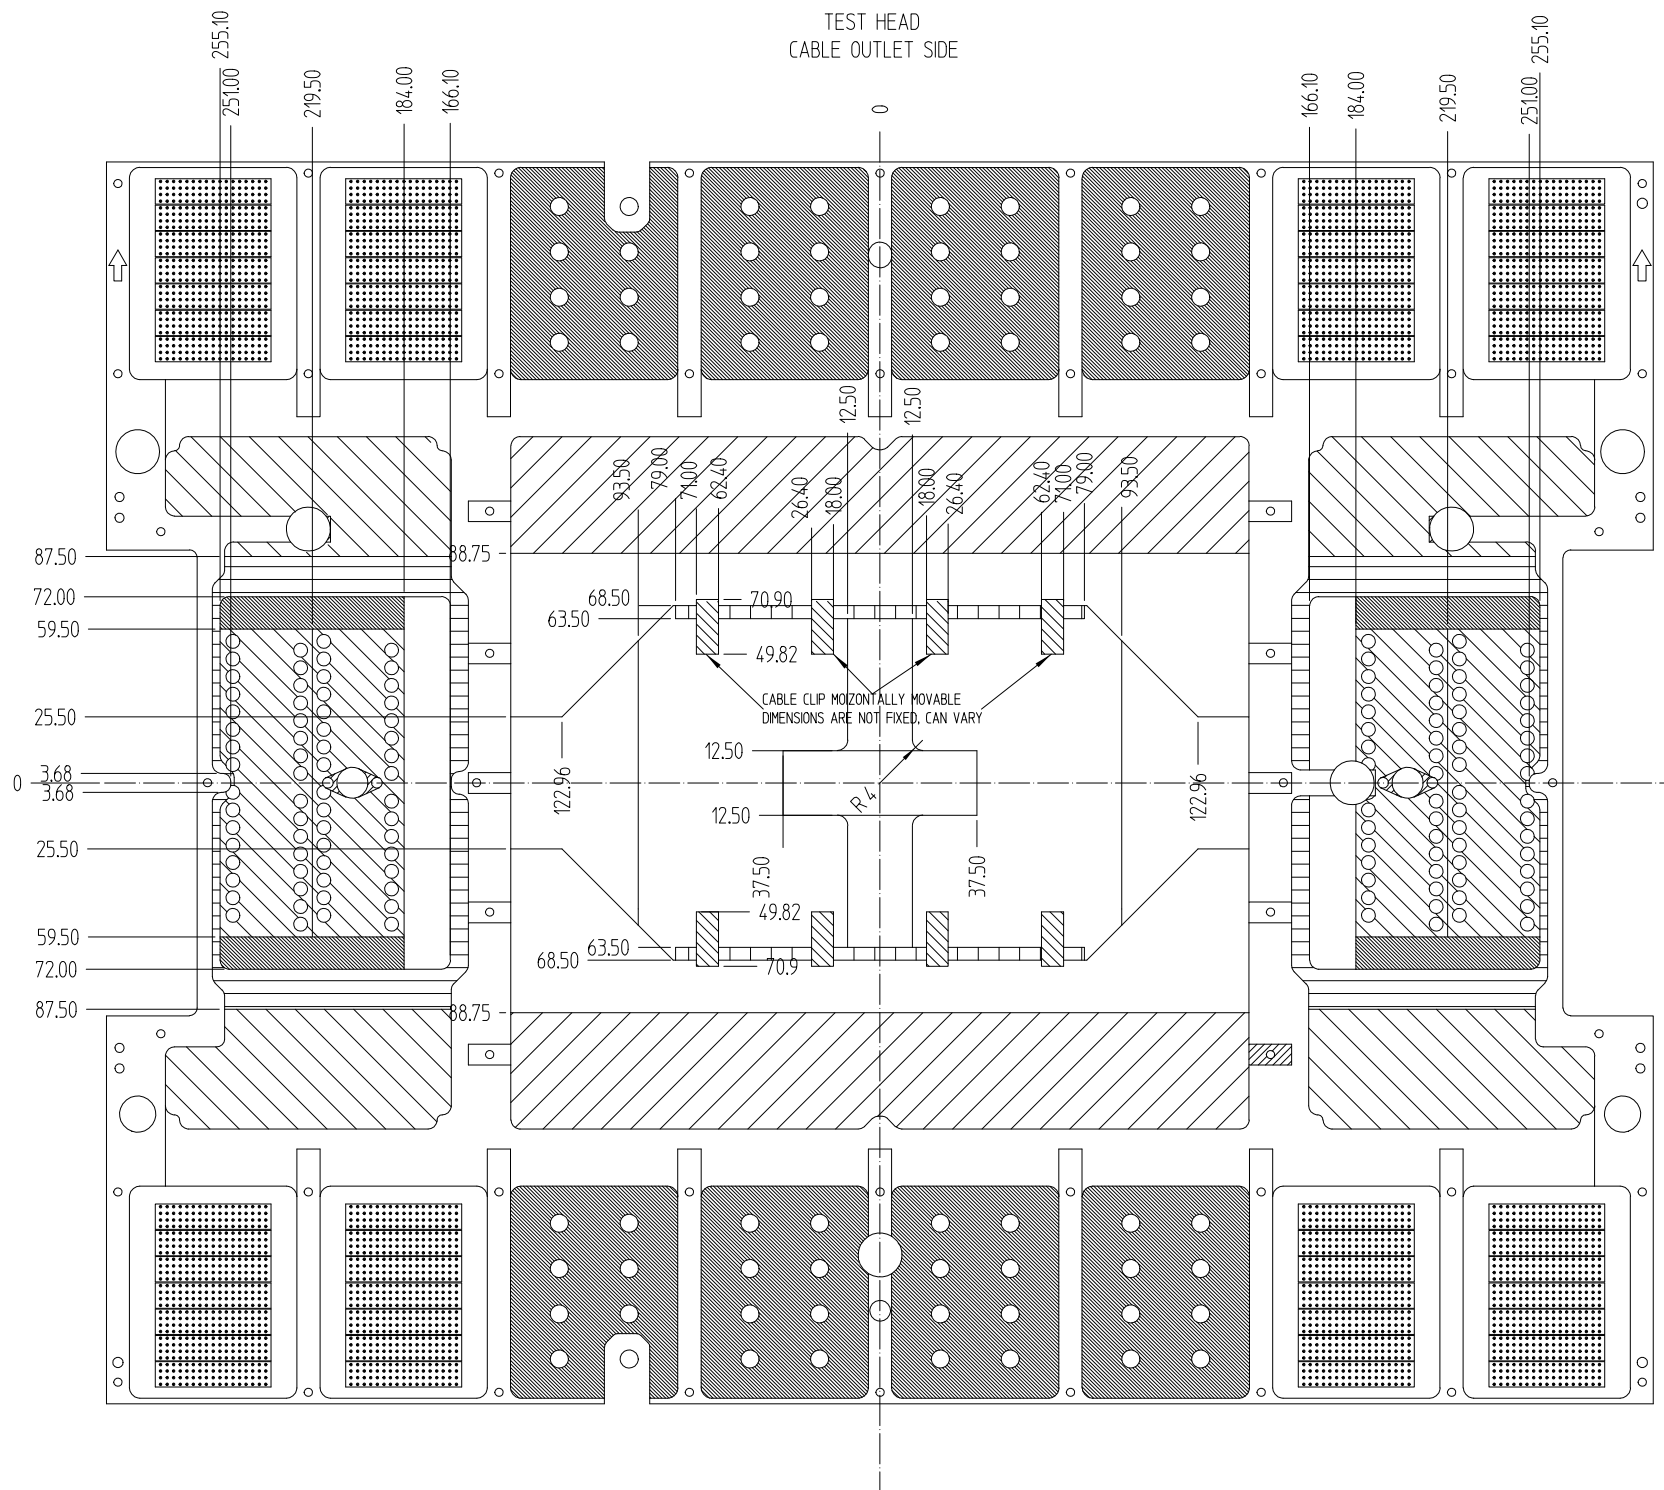

COMPONENT AREA, CENTER AREA
MAX COMPONENT HEIGHT 20MM.



COMPONENT AREA, OUTER AREA
MAX COMPONENT HEIGHT 20MM.




RF ADAPTER BRACKET AREA, OUTER AREA
0.5mm CLEARANCE TO STIFFENER.
NO COMPONENTS ALLOWED.
VIAS AND PADS ARE ALLOWED.




COMPONENT AREA, OUTER AREA
5MM CLEARANCE TO RF ADAPTER BRACKET.
MAX COMPONENT HEIGHT 4MM.



COMPONENT AREA, OUTER AREA
MAX COMPONENT HEIGHT 12MM.
IF RF CONNECTOR BRACKETS AND RF CABLES ARE NOT POPULATED, MAX COMPONENT HEIGHT 20MM.



COMPONENT AREA, CENTER AREA
MAX COMPONENT HEIGHT 15MM.
IF RF CABLE ROUTING BARS ARE NOT POPULATED, MAX COMPONENT HEIGHT 20MM.
STIFFENER INLAY NOT SHOWN, MAY VARY IF STIFFENER INLAY (STANDARD OR CUSTOMIZED VERSION) IS USED



COMPONENT AREA, CENTER AREA
MAX COMPONENT HEIGHT 8MM.
IF RF CABLE ROUTING BARS AND CLIPS ARE NOT POPULATED, MAX COMPONENT HEIGHT 20MM.

NOTE:
KOZ FOR ALL GENERIC AREAS,
SEE SHEET 3.

STANDARD TOLERANCES (UNLESS OTHERWISE SPECIFIED) LINEAR: ± 0.1 mm ANGULAR: $\pm 0.5^\circ$	
WORKPIECE EDGES DIN ISO 13715 	
DO NOT SCALE THIS DRAWING METRIC	GD&T SYMBOLOGY PER ISO 1101 & ISO 5459

Matthias Feyerabend DRAWN BY DATE (YYYY-MM-DD)	2019-04-09
Jose Moreira ENGINEER/CHECKER DATE	2019-04-09
UNLESS OTHERWISE SPECIFIED • DIMENSIONS ARE IN MILLIMETERS • THIRD ANGLE PROJECTION • ADHERENCE TO DWG A-5951-1561-1 (COMPANY STD. SECTION 608) AND A-5951-1745-1 (GSE) IS REQUIRED	

KOZ PCB BOTTOM SIDE		
TITLE		
5 OF 8 SHEET	1:3 SCALE	A2 SIZE

ADVANTEST.	
PART NUMBER	
E8027-96570	
DOCUMENT NUMBER	

ADVANTEST CONFIDENTIAL
LIMITED ACCESS

THIS DOCUMENT AND ANY ASSOCIATED DATA CONTAINS
CONFIDENTIAL INFORMATION THAT IS ADVANTEST
PROPERTY. ONLY DISCLOSE OR DUPLICATE FOR OTHERS
AS AUTHORIZED BY ADVANTEST.


FILE NAME
E8027-96570.ami

REVISION
B


STORE DATE
2019-04-09

DOCUMENT NUMBER
E8027-96570


VIEW FROM DUT/PROBE SIDE
HATCHED SURFACES REFER TO PCB BOTTOMSIDE

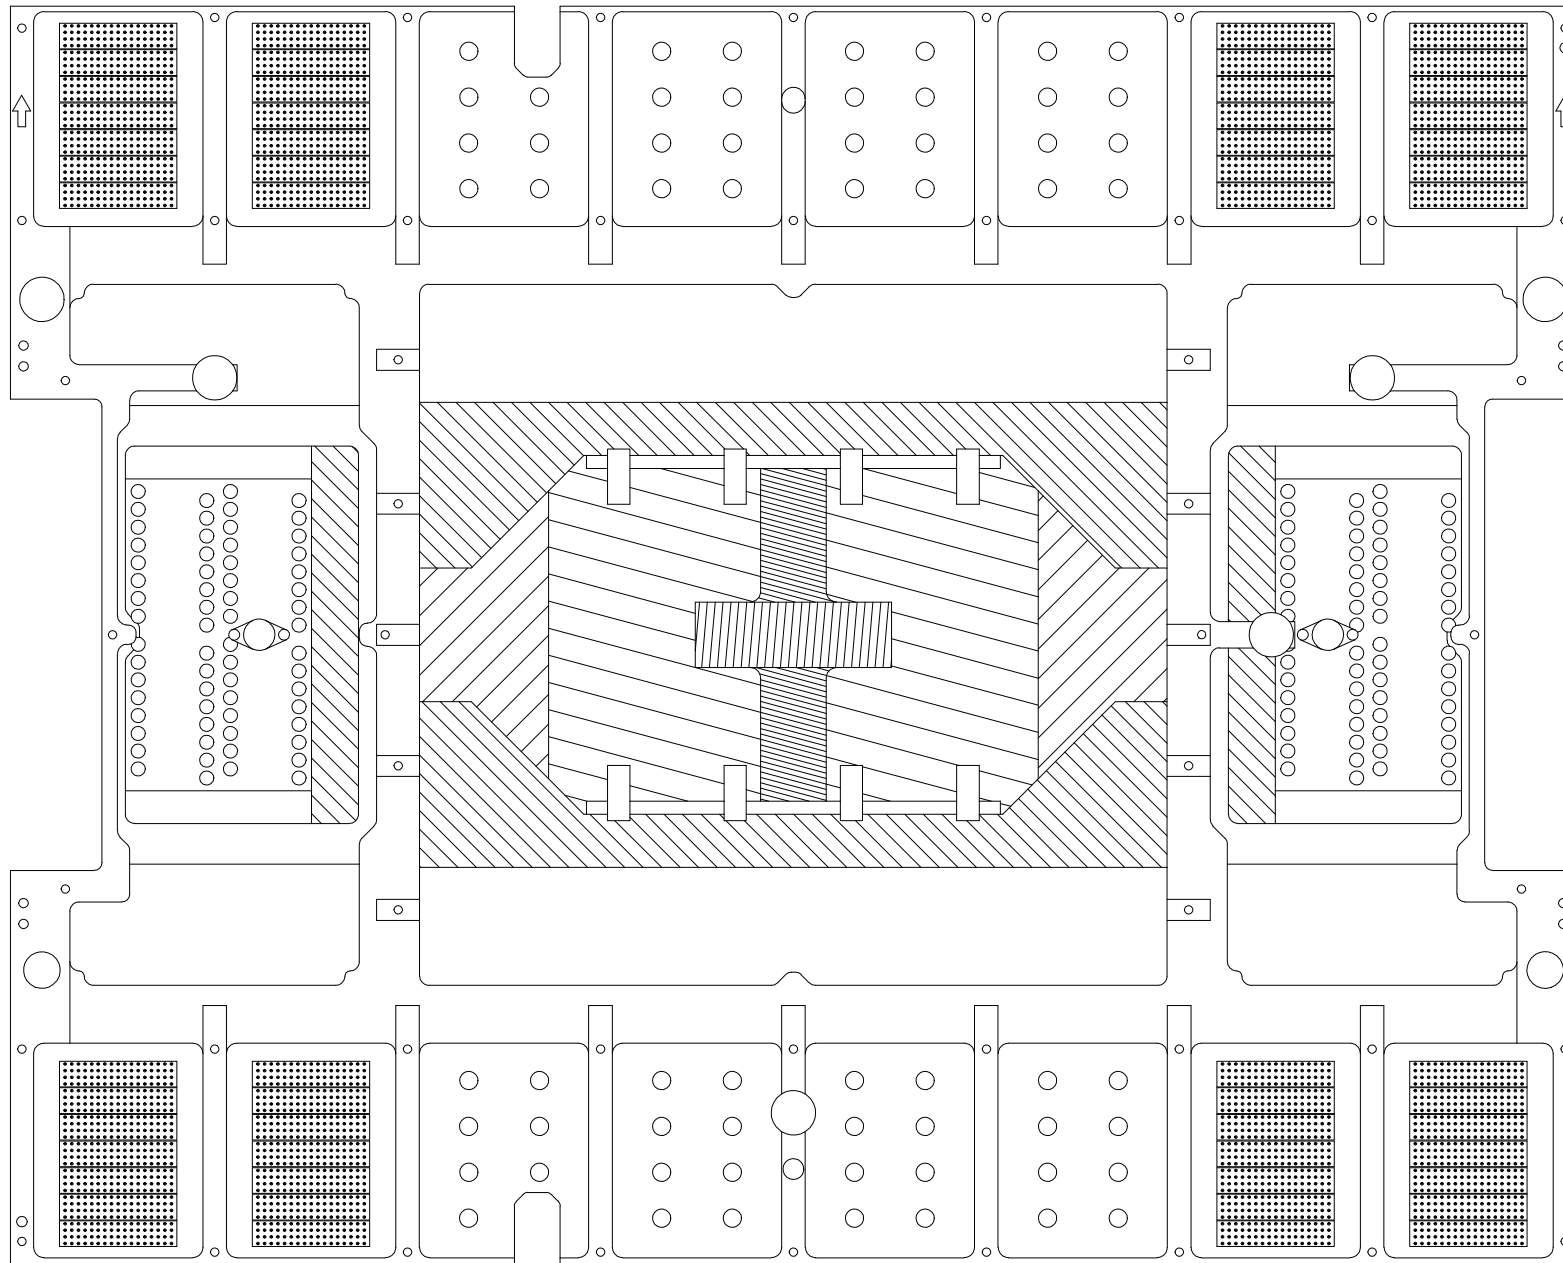

COMPONENT AREA
MAX COMPONENT HEIGHT 10MM.



PROBE-BACKER AREA
FOR PROBE-HEAD CORE MAX HEIGHT IS 12.5MM REF
IF NO PROBE-BACKER IS USED MAX COMPONENT HEIGHT IS 12MM
ALL PCB STRUCTURES ARE ALLOWED



COMPONENT AREA
IF RF CABLES POPULATED,
COMPONENT HEIGHT 12MM.
OTHERWISE MAX COMPONENT HEIGHT 20MM.



COMPONENT AREA
MAX COMPONENT HEIGHT 22MM.



COMPONENT AREA, CENTER AREA
MAX COMPONENT HEIGHT 32MM.

STANDARD TOLERANCES (UNLESS OTHERWISE SPECIFIED)
LINEAR: ± 0.1 mm ANGULAR: $\pm 0.5^\circ$

WORKPIECE EDGES DIN ISO 13715



DO NOT SCALE THIS
DRAWING
METRIC

GD&T SYMBOLOGY
PER
ISO 1101 & ISO 5459

Matthias Feyerabend
DRAWN BY

Jose Moreira
ENGINEER/CHECKER

UNLESS OTHERWISE SPECIFIED
• DIMENSIONS ARE IN MILLIMETERS
• THIRD ANGLE PROJECTION
• ADHERENCE TO DWG A-5951-1561-1
(COMPANY STD. SECTION 608) AND
A-5951-1745-1 (GSE) IS REQUIRED

2019-04-09
DATE (YYYY-MM-DD)

2019-04-09
DATE

KOZ
PCB BOTTOM SIDE

TITLE

6 OF 8
SHEET

1:2
SCALE

A2
SIZE

ADVANTEST.

PART
NUMBER


E8027-96570
DOCUMENT NUMBER

PORT ALLOCATION AND PIN NUMBERING

VIEW FROM DUT/PROBE SIDE
HATCHED SURFACES REFER TO PCB BOTTOMSIDE


EACH BLOCK USES THE
HD PIN NUMBERING

Detail 2
Scale 2:1

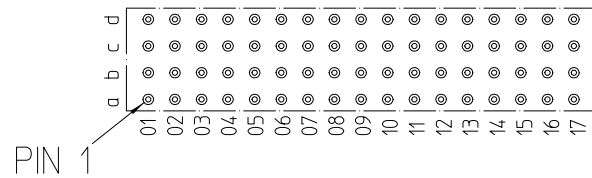


EXCEPT BLOCKS ASSIGNED TO UTILITY RESOURCES
WHICH USE THE UTILITY NUMBERING
(BLOCK ASSIGNMENT IS DEFINED BY THE FAMILY BOARD)

UTILITY BLOCK

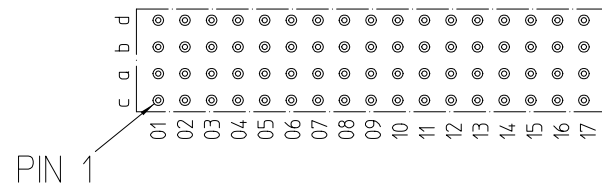


see Detail 2

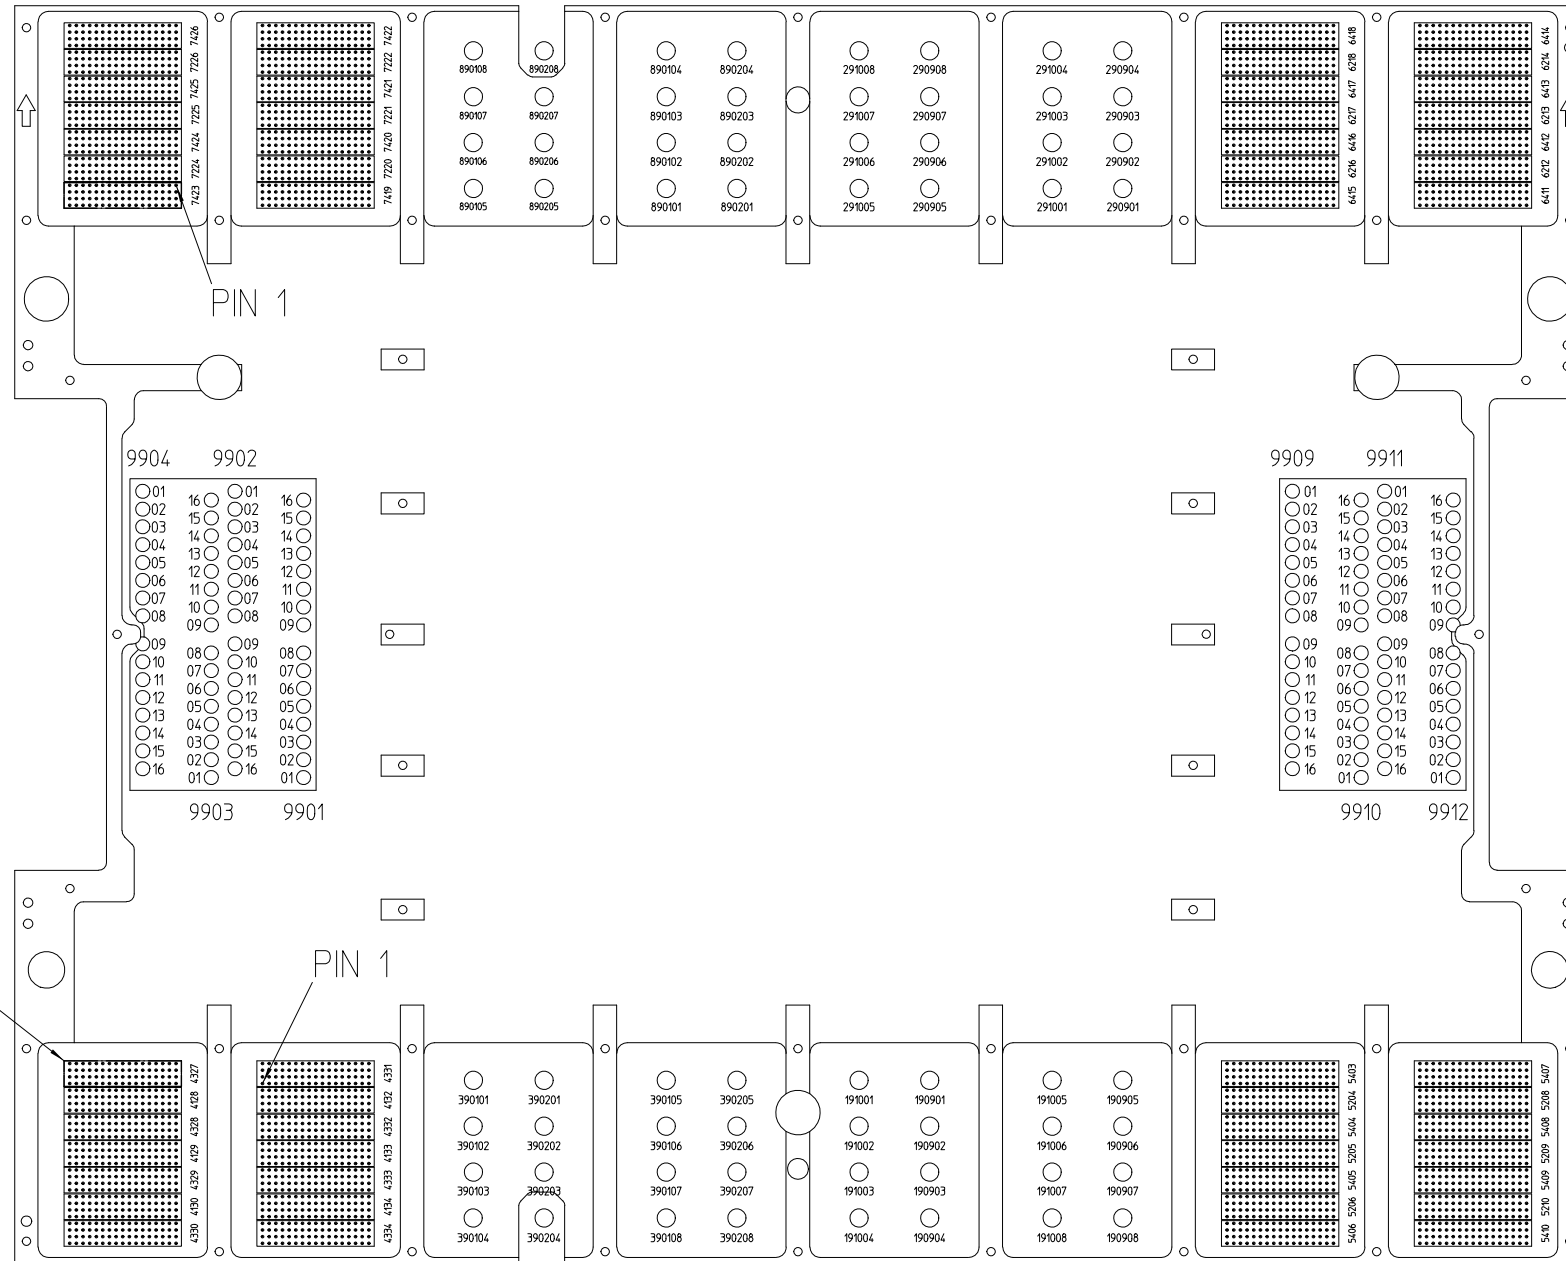

STANDARD TOLERANCES (UNLESS OTHERWISE SPECIFIED)
LINEAR: ± 0.1 mm ANGULAR: $\pm 0.5^\circ$

WORKPIECE EDGES DIN ISO 13715



DO NOT SCALE THIS
METRIC
DRAWING

GD&T SYMBOLOGY
PER
ISO 1101 & ISO 5459

Matthias Feyerabend
DRAWN BY

Jose Moreira
ENGINEER/CHECKER

UNLESS OTHERWISE SPECIFIED
• DIMENSIONS ARE IN MILLIMETERS
• THIRD ANGLE PROJECTION
• ADHERENCE TO DWG A-5951-1561-1
(COMPANY STD. SECTION 608) AND
A-5951-1745-1 (GSE) IS REQUIRED

2019-04-09
DATE (YYYY-MM-DD)

2019-04-09
DATE

KOZ PORT ALLOCATION
AND PIN NUMBERING
PCB TOPSIDE

TITLE

7 OF 8
SHEET

1:2
SCALE


A2
SIZE

ADVANTEST.

PART
NUMBER

E8027-96570
DOCUMENT NUMBER

MINIMUM CABLE BENDING REQUIREMENTS

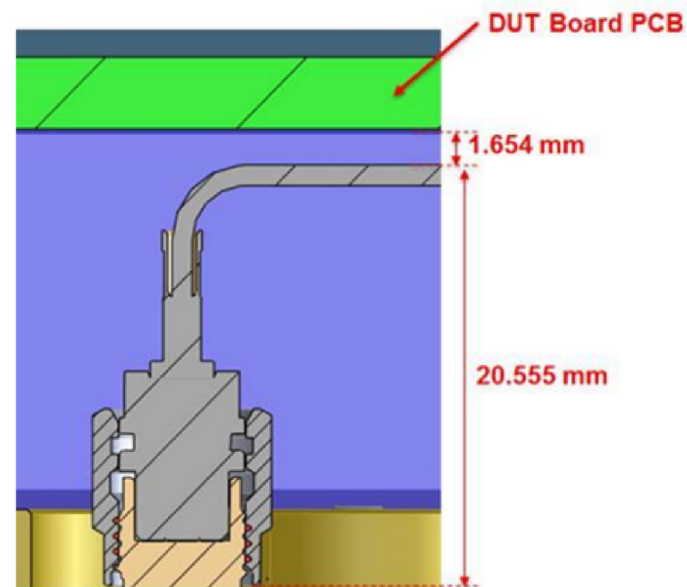


WSMM CC CONNECTOR BRACKET
E8027-66650 (TWO BRACKETS)

BACK COVER
E8028-61270

WSRF CONNECTOR BRACKET
N2605-61205 (ONE BRACKET)

DP STIFFENER
E8027-64170

RFIM CABLE ROUTING AS SHOWN IN THE PICTURE

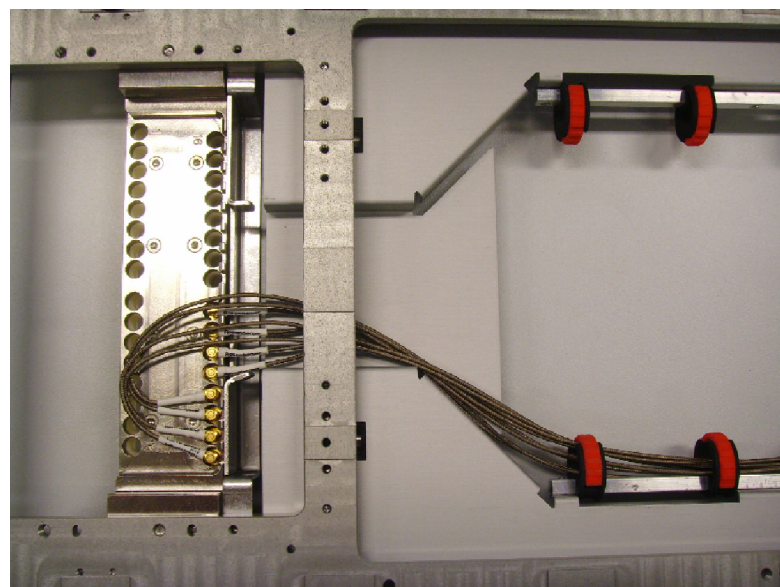

STANDARD TOLERANCES (UNLESS OTHERWISE SPECIFIED)
LINEAR: ± 0.1 mm ANGULAR: $\pm 0.5^\circ$

WORKPIECE EDGES DIN ISO 13715



DO NOT SCALE THIS
DRAWING
METRIC

GD&T SYMBOLOGY
PER
ISO 1101 & ISO 5459

Matthias Feyerabend
DRAWN BY

Jose Moreira
ENGINEER/CHECKER

UNLESS OTHERWISE SPECIFIED
• DIMENSIONS ARE IN MILLIMETERS
• THIRD ANGLE PROJECTION
• ADHERENCE TO DWG A-5951-1561-1
(COMPANY STD. SECTION 608) AND
A-5951-1745-1 (GSE) IS REQUIRED

2019-04-09
DATE (YYYY-MM-DD)

2019-04-09
DATE

WAVESCALE
MILLIMETER
APPLICATION

TITLE

8 OF 8
SHEET

1:2
SCALE

A2
SIZE

FRAME DATE: 2006-06-01

PART
NUMBER

E8027-96570
DOCUMENT NUMBER

ADVANTEST.