


FOR DETAILS, SEE DRAWING VIEWS


1. ALLOWABLE PROBE HEIGHT = SEE PROBER SPEC.
2. ALLOWABLE PCB THICKNESS = 3.5 TO 8.00MM.
3. CONTACT TAB PLANNARITY CONDITION = 0.03MM.
4. CAM HEIGHT CONDITION = 13.00 +/- 0.05MM.
5. MAX WEIGHT =12.5KG.

CAM HEIGHT CONDITION
NOTE: CAM HEIGHT IS PERPENDICULAR HEIGHT FROM THE TOP OF EACH INDIVIDUAL CONTACT TAB TO THE TANGENTIAL TOP OF ITS ASSOCIATED CAM FOLLOWER.

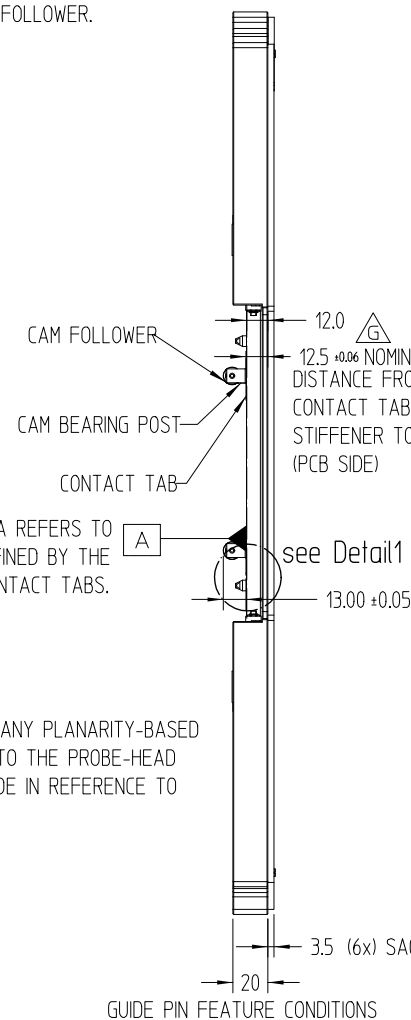


NOTE: DATUM A REFERS TO PLANE AS DEFINED BY THE TOP OF 4X CONTACT TABS.

RECOMMENDED: ANY PLANARITY-BASED
ADJUSTMENTS TO THE PROBE-HEAD
SHOULD BE MADE IN REFERENCE TO
DATUM A.




Detail1
Scale 1.5:1 

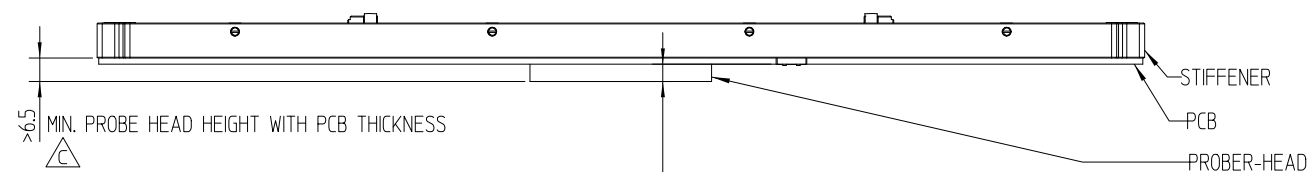

PREFER TO PROBER SPECIFICATIONS
FOR ALLOWABLE PROBE HEAD DEPTH
NOTE: ALLOWABLE PROBE HEAD DEPTH
MAY VARY FROM PROBER TO PROBER.

FILE NAME E8028-96570_G.ami		REVISION G	STORE DATE 2019-06-17	DOCUMENT NUMBER E8028-96570	
SYM	REVISIONS		REVISED BY	DATE	
A	AS ISSUED		ZHAN ZHANG	2017-03-22	
B	DIMENSIONS CHANGED, SEE SYMBOL 		Peter Hirschmann	2017-06-14	
C	DIMENSIONS CHANGED, MIN. PROBE HEAD HEIGHT WITH PCB DIMENSION ADDED SEE SYMBOL 		Peter Hirschmann	2017-07-25	
D	DIMENSIONS CHANGED, SEE SYMBOL 		Peter Hirschmann	2017-08-02	
E	DIMENSIONS CHANGED, SEE SYMBOL 		Peter Hirschmann	2017-10-05	
F	DETAIL 1 ADDED, DIMENSIONS CHANGED, SEE SYMBOL  SHEET 2 TO 7 ADDED		ZHAN ZHANG	2018-02-01	
G	SHEET 10 ADDED, DIMENSIONS CHANGED ON SHEET 3 AND SHEET 8, TOLERANCE ADDED ON SHEET 1, SEE SYMBOL 		Peter Hirschmann	2019-06-17	

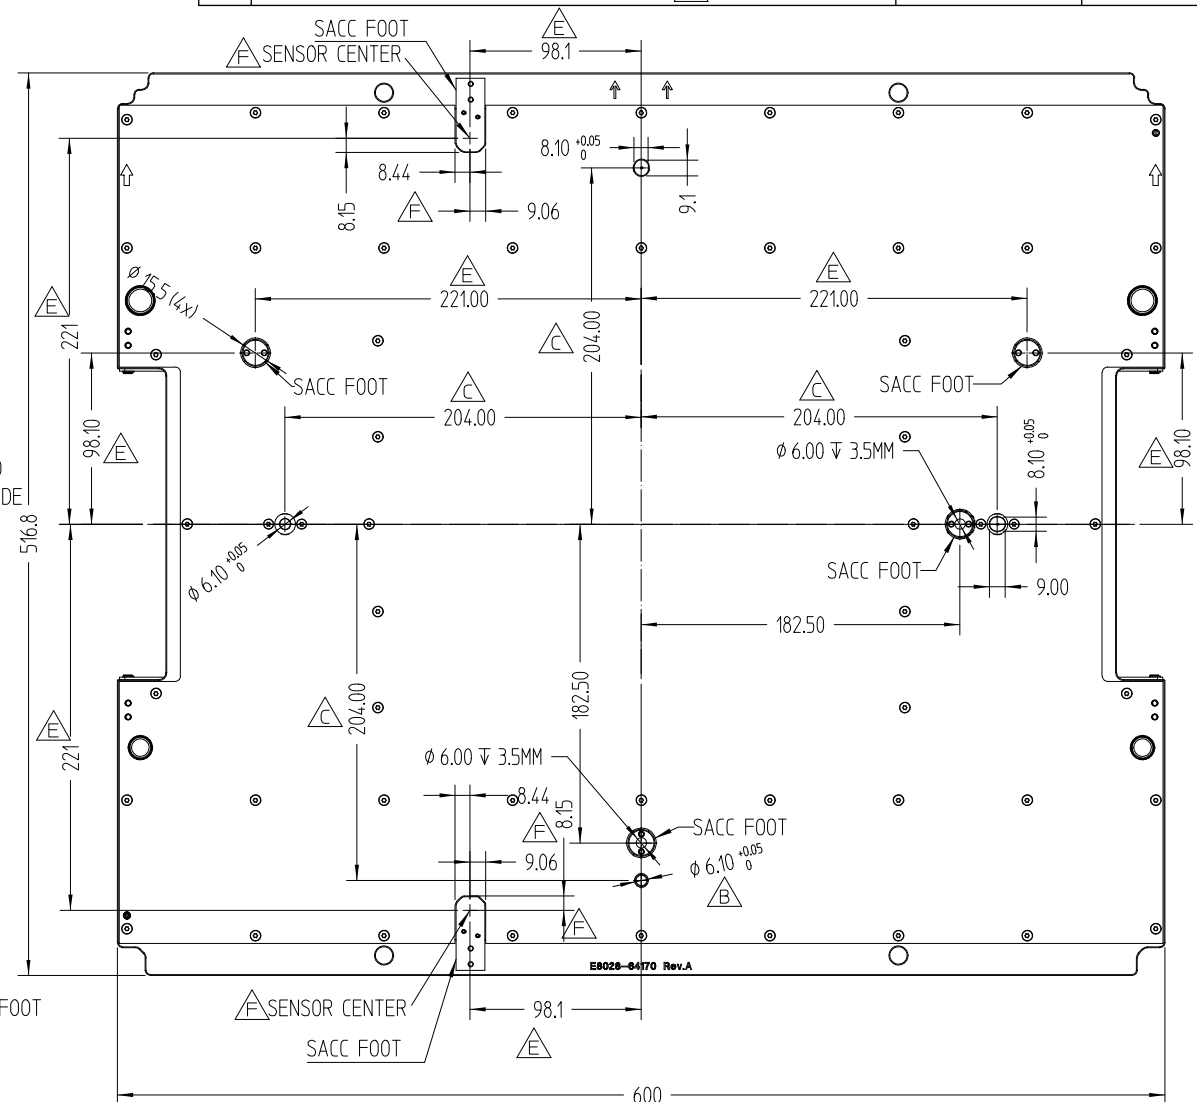

STANDARD TOLERANCES (UNLESS OTHERWISE SPECIFIED)		ZHAN ZHANG DRAWN BY		2018-2-1 DATE (YYYY-MM-DD)		TWINNING PROBE CARD SPECIFICATIONS			ADVANTEST.				
LINEAR: ±0.1 mm ANGULAR: ±1°		PETER HIRSCHMANN ENGINEER/CHECKER		2018-2-1 DATE									
				UNLESS OTHERWISE SPECIFIED		TITLE			PART NUMBER				
									FRAME DATE: 2006-06-01				
DO NOT SCALE THIS METRIC DRAWING		GD&T SYMBOLOGY PER ISO 1101 & ISO 5459		• DIMENSIONS ARE IN MILLIMETERS • THIRD ANGLE PROJECTION  • ADHERENCE TO DWG A-5951-1561-1 (COMPANY STD. SECTION 608) AND A-5951-1745-1 (GSE) IS REQUIRED		1 OF 10 SHEET		1:3 SCALE		A2 SIZE		E8028-96570 DOCUMENT NUMBER	

VIEW FROM DUT/PROBE SIDE

TEST HEAD
CABLE OUTLET SIDE

ARROW SILKSCREEN ON TOP
LAYER OF PCB FOR ORIENTATION
PURPOSE.

2X $\phi 4.02^{+0.03}_{-0.01}$ THRU
NOTE: RECOMMEND TO DRILL GUIDE
HOLES DURING SAME PROCESS
AS TESTER RESOURCE VIAS.

52X $\phi 3.2$ THRU ALL
 $\surd \phi 6.20 \times 90^\circ$

6X $\phi 17.0^{+0.1}$ THRU

8X $\phi 3.6$ THRU

2X $\phi 12.0^{+0.2}_{-0.2}$ THRU

4X $\phi 4.2$ THRU ALL
 $\surd \phi 5.60 \times 90^\circ$

$\phi 14.0^{+0.1}$

$\phi 8.0^{+0.2}_{-0.2}$ THRU

STANDARD TOLERANCES
(UNLESS OTHERWISE SPECIFIED)

LINEAR: ± 0.1 mm

ANGULAR: $\pm 1^\circ$

DO NOT SCALE THIS
DRAWING
METRIC

GD&T SYMBOLOLOGY
PER
ISO 1101 & ISO 5459

ZHAN ZHANG
DRAWN BY

PETER HIRSCHMANN
ENGINEER/CHECKER

2018-2-1
DATE (YYYY-MM-DD)

2018-2-1
DATE

UNLESS OTHERWISE SPECIFIED

• DIMENSIONS ARE IN MILLIMETERS

• THIRD ANGLE PROJECTION

• ADHERENCE TO DWG A-5951-1561-1
(COMPANY STD. SECTION 608) AND
A-5951-1745-1 (GSE) IS REQUIRED

PCB OUTLINE

TITLE

2 OF 10
SHEET

FRAME DATE: 2006-06-01

1:2
SCALE

A2
SIZE


ADVANTEST.

PART
NUMBER

E8028-96570

DOCUMENT NUMBER

VIEW FROM DUT/PROBE SIDE
HATCHED SURFACES REFER TO PCB BOTTOMSIDE

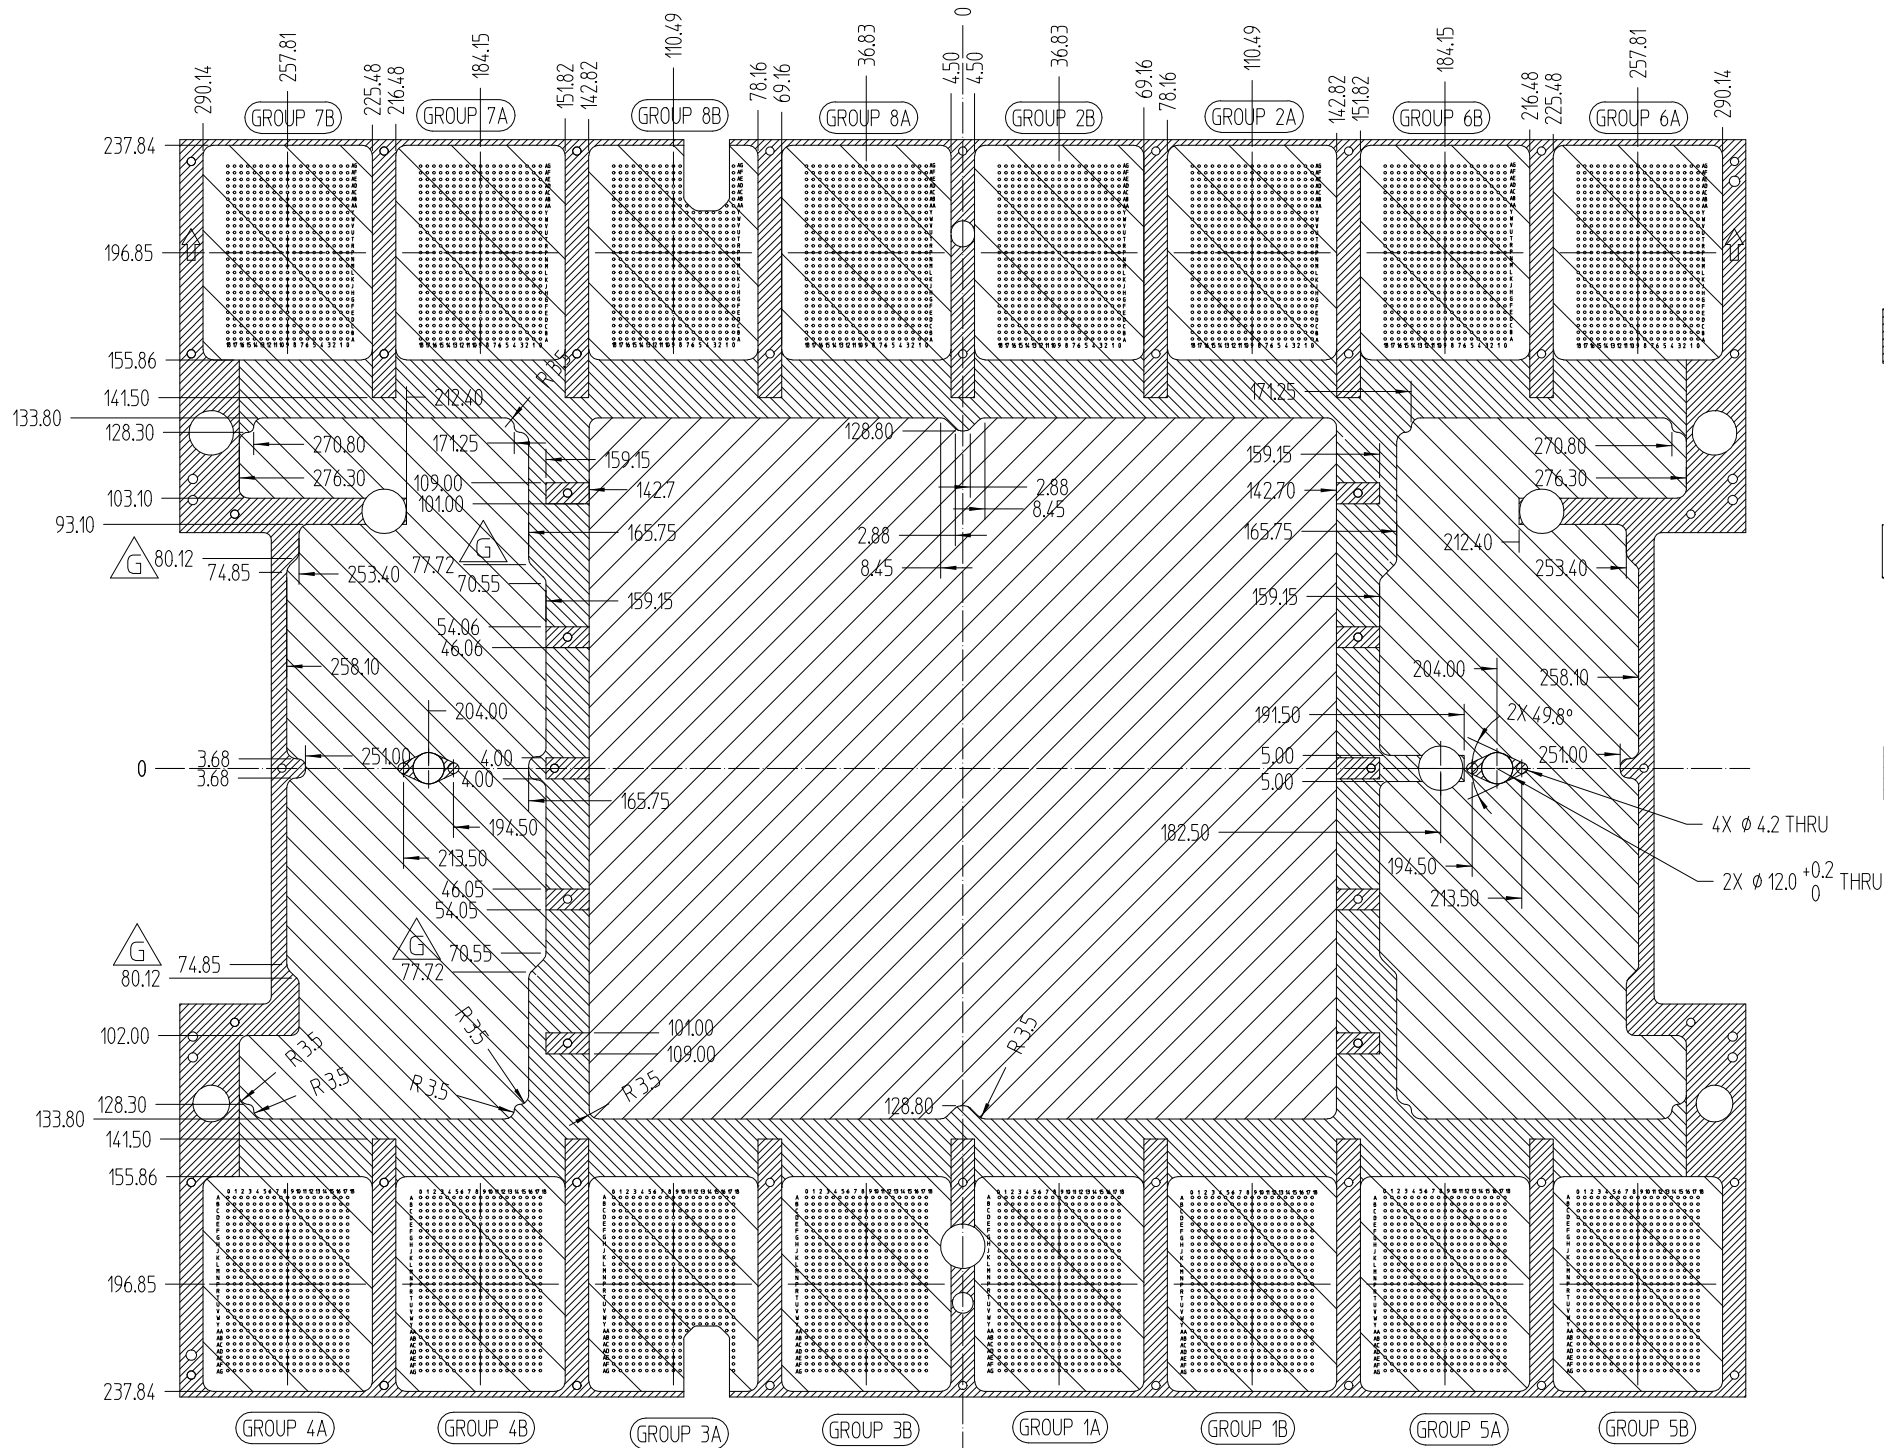

STIFFENER FRAME AREA
NO COMPONENTS ALLOWED.
VIAS AND PADS ARE NOT ALLOWED.

STIFFENER FRAME AREA
RESERVED FOR POGO SEGMENTS.
NO COMPONENTS ALLOWED.
VIAS AND PADS ARE ALLOWED.

STIFFENER FRAME AREA
0.5mm CLEARANCE TO STIFFENER.
NO COMPONENTS ALLOWED.
VIAS AND PADS ARE ALLOWED.

COMPONENT AREA, CENTER AREA
COMPONENT AREA MAY VARY BY USING STIFFENER INLAY BACKER AND BRIDGE BEAM VERSION.
KOZ WSRF BRIDGE BEAM RELATED SEE SHEET 5.
KOZ DIGITAL BRIDGE BEAM RELATED SEE SHEET 8.

COMPONENT AREA, OUTER AREA
COMPONENT AREA MAY VARY BY USING RF BRACKETS, PMUX INTERPOSER OUTER STIFFENER INLAYS
AND BRIDGE BEAM VERSIONS.
KOZ WSRF BRIDGE BEAM RELATED SEE SHEET 5.
KOZ DIGITAL BRIDGE BEAM RELATED SEE SHEET 8.

GENERAL NOTES FOR POGO LANDING PADS/VIAS:
1. POGO LANDING PADS: $\phi 1.4\text{mm} \dots 1.5\text{mm}$ HARD GOLD PLATED
POGO LANDING HOLES: $\phi 0.7\text{mm} \pm 0.05\text{mm}$ FHS(FINISH HOLE SIZE).
2. FOR MORE SPECIFIC INFORMATION, SEE TDC TOPIC 247077

STANDARD TOLERANCES
(UNLESS OTHERWISE SPECIFIED)

LINEAR: $\pm 0.1\text{ mm}$
ANGULAR: $\pm 1^\circ$

DO NOT SCALE THIS
METRIC
DRAWING

GD&T SYMBOLOLOGY
PER
ISO 1101 & ISO 5459

ZHAN ZHANG
DRAWN BY
PETER HIRSCHMANN
ENGINEER/CHECKER

2018-2-1
DATE (YYYY-MM-DD)
2018-2-1
DATE

UNLESS OTHERWISE SPECIFIED
• DIMENSIONS ARE IN MILLIMETERS
• THIRD ANGLE PROJECTION
• ADHERENCE TO DWG A-5951-1561-1
(COMPANY STD. SECTION 608) AND
A-5951-1745-1 (GSE) IS REQUIRED

KOZ
PCB BOTTOM SIDE

TITLE

3 OF 10
SHEET

1:2
SCALE


A2
SIZE

ADVANTEST.

PART
NUMBER

E8028-96570
DOCUMENT NUMBER

VIEW FROM DUT/PROBE SIDE
HATCHED SURFACES REFER TO PCB TOPSIDE

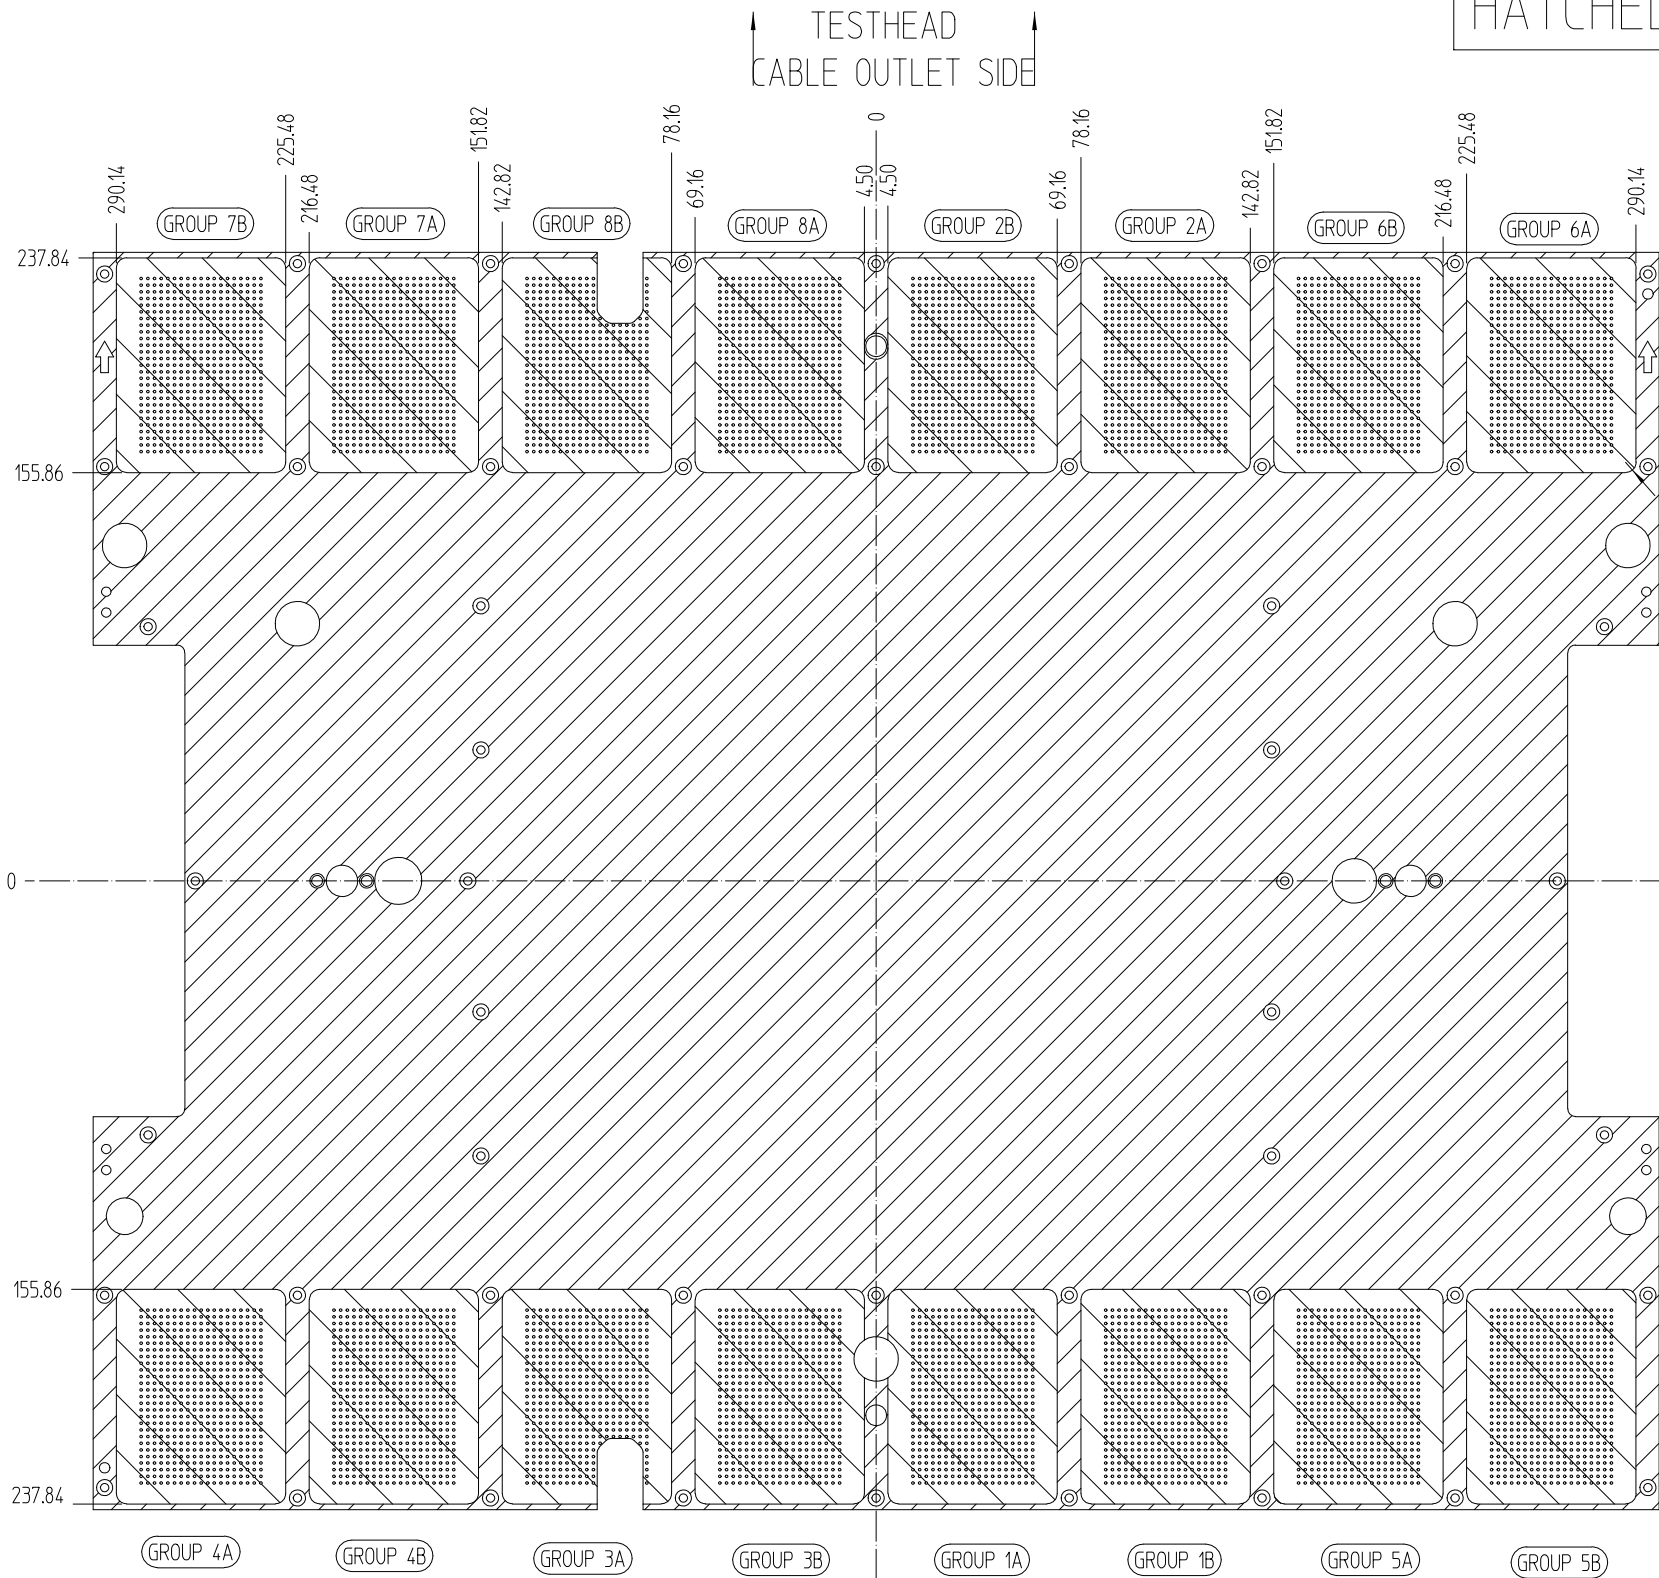

POGO SEGMENT AREA
RESERVED FOR POGO SEGMENTS.
NO COMPONENTS ALLOWED.
VIAS AND PADS ARE ALLOWED.

COMPONENT AREA
MAX COMPONENT AREA, REDUCED BY PROBE SACC.
MAX COMPONENT HEIGHT DEFINED BY PROBE SACC AND PROBE HEAD HEIGHT.

STANDARD TOLERANCES
(UNLESS OTHERWISE SPECIFIED)

LINEAR: ± 0.1 mm

ANGULAR: $\pm 1^\circ$

DO NOT SCALE THIS
METRIC
DRAWING

GD&T SYMBOLOGY
PER
ISO 1101 & ISO 5459

ZHAN ZHANG

DRAWN BY

PETER HIRSCHMANN

ENGINEER/CHECKER

2018-2-1

DATE (YYYY-MM-DD)

2018-2-1

DATE

UNLESS OTHERWISE SPECIFIED

• DIMENSIONS ARE IN MILLIMETERS

• THIRD ANGLE PROJECTION

• ADHERENCE TO DWG A-5951-1561-1
(COMPANY STD. SECTION 608) AND
A-5951-1745-1 (GSE) IS REQUIRED

KOZ
PCB TOPSIDE

TITLE

4 OF 10
SHEET

1:2
SCALE

A2
SIZE

FRAME DATE: 2006-06-01

ADVANTEST.


PART
NUMBER

E8028-96570

DOCUMENT NUMBER

KOZ WSRF RELATED

VIEW FROM DUT/PROBE SIDE
HATCHED SURFACES REFER TO PCB BOTTOM SIDE

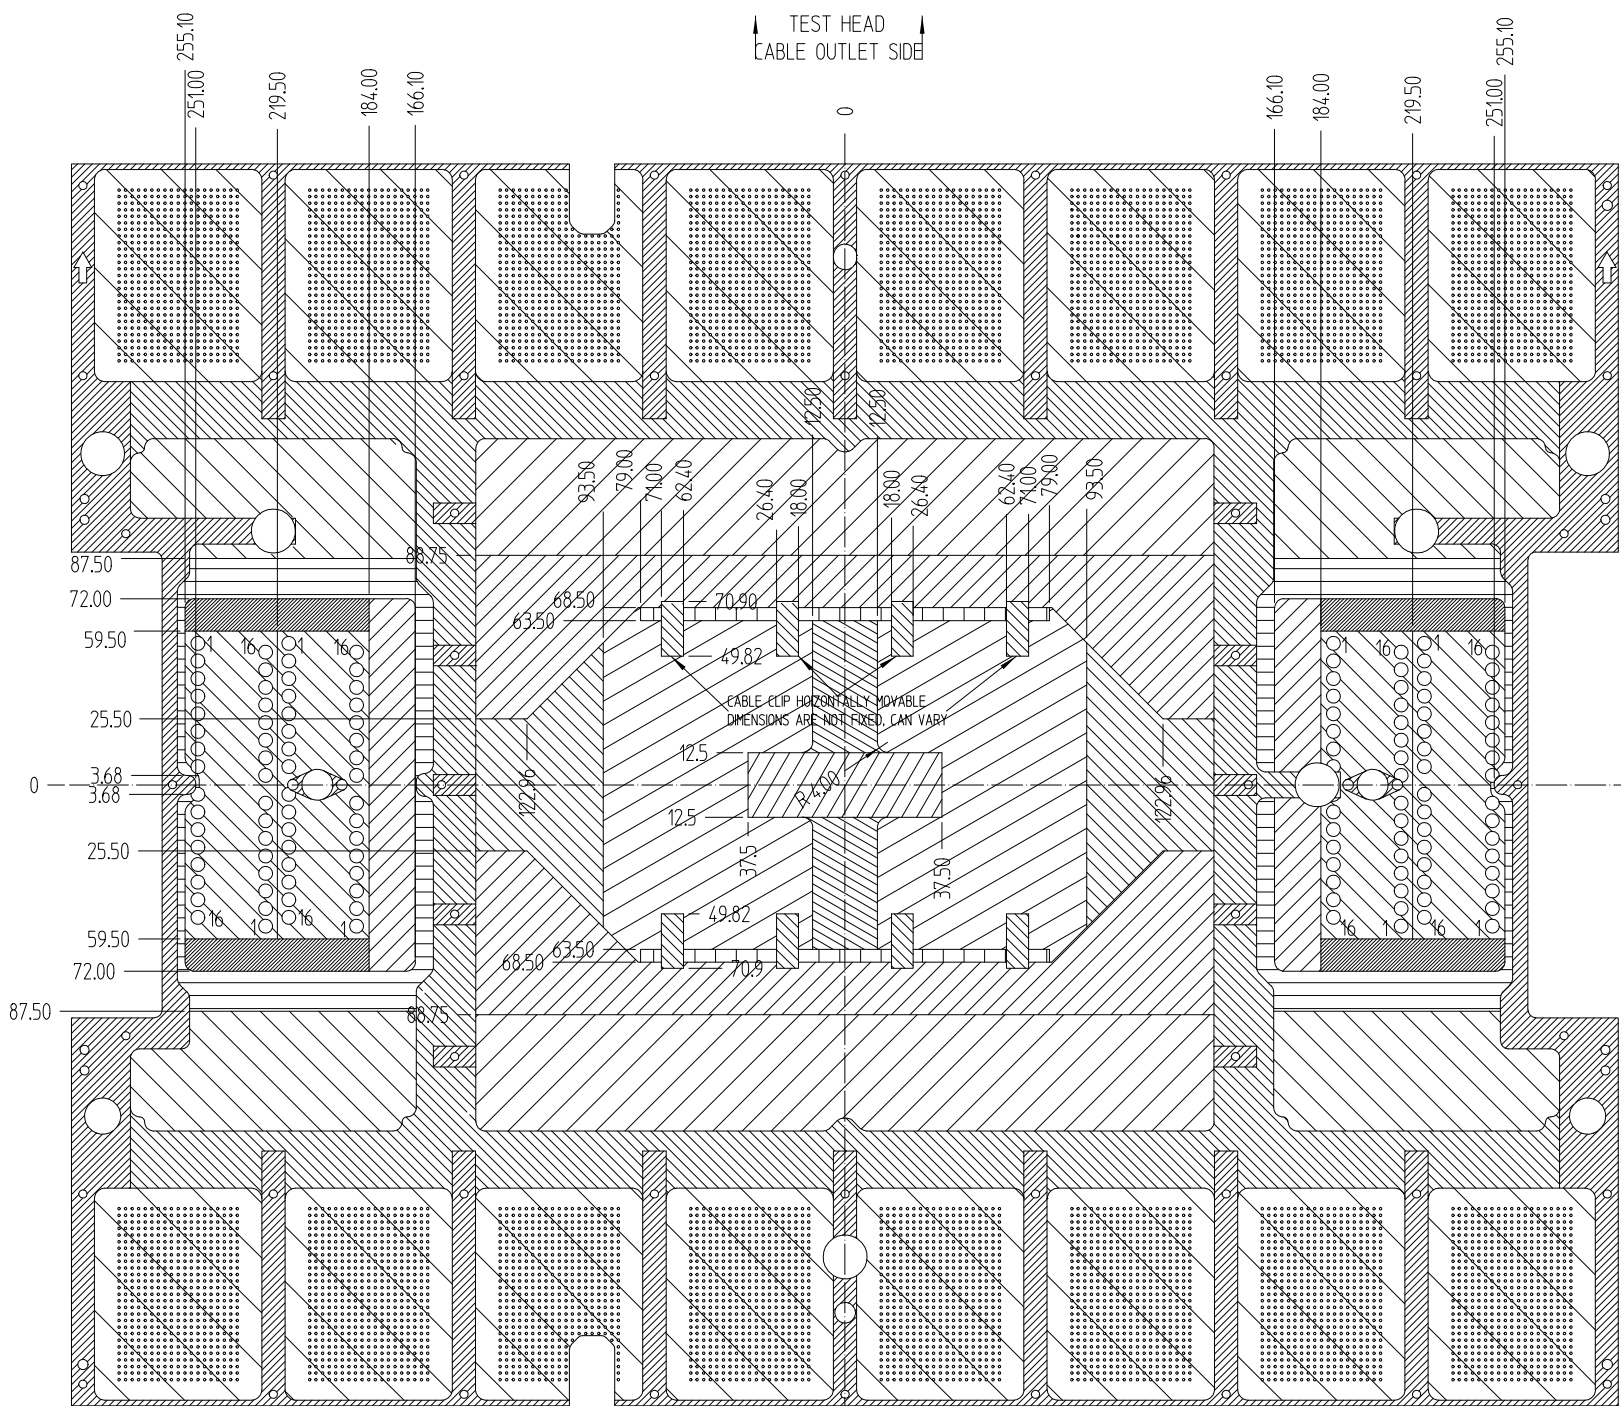

COMPONENT AREA, CENTER AREA
COMPONENT AREA MAY VARY BY USING STIFFENER INLAY AND BACKER.
MAX COMPONENT HEIGHT 20MM.
MAY REDUCED BY USING STIFFENER INLAY AND BACKER.

COMPONENT AREA, OUTER AREA
MAX COMPONENT HEIGHT 20MM.

RF ADAPTER BRACKET AREA, OUTER AREA
0.5mm CLEARANCE TO STIFFENER.
NO COMPONENTS ALLOWED.
VIAS AND PADS ARE ALLOWED.

COMPONENT AREA, OUTER AREA
5MM CLEARANCE TO RF ADAPTER BRACKET.
MAX COMPONENT HEIGHT 4MM.

COMPONENT AREA, OUTER AREA
MAX COMPONENT HEIGHT 12MM.
IF RF CONNECTOR BRACKETS AND RF CABLES ARE NOT POPULATED,MAX COMPONENT HEIGHT 20MM.

COMPONENT AREA, CENTER AREA
IF RF CABLE ROUTING BARS ARE NOT POPULATED, MAX COMPONENT HEIGHT 20MM.
STIFFENER INLAY NOT SHOWN, MAY VARY IF STIFFENER INLAY(STANDARD OR CUSTOMIZED VERSION) IS USED.

COMPONENT AREA, CENTER AREA
MAX COMPONENT HEIGHT 8MM.
IF RF CABLE ROUTING BARS AND CLIPS ARE NOT POPULATED, MAX COMPONENT HEIGHT 20MM.
STIFFENER INLAY NOT SHOWN, MAY VARY IF STIFFENER INLAY(STANDARD OR CUSTOMIZED VERSION) IS USED.

COMPONENT AREA
MAX COMPONENT HEIGHT 10MM.

COMPONENT AREA
IF RF CABLES POPULATED,
COMPONENT HEIGHT 12MM.
OTHERWISE MAX COMPONENT HEIGHT 20MM

COMPONENT AREA
MAX COMPONENT HEIGHT 22MM

PROBE-BACKER AREA
FOR PROBE-HEAD CORE MAX HEIGHT 12.5MM REF
IF NO PROBE-BACKER IS USED MAX COMPONENT HEIGHT IS 12MM

COMPONENT AREA, CENTER AREA
MAX COMPONENT HEIGHT 32MM.

NOTE:
KOZ FOR ALL GENERIC AREAS,
SEE SHEET 3.

STANDARD TOLERANCES
(UNLESS OTHERWISE SPECIFIED)

LINEAR: ± 0.1 mm
ANGULAR: $\pm 1^\circ$

DO NOT SCALE THIS
METRIC
DRAWING

GD&T SYMBOLOLOGY
PER
ISO 1101 & ISO 5459

ZHAN ZHANG
DRAWN BY

2018-2-1
DATE (YYYY-MM-DD)

PETER HIRSCHMANN
ENGINEER/CHECKER

2018-2-1
DATE

UNLESS OTHERWISE SPECIFIED

• DIMENSIONS ARE IN MILLIMETERS
• THIRD ANGLE PROJECTION
• ADHERENCE TO DWG A-5951-1561-1
(COMPANY STD. SECTION 608) AND
A-5951-1745-1 (GSE) IS REQUIRED

KOZ WSRF RELATED
PCB BOTTOM SIDE

TITLE

5 OF 10
SHEET

FRAME DATE 2006-06-01

1:2
SCALE


A2
SIZE

PART
NUMBER

E8028-96570
DOCUMENT NUMBER

ADVANTEST.

OVERVIEW WSRF APPLICATION

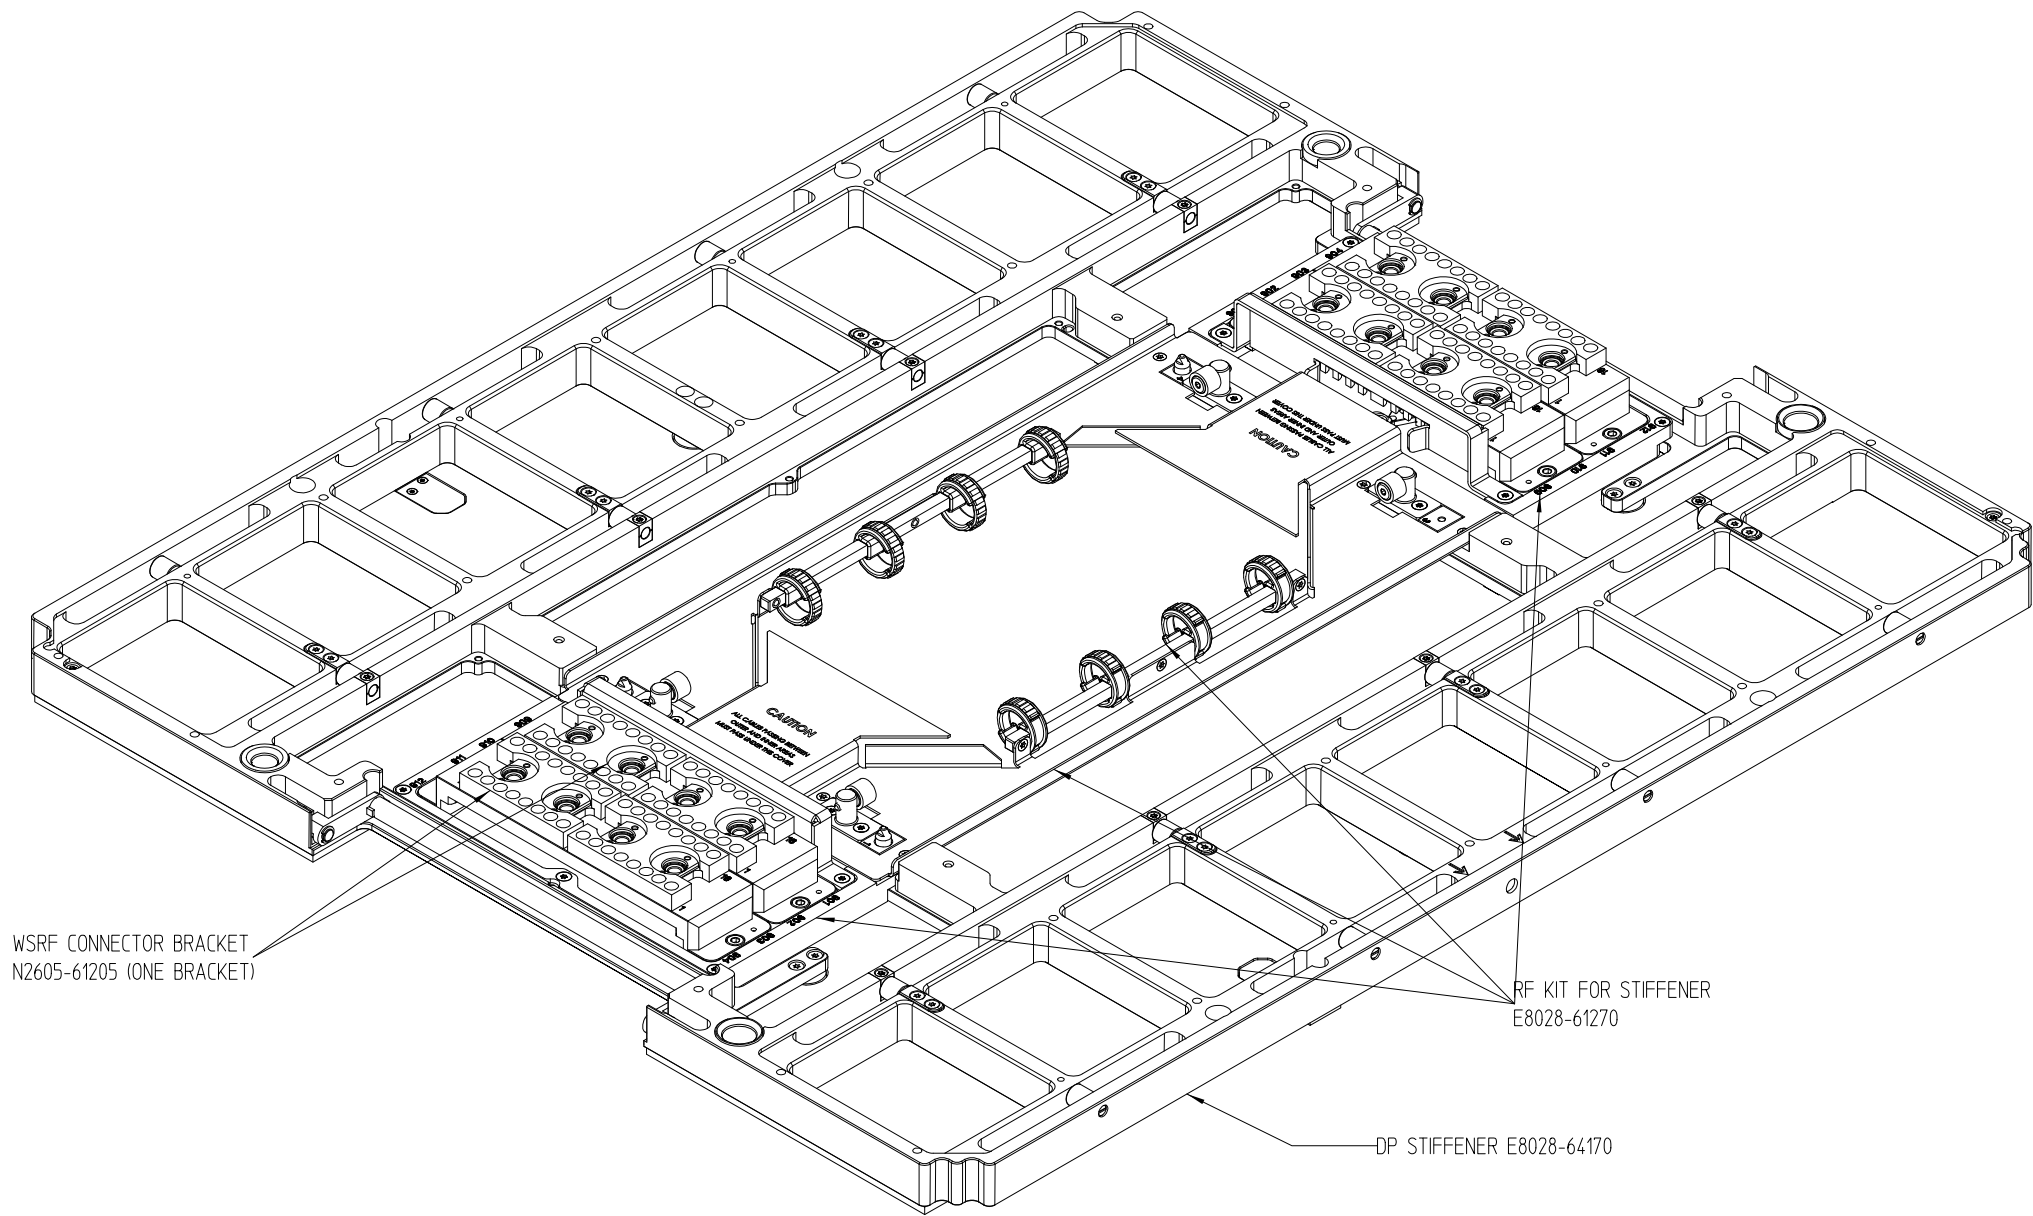

WSRF CONNECTOR BRACKET
N2605-61205 (ONE BRACKET)

RF KIT FOR STIFFENER
E8028-61270

DP STIFFENER E8028-64170


NOTE:
- STIFFENER INLAY AND BACKER NOT SHOWN

STANDARD TOLERANCES (UNLESS OTHERWISE SPECIFIED)		ZHAN ZHANG DRAWN BY		2018-2-1 DATE (YYYY-MM-DD)		WSRF APPLICATION		ADVANTEST.	
LINEAR: ±0.1 mm		PETER HIRSCHMANN ENGINEER/CHECKER		2018-2-1 DATE					
ANGULAR: ±1°		UNLESS OTHERWISE SPECIFIED				TITLE		PART NUMBER	
		° DIMENSIONS ARE IN MILLIMETERS							
DO NOT SCALE THIS METRIC DRAWING		° THIRD ANGLE PROJECTION 				6 OF 10 SHEET		1:2 SCALE	
GD&T SYMBOLGY PER ISO 1101 & ISO 5459		° ADHERENCE TO DWG A-5951-1561-1 (COMPANY STD. SECTION 608) AND A-5951-1745-1 (GSE) IS REQUIRED				A2 SIZE		E8028-96570 DOCUMENT NUMBER	

KOZ HSIO POGO BLOCK RELATED

TESTHEAD
CABLE OUTLET SIDE

VIEW FROM DUT/PROBE SIDE
HATCHED SURFACES REFER TO PCB BOTTOMSIDE

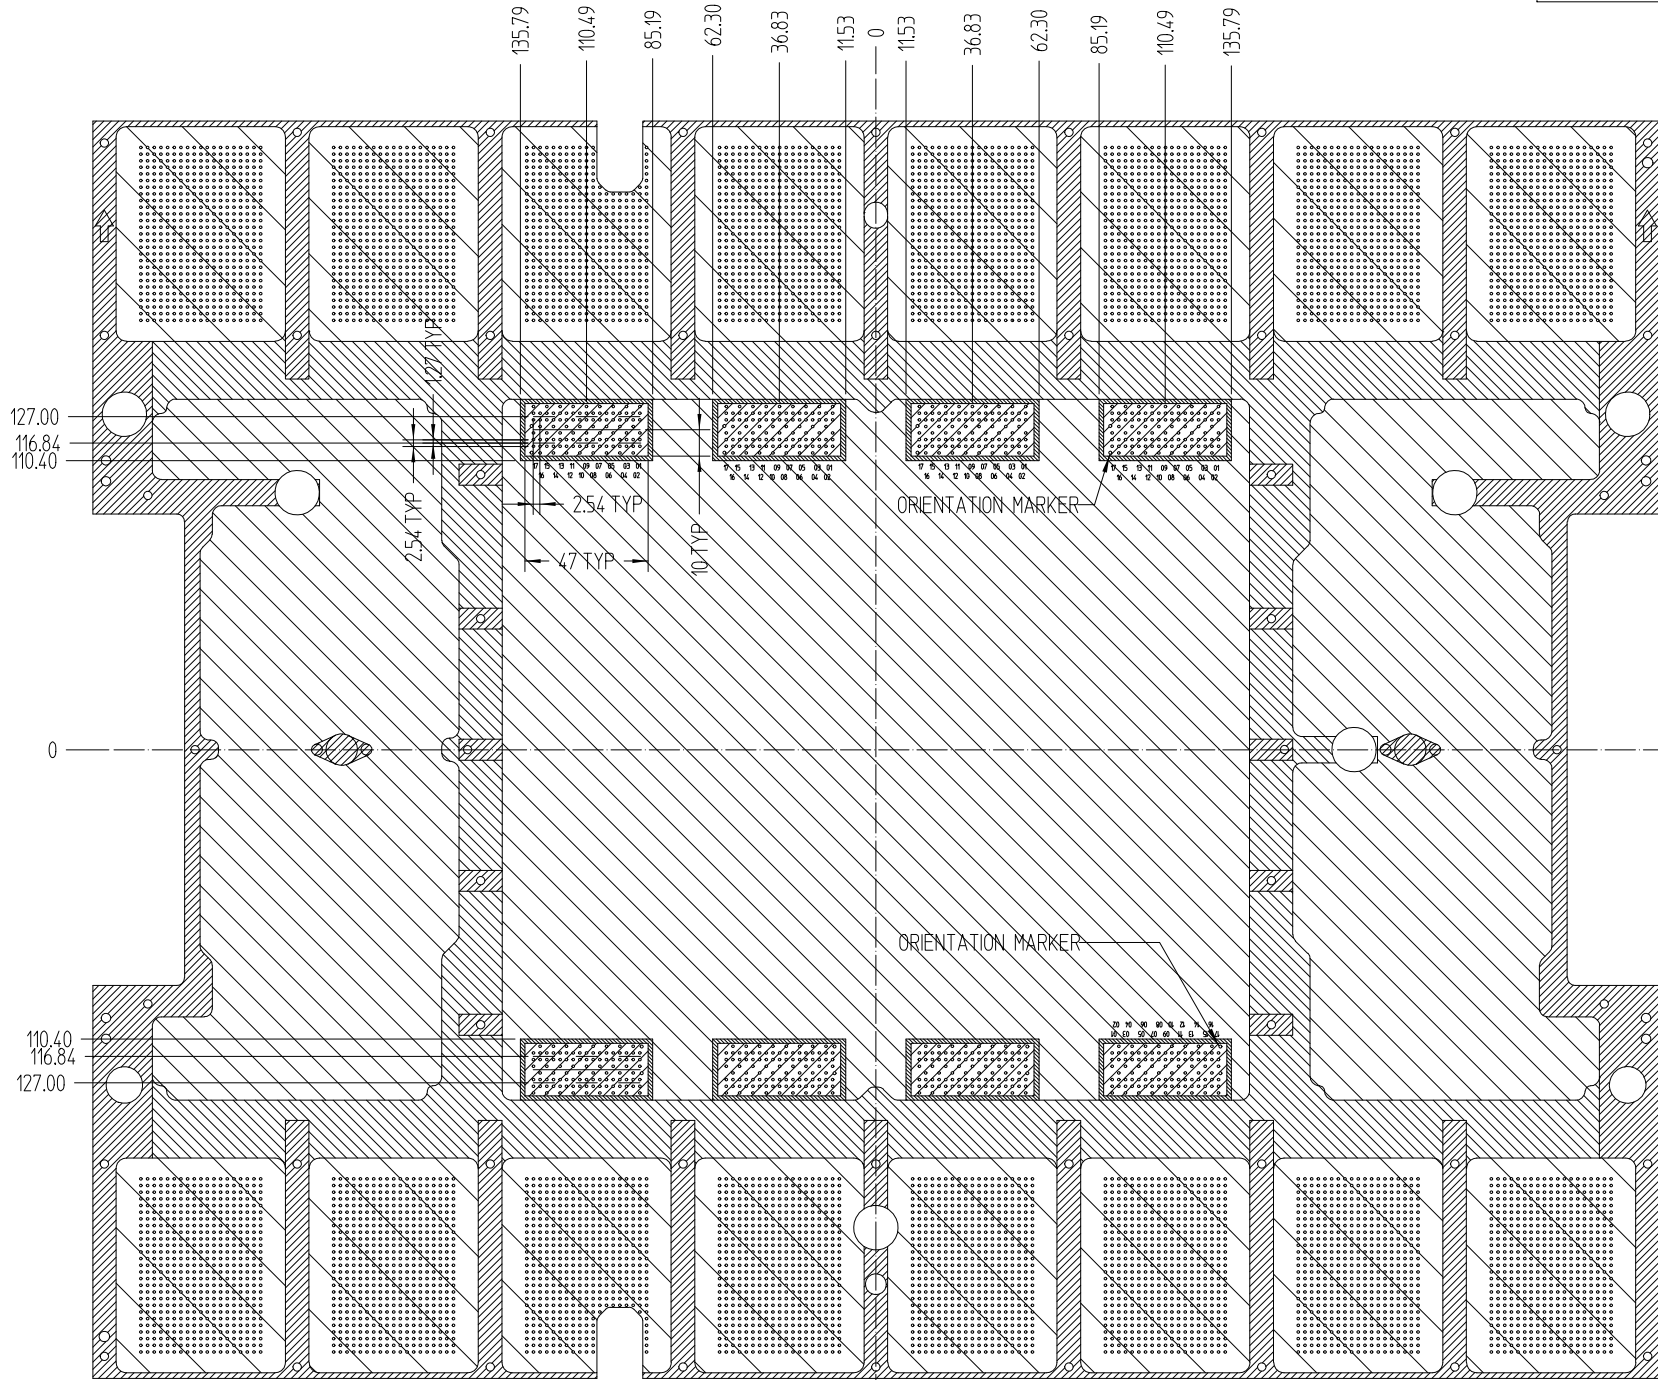

HSIO POGO BLOCK AREA
IF HSIO POGO IS USED:
NO COPONENTS ALLOWED
VIAS AND PADS ARE NOT ALLOWED

HSIO POGO BLOCK AREA
IF HSIO POGO IS USED:
NO COPONENTS ALLOWED
VIAS AND PADS ARE ALLOWED.
IF A STIFFENER INLAY IS USED:
NEEDS TO HAVE A CUTOUT IN THIS AREA

NOTE:
KOZ FOR ALL GENERIC AREAS, SEE SHEET 3

STANDARD TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
LINEAR:	±0.1 mm
ANGULAR:	±1°
DO NOT SCALE THIS DRAWING	GD&T SYMBOLOGY PER ISO 1101 & ISO 5459

ZHAN ZHANG DRAWN BY	2018-2-1 DATE (YYYY-MM-DD)
PETER HIRSCHMANN ENGINEER/CHECKER	2018-2-1 DATE
UNLESS OTHERWISE SPECIFIED • DIMENSIONS ARE IN MILLIMETERS • THIRD ANGLE PROJECTION • ADHERENCE TO DWG A-5951-1561-1 (COMPANY STD. SECTION 608) AND A-5951-1745-1 (GSE) IS REQUIRED	

KOZ HSIO RELATED PCB BOTTOM SIDE		
TITLE		
7 OF 10 SHEET	1:2 SCALE	A2 SIZE

ADVANTEST.	
PART NUMBER	
E8028-96570	
DOCUMENT NUMBER	

ADVANTEST CONFIDENTIAL
LIMITED ACCESS

THIS DOCUMENT AND ANY ASSOCIATED DATA CONTAINS
CONFIDENTIAL INFORMATION THAT IS ADVANTEST
PROPERTY. ONLY DISCLOSE OR DUPLICATE FOR OTHERS
AS AUTHORIZED BY ADVANTEST.

FILE NAME
E8028-96570_G.ami

REVISION
G


STORE DATE
2019-06-17

DOCUMENT NUMBER
E8028-96570

KOZ DIGITAL RELATED

VIEW FROM DUT/PROBE SIDE
HATCHED SURFACES REFER TO PCB BOTTOMSIDE

TESTHEAD
CABLE OUTLET SIDE

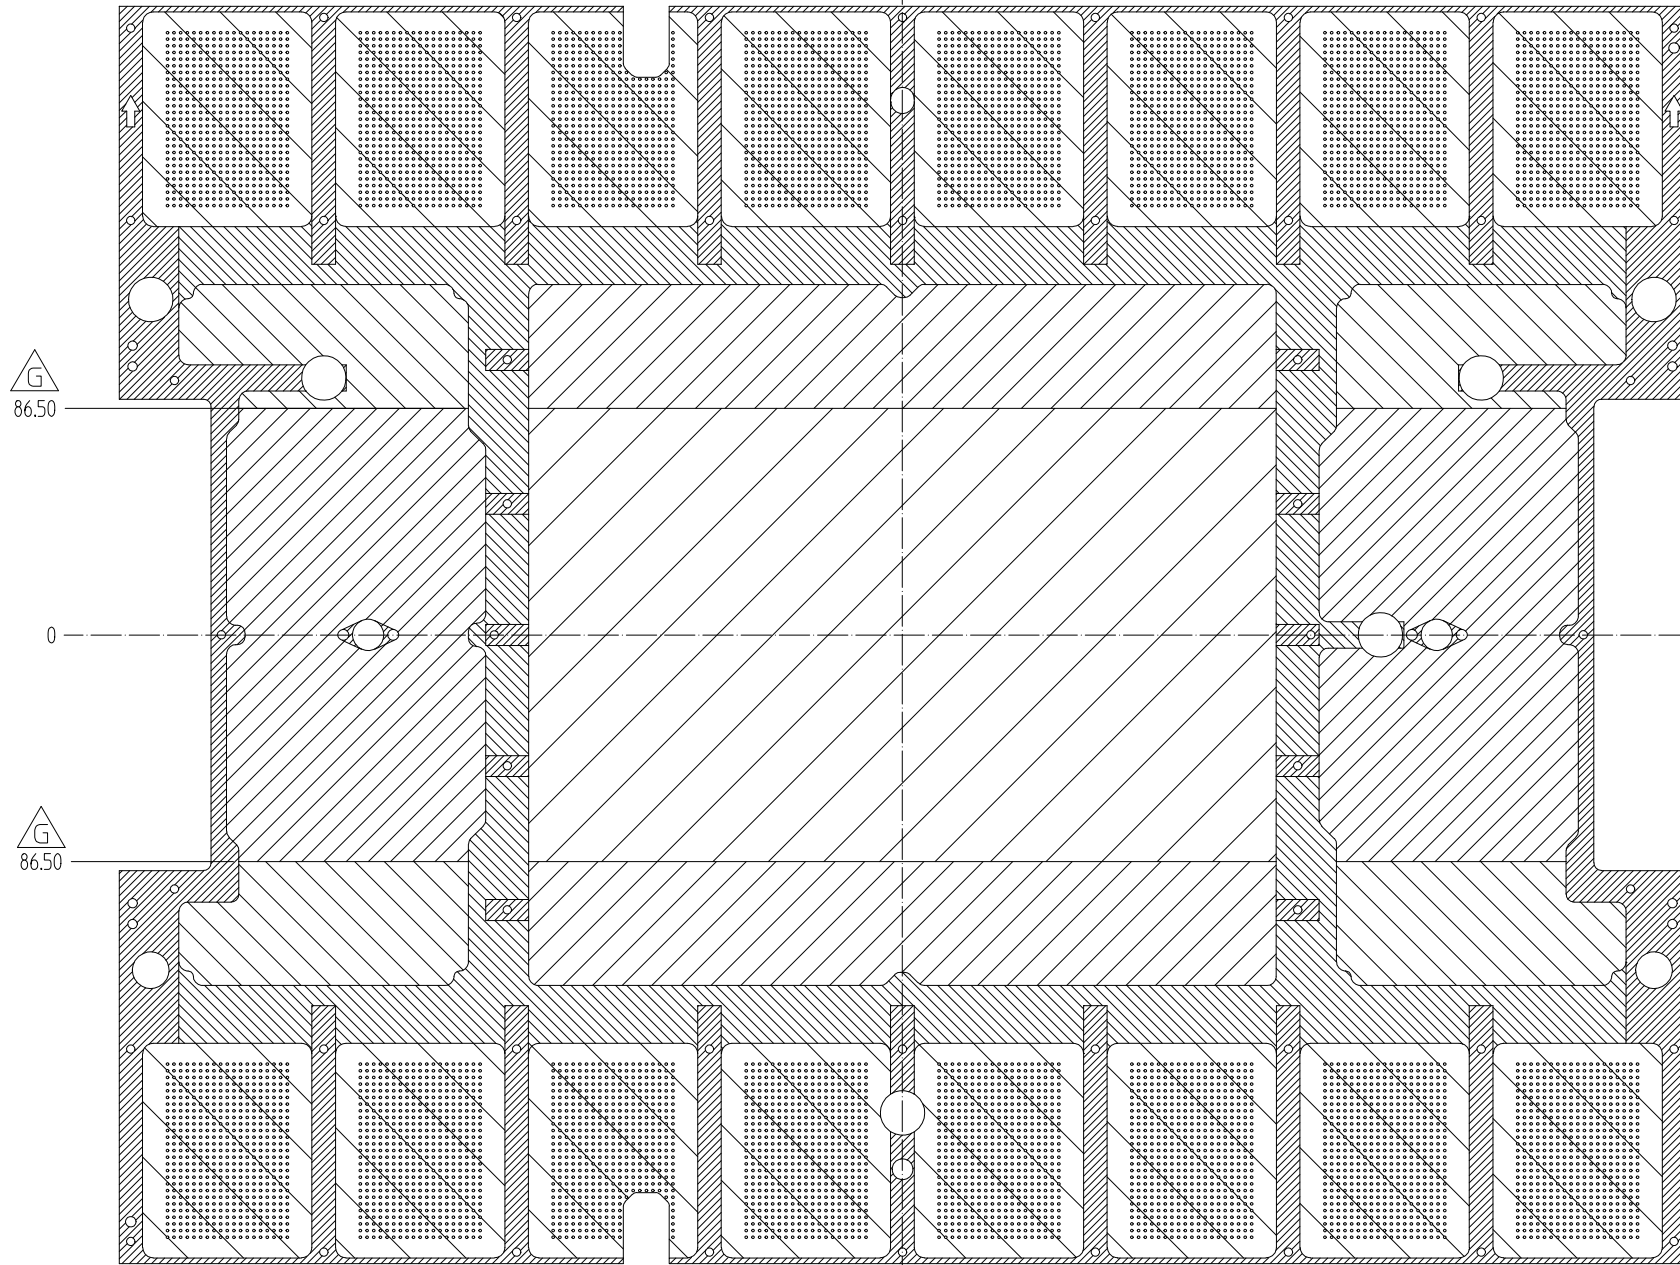

COMPONENT AREA, CENTER AREA
MAX HEIGHT: 12MM
MAY REDUSED BY USING STIFFENER INLAY AND BACKER.



COMPONENT AREA, CENTER AREA
COMPONENT AREA MAY VARY BY USING STIFFENER INLAY AND BACKER.
MAX COMPONENT HEIGHT 20MM.
MAY REDUSED BY USING STIFFENER INLAY AND BACKER.



COMPONENT AREA, OUTER AREA
MAX HEIGHT: 12MM
MAY REDUSED BY USING STIFFENER INLAY AND BACKER.



COMPONENT AREA, OUTER AREA
MAX COMPONENT HEIGHT 20MM.

NOTE:
KOZ FOR ALL GENERIC AREAS,
SEE SHEET 3.

STANDARD TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
LINEAR:	±0.1 mm
ANGULAR:	±1°
DO NOT SCALE THIS DRAWING	GD&T SYMBOLOGY PER ISO 1101 & ISO 5459

ZHAN ZHANG DRAWN BY	2018-2-1 DATE (YYYY-MM-DD)
PETER HIRSCHMANN ENGINEER/CHECKER	2018-2-1 DATE
UNLESS OTHERWISE SPECIFIED • DIMENSIONS ARE IN MILLIMETERS • THIRD ANGLE PROJECTION 	
• ADHERENCE TO DWG A-5951-1561-1 (COMPANY STD. SECTION 608) AND A-5951-1745-1 (GSE) IS REQUIRED	

KOZ DIGITAL RELATED PCB BOTTOM SIDE		
TITLE		
8 OF 10 SHEET	1:2 SCALE	A2 SIZE

ADVANTEST.	
PART NUMBER	
E8028-96570	
DOCUMENT NUMBER	

ADVANTEST CONFIDENTIAL
LIMITED ACCESS

THIS DOCUMENT AND ANY ASSOCIATED DATA CONTAINS
CONFIDENTIAL INFORMATION THAT IS ADVANTEST
PROPERTY. ONLY DISCLOSE OR DUPLICATE FOR OTHERS
AS AUTHORIZED BY ADVANTEST.


FILE NAME
E8028-96570_G.ami

REVISION
G

STORE DATE
2019-06-17

DOCUMENT NUMBER
E8028-96570

OVERVIEW DIGITAL APPLICATION

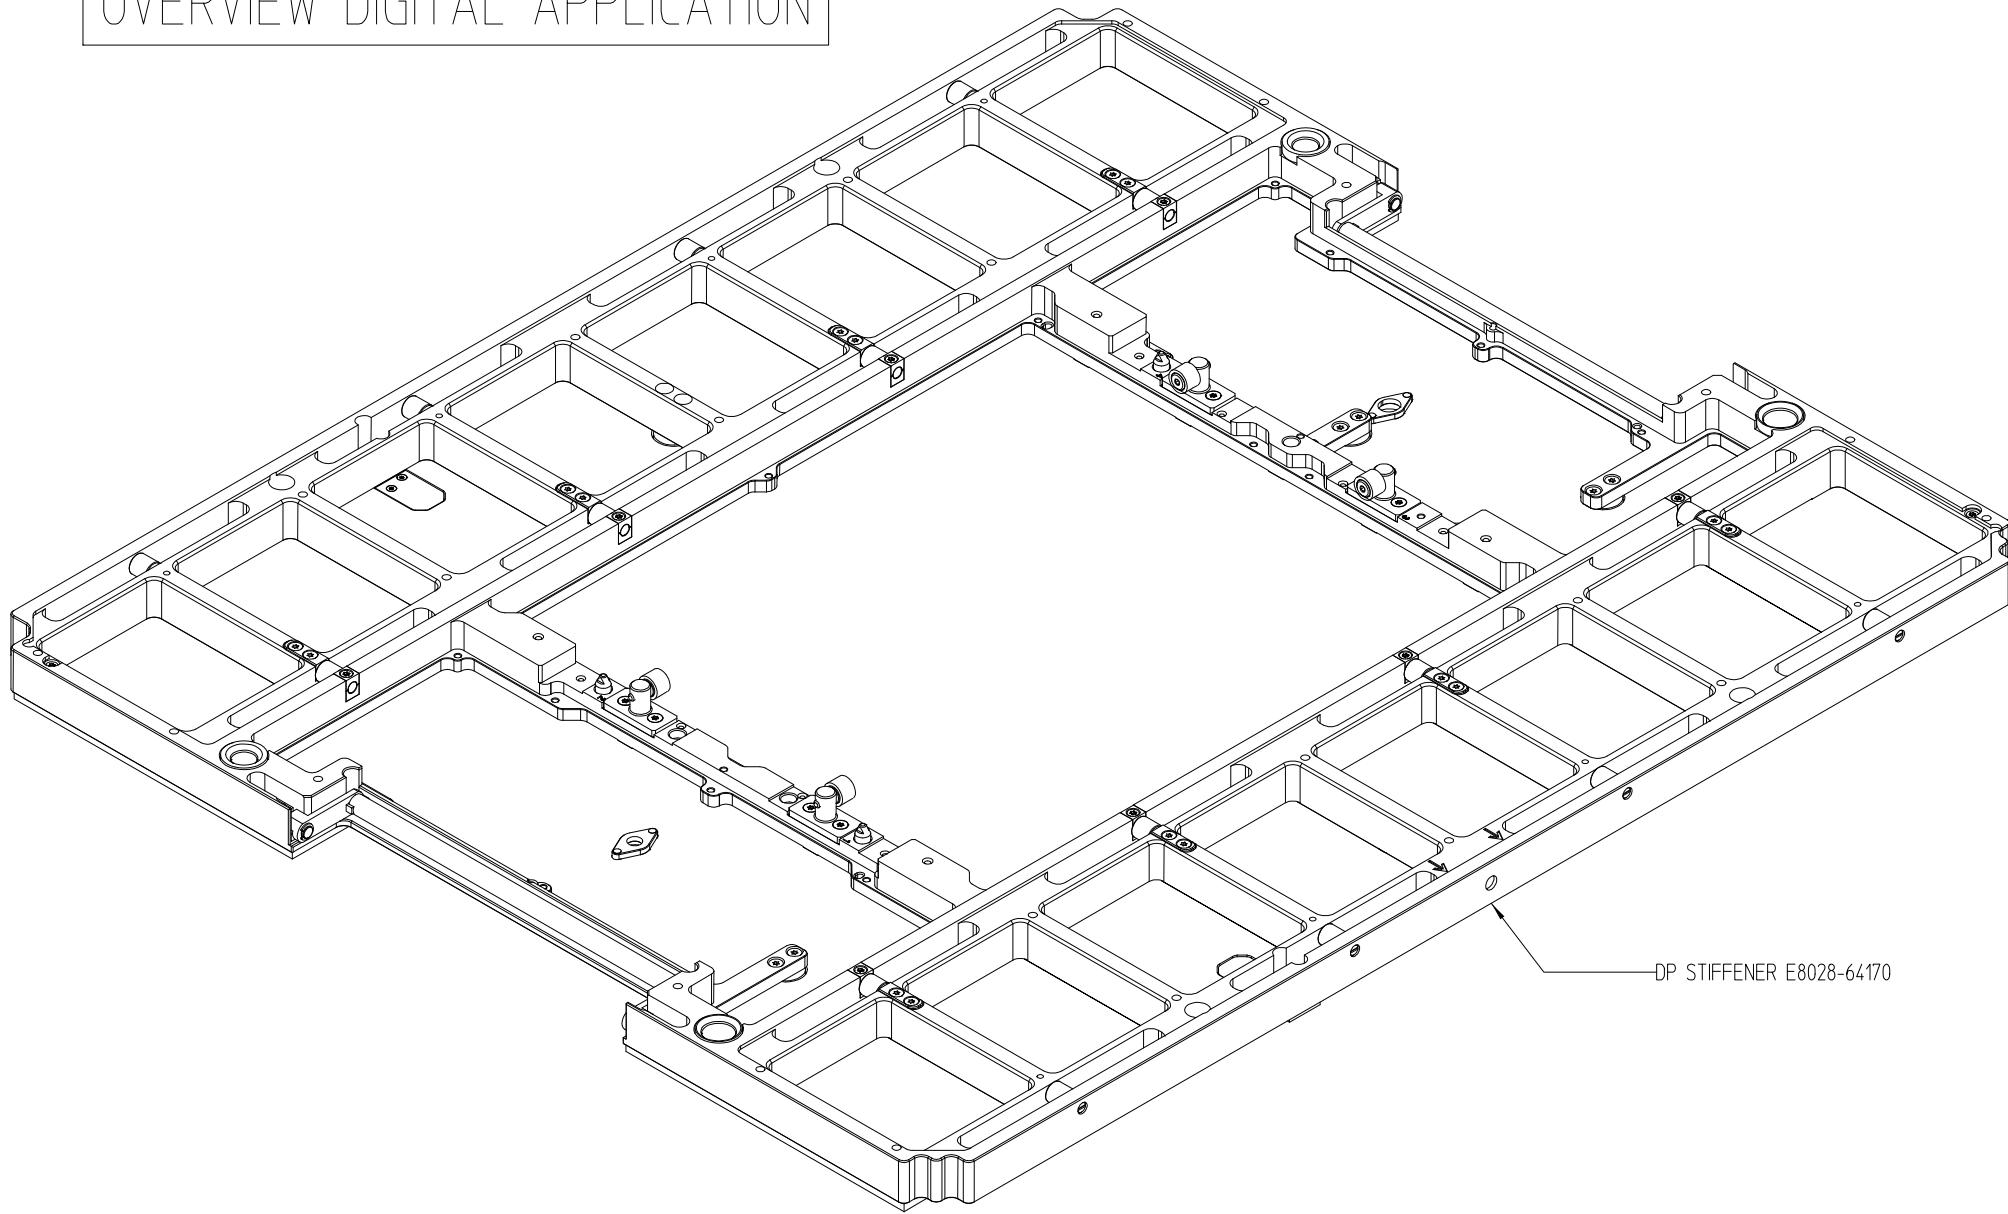

DP STIFFENER E8028-64170

NOTE:
- STIFFENER INLAY AND BACKER NOT SHOWN

STANDARD TOLERANCES
(UNLESS OTHERWISE SPECIFIED)

LINEAR: ± 0.1 mm
ANGULAR: $\pm 1^\circ$

DO NOT SCALE THIS
DRAWING

GD&T SYMBOLOGY
PER
ISO 1101 & ISO 5459

ZHAN ZHANG
DRAWN BY

PETER HIRSCHMANN
ENGINEER/CHECKER

2018-2-1
DATE (YYYY-MM-DD)

2018-2-1
DATE

UNLESS OTHERWISE SPECIFIED

- DIMENSIONS ARE IN MILLIMETERS
- THIRD ANGLE PROJECTION
- ADHERENCE TO DWG A-5951-1561-1 (COMPANY STD. SECTION 608) AND A-5951-1745-1 (GSE) IS REQUIRED

DIGITAL APPLICATION

TITLE

9 OF 10
SHEET

1:2
SCALE

A2
SIZE

ADVANTEST.


PART
NUMBER

E8028-96570
DOCUMENT NUMBER

KOZ WSRF/PMUX BRIDGE BEAM RELATED

VIEW FROM DUT/PROBE SIDE
HATCHED SURFACES REFER TO PCB BOTTOM SIDE

TEST HEAD
CABLE OUTLET SIDE

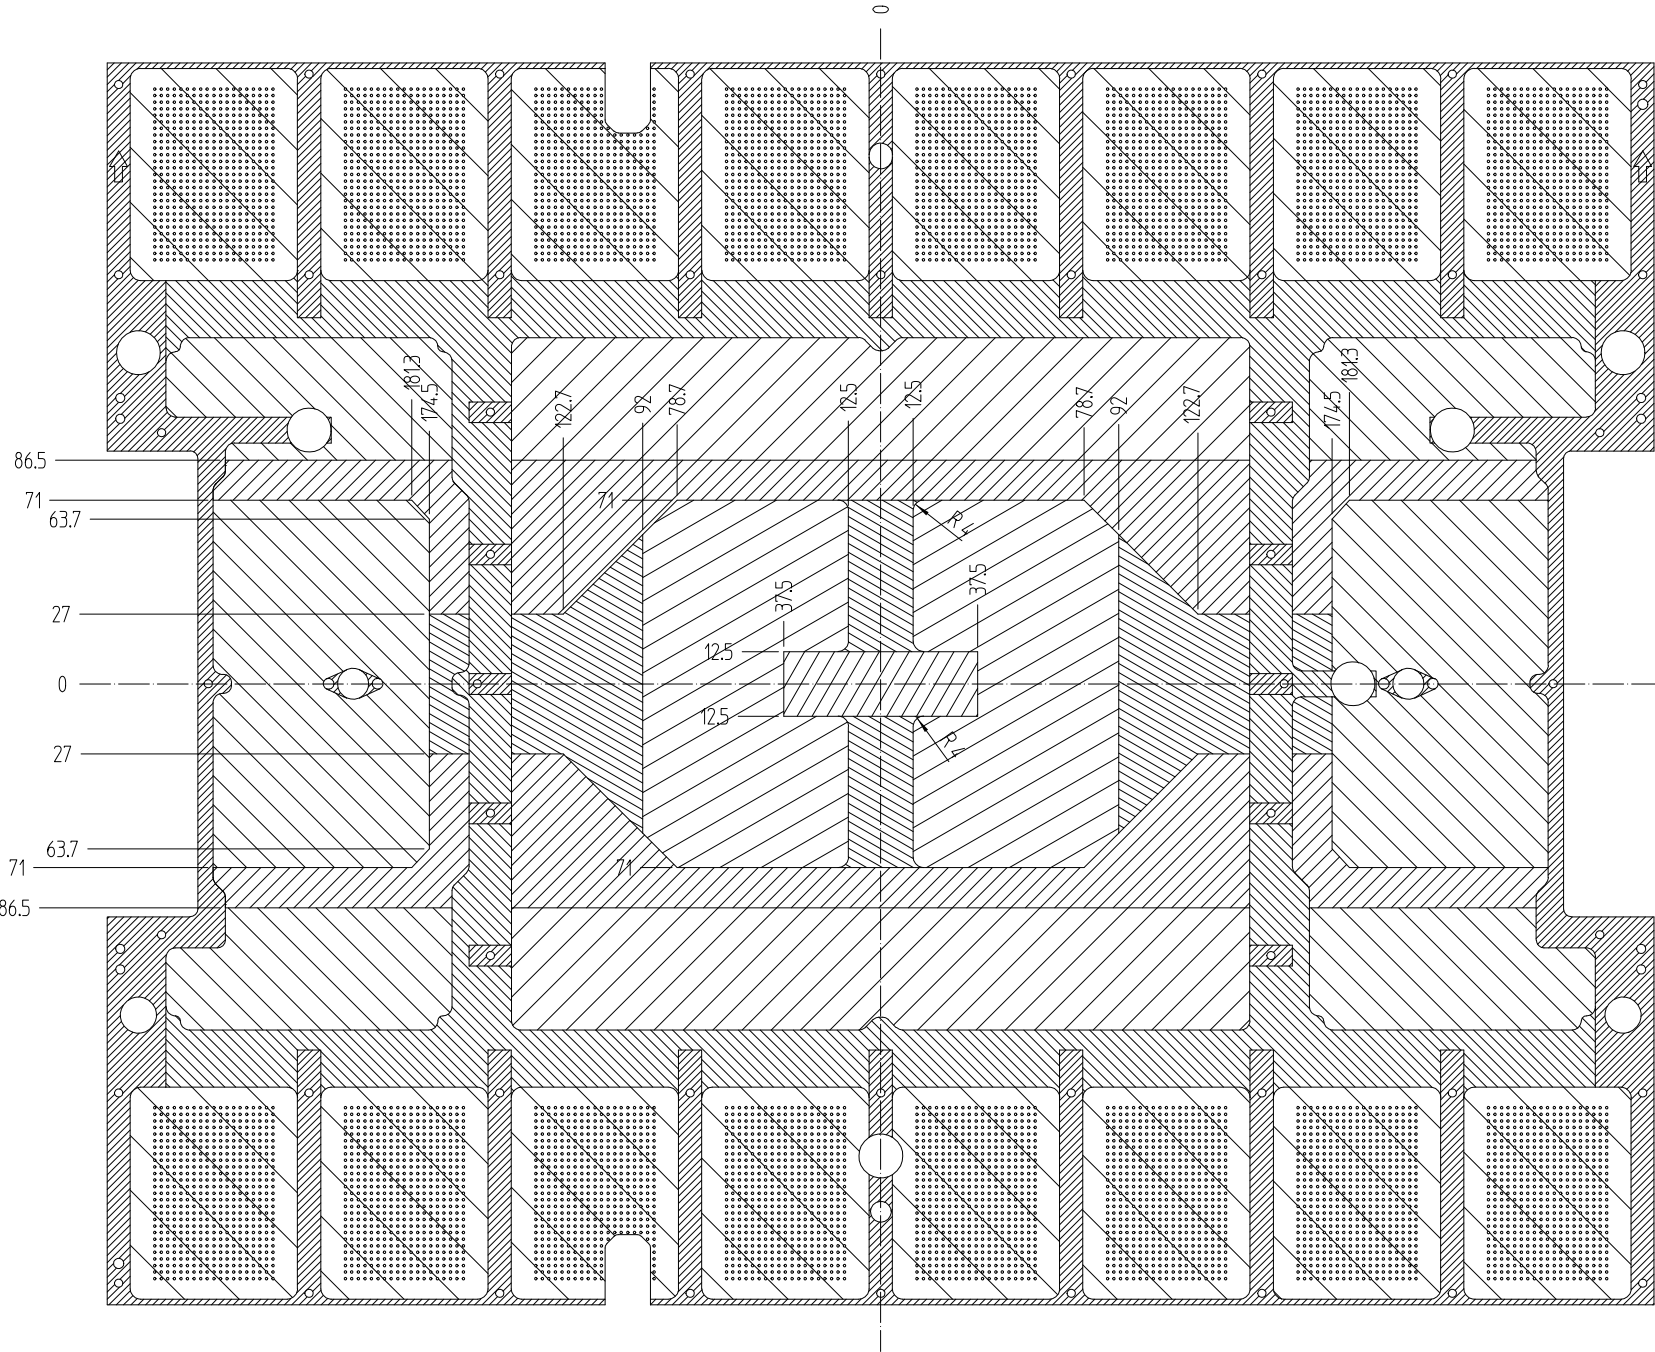

- COMPONENT AREA, CENTER AREA
COMPONENT AREA MAY VARY BY USING STIFFENER INLAY AND BACKER.
MAX COMPONENT HEIGHT 20MM.
MAY REDUSED BY USING STIFFENER INLAY AND BACKER.
- COMPONENT AREA, OUTER AREA
MAX COMPONENT HEIGHT 20MM.
- COMPONENT AREA
MAX COMPONENT HEIGHT 12MM.
- COMPONENT AREA
MAX COMPONENT HEIGHT 22MM
- PROBE-BACKER AREA
FOR PROBE-HEAD CORE HEIGHT 12.5MM REF
IF NO PROBE-BACKER IS USED MAX COMPONENT HEIGHT IS 12MM
- COMPONENT AREA, CENTER AREA
MAX COMPONENT HEIGHT 32MM.

NOTE:
KOZ FOR ALL GENERIC AREAS,
SEE SHEET 3.