


V93000 DIRECT PROBE PROBE-CARD SPECIFICATIONS

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	AS ISSUED	06/11/2010	DANIEL LAM
	B	UPDATED CONTACT TAB PLANARITY UPDATED PROBE DEPTH SPECIFICATION	05/11/2011	DANIEL LAM
	C	ADDED GUIDE PIN FEATURE CONDITIONS ADDED CONFIGURATIONS SHEET	10/9/2017	DANIEL LAM

^ TO CABLE-SIDE OF TEST-HEAD ^

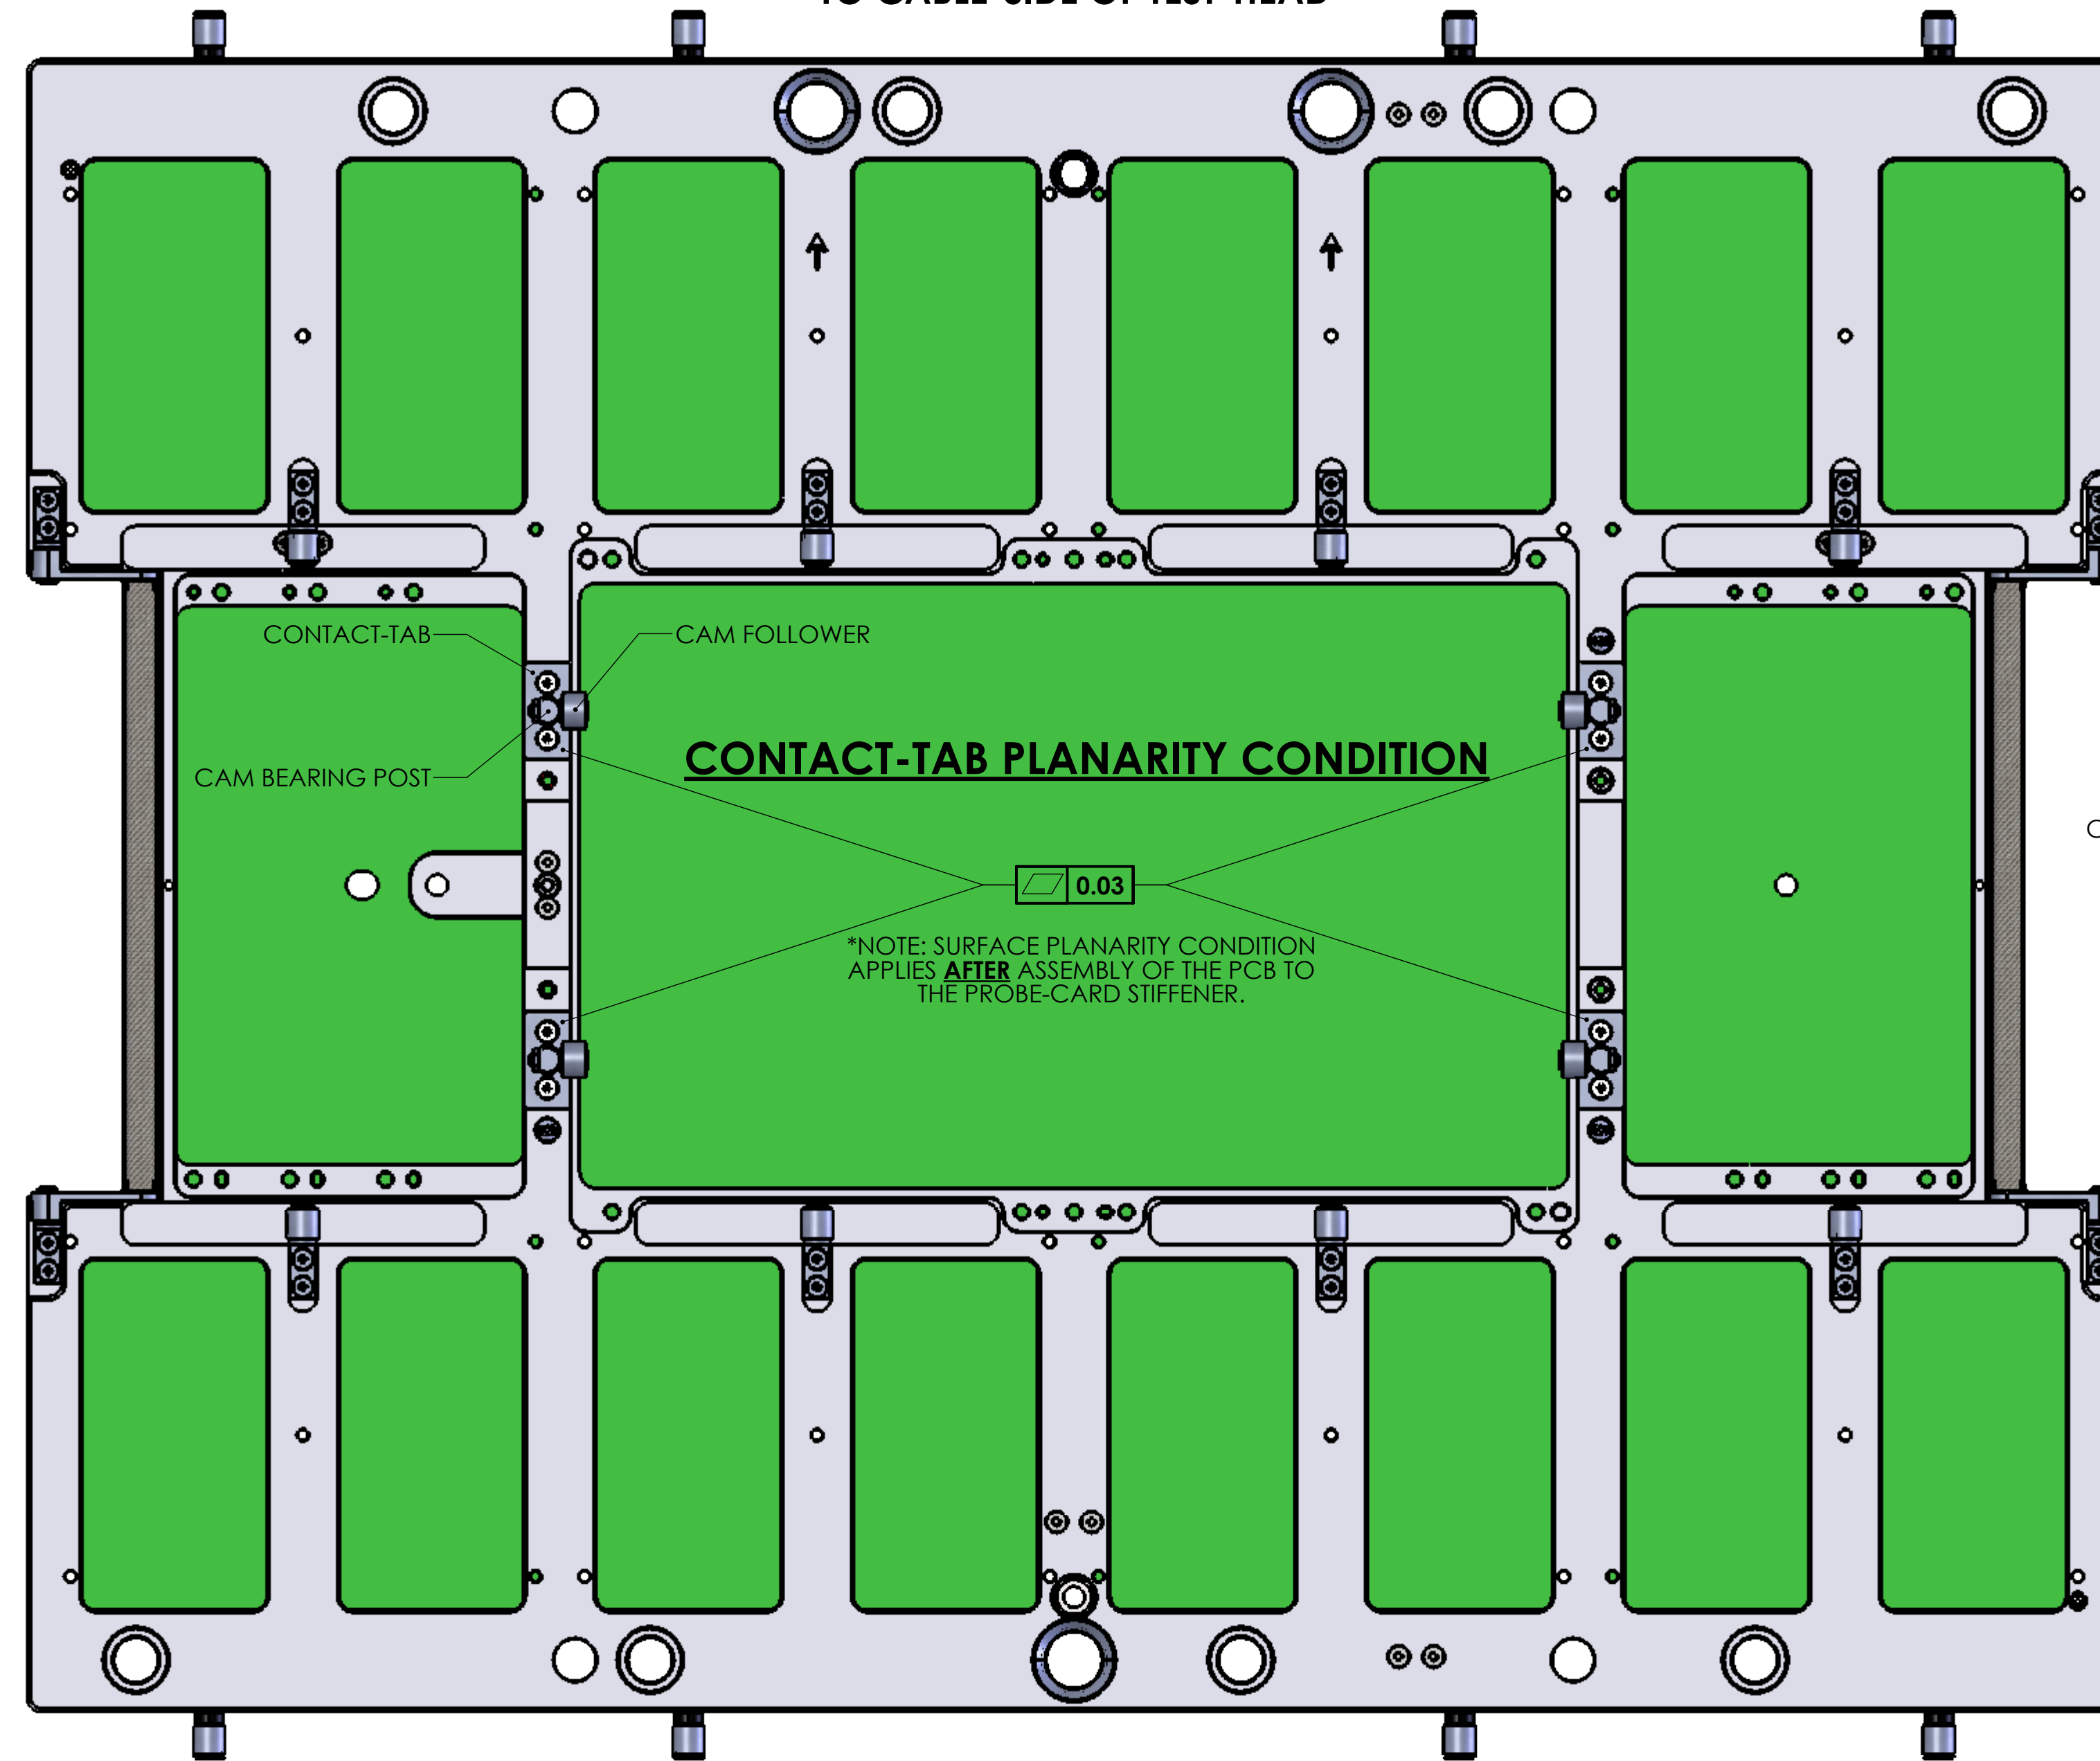

SPECIFICATIONS SUMMARY

(FOR DETAILS, SEE DRAWING VIEWS)


1. ALLOWABLE PROBE HEIGHT = SEE PROBER SPEC.
2. ALLOWABLE PCB THICKNESS = 3.18 TO 8.00 MM.
3. CONTACT TAB PLANARITY CONDITION = 0.025 MM.
4. CAM HEIGHT CONDITION = 13.00 +/- 0.05 MM.
5. GUIDE PIN HEIGHT CONDITION = 6.00 +/- 0.5 MM.
6. MAX WEIGHT = 12.5 KG.

CAM FOLLOWER
CONTACT TAB
CAM BEARING POST


GUIDE PIN

CAM HEIGHT CONDITION


*NOTE: CAM HEIGHT IS PERPENDICULAR HEIGHT FROM THE TOP OF EACH INDIVIDUAL CONTACT TAB TO THE TANGENTIAL TOP OF ITS ASSOCIATED CAM FOLLOWER.

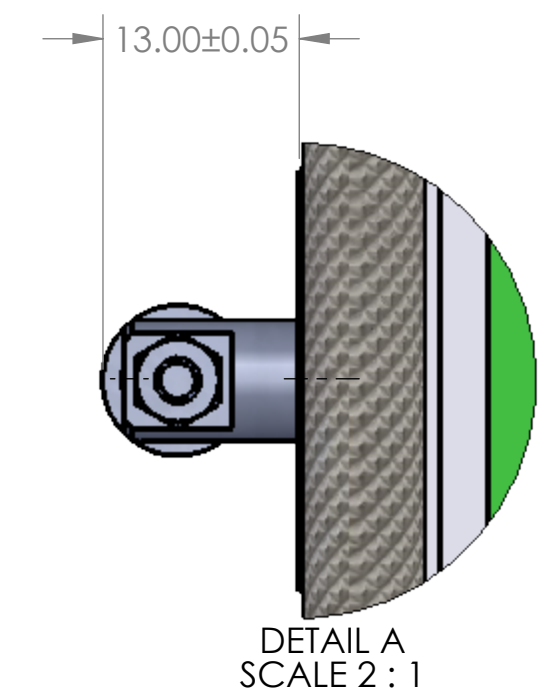

GUIDE PIN FEATURE CONDITIONS

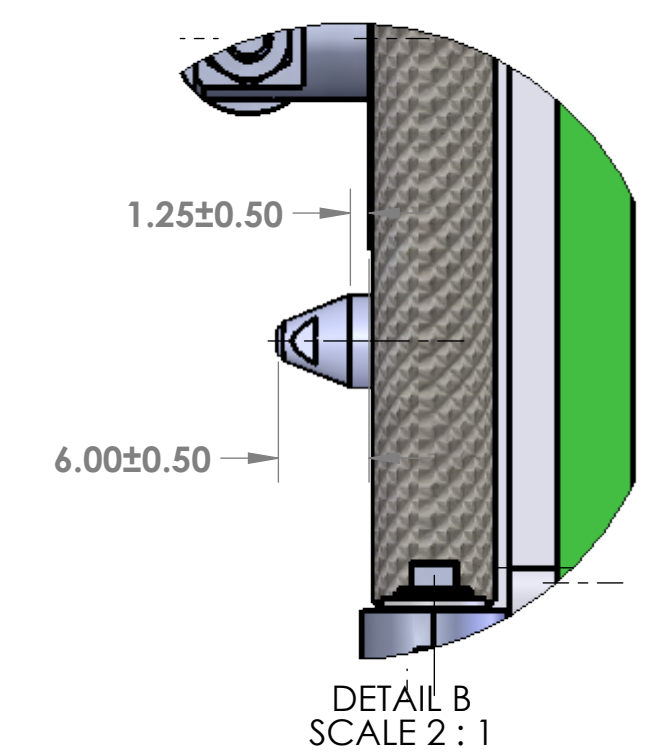

Z-HEIGHT ALLOWANCES

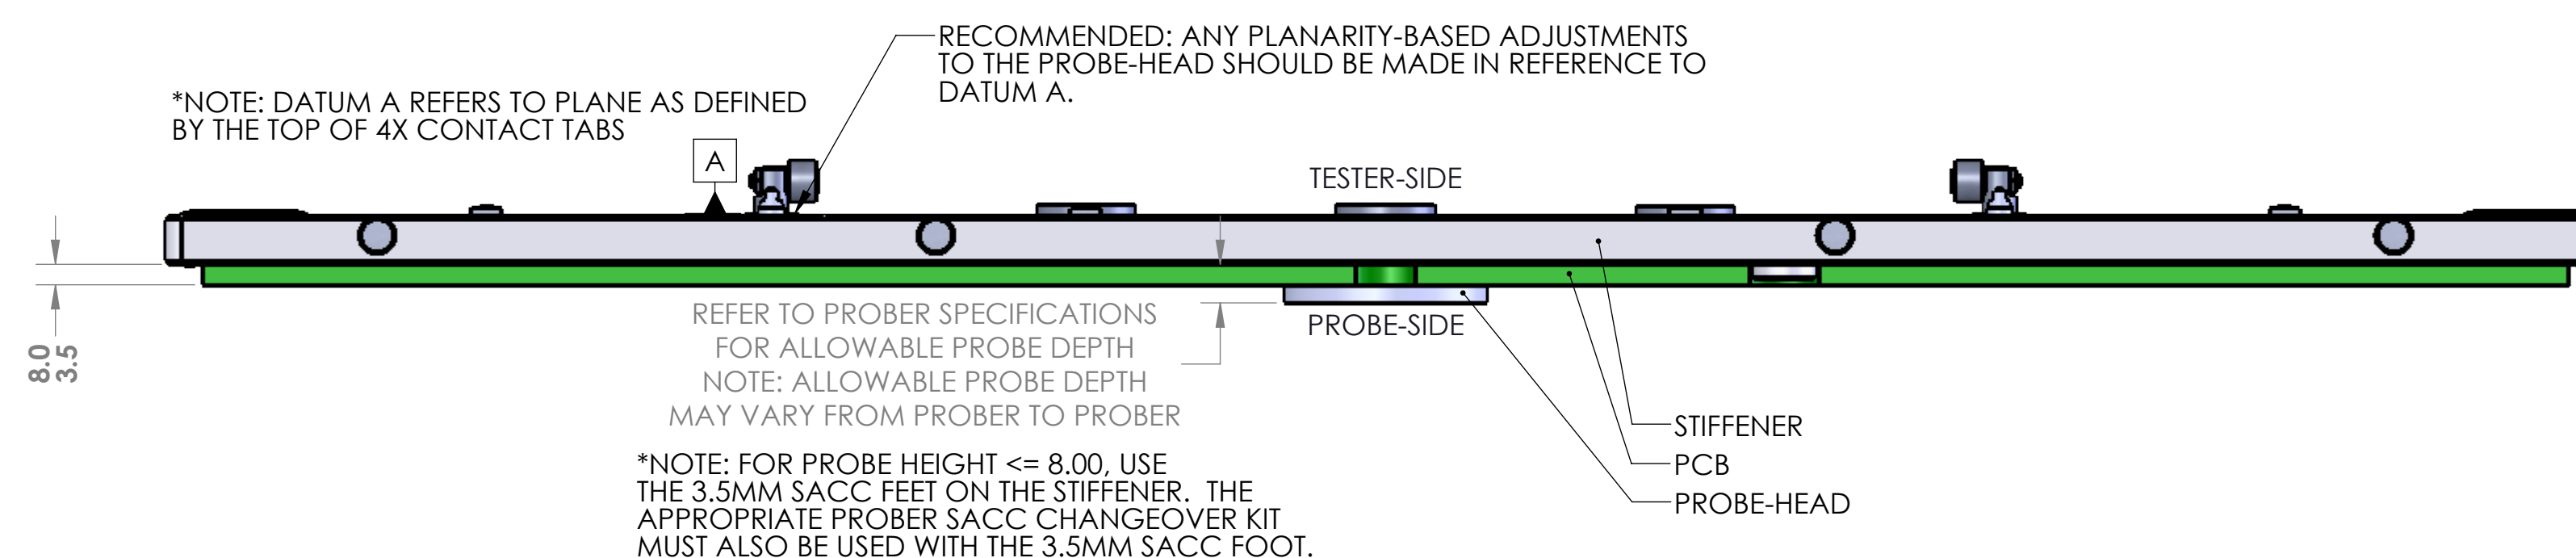

*NOTE: DATUM A REFERS TO PLANE AS DEFINED BY THE TOP OF 4X CONTACT TABS

RECOMMENDED: ANY PLANARITY-BASED ADJUSTMENTS TO THE PROBE-HEAD SHOULD BE MADE IN REFERENCE TO DATUM A.

REFER TO PROBER SPECIFICATIONS FOR ALLOWABLE PROBE DEPTH
NOTE: ALLOWABLE PROBE DEPTH MAY VARY FROM PROBER TO PROBER

*NOTE: FOR PROBE HEIGHT <= 8.00, USE THE 3.5MM SACC FEET ON THE STIFFENER. THE APPROPRIATE PROBER SACC CHANGEOVER KIT MUST ALSO BE USED WITH THE 3.5MM SACC FOOT.



STIFFENER
PCB
PROBE-HEAD

NOTE : THIS SHEET IS USED IF NO GENERAL TOLERANCE SPECIFIED.		TOLERANCES UNLESS SPECIFIED ARE AS FOLLOWS		FOR SHEET METAL PARTS WITHOUT BENDING ONLY TOLERANCES UNLESS SPECIFIED ARE AS FOLLOWS		FINISH SYMBOLS JIS B 9003/ISO 1302/2002 THIRD ANGLE PROJECTION DO NOT SCALE THIS DRAWING		UNLESS OTHERWISE SPECIFIED		TITLE V93000 DIRECT PROBE PROBE-CARD SPECIFICATIONS		ADVANTEST	
120 < L [mm] < 300	±0.2	120 < L [mm] < 300	±0.2	120 < L [mm] < 300	±0.2					PARTS CODE N2360-90117		DRAWING NO. N2360-90117	
300 < L [mm] < 500	±0.3	300 < L [mm] < 500	±0.3	300 < L [mm] < 500	±0.3					DRAWN BY DANIEL LAM		DATE 6/10/2010	
500 < L [mm] < 1000	±0.5	500 < L [mm] < 1000	±0.5	500 < L [mm] < 1000	±0.5					DESIGNED BY		DATE	
1000 < L [mm] < 2000	±1.0	1000 < L [mm] < 2000	±1.0	1000 < L [mm] < 2000	±1.0					CHECKED BY		DATE	
2000 < L [mm]	±1.5	2000 < L [mm]	±1.5	2000 < L [mm]	±1.5					REV C		SCALE 1:1	
±1° ON ANGULAR DIM'S		±1° ON ANGULAR DIM'S		±1° ON ANGULAR DIM'S						SIZE A1		SHEET 1 OF 3	

1. REFER TO E6980-96550 FOR FABRICATION, POGO-BLOCK, AND LANDING PAD DETAILS.

GENERAL NOTES (UNLESS OTHERWISE SPECIFIED)



V93000 DIRECT PROBE PROBE-CARD CONFIGURATION (UNIVERSAL)

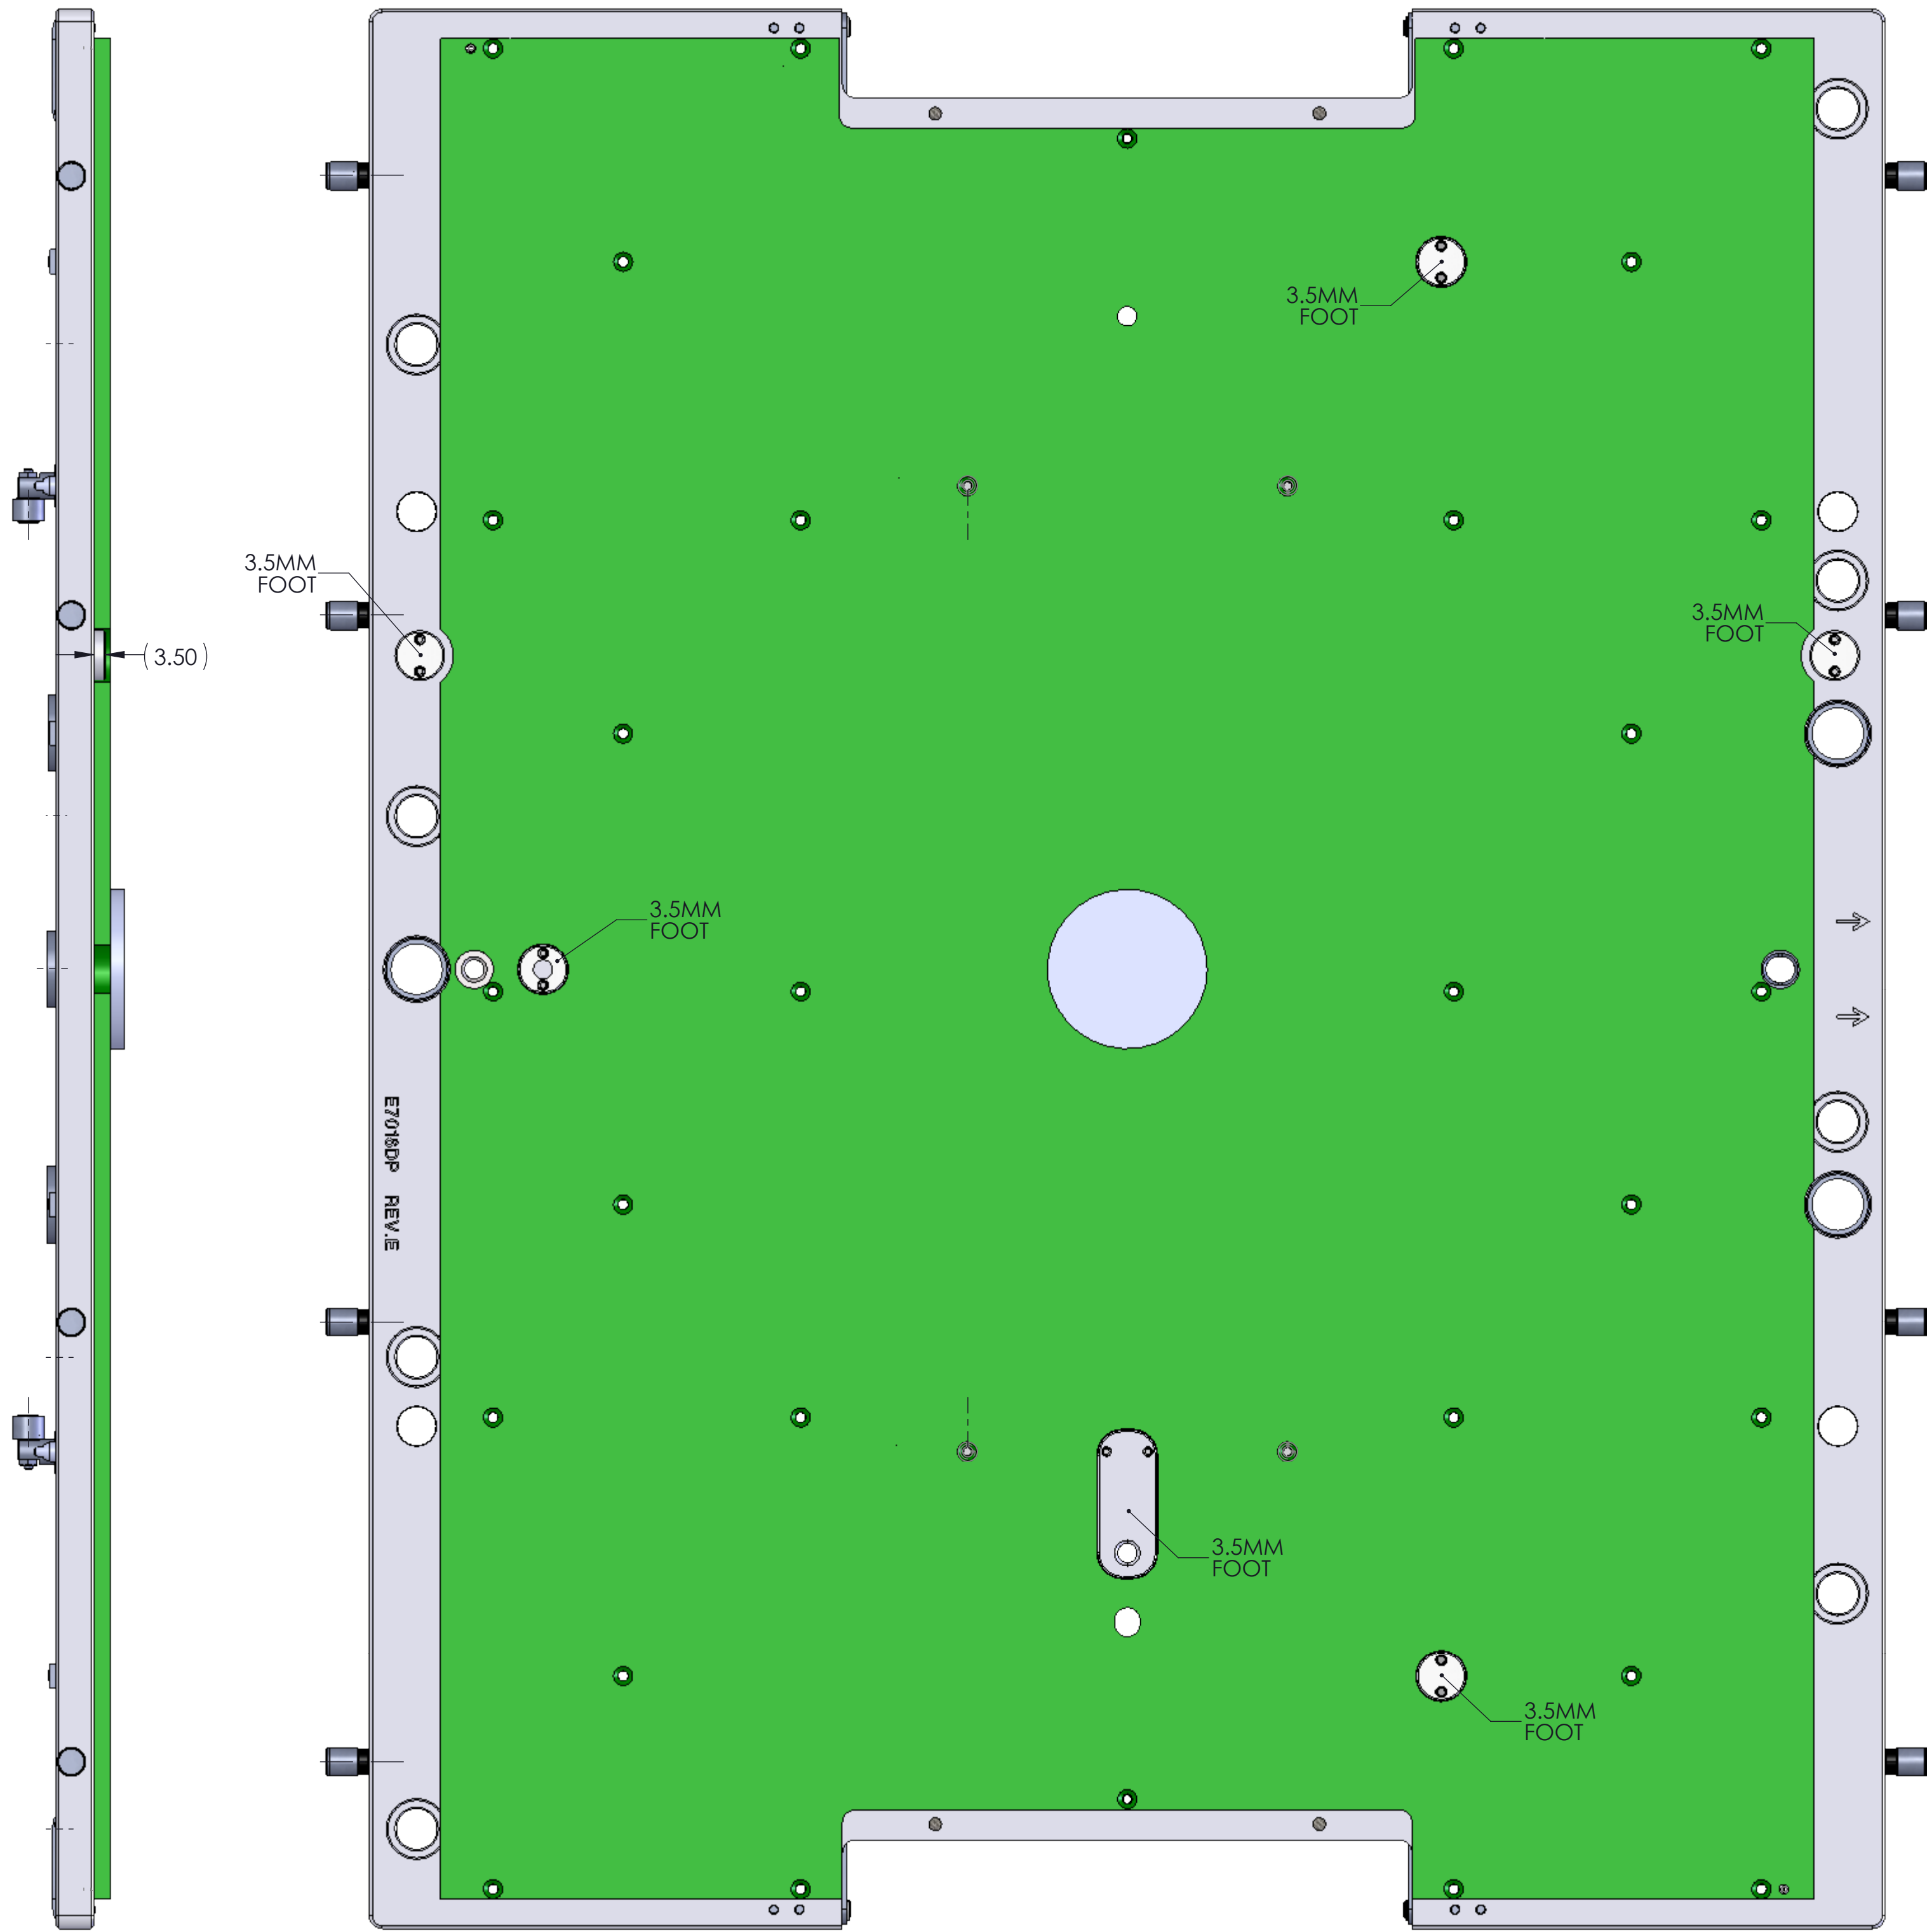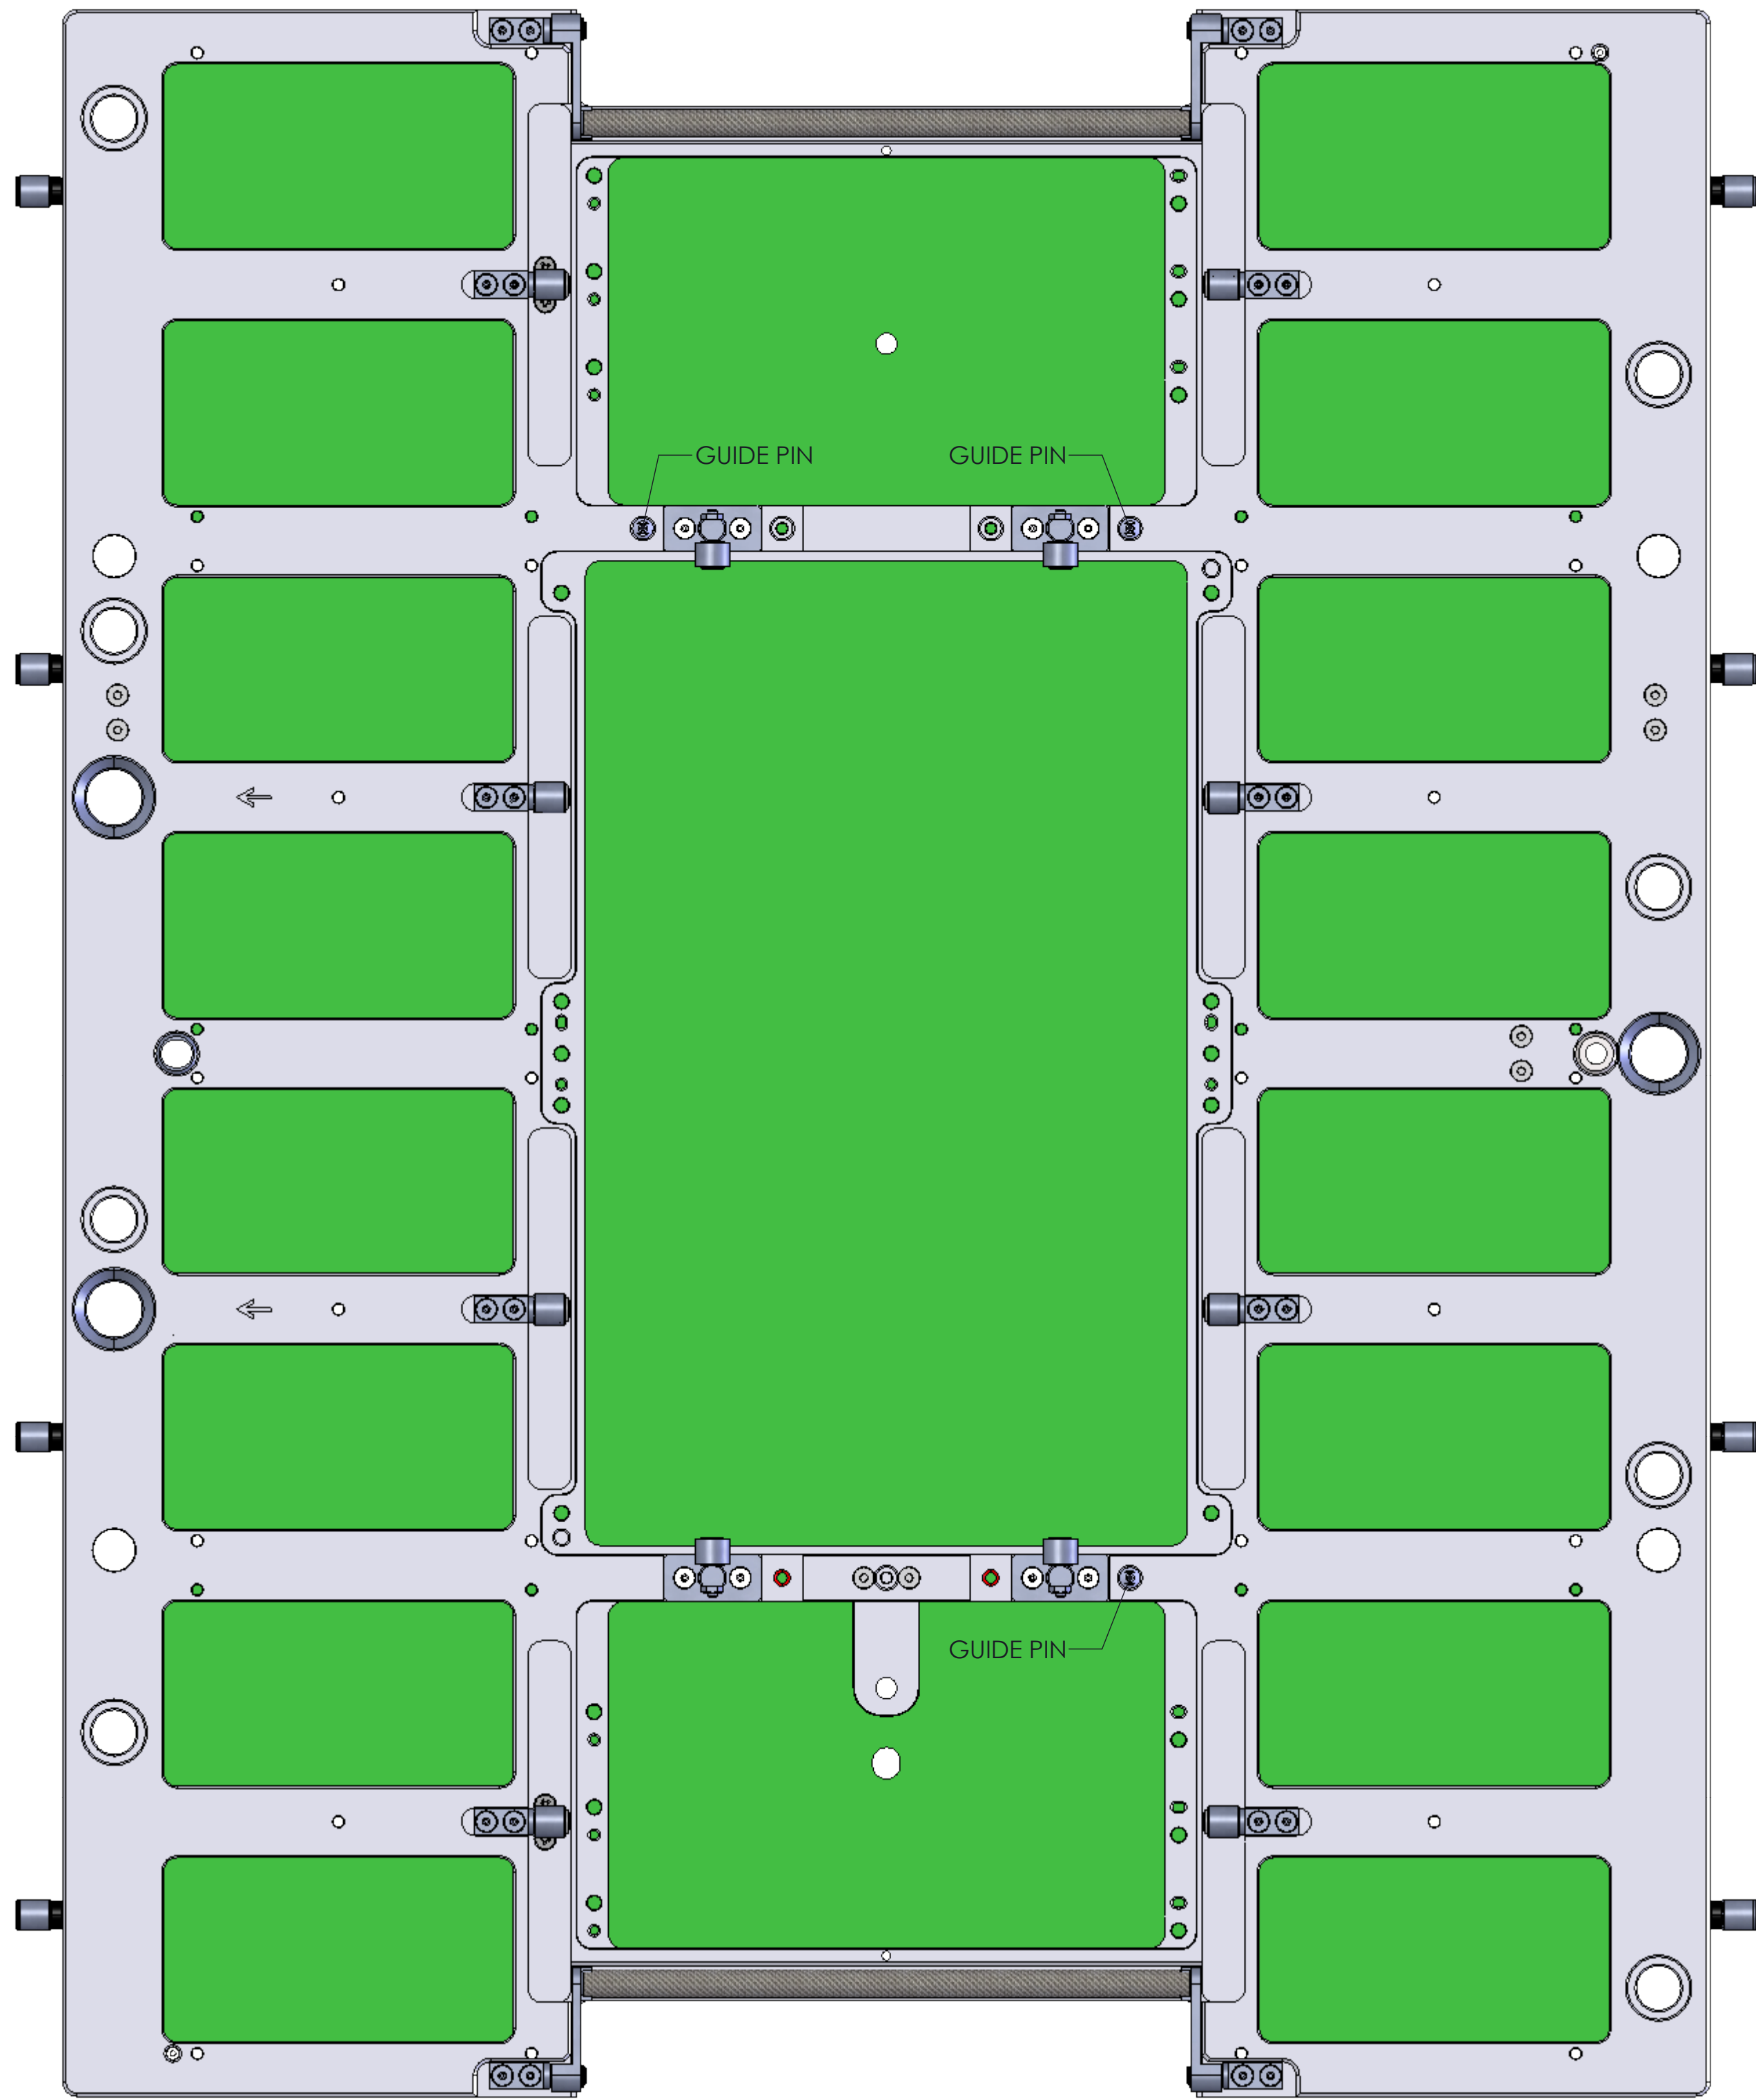

1. UNIVERSAL CONFIGURATION APPROPRIATE FOR CURRENT DIGITAL, PSRF, WSRF, AND PMUX APPLICATIONS.
2. PROBE-CARD GUIDE PINS MUST BE CONFIGURED IN THE UNIVERSAL CONFIGURATION TO USE THE X-Y CLAMP CAPABILITY OF THE V93000 DIRECT PROBE BRIDGE BEAM.

GENERAL NOTES (UNLESS OTHERWISE SPECIFIED)

NOTE : THIS SHEET IS USED IF NO GENERAL TOLERANCE SPECIFIED.		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS FINISH SYMBOLS JIS B 0013 2000 / ISO 1302 2002 THIS ANGULAR PROJECTION DO NOT SCALE THIS DRAWING		TITLE V93000 DIRECT PROBE PROBE-CARD SPECIFICATIONS	
TOLERANCES UNLESS SPECIFIED ARE AS FOLLOWS 120 < L [mm] < 300 : ±0.3 300 < L [mm] < 500 : ±0.5 500 < L [mm] < 1000 : ±0.5 1000 < L [mm] < 2000 : ±1.0 2000 < L [mm] < 3000 : ±1.0 3000 < L [mm] < 4000 : ±1.0 4000 < L [mm] < 5000 : ±1.0 5000 < L [mm] < 6000 : ±1.0 6000 < L [mm] < 7000 : ±1.0 7000 < L [mm] < 8000 : ±1.0 8000 < L [mm] < 9000 : ±1.0 9000 < L [mm] < 10000 : ±1.0 10000 < L [mm] < 11000 : ±1.0 11000 < L [mm] < 12000 : ±1.0 12000 < L [mm] < 13000 : ±1.0 13000 < L [mm] < 14000 : ±1.0 14000 < L [mm] < 15000 : ±1.0 15000 < L [mm] < 16000 : ±1.0 16000 < L [mm] < 17000 : ±1.0 17000 < L [mm] < 18000 : ±1.0 18000 < L [mm] < 19000 : ±1.0 19000 < L [mm] < 20000 : ±1.0 20000 < L [mm] < 21000 : ±1.0 21000 < L [mm] < 22000 : ±1.0 22000 < L [mm] < 23000 : ±1.0 23000 < L [mm] < 24000 : ±1.0 24000 < L [mm] < 25000 : ±1.0 25000 < L [mm] < 26000 : ±1.0 26000 < L [mm] < 27000 : ±1.0 27000 < L [mm] < 28000 : ±1.0 28000 < L [mm] < 29000 : ±1.0 29000 < L [mm] < 30000 : ±1.0 30000 < L [mm] < 31000 : ±1.0 31000 < L [mm] < 32000 : ±1.0 32000 < L [mm] < 33000 : ±1.0 33000 < L [mm] < 34000 : ±1.0 34000 < L [mm] < 35000 : ±1.0 35000 < L [mm] < 36000 : ±1.0 36000 < L [mm] < 37000 : ±1.0 37000 < L [mm] < 38000 : ±1.0 38000 < L [mm] < 39000 : ±1.0 39000 < L [mm] < 40000 : ±1.0 40000 < L [mm] < 41000 : ±1.0 41000 < L [mm] < 42000 : ±1.0 42000 < L [mm] < 43000 : ±1.0 43000 < L [mm] < 44000 : ±1.0 44000 < L [mm] < 45000 : ±1.0 45000 < L [mm] < 46000 : ±1.0 46000 < L [mm] < 47000 : ±1.0 47000 < L [mm] < 48000 : ±1.0 48000 < L [mm] < 49000 : ±1.0 49000 < L [mm] < 50000 : ±1.0 50000 < L [mm] < 51000 : ±1.0 51000 < L [mm] < 52000 : ±1.0 52000 < L [mm] < 53000 : ±1.0 53000 < L [mm] < 54000 : ±1.0 54000 < L [mm] < 55000 : ±1.0 55000 < L [mm] < 56000 : ±1.0 56000 < L [mm] < 57000 : ±1.0 57000 < L [mm] < 58000 : ±1.0 58000 < L [mm] < 59000 : ±1.0 59000 < L [mm] < 60000 : ±1.0 60000 < L [mm] < 61000 : ±1.0 61000 < L [mm] < 62000 : ±1.0 62000 < L [mm] < 63000 : ±1.0 63000 < L [mm] < 64000 : ±1.0 64000 < L [mm] < 65000 : ±1.0 65000 < L [mm] < 66000 : ±1.0 66000 < L [mm] < 67000 : ±1.0 67000 < L [mm] < 68000 : ±1.0 68000 < L [mm] < 69000 : ±1.0 69000 < L [mm] < 70000 : ±1.0 70000 < L [mm] < 71000 : ±1.0 71000 < L [mm] < 72000 : ±1.0 72000 < L [mm] < 73000 : ±1.0 73000 < L [mm] < 74000 : ±1.0 74000 < L [mm] < 75000 : ±1.0 75000 < L [mm] < 76000 : ±1.0 76000 < L [mm] < 77000 : ±1.0 77000 < L [mm] < 78000 : ±1.0 78000 < L [mm] < 79000 : ±1.0 79000 < L [mm] < 80000 : ±1.0 80000 < L [mm] < 81000 : ±1.0 81000 < L [mm] < 82000 : ±1.0 82000 < L [mm] < 83000 : ±1.0 83000 < L [mm] < 84000 : ±1.0 84000 < L [mm] < 85000 : ±1.0 85000 < L [mm] < 86000 : ±1.0 86000 < L [mm] < 87000 : ±1.0 87000 < L [mm] < 88000 : ±1.0 88000 < L [mm] < 89000 : ±1.0 89000 < L [mm] < 90000 : ±1.0 90000 < L [mm] < 91000 : ±1.0 91000 < L [mm] < 92000 : ±1.0 92000 < L [mm] < 93000 : ±1.0 93000 < L [mm] < 94000 : ±1.0 94000 < L [mm] < 95000 : ±1.0 95000 < L [mm] < 96000 : ±1.0 96000 < L [mm] < 97000 : ±1.0 97000 < L [mm] < 98000 : ±1.0 98000 < L [mm] < 99000 : ±1.0 99000 < L [mm] < 100000 : ±1.0		FOR SHEET METAL PARTS WITHOUT BENDING ONLY TOLERANCES UNLESS SPECIFIED ARE AS FOLLOWS 120 < L [mm] < 300 : ±0.3 300 < L [mm] < 500 : ±0.5 500 < L [mm] < 1000 : ±0.5 1000 < L [mm] < 2000 : ±1.0 2000 < L [mm] < 3000 : ±1.0 3000 < L [mm] < 4000 : ±1.0 4000 < L [mm] < 5000 : ±1.0 5000 < L [mm] < 6000 : ±1.0 6000 < L [mm] < 7000 : ±1.0 7000 < L [mm] < 8000 : ±1.0 8000 < L [mm] < 9000 : ±1.0 9000 < L [mm] < 10000 : ±1.0 10000 < L [mm] < 11000 : ±1.0 11000 < L [mm] < 12000 : ±1.0 12000 < L [mm] < 13000 : ±1.0 13000 < L [mm] < 14000 : ±1.0 14000 < L [mm] < 15000 : ±1.0 15000 < L [mm] < 16000 : ±1.0 16000 < L [mm] < 17000 : ±1.0 17000 < L [mm] < 18000 : ±1.0 18000 < L [mm] < 19000 : ±1.0 19000 < L [mm] < 20000 : ±1.0 20000 < L [mm] < 21000 : ±1.0 21000 < L [mm] < 22000 : ±1.0 22000 < L [mm] < 23000 : ±1.0 23000 < L [mm] < 24000 : ±1.0 24000 < L [mm] < 25000 : ±1.0 25000 < L [mm] < 26000 : ±1.0 26000 < L [mm] < 27000 : ±1.0 27000 < L [mm] < 28000 : ±1.0 28000 < L [mm] < 29000 : ±1.0 29000 < L [mm] < 30000 : ±1.0 30000 < L [mm] < 31000 : ±1.0 31000 < L [mm] < 32000 : ±1.0 32000 < L [mm] < 33000 : ±1.0 33000 < L [mm] < 34000 : ±1.0 34000 < L [mm] < 35000 : ±1.0 35000 < L [mm] < 36000 : ±1.0 36000 < L [mm] < 37000 : ±1.0 37000 < L [mm] < 38000 : ±1.0 38000 < L [mm] < 39000 : ±1.0 39000 < L [mm] < 40000 : ±1.0 40000 < L [mm] < 41000 : ±1.0 41000 < L [mm] < 42000 : ±1.0 42000 < L [mm] < 43000 : ±1.0 43000 < L [mm] < 44000 : ±1.0 44000 < L [mm] < 45000 : ±1.0 45000 < L [mm] < 46000 : ±1.0 46000 < L [mm] < 47000 : ±1.0 47000 < L [mm] < 48000 : ±1.0 48000 < L [mm] < 49000 : ±1.0 49000 < L [mm] < 50000 : ±1.0 50000 < L [mm] < 51000 : ±1.0 51000 < L [mm] < 52000 : ±1.0 52000 < L [mm] < 53000 : ±1.0 53000 < L [mm] < 54000 : ±1.0 54000 < L [mm] < 55000 : ±1.0 55000 < L [mm] < 56000 : ±1.0 56000 < L [mm] < 57000 : ±1.0 57000 < L [mm] < 58000 : ±1.0 58000 < L [mm] < 59000 : ±1.0 59000 < L [mm] < 60000 : ±1.0 60000 < L [mm] < 61000 : ±1.0 61000 < L [mm] < 62000 : ±1.0 62000 < L [mm] < 63000 : ±1.0 63000 < L [mm] < 64000 : ±1.0 64000 < L [mm] < 65000 : ±1.0 65000 < L [mm] < 66000 : ±1.0 66000 < L [mm] < 67000 : ±1.0 67000 < L [mm] < 68000 : ±1.0 68000 < L [mm] < 69000 : ±1.0 69000 < L [mm] < 70000 : ±1.0 70000 < L [mm] < 71000 : ±1.0 71000 < L [mm] < 72000 : ±1.0 72000 < L [mm] < 73000 : ±1.0 73000 < L [mm] < 74000 : ±1.0 74000 < L [mm] < 75000 : ±1.0 75000 < L [mm] < 76000 : ±1.0 76000 < L [mm] < 77000 : ±1.0 77000 < L [mm] < 78000 : ±1.0 78000 < L [mm] < 79000 : ±1.0 79000 < L [mm] < 80000 : ±1.0 80000 < L [mm] < 81000 : ±1.0 81000 < L [mm] < 82000 : ±1.0 82000 < L [mm] < 83000 : ±1.0 83000 < L [mm] < 84000 : ±1.0 84000 < L [mm] < 85000 : ±1.0 85000 < L [mm] < 86000 : ±1.0 86000 < L [mm] < 87000 : ±1.0 87000 < L [mm] < 88000 : ±1.0 88000 < L [mm] < 89000 : ±1.0 89000 < L [mm] < 90000 : ±1.0 90000 < L [mm] < 91000 : ±1.0 91000 < L [mm] < 92000 : ±1.0 92000 < L [mm] < 93000 : ±1.0 93000 < L [mm] < 94000 : ±1.0 94000 < L [mm] < 95000 : ±1.0 95000 < L [mm] < 96000 : ±1.0 96000 < L [mm] < 97000 : ±1.0 97000 < L [mm] < 98000 : ±1.0 98000 < L [mm] < 99000 : ±1.0 99000 < L [mm] < 100000 : ±1.0		PARTS CODE N2360-90117	
DRAWN BY DANIEL LAM		DATE 6/10/2010		REV SCALE C 1:1	
DESIGNED BY		DATE		N2360-90117 SIZE A1	
CHECKED BY		DATE		SHEET 2 OF 3	

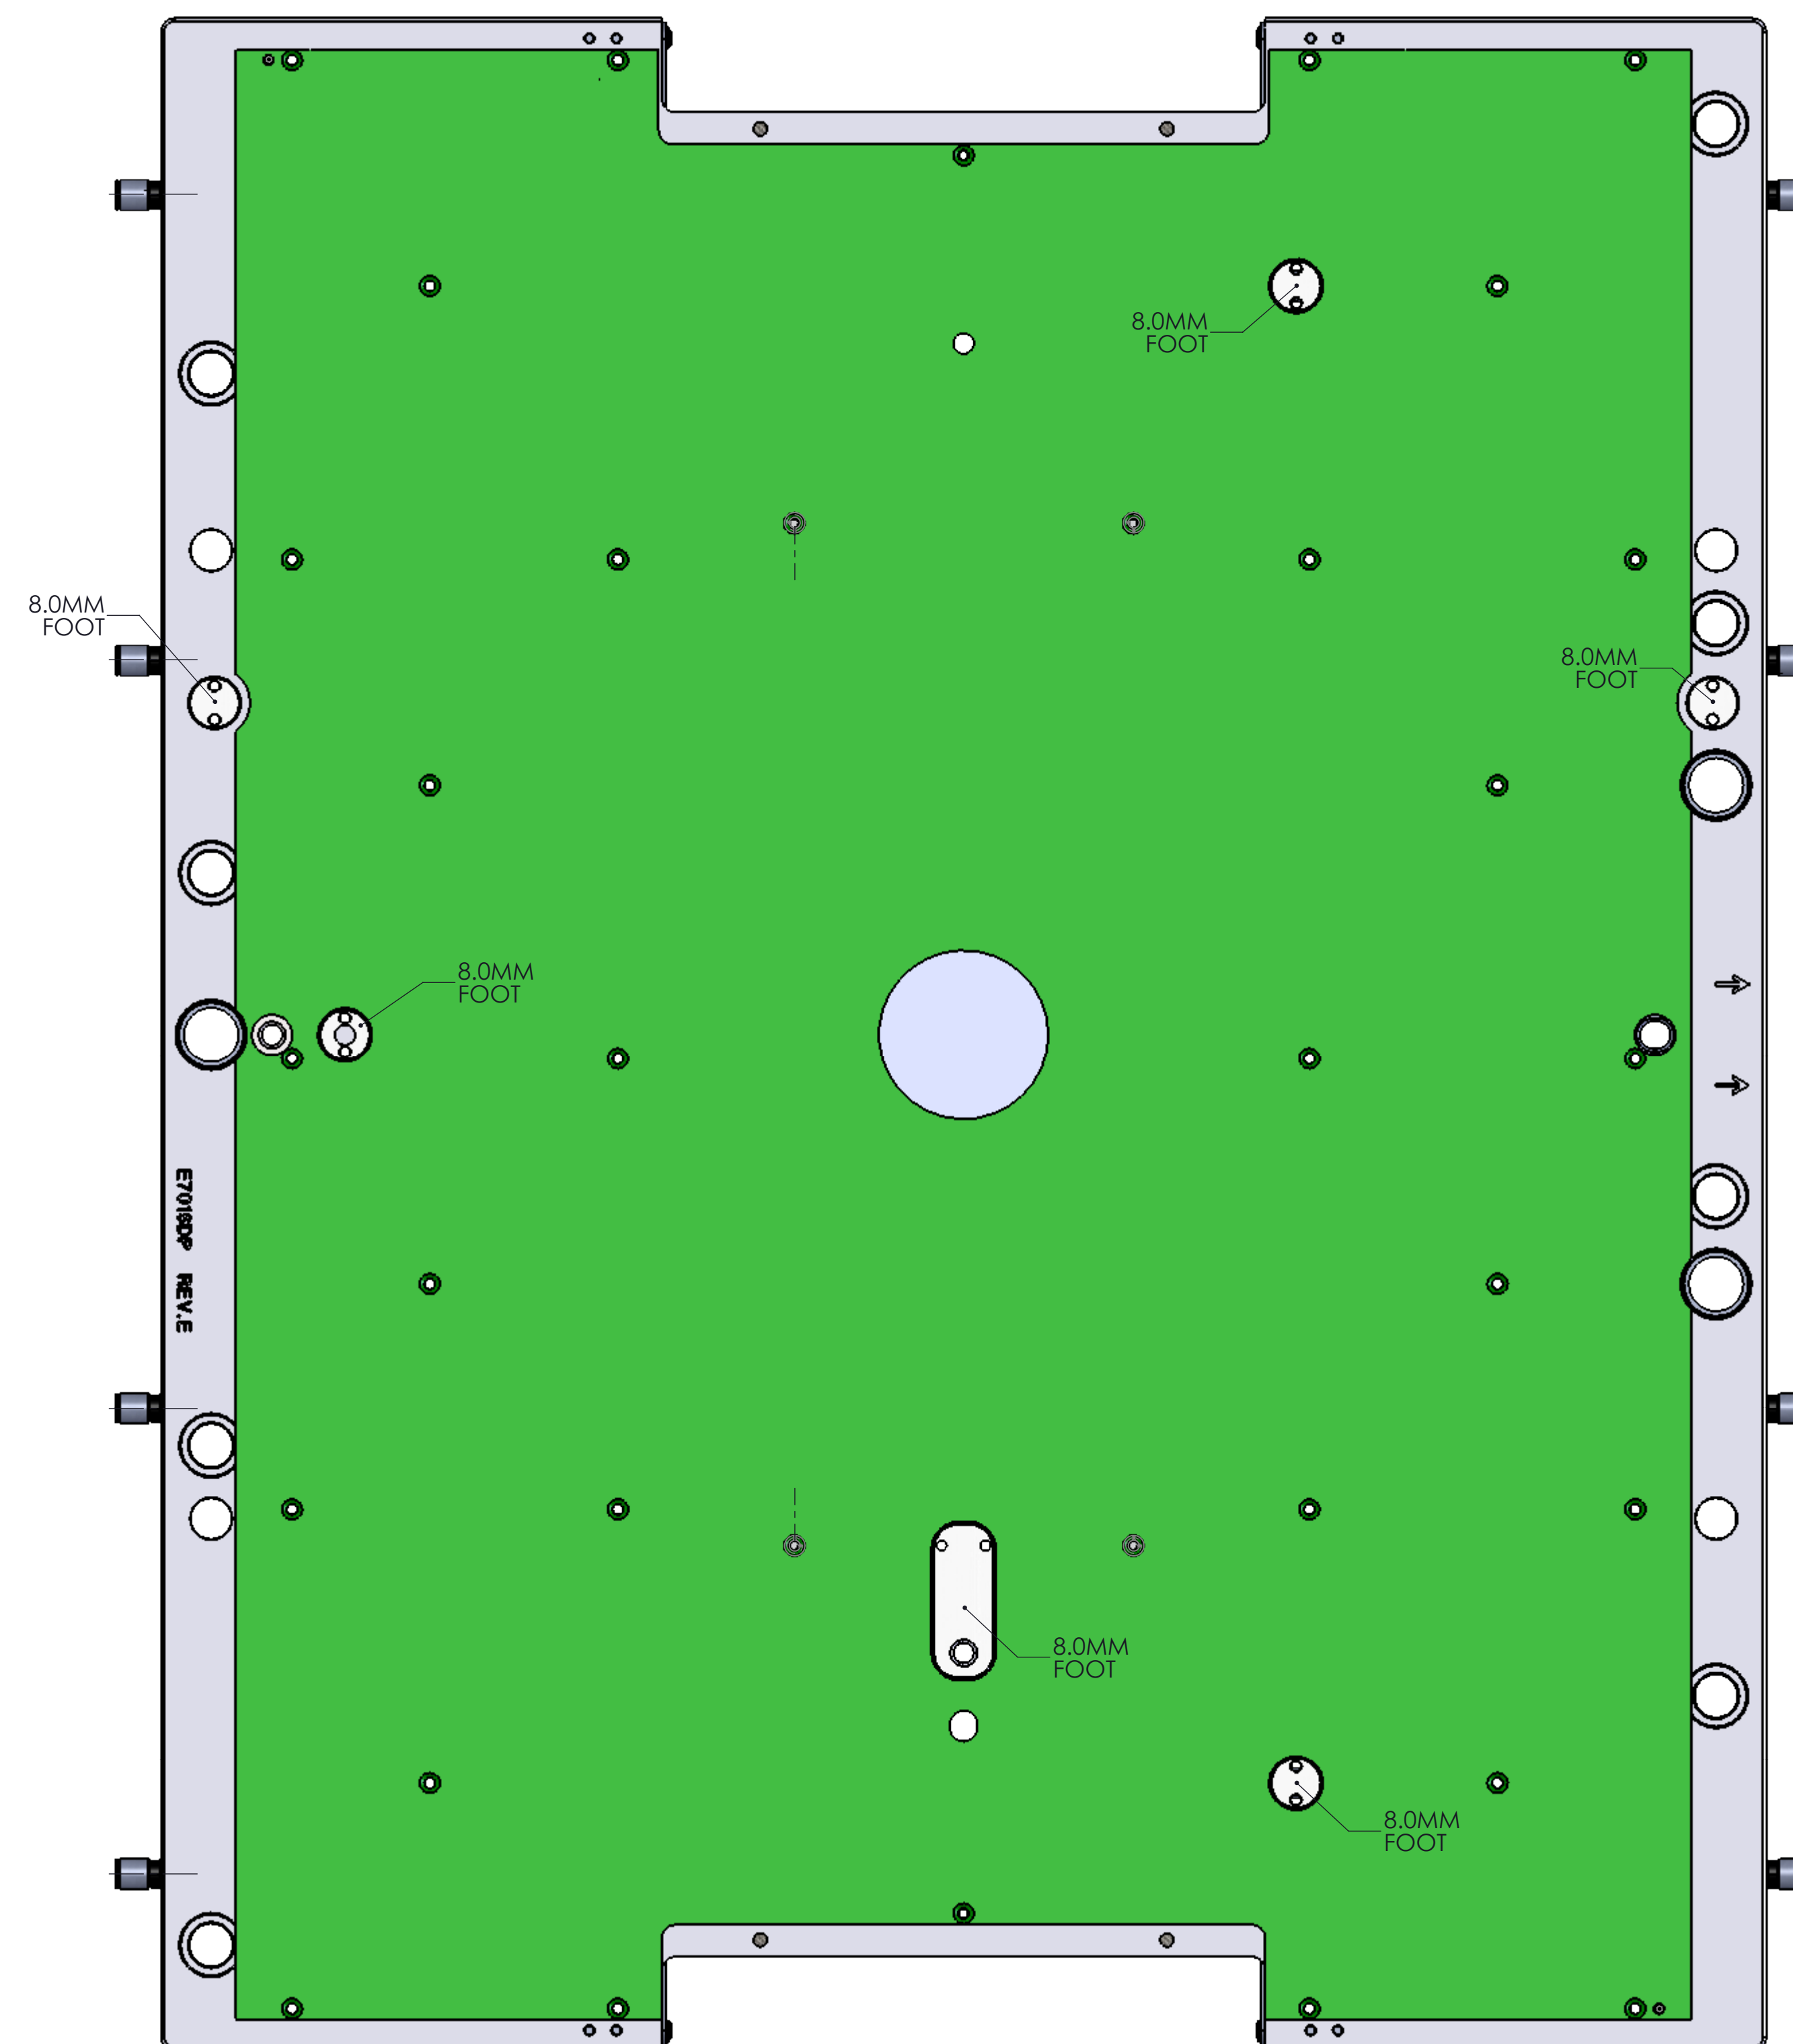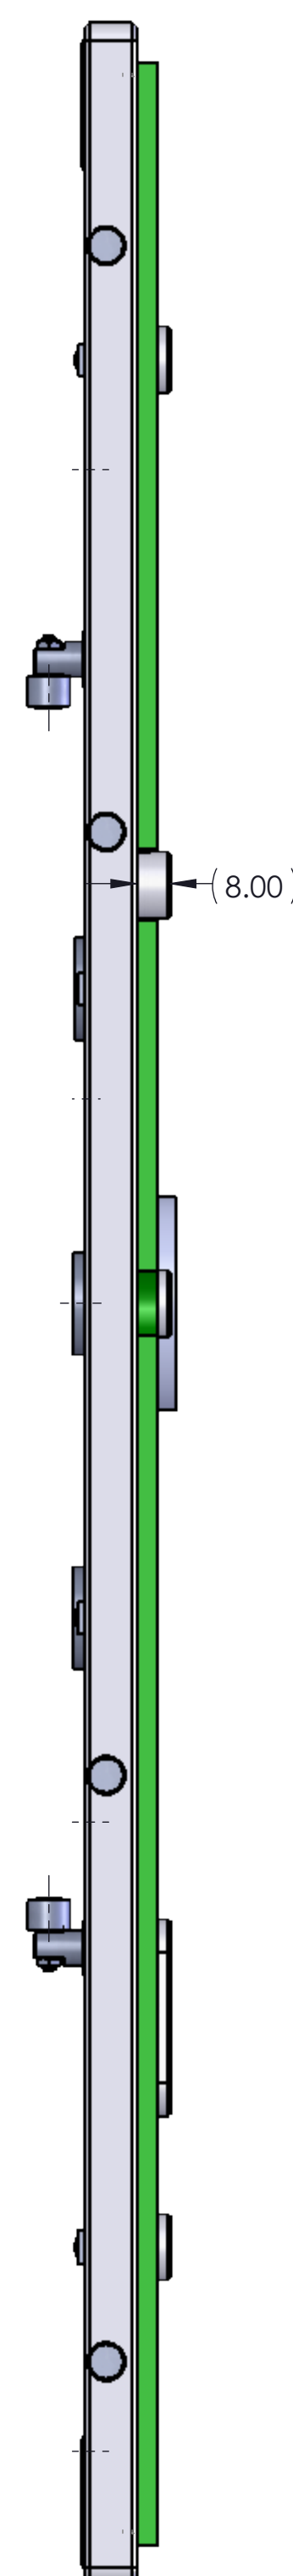

GENERAL NOTES (UNLESS OTHERWISE SPECIFIED)

NOTE : THIS SHEET IS USED IF NO GENERAL TOLERANCE SPECIFIED.		±	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	TITLE: V93000 DIRECT PROBE PROBE-CARD SPECIFICATIONS	PARTS CODE: N2360-90117		ADVANTEST
TOLERANCES UNLESS SPECIFIED ARE:		FOR SHEET METAL PARTS WITHOUT FINISHING OPERATIONS	FINISH SYMBOLS	DESIGNED BY: DANIEL LAM		DRAWING NO: N2360-90117	REV SCALE: 1:1
30 [mm] ± 0.25	FOR PLASTIC PARTS ONLY	FOR SHEET METAL PARTS WITH FINISHING OPERATIONS	*FINISH ANGLE PROJECTION	DRAWN BY: DANIEL LAM		DATE: 6/10/2010	SHEET 3 OF 3
120 [mm] ± 0.45	±0.000 ANGLES ±1.0	1500 [mm] ± 0.3	*100 NOT SCALE THIS DRAWING	CHECKED BY: DANIEL LAM		DATE: 6/10/2010	
60 [mm] ± 0.25		500 [mm] ± 0.3					
±0.000 ANGLES ±1.0		100 [mm] ± 0.2					
		ON ANGULAR DIV'S					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					
		100 [mm] ± 0.2					
		1000 [mm] ± 0.3					