

PRODUCT:

N2494A-201
PSRF Center Plate for Segmented Bridge Adapter

N2494A
PSRF Segmented Bridge Adapter Kit


N2494A-207
PSRF Seiko/Synax/Tesec Stiffener Inlay
for Bridge Adapter

E6980DA
Stiffener Small

E6980EA
Stiffener Large

Customized DUT Board
(small or large)

PORT SCALE RF DUT BOARD SETUP FOR SEGMENTED BRIDGE ADAPTER FOR
SEIKO/SYNAX/TESEC HANDLER
PRODUCT OVERVIEW AND ASSEMBLY INSTRUCTION

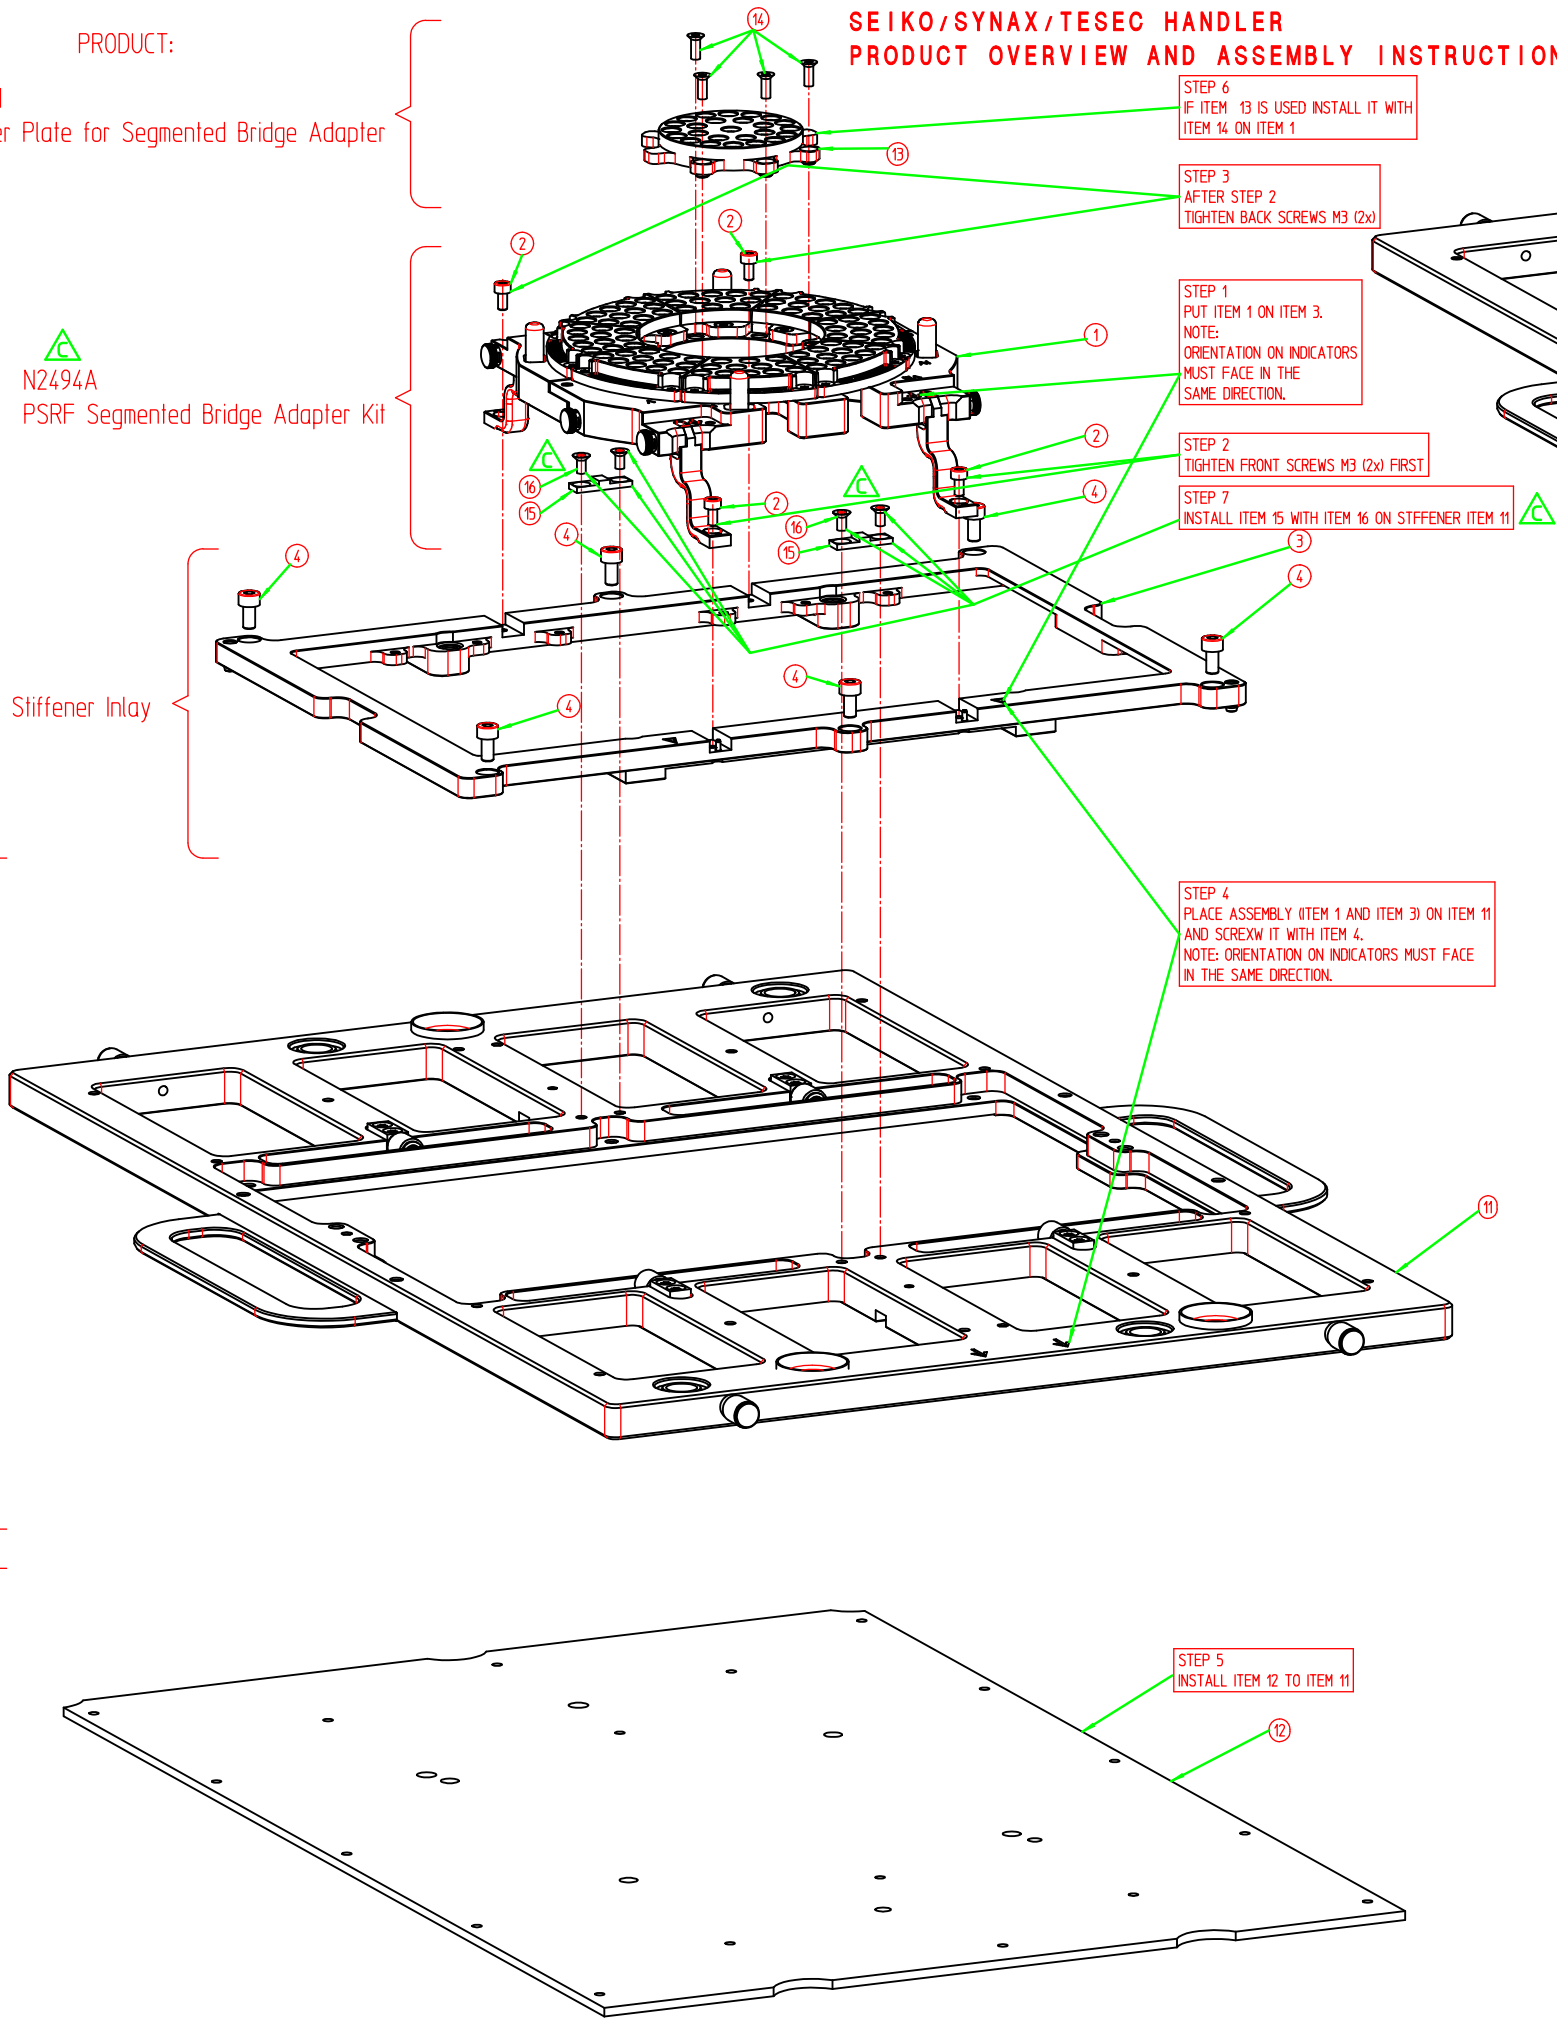

STEP 6
IF ITEM 13 IS USED INSTALL IT WITH
ITEM 14 ON ITEM 1

STEP 3
AFTER STEP 2
TIGHTEN BACK SCREWS M3 (2x)


STEP 1
PUT ITEM 1 ON ITEM 3.
NOTE:
ORIENTATION ON INDICATORS
MUST FACE IN THE
SAME DIRECTION.

STEP 2
TIGHTEN FRONT SCREWS M3 (2x) FIRST

STEP 7
INSTALL ITEM 15 WITH ITEM 16 ON STIFFENER ITEM 11

STEP 4
PLACE ASSEMBLY (ITEM 1 AND ITEM 3) ON ITEM 11
AND SCREW IT WITH ITEM 4.
NOTE: ORIENTATION ON INDICATORS MUST FACE
IN THE SAME DIRECTION.

STEP 5
INSTALL ITEM 12 TO ITEM 11

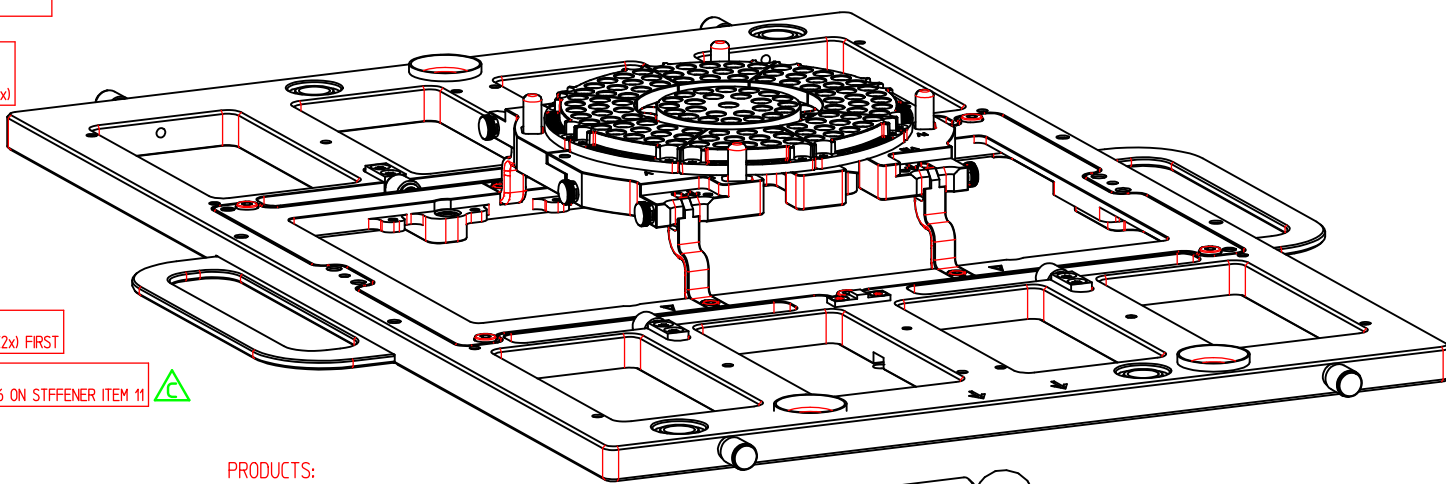

PRODUCTS:

N2494A-262 EXTRACTION TOOL FOR MULTI-PORT RF CABLE

N2393-83805 SMP SCREW DRIVER

N2494A-260 PSRF MULTI-PORT MINI-COAX CONNECTOR (MPMCC),
6 CHANNELS, SINGLE ITEM

N2494A-261 PSRF HOUSING FOR CHANNEL CABLES, MPMCC,
6 CHANNELS, SINGLE ITEM

N2494A-601 PSRF DUT CABLE SET FOR MPMCC,
STRAIGHT, LENGTH 150mm, 6 CH, SINGLE ITEM

N2494A-602 PSRF DUT CABLE SET FOR MPMCC,
STRAIGHT, LENGTH 200mm, 6 CH, SINGLE ITEM

N2494A-101 PSRF DUT CABLE FOR MPMCC,
STRAIGHT, 150mm LENGTH, MALE, SINGLE ITEM

N2494A-102 PSRF DUT CABLE FOR MPMCC,
STRAIGHT, 200mm LENGTH, MALE, SINGLE ITEM

N2494A-001 PSRF DUT CABLE FOR MPMCC,
STRAIGHT, 150mm LENGTH, FEMALE, SINGLE ITEM

N2494A-002 PSRF DUT CABLE FOR MPMCC,
STRAIGHT, 200mm LENGTH, FEMALE, SINGLE ITEM

N2494A-691 PSRF DUT CABLE SET FOR MPMCC,
90 DEGREE, LENGTH 150mm, 6 CH, SINGLE ITEM




N2494A-692 PSRF DUT CABLE SET FOR MPMCC,
90 DEGREE, LENGTH 200mm, 6 CH, SINGLE ITEM

N2494A-191 PSRF DUT CABLE FOR MPMCC,
90 DEGREE, 150mm LENGTH, MALE, SINGLE ITEM

N2494A-192 PSRF DUT CABLE FOR MPMCC,
90 DEGREE, 200mm LENGTH, MALE, SINGLE ITEM


N2494A-091 PSRF DUT CABLE FOR MPMCC,
90 DEGREE, 150mm LENGTH, FEMALE, SINGLE ITEM

N2494A-092 PSRF DUT CABLE FOR MPMCC,
90 DEGREE, 200mm LENGTH, FEMALE, SINGLE ITEM

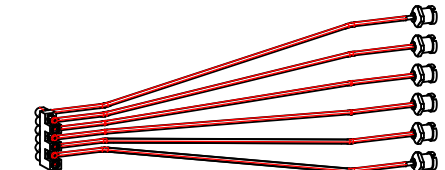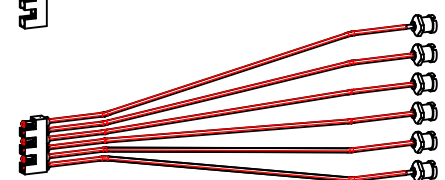

FILE NAME		REVISION	DATE	REVISION NUMBER
N2494-90111-1STC.cad		C	2011-03-30	N2494-90111-1
REV	DESCRIPTION	REVISION BY	DATE	
A	AS ISSUED	Peter Hirschmann	2010-02-10	
B	SHEET 3 AND 4 ADDED	Peter Hirschmann	2010-07-19	
C	PRODUCT N2494A CHANGED	Peter Hirschmann	2011-03-30	

Port Scale RF DUT Board setup for Segmented Bridge Adpater for Seiko/Synax/Tesec handler
Keep-out area definition for DUT Board design, using Purge Kit N2367A in DUT IF

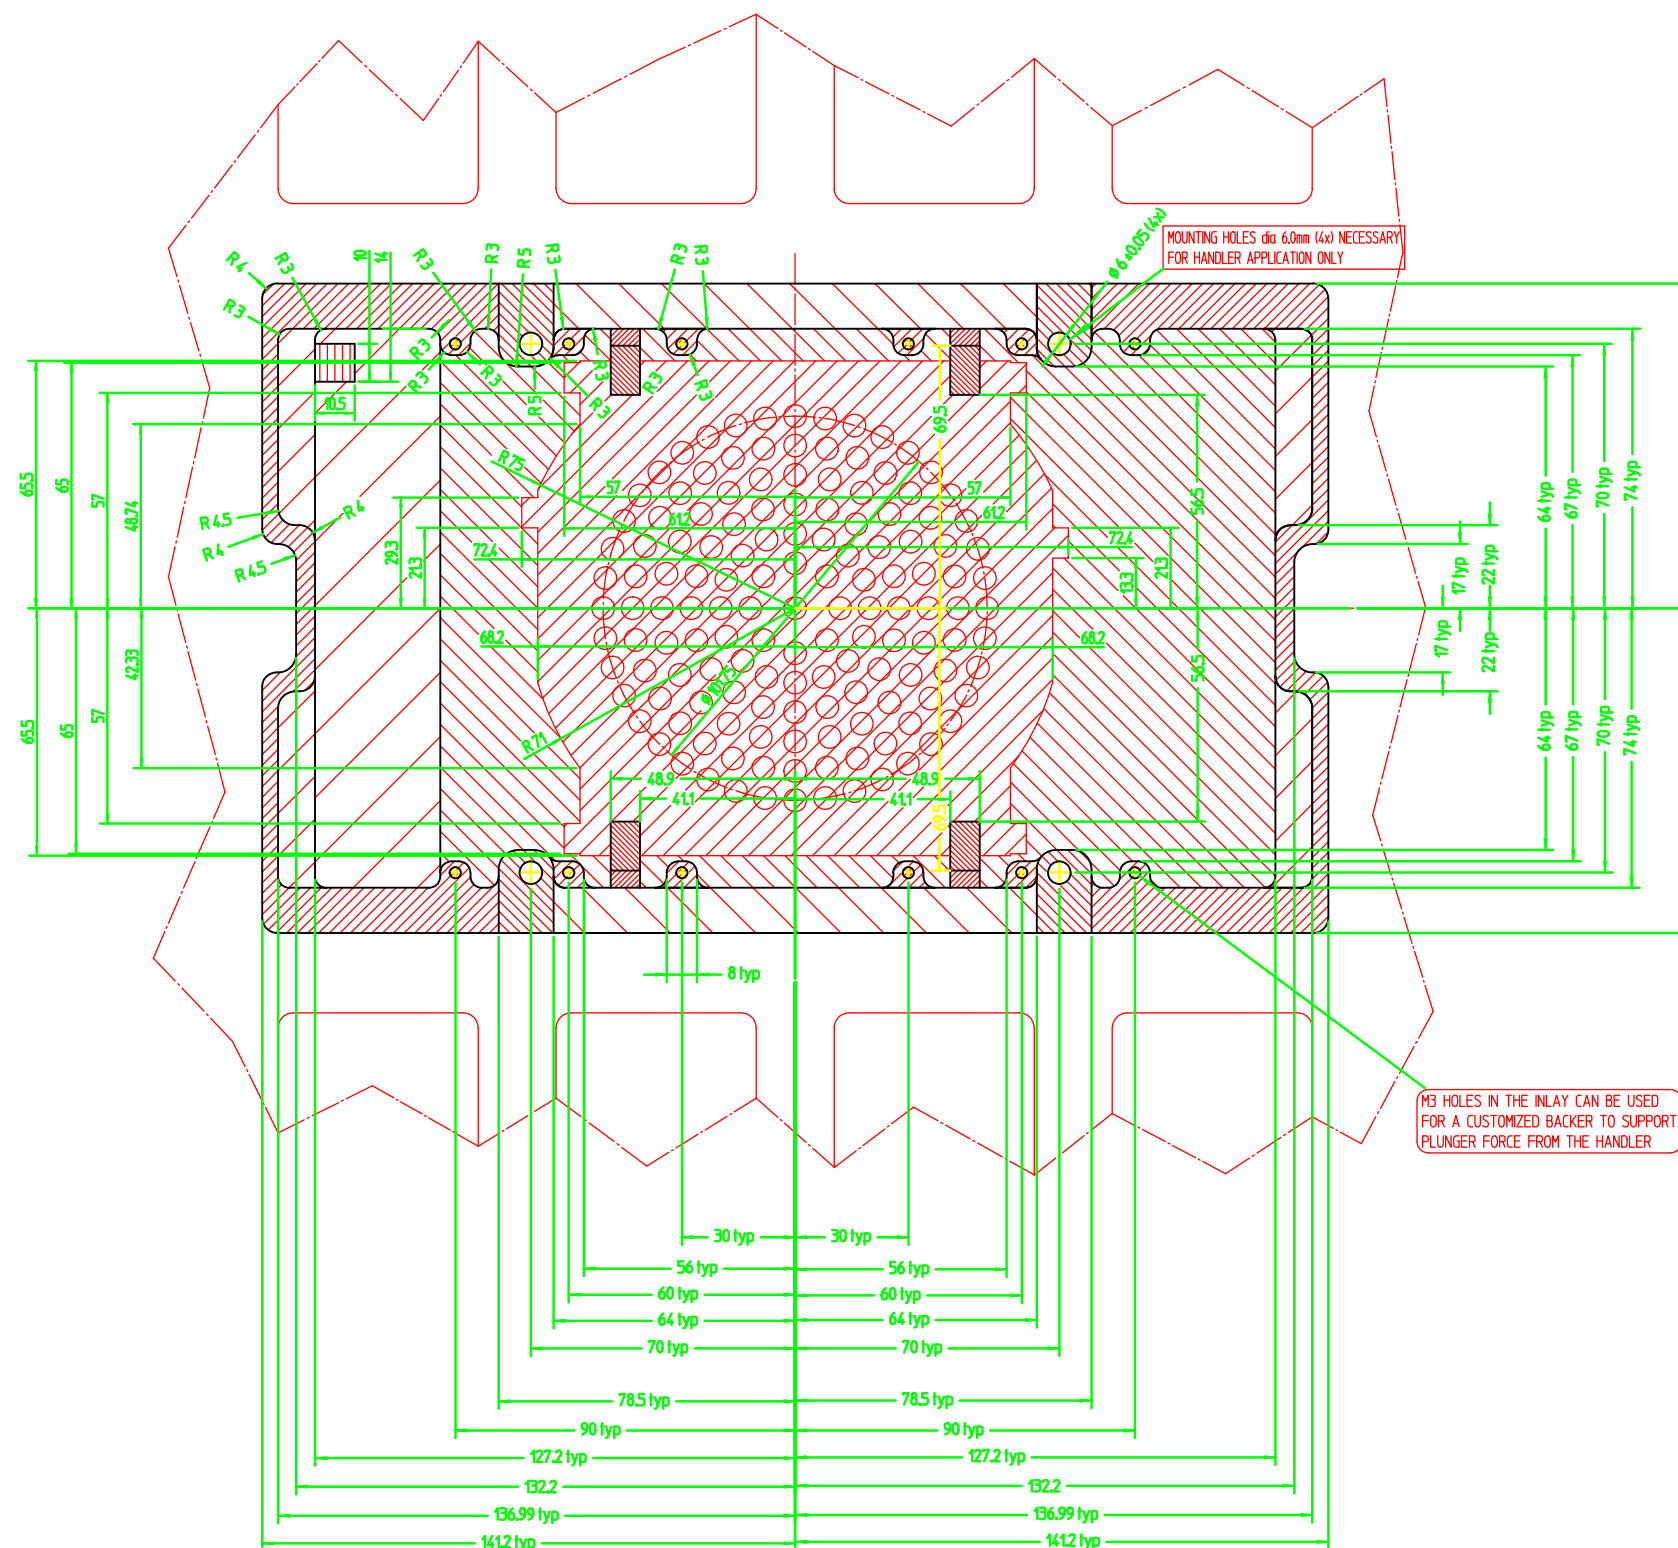

1. THESE AREAS CONTACT THE STIFFENER INLAY ON BOTTOM SIDE OF PCB
SIGNAL, GND TRACES, VIAS AND PADS ARE NOT ALLOWED
 2. THESE AREAS ARE AT A CLEARANCE HEIGHT OF 3.5mm TO THE STIFFENER INLAY ON BOTTOM SIDE OF PCB
SIGNAL AND GND TRACES, VIAS AND PADS ARE ALLOWED
RECOMMENDED MAX. COMPONENT HEIGHT = 2.5mm
 3. THESE AREAS ARE AT A CLEARANCE HEIGHT OF 5mm TO THE STIFFENER INLAY ON BOTTOM SIDE OF PCB
SIGNAL AND GND TRACES, VIAS AND PADS ARE ALLOWED
RECOMMENDED MAX. COMPONENT HEIGHT = 4mm
 4. THESE AREAS ARE AT A CLEARANCE HEIGHT OF 9.5mm TO THE STIFFENER INLAY ON BOTTOM SIDE OF PCB
SIGNAL AND GND TRACES, VIAS AND PADS ARE ALLOWED
RECOMMENDED MAX. COMPONENT HEIGHT = 8.5mm
 5. THIS AREA HAS A CLEARANCE HEIGHT OF 34.8mm TO THE CONNECTOR PLATE ON BOTTOM SIDE OF PCB, WITHOUT TAKING CARE OF RF CABLES AND BENDING RADIUS.
SIGNAL AND GND TRACES, VIAS AND PADS ARE ALLOWED
RECOMMENDED MAX. COMPONENT HEIGHT = 20.0mm
 6. THESE AREAS ARE AT A CLEARANCE HEIGHT OF 22.5mm TO THE PURGE KIT N2367A ON BOTTOM SIDE OF PCB.
COMPONENT PLACEMENT AREA ON BOTTOM SIDE OF PCB
TRACES, VIAS AND PADS ARE ALLOWED
RECOMMENDED MAX. COMPONENT HEIGHT = 20.0mm
 7. THESE AREAS ARE AT A CLEARANCE HEIGHT OF 8mm TO THE STIFFENER INLAY ON BOTTOM SIDE OF PCB
SIGNAL AND GND TRACES, VIAS AND PADS ARE ALLOWED
RECOMMENDED MAX. COMPONENT HEIGHT = 7mm
 8. THESE AREAS ARE AT A CLEARANCE HEIGHT OF 21.0mm TO THE STIFFENER INLAY ON BOTTOM SIDE OF PCB
SIGNAL AND GND TRACES, VIAS AND PADS ARE ALLOWED
RECOMMENDED MAX. COMPONENT HEIGHT = 20.0mm
 9. THIS AREA IS AT A CLEARANCE HEIGHT OF 27.0mm TO THE PURGE KIT N2367A ON BOTTOM SIDE OF PCB.
COMPONENT PLACEMENT AREA ON BOTTOM SIDE OF PCB
TRACES, VIAS AND PADS ARE ALLOWED
RECOMMENDED MAX. COMPONENT HEIGHT = 20.0mm
 10. THIS AREA IS AT A CLEARANCE HEIGHT OF 12.0mm TO THE PURGE KIT N2367A ON BOTTOM SIDE OF PCB.
COMPONENT PLACEMENT AREA ON BOTTOM SIDE OF PCB
TRACES, VIAS AND PADS ARE ALLOWED
RECOMMENDED MAX. COMPONENT HEIGHT = 11.0mm

NOTES:

1. USE KEEP-OUT AREA DEFINITION IN CONJUNCTION WITH GENERAL DUT BOARD DEFINITION, SEE D-E6980-96540-1 SMALL DUT BOARD AND D-E6980-96550-1 LARGE DUT BOARD
2. ALL KEEP-OUT AREAS RELATE TO THE BOTTOM SIDE OF THE PCB

NO TEST SCHEMATIC METRIC	ONLY AVAILABLE FOR 100, 150 & 200 DASH	Peter Hirschmann SEIKO SY	2010-02-10 DATE TESTED	PSRF SEGMENTED BRIDGE ADAPTER KEEP OUT AREA WITH PURGE KIT N2637A SEIKO/SYNAX/TESEC	VERIGY	
		Peter Hirschmann SEIKO SY	2010-02-10 DATE TESTED			
		• RECOMMEND ADR IN HILFENBEREICH • THIRD ANGLE PROJECTION • ADDITIONAL TO PART 4-000-000-000 • CATEGORY 200, 150 AND 100 DASH				
		WELD 3 4 1:1 SCALE				TEST METHOD A1
N2494-90111-1 PRODUCT NUMBER						

NOTES:

1. USE KEEP-OUT AREA DEFINITION IN CONJUNCTION WITH GENERAL OUT BOARD DEFINITION, SEE D-E6980-96540-1 SMALL OUT BOARD AND D-E6980-96550-1 LARGE OUT BOARD
2. ALL KEEP-OUT AREAS RELATE TO THE BOTTOM SIDE OF THE PCB

