

## APPENDIX H

### ILLUSTRATED LIST OF MANUFACTURED ITEMS

#### H-1 ILLUSTRATED FIELD MANUFACTURE ITEMS LIST.

##### H-1.1 Introduction.

This appendix includes complete instructions for making items authorized to be manufactured or fabricated at shop maintenance or bench maintenance. Individual illustrations for these items include simplified line drawings and supporting text containing all instructional data needed to make the item. Bulk material used in the fabrication of these items are listed by part number, material classification and National Stock Number (NSN). Each illustration includes the part number of the item to be fabricated.

##### H-1.2 Part Number Index.

The part number index lists all items in alphanumeric order with a cross-reference to the figure in which the item appears.

#### Part Number Index

| <u>Part Number</u> | <u>Figure No.</u> |
|--------------------|-------------------|
| A3012557           | H-167             |
| A3012558           | H-179             |
| AV15-1992          | H-198             |
| BH102-9311434      | H-214             |
| EWR97182-041       | H-235             |
| MS20001PH4-0250    | H-1               |
| MS20001PH4-1200    | H-1               |
| MS20001PX4-0450    | H-1               |
| MS20001PX4-1984    | H-1               |
| MS20001PX5-1950    | H-1               |
| MS20001PY4-0450    | H-1               |
| MS20001PY4-1984    | H-1               |
| MS20001PY5-1950    | H-1               |
| MS20001P4-0375     | H-1               |
| MS20001P4-600      | H-1               |
| MS20001P4-1012     | H-1               |
| MS20001P5-600      | H-1               |
| MS20001P5-0980     | H-1               |
| MS20001P5-1000     | H-1               |
| MS20001P6-1950     | H-1               |
| MS20253P2-250      | H-2               |
| MS20253P2-275      | H-2               |

## Part Number Index (Cont)

| <u>Part Number</u> | <u>Figure No.</u> |
|--------------------|-------------------|
| MS20253P2-475      | H-2               |
| MS20253P2-500      | H-2               |
| MS20253P2-538      | H-2               |
| MS20253P2-1200     | H-2               |
| MS20253P2-1225     | H-2               |
| MS20253P2-1984     | H-2               |
| MS20253P2-1988     | H-2               |
| MS20253P2-2050     | H-2               |
| MS20257-1-0550     | H-3               |
| MS20257HP2-400     | H-3               |
| MS20257HP3-0500    | H-3               |
| MS20257P2-0350     | H-3               |
| MS20257P2-0400     | H-3               |
| MS20257P2-7200     | H-3               |
| MS20257P3-250      | H-3               |
| MS20257P3-0300     | H-3               |
| MS20257P3-900      | H-3               |
| MS20257P3-1200     | H-3               |
| MS20257P3-1462     | H-3               |
| MS20257P3-1500     | H-3               |
| MS20257P4-600      | H-3               |
| MS20257XP4-2050    | H-3               |
| MS20257XP5-2050    | H-3               |
| MS20257YP4-2050    | H-3               |
| MS20257YP5-2050    | H-3               |
| MS21266-1N         | H-4               |
| M22759/13-20-9     | H-5               |
| PM21700            | H-7               |
| PM21703            | H-7               |
| SS2940-1           | H-88              |
| SS2940-2           | H-88              |
| SS2942-2           | H-8               |
| SS2942-3           | H-8               |
| SS2942-4.75        | H-8               |
| SS2942-15          | H-8               |
| SS2942-35          | H-8               |
| SS2942-38          | H-8               |
| SS6124-09-100      | H-9               |
| SS7001-7A          | H-10              |
| SS7001-15B         | H-10              |
| SS7001-21B         | H-10              |

## Part Number Index (Cont)

| <u>Part Number</u> | <u>Figure No.</u> |
|--------------------|-------------------|
| SS7001-24B         | H-10              |
| SS7001-61C         | H-10              |
| SS7072A0187ZXXX    | H-11              |
| SS7072A0250Z180    | H-11              |
| SS7072A0250Z250    | H-11              |
| SS7072A0375ZXXX    | H-11              |
| SS7072A0375Z050    | H-11              |
| SS7072A0500Z010    | H-11              |
| SS7072A0500Z150    | H-11              |
| SS7072A0500Z350    | H-11              |
| SS7072A0750ZXXX    | H-11              |
| SS7072A0750Z014    | H-11              |
| SS7072A0750Z021    | H-11              |
| SS7072A0750Z022    | H-11              |
| SS7072A0750Z028    | H-11              |
| SS7072A0750Z029    | H-11              |
| SS7072A0750Z030    | H-11              |
| SS7072A0750Z045    | H-11              |
| SS7072A0750Z053    | H-11              |
| SS7072A0750Z055    | H-11              |
| SS7072A0750Z063    | H-11              |
| SS7072A0750Z073    | H-11              |
| SS7072A0750Z098    | H-11              |
| SS7072A0750Z860    | H-11              |
| SS7072A1000Z012    | H-11              |
| SS7072A1000Z023    | H-11              |
| SS7072B0125S015    | H-11              |
| SS7072B0187S015    | H-11              |
| SS7072B0250S015    | H-11              |
| SS7072E0250Z720    | H-11              |
| SS7072E0375Z600    | H-11              |
| SS7072E0375Z720    | H-11              |
| SS7072E0500T600    | H-11              |
| SS7072E0500Z008    | H-11              |
| SS7072E0500Z480    | H-11              |
| SS7072E0625ZXXX    | H-11              |
| SS7072E0625Z260    | H-11              |
| SS7072E0625Z300    | H-11              |
| SS7072E0625Z360    | H-11              |
| SS7072E0750Z720    | H-11              |
| SS7072E1000T500    | H-11              |

## Part Number Index (Cont)

| <u>Part Number</u>   | <u>Figure No.</u> |
|----------------------|-------------------|
| SS7072E1000T570      | H-11              |
| SS7072E1000ZXXX      | H-11              |
| SS7072G02500020      | H-11              |
| SS7072L0125Z015      | H-11              |
| SS7114E005-0250      | H-12              |
| SS7114E005-0300      | H-12              |
| SS7114ETA-0720       | H-12              |
| SS7114ETB-0600       | H-12              |
| SS7114ETC-0480       | H-12              |
| SS7114ETC-0840       | H-12              |
| SS7114ETD-0565       | H-12              |
| SS7114ETG-0840       | H-12              |
| SS7114ET05-0840      | H-12              |
| SS7114ET08-1610      | H-12              |
| SS7311-16-9          | H-13              |
| SS7311-22-9          | H-13              |
| SS7313-20A1          | H-126             |
| SS9096A06GG0095      | H-173             |
| S6120-61188-016      | H-14              |
| S8935F0S60           | H-17              |
| S8935F0S200          | H-17              |
| S9352-8-9-100        | H-18              |
| S9352-10-9-600       | H-18              |
| S9352-10-9-2000      | H-18              |
| TGN55-01052-041      | H-258             |
| V300-1(65)-50        | H-32              |
| V300-1(65)-50-SA0140 | H-32              |
| V300-1(65)-63        | H-32              |
| V300-1(65)-75        | H-32              |
| V300-1(65)-100       | H-32              |
| V300-1(65)-150       | H-32              |
| V330-1(80)-50        | H-32              |
| V300-1(80)-75-SA0145 | H-32              |
| V330-1(80)-100       | H-32              |
| V300-1(80)-200       | H-32              |
| V300-2-50-SA0140     | H-32              |
| V300-2-75-SA0145     | H-32              |
| V300-2-100-SA0140    | H-32              |
| V300-2-150           | H-32              |
| V330-1(65)-100       | H-32              |
| V330-1(80)-200       | H-32              |

## Part Number Index (Cont)

| <u>Part Number</u> | <u>Figure No.</u> |
|--------------------|-------------------|
| V330-2-50          | H-32              |
| V330-2-63          | H-32              |
| V330-2-75          | H-32              |
| V330-2-200         | H-32              |
| 0341-0001-3        | H-183             |
| 0341-0002-3        | H-183             |
| 0341-0003-3        | H-183             |
| 0341-0004-3        | H-183             |
| 10-615393          | H-59              |
| 10-90604-201       | H-64              |
| 1420-BH-001        | H-43              |
| 1420-BH-002        | H-44/H-228        |
| 1420-BH-007        | H-45              |
| 1420-BH-008        | H-46              |
| 1420-BH-009        | H-47              |
| 1420-BH-010-01     | H-48              |
| 1420-BH-011-02     | H-49              |
| 1420-BH-011-03     | H-49              |
| 1420-BH-011-04     | H-49              |
| 1420-BH-012-01     | H-50              |
| 1420-BH-013        | H-51              |
| 1427-566558        | H-134             |
| 1520-BH5E001       | H-168             |
| 1560-EG-159        | H-221             |
| 1730-BH-001-01     | H-52              |
| 1730-B4-002-01     | H-53              |
| 1730BH025-1        | H-187             |
| 1730BH025-2        | H-188             |
| 1730BH025-3        | H-189             |
| 1730BH025-4        | H-190             |
| 1730BH025-5        | H-191             |
| 1730BH025-6        | H-192             |
| 2763-1             | H-213             |
| 2763-2             | H-213             |
| 2763-3             | H-213             |
| 2763-4             | H-213             |
| 2763-5             | H-213             |
| 2763-6             | H-213             |
| 2763-7             | H-213             |
| 2803-1             | H-213             |
| 2803-2             | H-213             |

## Part Number Index (Cont)

| <u>Part Number</u> | <u>Figure No.</u> |
|--------------------|-------------------|
| 2652559-1          | H-133             |
| 410404-1           | H-181             |
| 4920BHS3E004       | H-169             |
| 70000-00550-101    | H-123             |
| 70000-00550-102    | H-123             |
| 70000-00550-103    | H-123             |
| 70000-00550-104    | H-123             |
| 70000-00550-105    | H-123             |
| 70070-20013-106    | H-127             |
| 70070-20013-107    | H-32              |
| 70070-20013-108    | H-32              |
| 70070-20013-109    | H-32              |
| 70070-20013-111    | H-32              |
| 70070-20013-112    | H-32              |
| 70070-20013-113    | H-32              |
| 70070-20013-114    | H-32              |
| 70070-20013-115    | H-32              |
| 70070-20013-116    | H-32              |
| 70070-20013-117    | H-32              |
| 70070-20013-118    | H-32              |
| 70070-20013-119    | H-32              |
| 70070-20013-120    | H-32              |
| 70070-20013-121    | H-32              |
| 70070-20013-122    | H-32              |
| 70070-20013-123    | H-32              |
| 70070-20013-124    | H-32              |
| 70070-20013-125    | H-32              |
| 70070-20013-126    | H-32              |
| 70070-20013-133    | H-32              |
| 70070-20013-134    | H-32              |
| 70070-20013-137    | H-32              |
| 70070-20013-138    | H-32              |
| 70070-20013-139    | H-32              |
| 70070-20013-140    | H-32              |
| 70070-20013-141    | H-32              |
| 70070-20013-150    | H-32              |
| 70070-20013-151    | H-32              |
| 70070-20013-152    | H-128             |
| 70070-20013-153    | H-128             |
| 70070-20013-154    | H-128             |
| 70070-20013-155    | H-128             |

## Part Number Index (Cont)

| <u>Part Number</u>     | <u>Figure No.</u> |
|------------------------|-------------------|
| 70070-20013-156        | H-128             |
| 70070-20013-158        | H-128             |
| 70070-20013-160        | H-32              |
| 70070-20013-161        | H-32              |
| 70070-20013-162        | H-32              |
| 70070-20013-163        | H-32              |
| 70070-20013-164        | H-32              |
| 70070-20014-102        | H-32              |
| 70070-20014-105        | H-32              |
| 70070-20014-108        | H-32              |
| 70070-20014-110        | H-125             |
| 70070-30112-164        | H-72              |
| 70070-50005-108        | H-54              |
| 70070-50005-109        | H-54              |
| 70070-50005-111        | H-54              |
| 70070-50005-112        | H-54              |
| 70070-50005-113        | H-54              |
| 70070-50005-119        | H-54              |
| 70070-50006-107        | H-56              |
| 70070-50006-108        | H-56              |
| 70100-100-1-041        | H-264             |
| 70100-100-1-042        | H-264             |
| 70102-08100-041T046.06 | H-198             |
| 70102-08100-041T098.02 | H-198             |
| 70102-11109-101        | H-112             |
| 70102-11109-102        | H-112             |
| 70103-08002-116        | H-265             |
| 70103-08002-120        | H-263             |
| 70104-08015-102        | H-219             |
| 70106-08100-T1A        | H-222             |
| 70106-08100-T1B        | H-222             |
| 70106-08100-T4         | H-224             |
| 70106-08100-T5         | H-225             |
| 70106-08100-T6         | H-226             |
| 70205-06052-111        | H-55              |
| 70205-06052-112        | H-55              |
| 70205-06052-113        | H-55              |
| 70205-06052-114        | H-144             |
| 70205-06052-115        | H-144             |
| 70205-06053-105        | H-3               |
| 70205-06053-106        | H-3               |

## Part Number Index (Cont)

| <u>Part Number</u> | <u>Figure No.</u> |
|--------------------|-------------------|
| 70207-02727-119    | H-141             |
| 70207-02727-120    | H-141             |
| 70207-02727-125    | H-141             |
| 70209-02532-102    | H-25              |
| 70209-02532-103    | H-25              |
| 70209-02532-104    | H-25              |
| 70209-02532-105    | H-92              |
| 70209-02532-106    | H-92              |
| 70209-02532-107    | H-92              |
| 70209-02532-110    | H-92              |
| 70209-02532-111    | H-92              |
| 70209-02532-112    | H-92              |
| 70209-02532-113    | H-92              |
| 70209-03018-110    | H-25              |
| 70209-03018-111    | H-25              |
| 70209-03018-121    | H-25              |
| 70209-03018-122    | H-25              |
| 70211-02104-138    | H-146             |
| 70211-02104-139    | H-146             |
| 70212-02137-145    | H-27              |
| 70212-02139-106    | H-132             |
| 70212-02139-108    | H-26              |
| 70212-05004-118    | H-1               |
| 70213-03008-042    | H-1/H-2           |
| 70214-02556-110    | H-60              |
| 70214-02556-111    | H-25              |
| 70214-02556-112    | H-25              |
| 70214-02556-113    | H-60              |
| 70214-02556-116    | H-25              |
| 70215-02312-102    | H-95              |
| 70215-02312-104    | H-32              |
| 70215-02312-105    | H-32              |
| 70215-02312-106    | H-70              |
| 70215-02312-119    | H-100             |
| 70215-02531-102    | H-101             |
| 70215-02531-105    | H-101             |
| 70215-05002-117    | H-1               |
| 70215-05002-118    | H-1               |
| 70215-05002-119    | H-1               |
| 70215-05002-120    | H-1               |
| 70215-05002-128    | H-2               |



## Part Number Index (Cont)

| <u>Part Number</u> | <u>Figure No.</u> |
|--------------------|-------------------|
| 70215-05002-129    | H-2               |
| 70215-05002-130    | H-145             |
| 70215-05002-131    | H-145             |
| 70215-42409-114    | H-1               |
| 70215-42409-115    | H-1               |
| 70215-42410-051    | H-3               |
| 70215-42410-052    | H-3               |
| 70216-01000-107    | H-170             |
| 70216-01007-117    | H-94              |
| 70216-01007-118    | H-94              |
| 70216-01007-158    | H-94              |
| 70216-01007-174    | H-94              |
| 70216-02401-104    | H-30              |
| 70216-02401-107    | H-8               |
| 70216-02401-110    | H-240             |
| 70216-02401-121    | H-240             |
| 70216-02401-122    | H-240             |
| 70216-02401-126    | H-32              |
| 70216-02401-129    | H-240             |
| 70216-02402-110    | H-30              |
| 70216-02402-122    | H-35              |
| 70216-02402-124    | H-8/H-30          |
| 70216-02402-129    | H-32              |
| 70216-02402-139    | H-34              |
| 70216-02402-150    | H-35              |
| 70216-02402-158    | H-35              |
| 70216-02402-159    | H-35              |
| 70216-02402-160    | H-35              |
| 70216-02402-163    | H-35              |
| 70216-02402-164    | H-35              |
| 70216-02402-166    | H-35              |
| 70216-02402-167    | H-35              |
| 70216-02407-123    | H-254             |
| 70217-01000-114    | H-111             |
| 70217-01003-151    | H-86              |
| 70217-01003-158    | H-32              |
| 70217-01003-159    | H-32              |
| 70217-01003-160    | H-32              |
| 70217-01003-161    | H-32              |
| 70217-01003-177    | H-63              |
| 70217-01003-178    | H-63              |

## Part Number Index (Cont)

| <u>Part Number</u> | <u>Figure No.</u> |
|--------------------|-------------------|
| 70217-01003-194    | H-40              |
| 70217-01010-101    | H-62              |
| 70217-01010-108    | H-62              |
| 70217-01010-110    | H-98              |
| 70217-01010-111    | H-97              |
| 70217-01010-113    | H-62              |
| 70217-02701-101    | H-30              |
| 70217-02701-107    | H-30              |
| 70217-02701-113    | H-85              |
| 70217-02705-107    | H-32              |
| 70217-02705-108    | H-96              |
| 70217-02705-112    | H-96              |
| 70217-02705-115    | H-96              |
| 70217-02708-051    | H-140             |
| 70217-02721-109    | H-76              |
| 70217-02721-110    | H-76              |
| 70217-02721-111    | H-76              |
| 70217-02721-116    | H-76              |
| 70217-02721-117    | H-76              |
| 70217-02721-123    | H-76              |
| 70217-02721-132    | H-76              |
| 70217-02721-133    | H-76              |
| 70217-02721-140    | H-76              |
| 70217-02721-141    | H-76              |
| 70217-02721-143    | H-76              |
| 70217-02721-147    | H-76              |
| 70217-02721-148    | H-76              |
| 70217-02721-151    | H-76              |
| 70217-02721-154    | H-76              |
| 70217-03001-108    | H-1               |
| 70217-03001-109    | H-1               |
| 70217-03002-111    | H-1               |
| 70217-03002-112    | H-1               |
| 70217-03006-113    | H-1               |
| 70217-03006-114    | H-1               |
| 70219-02114-109    | H-103             |
| 70219-02114-110    | H-103             |
| 70219-02315-105    | H-6               |
| 70219-02315-106    | H-6               |
| 70219-03002-113    | H-21              |
| 70219-03002-116    | H-21              |

## Part Number Index (Cont)

| <u>Part Number</u> | <u>Figure No.</u> |
|--------------------|-------------------|
| 70219-03002-117    | H-21              |
| 70219-03002-118    | H-21              |
| 70219-03002-132    | H-21              |
| 70219-03002-135    | H-21              |
| 70219-03002-138    | H-21              |
| 70219-03002-139    | H-21              |
| 70219-04200-135    | H-30              |
| 70219-04500-102    | H-28              |
| 70219-04500-103    | H-28              |
| 70219-04500-104    | H-28              |
| 70219-04704-105    | H-57              |
| 70219-04704-106    | H-28              |
| 70219-04704-107    | H-28              |
| 70219-04704-108    | H-28              |
| 70219-04704-111    | H-28              |
| 70219-04802-117    | H-3               |
| 70219-06000-101    | H-200             |
| 70219-06000-102    | H-200             |
| 70219-06000-103    | H-199             |
| 70219-06000-104    | H-199             |
| 70219-06000-105    | H-199             |
| 70219-06000-106    | H-199             |
| 70219-06000-107    | H-199             |
| 70219-06000-108    | H-199             |
| 70219-06000-109    | H-200             |
| 70219-06000-110    | H-199             |
| 70219-06000-111    | H-199             |
| 70219-06000-112    | H-199             |
| 70250-13004-101    | H-176             |
| 70302-02142-104    | H-8               |
| 70302-02142-108    | H-8               |
| 70302-02142-110    | H-107             |
| 70302-10013-108    | H-65              |
| 70302-10013-109    | H-65              |
| 70302-10013-110    | H-65              |
| 70302-10013-111    | H-65              |
| 70302-10013-118    | H-65              |
| 70302-10013-133    | H-65              |
| 70302-10013-134    | H-65              |
| 70302-10013-135    | H-65              |
| 70302-10013-136    | H-65              |

## Part Number Index (Cont)

| <u>Part Number</u> | <u>Figure No.</u> |
|--------------------|-------------------|
| 70302-10013-137    | H-65              |
| 70302-10019-101    | H-105             |
| 70302-10019-102    | H-105             |
| 70302-10019-103    | H-105             |
| 70302-10019-104    | H-105             |
| 70302-10019-105    | H-105             |
| 70303-03023-105    | H-22              |
| 70303-03023-106    | H-22              |
| 70303-03023-109    | H-22              |
| 70303-03023-113    | H-22              |
| 70303-03201-106    | H-180             |
| 70308-03010-105    | H-115             |
| 70308-03502-041    | H-3               |
| 70308-03504-111    | H-1               |
| 70308-03504-112    | H-1               |
| 70308-03602-109    | H-91              |
| 70400-00510-101    | H-23              |
| 70400-00510-102    | H-23              |
| 70400-06661-104    | H-196             |
| 70500-01053-113    | H-101             |
| 70500-02053-116    | H-118             |
| 70500-02053-117    | H-114             |
| 70500-02053-118    | H-114             |
| 70500-02053-119    | H-32              |
| 70500-02053-120    | H-32              |
| 70500-02053-121    | H-32              |
| 70500-02053-122    | H-32              |
| 70500-02053-123    | H-32              |
| 70500-02054-104    | H-73              |
| 70500-02057-102    | H-31              |
| 70500-02057-159    | H-36              |
| 70500-02057-160    | H-36              |
| 70500-02058-123    | H-37              |
| 70500-02058-150    | H-42              |
| 70500-02058-151    | H-42              |
| 70500-02058-161    | H-42              |
| 70500-02058-167    | H-119             |
| 70500-02059-155    | H-116             |
| 70500-02059-160    | H-116             |
| 70500-02060-120    | H-19              |
| 70500-02060-121    | H-19              |

## Part Number Index (Cont)

| <u>Part Number</u> | <u>Figure No.</u> |
|--------------------|-------------------|
| 70500-02060-124    | H-58              |
| 70500-02060-143    | H-122             |
| 70500-02060-145    | H-122             |
| 70500-02060-192    | H-122             |
| 70500-02060-193    | H-122             |
| 70500-02060-202    | H-68              |
| 70500-02060-205    | H-68              |
| 70500-02060-206    | H-68              |
| 70500-02060-207    | H-122             |
| 70500-02060-208    | H-122             |
| 70500-02060-222    | H-68              |
| 70500-02060-223    | H-68              |
| 70500-02061-121    | H-16              |
| 70500-02061-122    | H-16              |
| 70500-02061-123    | H-16              |
| 70500-02061-125    | H-32              |
| 70500-02061-126    | H-32              |
| 70500-02061-127    | H-32              |
| 70500-02061-128    | H-32              |
| 70500-02061-129    | H-32              |
| 70500-02062-107    | H-19              |
| 70500-02062-124    | H-16              |
| 70500-02062-125    | H-32              |
| 70500-02062-126    | H-32              |
| 70500-02062-136    | H-69              |
| 70500-02062-137    | H-19              |
| 70500-02062-146    | H-19              |
| 70500-02062-150    | H-69              |
| 70500-02063-123    | H-61              |
| 70500-02063-124    | H-32              |
| 70500-02063-125    | H-32              |
| 70500-02063-126    | H-32              |
| 70500-02063-149    | H-19              |
| 70500-02063-151    | H-99              |
| 70500-02063-152    | H-32              |
| 70500-02063-153    | H-32              |
| 70500-02063-179    | H-19              |
| 70500-02063-184    | H-19              |
| 70500-02063-211    | H-32              |
| 70500-02063-212    | H-32              |
| 70500-02063-213    | H-32              |

## Part Number Index (Cont)

| <u>Part Number</u> | <u>Figure No.</u> |
|--------------------|-------------------|
| 70500-02063-214    | H-32              |
| 70500-02063-215    | H-32              |
| 70500-02063-216    | H-32              |
| 70500-02063-217    | H-32              |
| 70500-02063-218    | H-32              |
| 70500-02063-219    | H-32              |
| 70500-02063-220    | H-32              |
| 70500-02063-221    | H-32              |
| 70500-02063-222    | H-32              |
| 70500-02064-135    | H-32              |
| 70500-02064-136    | H-19              |
| 70500-02064-142    | H-32              |
| 70500-02064-143    | H-32              |
| 70500-02064-210    | H-32              |
| 70500-02064-211    | H-32              |
| 70500-02064-212    | H-32              |
| 70500-02064-213    | H-32              |
| 70500-02064-214    | H-32              |
| 70500-02064-215    | H-32              |
| 70500-02064-216    | H-32              |
| 70500-02064-217    | H-32              |
| 70500-02064-221    | H-32              |
| 70500-02065-103    | H-82              |
| 70500-02066-124    | H-129             |
| 70500-02066-131    | H-131             |
| 70500-02066-132    | H-131             |
| 70500-02066-133    | H-131             |
| 70500-02066-134    | H-131             |
| 70500-02066-135    | H-131             |
| 70500-02066-136    | H-131             |
| 70500-02066-137    | H-129             |
| 70500-02066-138    | H-129             |
| 70500-02066-139    | H-131             |
| 70500-02066-140    | H-131             |
| 70500-02066-141    | H-129             |
| 70500-02066-142    | H-131             |
| 70500-02066-143    | H-129             |
| 70500-02066-144    | H-131             |
| 70500-02066-145    | H-129             |
| 70500-02066-146    | H-131             |
| 70500-02066-147    | H-129             |

## Part Number Index (Cont)

| <b><u>Part Number</u></b> | <b><u>Figure No.</u></b> |
|---------------------------|--------------------------|
| 70500-02066-148           | H-129                    |
| 70500-02066-149           | H-129                    |
| 70500-02066-150           | H-131                    |
| 70500-02066-151           | H-131                    |
| 70500-02066-152           | H-131                    |
| 70500-02066-153           | H-131                    |
| 70500-02066-154           | H-131                    |
| 70500-02066-155           | H-129                    |
| 70500-02066-156           | H-129                    |
| 70500-02066-157           | H-131                    |
| 70500-02066-158           | H-131                    |
| 70500-02066-159           | H-131                    |
| 70500-02066-160           | H-131                    |
| 70500-02066-161           | H-131                    |
| 70500-02066-162           | H-131                    |
| 70500-02066-163           | H-131                    |
| 70500-02066-164           | H-131                    |
| 70500-02066-165           | H-129                    |
| 70500-02066-166           | H-129                    |
| 70500-02066-167           | H-129                    |
| 70500-02066-168           | H-129                    |
| 70500-02066-169           | H-129                    |
| 70500-02066-170           | H-129                    |
| 70500-02066-171           | H-131                    |
| 70500-02066-172           | H-131                    |
| 70500-02066-173           | H-131                    |
| 70500-02066-174           | H-131                    |
| 70500-02066-175           | H-131                    |
| 70500-02066-176           | H-131                    |
| 70500-02066-177           | H-129                    |
| 70500-02066-178           | H-129                    |
| 70500-02066-179           | H-129                    |
| 70500-02066-180           | H-129                    |
| 70500-02066-181           | H-129                    |
| 70500-02066-182           | H-129                    |
| 70500-02066-201           | H-131                    |
| 70500-02066-202           | H-131                    |
| 70500-02066-203           | H-131                    |
| 70500-02066-204           | H-131                    |
| 70500-02066-205           | H-131                    |
| 70500-02066-206           | H-131                    |

## Part Number Index (Cont)

| <u>Part Number</u> | <u>Figure No.</u> |
|--------------------|-------------------|
| 70500-02066-207    | H-131             |
| 70500-02066-208    | H-131             |
| 70500-02066-209    | H-131             |
| 70500-02066-210    | H-131             |
| 70500-02066-211    | H-131             |
| 70500-02066-212    | H-131             |
| 70500-02066-213    | H-131             |
| 70500-02066-214    | H-129             |
| 70500-02066-215    | H-131             |
| 70500-02066-216    | H-131             |
| 70500-02066-217    | H-131             |
| 70500-02066-218    | H-129             |
| 70500-02066-219    | H-129             |
| 70500-02066-220    | H-129             |
| 70500-02066-221    | H-129             |
| 70500-02066-222    | H-131             |
| 70500-02066-223    | H-129             |
| 70500-02066-224    | H-131             |
| 70500-02066-225    | H-129             |
| 70500-02066-226    | H-129             |
| 70500-02066-227    | H-129             |
| 70500-02066-228    | H-129             |
| 70500-02066-229    | H-129             |
| 70500-02066-230    | H-129             |
| 70500-02066-231    | H-131             |
| 70500-02066-232    | H-131             |
| 70500-02066-233    | H-129             |
| 70500-02066-234    | H-129             |
| 70500-02066-235    | H-129             |
| 70500-02066-236    | H-131             |
| 70500-02066-237    | H-131             |
| 70500-02066-238    | H-129             |
| 70500-02066-239    | H-129             |
| 70500-02066-240    | H-131             |
| 70500-02066-242    | H-131             |
| 70500-02066-243    | H-129             |
| 70500-02066-244    | H-129             |
| 70500-02066-245    | H-129             |
| 70500-02066-246    | H-129             |
| 70500-02066-247    | H-129             |
| 70500-02066-248    | H-129             |



## Part Number Index (Cont)

| <u>Part Number</u> | <u>Figure No.</u> |
|--------------------|-------------------|
| 70500-02066-249    | H-131             |
| 70500-02066-250    | H-131             |
| 70500-02066-251    | H-131             |
| 70500-02066-252    | H-131             |
| 70500-02066-253    | H-131             |
| 70500-02066-254    | H-131             |
| 70500-02066-255    | H-131             |
| 70500-02066-256    | H-131             |
| 70500-02066-257    | H-131             |
| 70500-02066-258    | H-129             |
| 70500-02066-259    | H-131             |
| 70500-02066-260    | H-131             |
| 70500-02066-261    | H-131             |
| 70500-02066-262    | H-131             |
| 70500-02066-263    | H-129             |
| 70500-02066-265    | H-129             |
| 70500-02066-266    | H-129             |
| 70500-02066-267    | H-129             |
| 70500-02066-268    | H-131             |
| 70500-02066-269    | H-131             |
| 70500-02066-270    | H-131             |
| 70500-02066-271    | H-131             |
| 70500-02066-272    | H-129             |
| 70500-02066-273    | H-131             |
| 70500-02066-274    | H-129             |
| 70500-02066-275    | H-129             |
| 70500-02066-276    | H-129             |
| 70500-02066-277    | H-129             |
| 70500-02066-278    | H-131             |
| 70500-02066-279    | H-131             |
| 70500-02066-280    | H-131             |
| 70500-02066-281    | H-131             |
| 70500-02066-282    | H-131             |
| 70500-02066-283    | H-131             |
| 70500-02066-284    | H-131             |
| 70500-02066-285    | H-131             |
| 70500-02066-286    | H-131             |
| 70500-02066-287    | H-131             |
| 70500-02066-288    | H-131             |
| 70500-02066-289    | H-131             |
| 70500-02066-290    | H-131             |

## Part Number Index (Cont)

| <u>Part Number</u> | <u>Figure No.</u> |
|--------------------|-------------------|
| 70500-02066-291    | H-131             |
| 70500-02066-292    | H-131             |
| 70500-02066-293    | H-131             |
| 70500-02066-294    | H-131             |
| 70500-02066-295    | H-131             |
| 70500-02066-296    | H-129             |
| 70500-02066-297    | H-129             |
| 70500-02066-298    | H-129             |
| 70500-02066-299    | H-131             |
| 70500-02066-300    | H-131             |
| 70500-02066-301    | H-131             |
| 70500-02066-302    | H-131             |
| 70500-02066-303    | H-131             |
| 70500-02066-304    | H-131             |
| 70500-02066-305    | H-129             |
| 70500-02066-306    | H-129             |
| 70500-02066-307    | H-131             |
| 70500-02066-308    | H-131             |
| 70500-02066-309    | H-131             |
| 70500-02066-310    | H-131             |
| 70500-02066-311    | H-129             |
| 70500-02066-312    | H-129             |
| 70500-02066-313    | H-129             |
| 70500-02066-314    | H-129             |
| 70500-02066-315    | H-129             |
| 70500-02066-316    | H-129             |
| 70500-02066-319    | H-131             |
| 70500-02066-320    | H-131             |
| 70500-02066-321    | H-131             |
| 70500-02066-324    | H-131             |
| 70500-02066-325    | H-131             |
| 70500-02066-326    | H-131             |
| 70500-02066-332    | H-131             |
| 70500-02066-333    | H-131             |
| 70500-02068-109    | H-104             |
| 70500-02068-118    | H-71              |
| 70500-02068-121    | H-104             |
| 70500-02068-123    | H-83              |
| 70500-02068-124    | H-104             |
| 70500-02070-109    | H-74              |
| 70500-02070-111    | H-74              |

## Part Number Index (Cont)

| <u>Part Number</u> | <u>Figure No.</u> |
|--------------------|-------------------|
| 70500-02070-118    | H-74              |
| 70500-02070-149    | H-108             |
| 70500-02070-154    | H-74              |
| 70500-02071-109    | H-93              |
| 70500-02071-110    | H-93              |
| 70500-02071-111    | H-75              |
| 70500-02072-107    | H-77              |
| 70500-02072-108    | H-77              |
| 70500-02073-101    | H-89              |
| 70500-02073-106    | H-106             |
| 70500-02073-107    | H-106             |
| 70500-02073-108    | H-106             |
| 70500-02076-101    | H-109             |
| 70500-03050-108    | H-67              |
| 70500-03050-113    | H-66              |
| 70500-03050-114    | H-66              |
| 70500-03050-115    | H-66              |
| 70500-03050-130    | H-121             |
| 70500-03050-151    | H-66              |
| 70500-03050-153    | H-67              |
| 70500-03050-154    | H-66              |
| 70500-03050-165    | H-15              |
| 70550-01125-108    | H-1               |
| 70550-01126-106    | H-3               |
| 70550-01126-107    | H-3               |
| 70550-01126-124    | H-3               |
| 70550-02151-101    | H-78              |
| 70550-02151-102    | H-78              |
| 70551-07000-103    | H-84              |
| 70651-03102-180    | H-38              |
| 70651-03102-181    | H-38              |
| 70651-03102-182    | H-38              |
| 70652-02251-170    | H-38              |
| 70652-02251-171    | H-38              |
| 70652-02251-172    | H-38              |
| 70652-02251-174    | H-38              |
| 70652-02251-175    | H-38              |
| 70652-02251-177    | H-38              |
| 70652-02251-179    | H-38              |
| 70652-02251-180    | H-38              |
| 70652-02252-149    | H-41              |

## Part Number Index (Cont)

| <u>Part Number</u> | <u>Figure No.</u> |
|--------------------|-------------------|
| 70652-03252-143    | H-41              |
| 70652-03252-146    | H-41              |
| 70652-03252-149    | H-41              |
| 70652-03252-153    | H-41              |
| 70652-03252-158    | H-41              |
| 70652-03252-159    | H-41              |
| 70700-03252-160    | H-41              |
| 70700-03252-161    | H-41              |
| 70652-05251-143    | H-41              |
| 70652-05251-149    | H-41              |
| 70700-20014-110    | H-125             |
| 70700-20313-104    | H-110             |
| 70700-20313-105    | H-110             |
| 70700-20313-106    | H-81              |
| 70700-20313-107    | H-81              |
| 70700-20313-108    | H-81              |
| 70700-20313-118    | H-124             |
| 70700-20313-119    | H-124             |
| 70700-20324-105    | H-90              |
| 70700-20325-101    | H-120             |
| 70700-20325-102    | H-120             |
| 70700-20325-103    | H-120             |
| 70700-20325-104    | H-120             |
| 70700-20325-105    | H-120             |
| 70700-20325-106    | H-120             |
| 70700-20325-107    | H-120             |
| 70700-20325-108    | H-120             |
| 70700-20369-102    | H-29              |
| 70700-20395-107    | H-79              |
| 70700-20395-108    | H-79              |
| 70700-20403-041    | H-257             |
| 70700-20420-116    | H-80              |
| 70700-20426-118    | H-117             |
| 70700-20460-103    | H-39              |
| 70700-20507-104    | H-29              |
| 70700-20507-105    | H-87              |
| 70700-20508-102    | H-29              |
| 70700-20509-103    | H-29              |
| 70700-20509-104    | H-24              |
| 70700-20511-106    | H-33              |
| 70700-20511-107    | H-33              |

## Part Number Index (Cont)

| <u>Part Number</u> | <u>Figure No.</u> |
|--------------------|-------------------|
| 70700-20511-108    | H-33              |
| 70700-20511-109    | H-33              |
| 70700-20511-110    | H-33              |
| 70700-20511-111    | H-33              |
| 70700-20511-112    | H-33              |
| 70700-20511-113    | H-33              |
| 70700-20511-114    | H-33              |
| 70700-20511-115    | H-33              |
| 70700-20511-116    | H-33              |
| 70700-20511-117    | H-33              |
| 70700-20511-118    | H-33              |
| 70700-20511-119    | H-39              |
| 70700-20511-121    | H-39              |
| 70700-20512-103    | H-29              |
| 70700-20512-106    | H-29              |
| 70700-20514-103    | H-29              |
| 70700-20515-102    | H-29              |
| 70700-20515-104    | H-29              |
| 70700-20677-102    | H-113             |
| 70700-20677-103    | H-113             |
| 70700-20680-108    | H-20              |
| 70700-25450-041    | H-266             |
| 70700-77315-041    | H-223             |
| 76122-82279-003    | H-30              |

---

**H-1.3 Alphabetical Index.**

The alphabetical index lists all items in alphabetical order with a cross-reference to the figure in which the item appears.

**Alphabetical Index**

| <b><u>Nomenclature</u></b>                                      | <b><u>Figure No.</u></b> |
|-----------------------------------------------------------------|--------------------------|
| ACCELEROMETER MOUNT PLATE                                       | H-247                    |
| AFCS SCREEN COVER                                               | H-218                    |
| AFT BULKHEAD SEAL                                               | H-15                     |
| AUXILIARY CABIN HEATER JUMPER PLUG                              | H-158                    |
| AUXILIARY POWER UNIT FIREWALL SEAL                              | H-22                     |
| BACKING STRIP                                                   | H-130                    |
| BATTERY BOX COVER SEALS                                         | H-92                     |
| BATTERY SENSOR RELAY TESTER                                     | H-255                    |
| BATTERY TEST CELL                                               | H-238                    |
| BATTERY TEST VENT CAP AND TEE                                   | H-239                    |
| BEADED TUBE                                                     | H-93                     |
| BIFILAR BUSHINGS REPLACEMENT TOOLS                              | H-213                    |
| BLACKOUT CURTAIN COVER                                          | H-128                    |
| BLADE DEICE TEST BLOCK                                          | H-148                    |
| BLADE DEICE TEST HARNESS                                        | H-147                    |
| BLADE DEICE TEST SET                                            | H-155                    |
| BLADE/SPINDLE CUFF BUSHING INSTALLATION TOOLS                   | H-161                    |
| BLANKET ASSEMBLY TAB                                            | H-121                    |
| BOOST PUMP CONTROL PANEL TEST HARNESS                           | H-153                    |
| BOOT SUPPORT LOCATOR                                            | H-253                    |
| BRACKET ANGLE                                                   | H-233                    |
| BREECH CAP PLUG ASSEMBLY WRENCH AND GO/NO-GO BREECH<br>CAP GAGE | H-135                    |
| CABIN DOOR JETTISON WINDOW SEALS                                | H-96                     |
| CABIN DOOR SEAL                                                 | H-76                     |
| CABIN DUCT SEAL                                                 | H-31                     |
| CARGO HOOK ACCESS SEAL                                          | H-60                     |
| CARGO HOOK BUSHING INSTALLATION BLOCK                           | H-194                    |
| CAUTION ADVISORY TEST ADAPTER                                   | H-53                     |
| CEILING CENTER PANEL FLAP                                       | H-16                     |
| CEILING DRIP PAN SEAL                                           | H-68                     |
| CEILING PANEL GASKET                                            | H-69                     |
| CEILING PANEL SEAL                                              | H-77                     |
| CEILING PANEL STRAP                                             | H-99                     |
| CEILING PANEL TUBE                                              | H-61                     |
| CELL PULLER                                                     | H-47                     |
| CHAFF/FLARE DISPENSER COVER                                     | H-214                    |

## Alphabetical Index (Cont)

| <u>Nomenclature</u>                              | <u>Figure No.</u> |
|--------------------------------------------------|-------------------|
| CHAFING STRIP                                    | H-57              |
| CHAIN ASSEMBLY TUBING                            | H-133             |
| CHECKING SHIM                                    | H-112             |
| CLIP                                             | H-63              |
| CLIP                                             | H-184             |
| COCKPIT DOOR JAMB SEALS                          | H-123             |
| CONTROLS ENCLOSURE FLAP                          | H-114             |
| CONTROLS ENCLOSURE SUPPORT                       | H-118             |
| CORD ASSEMBLY                                    | H-9               |
| COVER SEAL                                       | H-73              |
| CREW CHIEF'S WINDOW BRUSH SEAL                   | H-183             |
| CREW CHIEF'S WINDOW CLEAR PLASTIC SCREEN         | H-231             |
| CREW CHIEF'S WINDOW LATCH SEAL                   | H-35              |
| CREW CHIEF'S WINDOW SEAL                         | H-34              |
| CREW CHIEF'S WINDOW SEAL                         | H-240             |
| CREW CHIEF'S WINDOW UPPER CHANNEL INSERT/SUPPORT | H-230             |
| CREW DOOR DOUBLER                                | H-86              |
| CURTAIN TAB                                      | H-125             |
| CURTAIN TAB                                      | H-127             |
| CUSHION                                          | H-90              |
| DAMPER BLEED UNIT                                | H-174             |
| DAMPER INDICATOR CRADLE                          | H-164             |
| DAMPER INDICATOR DISASSEMBLY TOOL                | H-237             |
| DAMPER INDICATOR HANDLE RETAINER                 | H-215             |
| DAMPER INDICATOR INSERTION TOOL                  | H-165             |
| DAMPER INDICATOR INSTALLATION TOOL               | H-166             |
| DEFUEL ADAPTER                                   | H-163             |
| DISPENSER TEST CABLE                             | H-175             |
| DOUBLER                                          | H-111             |
| DRAG BEAM FUSELAGE SUPPORT FITTING BEARING DRIFT | H-178             |
| DRAG BEAM WEDGE                                  | H-167             |
| DRAG LINK ADJUSTING TOOL                         | H-162             |
| DRAIN PAN SEAL                                   | H-108             |
| DRAIN TUBE                                       | H-106             |
| DRAIN TUBE                                       | H-109             |
| DRIP PAN CABLE ASSEMBLY                          | H-173             |
| DRIP PAN SEAL                                    | H-74              |
| DRIP PAN SEAL                                    | H-75              |
| DRIP PAN SEAL                                    | H-122             |
| DRIP PAN SEAL                                    | H-236             |
| DRIP PAN TUBE                                    | H-89              |

## Alphabetical Index (Cont)

| <u>Nomenclature</u>                             | <u>Figure No.</u> |
|-------------------------------------------------|-------------------|
| DROOP STOP NUT WRENCH                           | H-168             |
| DUCT INSTALLATION GASKET                        | H-36              |
| DUCT INSTALLATION SEAL                          | H-37              |
| DUCT INSTALLATION SEAL                          | H-42              |
| DUCT INSTALLATION SEAL                          | H-102             |
| EDGING                                          | H-4               |
| EDGING SEAL                                     | H-101             |
| ELASTIC CORD                                    | H-39              |
| ELASTOMERIC ROD END BEARING PLASTIC FEELER GAGE | H-232             |
| ELECTRICAL WIRE                                 | H-59              |
| ELECTRICAL WIRE                                 | H-5               |
| ELECTRICAL WIRE                                 | H-78              |
| ELECTROLYTE LEVEL CHECKER                       | H-242             |
| ELECTROLYTE REMOVAL TOOL                        | H-241             |
| ENGINE AIR INLET SEAL                           | H-105             |
| ENGINE FAIRING SEAL                             | H-107             |
| ENGINE INLET FIREWALL SEAL                      | H-65              |
| ESSS GATE VALVE TEST HARNESS                    | H-156             |
| ESSS WRENCH                                     | H-138             |
| EXHAUST FAIRING BULKHEAD SEAL                   | H-115             |
| FEELER GAGE                                     | H-235             |
| FLANGE PULLER                                   | H-50              |
| FLIGHT CONTROL QUICK-DISCONNECT WRENCH          | H-48              |
| FOIL PANEL SQUARE OR RECTANGULAR CONFIGURATION  | H-129             |
| FOIL PANEL UNUSUAL CONFIGURATION                | H-131             |
| FOIL TAPE                                       | H-170             |
| FORMER INSTALLATION GASKET                      | H-26              |
| FRAME SHIM                                      | H-146             |
| FUEL CELL CAP PRESSURE TEST ADAPTER             | H-212             |
| FUEL CELL PRESSURE TEST PLATE                   | H-206             |
| FUEL FEED SYSTEM TEST HOSE ASSEMBLY             | H-229             |
| FUEL LINES AND PUMP ENCLOSURE SEAL              | H-21              |
| FUEL QUANTITY SIMULATOR TEST SET                | H-152             |
| GASKET                                          | H-66              |
| GASKET TOP                                      | H-116             |
| GEAR BOX SHIM                                   | H-199             |
| GEAR BOX SPACER                                 | H-200             |
| GRIP                                            | H-79              |
| HAND HOLD FLAP AND STRAP                        | H-144             |
| HEATER MAT RESISTANCE TEST SET                  | H-258             |
| HIGH-LOW GAGE                                   | H-139             |



## Alphabetical Index (Cont)

| <u>Nomenclature</u>                                           | <u>Figure No.</u> |
|---------------------------------------------------------------|-------------------|
| HIGH-TEMPERATURE ELECTRICAL WIRE                              | H-13              |
| HIGH-TEMPERATURE ELECTRICAL WIRE                              | H-17              |
| HIGH-TEMPERATURE ELECTRICAL WIRE                              | H-126             |
| HINGE                                                         | H-1               |
| HINGE                                                         | H-3               |
| HINGE HALF                                                    | H-6               |
| HINGE PIN                                                     | H-2               |
| HIRSS INLET DOOR SEAL                                         | H-91              |
| HYDRAULIC DRAIN TUBING                                        | H-38              |
| HYDRAULIC TUBING                                              | H-41              |
| HYPODERMIC SYRINGE                                            | H-197             |
| INFRARED LIGHT TEST SET                                       | H-149             |
| INSULATION                                                    | H-18              |
| INSULATION SLEEVE                                             | H-11              |
| INSULATION SLEEVE                                             | H-64              |
| INSULATION TUBING                                             | H-12              |
| JETTISON HANDLE GUARD                                         | H-140             |
| LINER                                                         | H-263             |
| LINER                                                         | H-265             |
| LOCATING TOOL                                                 | H-43              |
| MAIN GEAR STRUT WELL SEAL                                     | H-95              |
| MAIN LANDING GEAR FAIRING BUMPER                              | H-100             |
| MAIN LANDING GEAR FAIRING SEAL                                | H-70              |
| MAIN ROTOR BLADE CHEVRON PATCH                                | H-264             |
| MAIN ROTOR BLADE COVER                                        | H-187             |
| MAIN ROTOR BLADE HOLDER                                       | H-193             |
| MAIN ROTOR BLADE SOLID PIN REMOVAL TOOL                       | H-266             |
| MAIN ROTOR BLADE TIP TARGETS                                  | H-248             |
| MAIN ROTOR DAMPER HOLDING FIXTURE                             | H-223             |
| MAIN ROTOR DAMPER PISTON ROD INSERTION TOOL                   | H-225             |
| MAIN ROTOR DAMPER PISTON ROD WRENCH                           | H-226             |
| MAIN ROTOR DAMPER SEAL EXPANSION TOOL                         | H-224             |
| MAIN ROTOR DAMPER SLEEVE BEARING<br>INSTALLATION/REMOVAL TOOL | H-222             |
| MAIN ROTOR HEAD COVER                                         | H-189             |
| MAIN ROTOR SHAFT IMPACT TOOL                                  | H-252             |
| MAST COVER                                                    | H-192             |
| MASTER BRAKE CYLINDER TEST STAND                              | H-227             |
| MOUNTING BOLT ADAPTER                                         | H-46              |
| NOSE DOOR DRAIN TUBE                                          | H-62              |
| NYLON WEBBING STRAP                                           | H-80              |

## Alphabetical Index (Cont)

| <u>Nomenclature</u>                                                       | <u>Figure No.</u> |
|---------------------------------------------------------------------------|-------------------|
| NYLON WEDGE                                                               | H-260             |
| OIL COOLER COVER ASSEMBLY                                                 | H-33              |
| OIL PUMP INSTALLATION TOOL                                                | H-45              |
| ORIFICE ASSEMBLY GAGE                                                     | H-267             |
| OUTPUT DRIVE SHAFT PULLER                                                 | H-216             |
| OUTPUT DRIVE SHAFT PULLER                                                 | H-262             |
| PAD                                                                       | H-81              |
| PANEL FASTENER STRIP                                                      | H-10              |
| PATCH ASSEMBLY                                                            | H-191             |
| PISTON GUIDE REMOVAL TOOL                                                 | H-136             |
| PISTON PLUG REMOVAL TOOL                                                  | H-137             |
| PITCH BEAM/HORN BUSHING SIZING BLOCK                                      | H-228             |
| PITCH CONTROL LINK TOOL                                                   | H-256             |
| PITOT-STATIC TEST SET                                                     | H-49              |
| PIVOT BEARING REPLACEMENT WRENCH                                          | H-51              |
| PLATE                                                                     | H-24              |
| PLYWOOD FRAME                                                             | H-110             |
| PNEUMATIC ADAPTER (ESSS)                                                  | H-151             |
| POLYHINGE                                                                 | H-19              |
| POSITIONER TOOL                                                           | H-257             |
| PUSHER TUBE                                                               | H-172             |
| PYLON DOOR CHAFING STRIP                                                  | H-28              |
| RECOVERY KIT SPREADER BAR                                                 | H-177             |
| ROPE, PLUG HANDLE                                                         | H-29              |
| ROTARY INPUT BEARING REMOVAL TUBE                                         | H-211             |
| RUBBER EDGING                                                             | H-88              |
| SAFETY CHAIN                                                              | H-134             |
| SEAL                                                                      | H-8               |
| SEAL                                                                      | H-55              |
| SEAL                                                                      | H-67              |
| SEAL                                                                      | H-85              |
| SEAL, FIREWALL                                                            | H-180             |
| SEAL INSTALLATION TOOL                                                    | H-157             |
| SEAL PULLER                                                               | H-160             |
| SEAL RETAINER STRIP                                                       | H-14              |
| SEAL SPLICE                                                               | H-98              |
| SEALS - BATTERY, CARGO HOOK, ACCUMULATOR BRACKET                          | H-25              |
| SEALS - COCKPIT DOOR, CREW CHIEF'S WINDOW, CABIN DOOR,<br>AND ROTOR PYLON | H-30              |
| SEARCHLIGHT SPANNER WRENCH                                                | H-250             |
| SEARCHLIGHT TEST STAND                                                    | H-249             |


## Alphabetical Index (Cont)

| <u>Nomenclature</u>                                         | <u>Figure No.</u> |
|-------------------------------------------------------------|-------------------|
| SHIM                                                        | H-97              |
| SHORTING JUMPERS                                            | H-246             |
| SIDEWALL DUCT SEAL                                          | H-119             |
| SIDEWALL PANEL HINGE                                        | H-71              |
| SIZING BLOCK                                                | H-44              |
| SLEEVE BEARING REMOVAL/INSTALLATION TOOLS                   | H-198             |
| SOFT LIGHTING MASTER WARNING PANEL                          | H-243             |
| SPACER REMOVAL TOOL                                         | H-219             |
| SPHERICAL BEARING REMOVER/INSTALLER                         | H-195             |
| SPINDLE HORN NUT TORQUE ADAPTER                             | H-205             |
| SPLINE ADAPTER REMOVAL TOOL                                 | H-261             |
| STABILATOR BOLT REMOVAL TOOL                                | H-169             |
| STABILATOR DRIFT PIN                                        | H-251             |
| STABILATOR FITTING SUPPORT                                  | H-171             |
| STABILATOR POSITION SENSOR/LIMIT SWITCH LOCKPIN             | H-179             |
| STABILATOR POSITION SENSOR/LIMIT SWITCH TEST UNIT           | H-154             |
| STABILIZER STRUT                                            | H-182             |
| STIFFENER                                                   | H-83              |
| STORAGE BAG                                                 | H-120             |
| STORAGE FRAME STRAP                                         | H-124             |
| STORES JETTISON SYSTEM TEST ADAPTER                         | H-150             |
| STRAP                                                       | H-40              |
| STRAP                                                       | H-58              |
| STRAP                                                       | H-104             |
| STRIP, TAIL ROTOR DRIVE SHAFT COVER                         | H-145             |
| SUPPORT INSTALLATION SEAL                                   | H-27              |
| SWITCH ADJUSTMENT TOOL                                      | H-217             |
| SWITCH PANEL TEST HARNESS                                   | H-52              |
| TAIL LANDING GEAR LOCK MECHANISM BELLCRANK BUSHING<br>DRIFT | H-203             |
| TAIL LANDING GEAR LOCKPIN BUSHING DRIFT                     | H-204             |
| TAIL LANDING GEAR LOCKPIN OVERSIZE BUSHING                  | H-221             |
| TAIL LANDING GEAR OVERSIZED AXLE BUSHING                    | H-210             |
| TAIL LANDING GEAR STRUT LIMITER                             | H-176             |
| TAIL ROTOR ADAPTER PAD                                      | H-117             |
| TAIL ROTOR BLADE BOOT INSTALLATION TOOL                     | H-207             |
| TAIL ROTOR BLADE COVER                                      | H-188             |
| TAIL ROTOR CABLE CONDUIT                                    | H-23              |
| TAIL ROTOR GEAR BOX COVER                                   | H-190             |
| TAIL ROTOR INSTALLATION CHECKING SHIM                       | H-208             |
| TAIL ROTOR PYLON CONDUIT                                    | H-84              |

## Alphabetical Index (Cont)

| <u>Nomenclature</u>                                | <u>Figure No.</u> |
|----------------------------------------------------|-------------------|
| TEFLON LINED SPHERICAL BEARING PLASTIC FEELER GAGE | H-209             |
| TERMINAL BOARD COVER                               | H-234             |
| TEST BOX ASSEMBLY HINGE                            | H-20              |
| TORQUE REACTOR                                     | H-181             |
| TORQUE REACTOR PLATE                               | H-259             |
| TORQUELESS GRIP INSTALLATION PLATE                 | H-245             |
| TORQUELESS GRIP INSTALLATION TOOL                  | H-244             |
| TRACK REPAIR ANGLE                                 | H-186             |
| TRACK REPAIR PLATE                                 | H-185             |
| TRANSMISSION DRAIN TUBING                          | H-56              |
| TRANSMISSION DRIP PAN SEAL                         | H-54              |
| TUBE                                               | H-72              |
| TUBE                                               | H-82              |
| TUBING                                             | H-7               |
| UPPER FUSELAGE GASKET                              | H-132             |
| VALVE TEST FIXTURE                                 | H-202             |
| VELCRO TAPE                                        | H-32              |
| VENT WINDOW SEALS                                  | H-94              |
| VIBRATION ABSORBER LINERS                          | H-103             |
| VIBRATION ABSORBER SUPPORT ASSEMBLY                | H-220             |
| WASHER                                             | H-87              |
| WASHER, SPRING CYLINDER                            | H-196             |
| WEAR STRAP                                         | H-113             |
| WEAR STRIP                                         | H-141             |
| WEAR STRIP                                         | H-201             |
| WEAR STRIP                                         | H-254             |
| WEAR STRIP - CABIN DOOR LOWER TRACK                | H-143             |
| WEAR STRIP - CABIN DOOR UPPER TRACK                | H-142             |
| WOODEN TUNING WEDGE                                | H-159             |

---

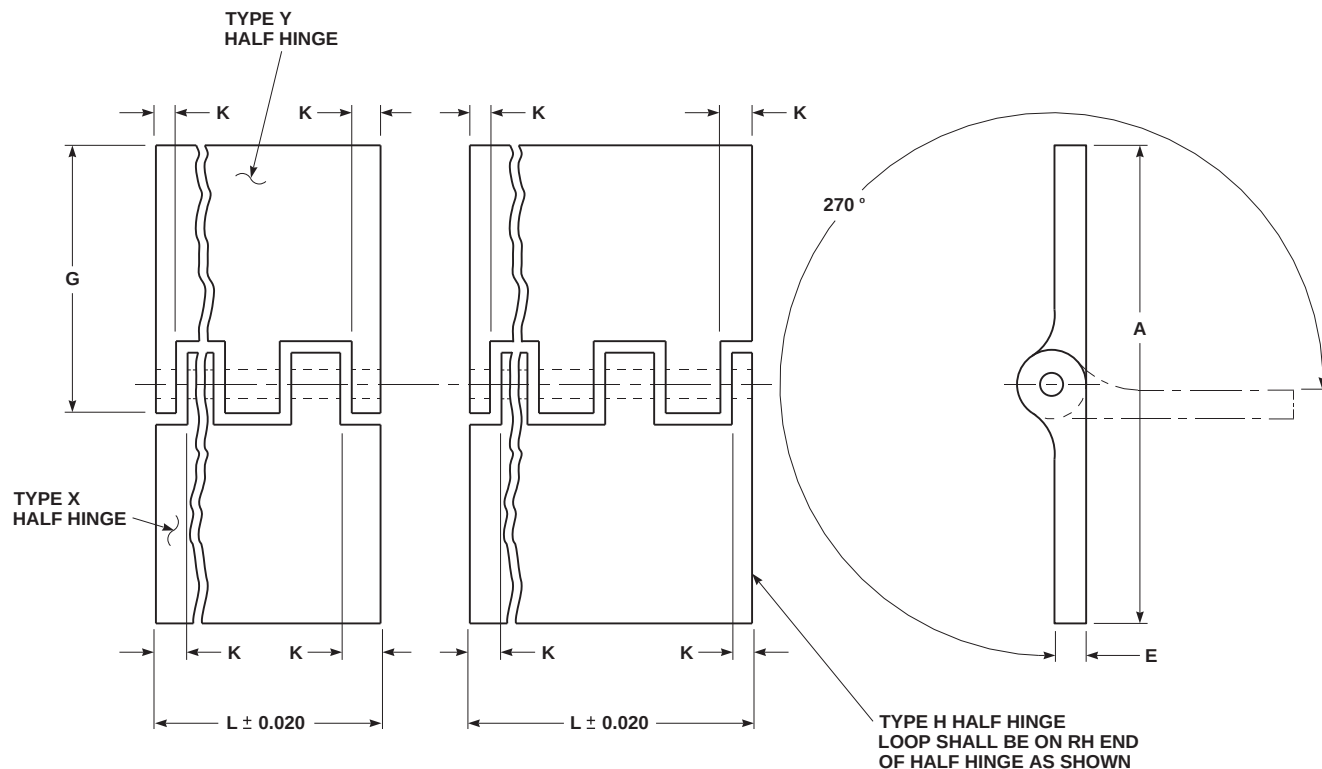

## EXAMPLE

ANODIZED — HINGE DASH NO.  
 MS20001 — PH4 — -0250  
 BASIC NO. — TYPE H  
 HINGE HALF  
 (NO TYPE DESIGNATION  
 MEANS COMPLETE HINGE)  
 HINGE LENGTH (2.50 IN. LONG)

|          | A             | E     | G     | G<br>HALF HINGE<br>SIZE | K     |         |
|----------|---------------|-------|-------|-------------------------|-------|---------|
| DASH NO. | WIDTH<br>OPEN |       | MAX   | MIN                     | MIN   | PIN DIA |
| 4        | 1.500         | 0.056 | 0.850 | 0.830                   | 0.188 | 0.090   |
| 5        | 1.750         | 0.056 | 0.975 | 0.955                   | 0.188 | 0.090   |
| 6        | 2.000         | 0.056 | 1.102 | 1.078                   | 0.188 | 0.090   |

PART NUMBER: 70212-05004-118  
 70213-03008-042  
 70215-05002-117 THRU -120  
 70215-42409-114, -115  
 70217-03001-108, -109  
 70217-03002-111, -112  
 70217-03006-113, -114  
 70308-03504-111, -112  
 70550-01125-108

FO0975\_1  
 SA

FIGURE H-1. HINGE (SHEET 1 OF 2)


| PART NUMBER     | MAKE FROM<br>NSN | SIKORSKY<br>PART NUMBER |
|-----------------|------------------|-------------------------|
| MS20001PH4-1200 | 5340-00-949-8274 | 70215-05002-117         |
| MS20001PH4-1200 | 5340-00-949-8274 | 70215-05002-118         |
| MS20001PH4-1200 | 5340-00-949-8274 | 70215-05002-119         |
| MS20001PH4-0250 | 5340-00-949-8274 | 70215-05002-120         |
| MS20001PX4-0450 | 5340-00-949-8274 | 70217-03006-114         |
| MS20001PY4-0450 | 5340-00-984-5569 | 70217-03006-113         |
| MS20001PY4-0450 | 5340-00-984-5569 | 70217-03006-114         |
| MS20001PY4-1984 | 5340-00-984-5569 | —                       |
| MS20001PY5-1950 | 5340-00-984-5569 | 70213-03008-042         |
| MS20001PX4-1984 | 5340-00-949-8274 | 70550-01125-108         |
| MS20001PX5-1950 | 5340-00-949-8274 | 70213-03008-042         |
| MS20001P4-600   | 5340-00-664-8141 | 70212-05004-118         |
| MS20001P4-0375  | 5340-00-664-8141 | —                       |
| MS20001P5-600   | 5340-00-664-8141 | 70217-03002-111         |
| MS20001P4-1012  | 5340-00-664-8141 | 70217-03001-108         |
| MS20001P4-1012  | 5340-00-664-8141 | 70217-03001-109         |
| MS20001P5-600   | 5340-00-550-5036 | 70217-03002-112         |
| MS20001P5-0980  | 5340-00-550-5036 | 70308-03504-111         |
| MS20001P5-0980  | 5340-00-550-5036 | 70308-03504-112         |
| MS20001P5-1000  | 5340-00-550-5036 | —                       |
| MS20001P6-1950  | 5430-00-664-8118 | 70215-42409-114         |
| MS20001P6-1950  | 5340-00-664-8118 | 70215-42409-115         |

## NOTES

1. MAKE FROM ALUMINUM ALLOY HINGE STOCK, MS2001
2. TYPE X HINGE HALF MATES WITH TYPE Y HINGE HALF. TYPE H IS INTERCHANGE-ABLE WITH BOTH TYPES OF HINGE HALVES.
3. HINGE PINS ARE PER MS20253. USE CADMIUM-PLATED CORROSION RESISTANT STEEL PINS WITH ALUMINUM ALLOY HINGE.
4. REMOVE ALL BURRS AND SHARP EDGES.
5. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
6. TREAT CUT EDGES WITH CORROSION RESISTANT COATING (ALODINE 1200S), ITEM 118, APPENDIX D.
7. INK STAMP "MS20001 (SIZE DASH NO.)" AT REGULAR INTERVALS ALONG LENGTH OF HINGE SO THAT ANY 3-INCH LENGTH WILL HAVE AT LEAST ONE COMPLETE IDENTIFICATION IN FIGURES NOT LESS THAN 0.060 INCH HIGH.

FO0975\_2B  
SA

## FIGURE H-1. HINGE (SHEET 2 OF 2)

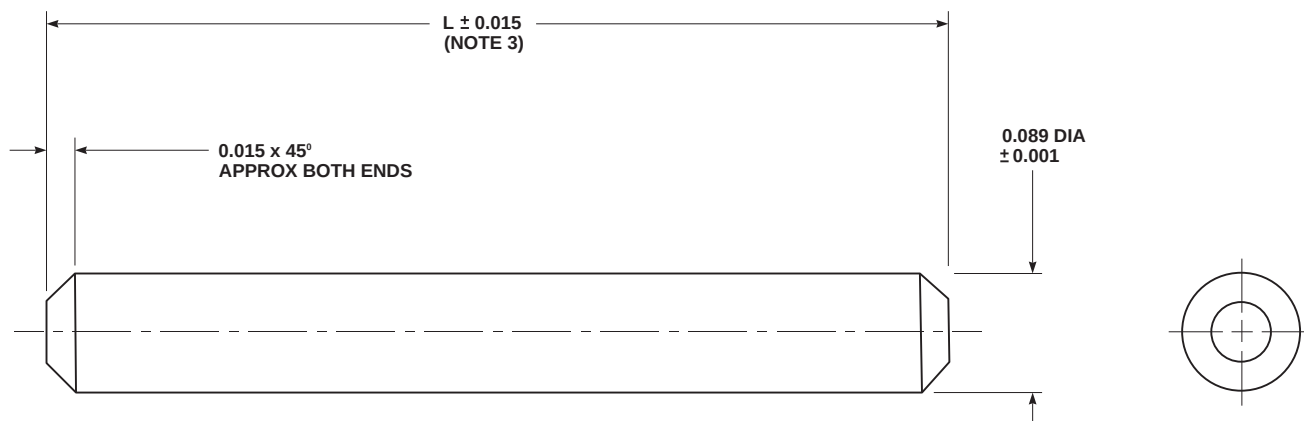

| PART NUMBER      | L LENGTH | SIKORSKY<br>PART NUMBER |
|------------------|----------|-------------------------|
| MS20253P2-250    | 2.500    | —                       |
| MS20253P2-275*   | 2.750    | 70215-05002-128         |
| MS20253P2-475    | 4.750    | —                       |
| MS20253P2-500    | 5.000    | —                       |
| MS20253P2-538    | 5.380    | —                       |
| MS20253P2-1200   | 12.000   | —                       |
| MS20253P2-1225** | 12.250   | 70215-05002-129         |
| MS20253P2-1984   | 19.840   | —                       |
| MS20253P2-1988   | 19.880   | 70213-03008-042         |
| MS20253P2-2050   | 20.500   | —                       |

\*ON INSTALLATION, STAKE FRONT END OF PIN.

\*\*ON INSTALLATION, STAKE REAR END OF PIN.


#### NOTES

1. MAKE FROM HINGE PIN STOCK, MS20253P2, NSN 5340-00-043-3723.
2. LETTER P IN FIRST DASH NUMBER INDICATES CADMIUM-PLATE. NUMBER 2 IN FIRST DASH NUMBER INDICATES PIN DIAMETER (0.089).
3. SECOND DASH NUMBER INDICATES LENGTH IN INCHES AND HUNDREDTHS.
4. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
5. IDENTIFY PARTS PER MIL-STD-130.
6. CUT PIN TO REQUIRED LENGTH PER CHART AND FINISH ENDS PER FIGURE.
7. REMOVE ALL BURRS AND SHARP EDGES.
8. FOR USE WITH ALUMINUM ALLOY HINGE, MS20001 AND MS20257, AS REQUIRED.
9. STAKE PINS, AS REQUIRED.


PART NUMBER: 70213-03008-042  
70215-05002-128, -129

FO0286B  
SA

FIGURE H-2. HINGE PIN

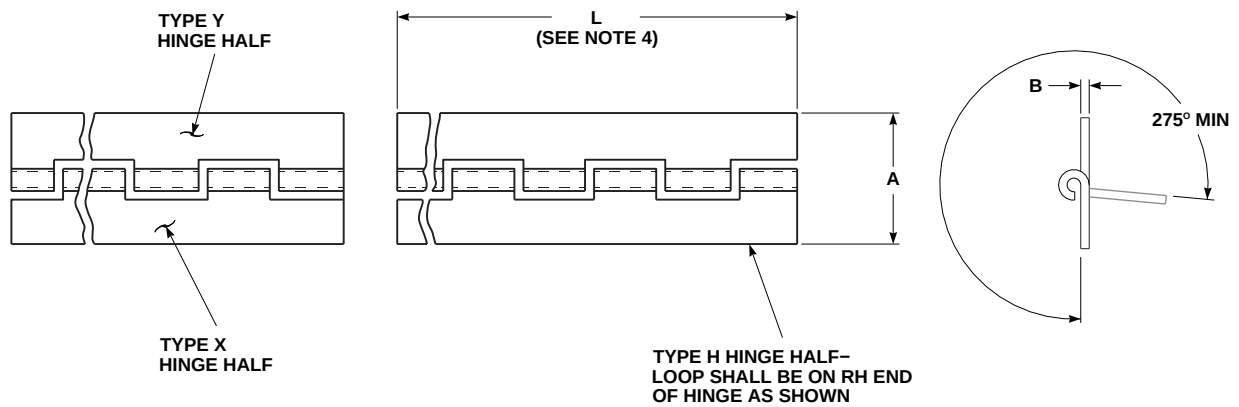

EXAMPLE

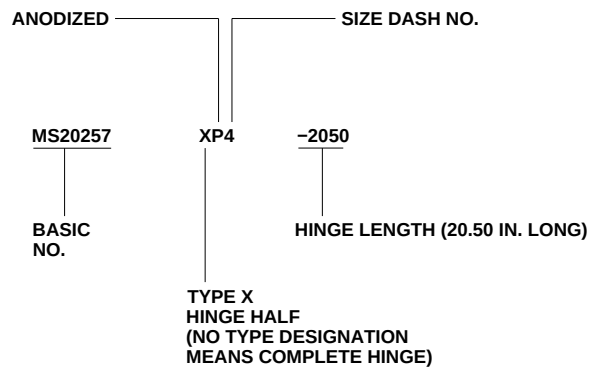

| DASH NO. | A WIDTH OPEN | B THICKNESS | PIN DIA |
|----------|--------------|-------------|---------|
| 1        | 0.750        | 0.032       | 0.063   |
| 2        | 1.062        | 0.040       | 0.090   |
| 3        | 1.250        | 0.040       | 0.090   |
| 4        | 1.500        | 0.040       | 0.090   |
| 5        | 2.000        | 0.051       | 0.090   |

PART NUMBER: 70205-06053-105, -106  
70215-42410-051, -052  
70219-04802-117  
70308-03502-041  
70550-01126-106, -107, -124

FO0981  
SA

FIGURE H-3. HINGE (SHEET 1 OF 2)




| PART NUMBER     | MAKE FROM NSN    | SIKORSKY<br>PART NUMBER |
|-----------------|------------------|-------------------------|
| MS20257HP2-400  | 5340-00-051-9132 | 70215-42410-051         |
| MS20257HP2-400  | 5340-00-051-9132 | 70215-42410-052         |
| MS20257HP3-0500 | 5340-00-051-9132 | 70205-06053-105         |
| MS20257HP3-0500 | 5340-00-051-9132 | 70205-06053-106         |
| MS20257XP4-2050 | 5340-00-051-9133 | —                       |
| MS20257YP4-2050 | 5340-00-051-9133 | —                       |
| MS20257XP5-2050 | 5340-00-069-5124 | 70550-01126-124         |
| MS20257XP5-2050 | 5340-00-069-5124 | 70550-01126-106         |
| MS20257YP5-2050 | 5340-00-069-5124 | 70550-01126-107         |
| MS20257-1-0550  | 5340-00-057-2625 | —                       |
| MS20257P2-0350  | 5340-00-250-4970 | —                       |
| MS20257P2-0400  | 5340-00-250-4970 | —                       |
| MS20257P2-7200  | 5340-00-250-4970 | 70308-03502-041         |
| MS20257P3-250   | 5340-00-051-9132 | —                       |
| MS20257P3-0300  | 5340-00-051-9132 | 70219-04802-117         |
| MS20257P3-900   | 5340-00-051-9132 | —                       |
| MS20257P3-1200  | 5340-00-051-9132 | —                       |
| MS20257P3-1462  | 5340-00-051-9132 | —                       |
| MS20257P3-1500  | 5340-00-051-9132 | —                       |
| MS20257P4-600   | 5340-00-051-9133 | —                       |

### NOTES

1. MAKE FROM ALUMINUM ALLOY HINGE STOCK, MS20257.
2. TYPE X HINGE HALF MATES WITH TYPE Y HINGE HALF. TYPE H IS INTERCHANGEABLE WITH BOTH TYPES (X AND Y) HINGE HALVES.
3. HINGE PINS ARE PER MS20253. USE CADMIUM-PLATED CORROSION RESISTANT STEEL PINS WITH ALUMINUM ALLOY HINGE.
4. REMOVE ALL BURRS AND SHARP EDGES.
5. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
6. TREAT CUT EDGES WITH CORROSION RESISTANT COATING (ALODINE 1200S), ITEM 118, APPENDIX D.
7. INK STAMP "MS20257 (SIZE DASH NO.)" AT REGULAR INTERVALS ALONG LENGTH OF HINGE SO THAT ANY 3-INCH LENGTH WILL HAVE AT LEAST ONE COMPLETE IDENTIFICATION IN FIGURES NOT LESS THAN 0.060 INCH HIGH.

FO0544\_2C  
SA

**FIGURE H-3. HINGE (SHEET 2 OF 2)**

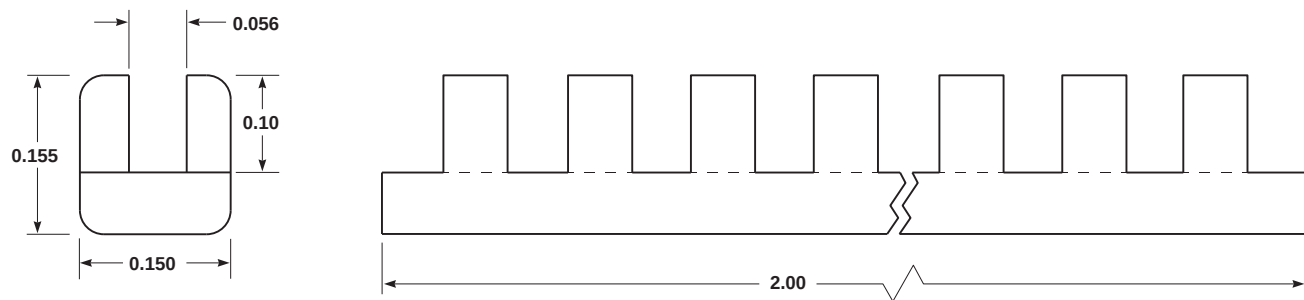


#### NOTES

1. MAKE FROM NYLON PLASTIC GROMMET STOCK, MS21266-1N, NSN 5325-00-960-2410.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. IDENTIFY PARTS PER MIL-STD-130.
4. TRIM PART TO SIZE ON INSTALLATION.

PART NUMBER: MS21266-1N

FO0980  
SA

**FIGURE H-4. EDGING**

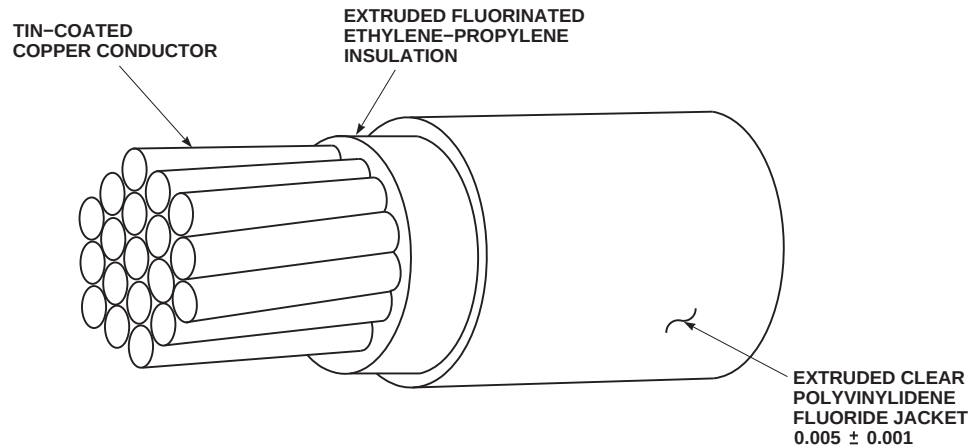**NOTES**


1. MAKE FROM ELECTRICAL WIRE, NSN 6145-00-926-1211, WHITE WITHOUT STRIPES OR BANDS.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. CUT WIRE TO REQUIRED LENGTH.
4. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: M22759 / 13-20-9

FO0979  
SA

**FIGURE H-5. ELECTRICAL WIRE**



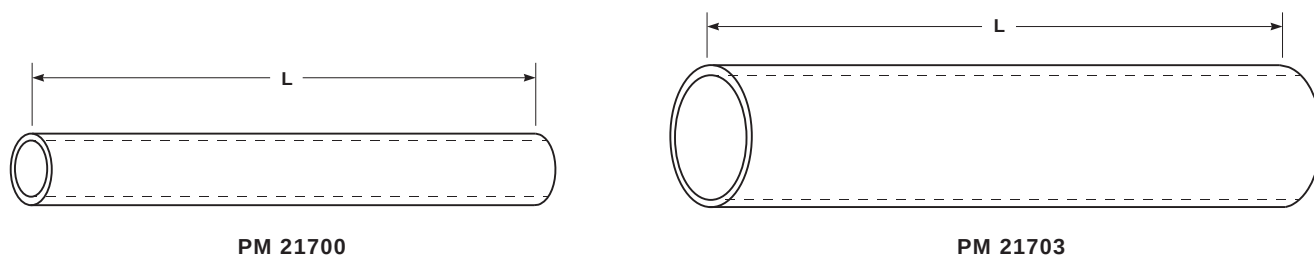

| PART NUMBER AND DESCRIPTION                                   | L LENGTH   | MAKE FROM      | NSN              |
|---------------------------------------------------------------|------------|----------------|------------------|
| PM21700 - CLEAR TUBING, 3/8 IN. ID, MIL-I-7444, TY 1, CL 1    | 8.0        | M23053/1-207-0 | 5970-01-085-2844 |
| PM27103 - CLEAR TUBING, 3/4 IN. ID, 3002 TRANSFLEX, MIL-I-631 | 40.5 ± 0.5 | M23053/8-011-C | 5970-01-079-1999 |


## NOTES

1. MAKE TUBING PER CHART.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: PM21700, PM21703

FO0978  
SA

FIGURE H-7. TUBING

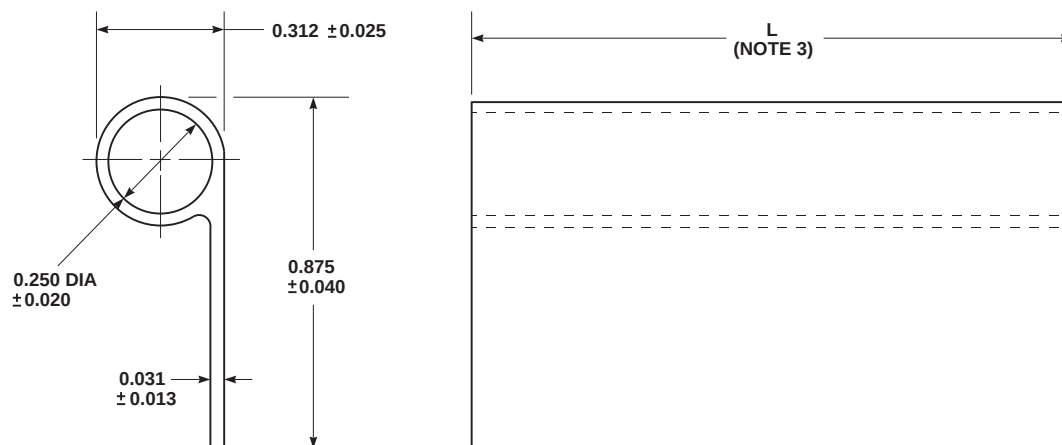

| PART NUMBER | L LENGTH | SIKORSKY<br>PART NUMBER |
|-------------|----------|-------------------------|
| SS2942-2    | 2.00     | —                       |
| SS2942-3    | 3.00     | —                       |
| SS2942-4.75 | 4.75     | —                       |
| SS2942-15   | 15.00    | 70302-02142-104         |
| SS2942-15   | 15.00    | 70302-02142-108         |
| SS2942-35** | 35.00    | 70216-02401-107         |
| SS2942-38** | 38.00    | 70216-02402-124         |

\*\*ALTERNATE PART.

#### NOTES


1. MAKE FROM FORMED NEOPRENE, SEAL STOCK, SS2942, MIL-R-6855, CLASS 2, GRADE 60, NSN5330-01-136-1781.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. DASH NUMBER IN SEAL PART NUMBER DESIGNATES LENGTH OF SEAL IN INCHES.
4. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GREEN INK, TT-I-1795. USE 1/16 - 1/8 INCH HIGH SANS SERIF CHARACTERS.

EXAMPLE: P / N 70216-02401-107      3Q 86  
PART NUMBER      THIRD QUARTER 1986

PART NUMBER: SS2942-2, -3, -4.75, -15, -35, -38  
70216-02401-107, -124  
70302-02142-104, -108

FO0977  
SA

FIGURE H-8. SEAL

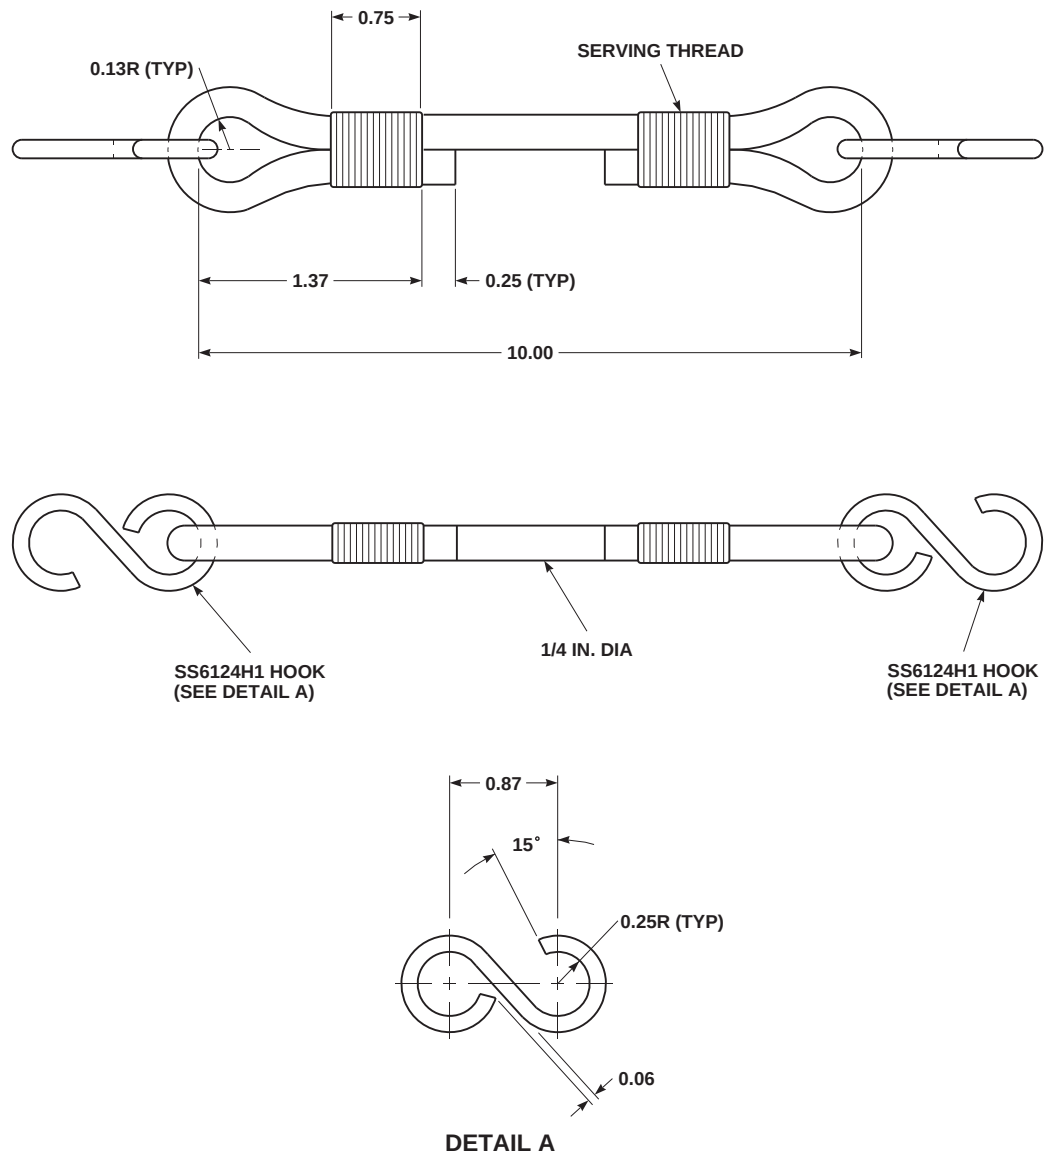


#### NOTES

1. MAKE FROM:
  - A. CORD - 1/4-INCH-DIAMETER SHOCK ABSORBING, MIL-C-5651, NSN 8305-00-276-7575.
  - B. HOOK - 0.125-INCH-DIAMETER PASSIVATED CRES STEEL ROD, 302 COND. B, QQ-W-423, NSN 9505-00-684-0972.
  - C. THREAD - MIL-T-5660, TYPE II, STYLE A, NSN 8310-00-194-4065.
2. FABRICATE HOOKS AS SHOWN IN DETAIL A OF FIGURE.
3. CUT CORD TO REQUIRED LENGTH AND ASSEMBLE HOOKS. WRAP SERVING THREAD PER FIGURE.
4. COAT FINISHED SERVING THREAD WITH CLEAR SHELLAC, A-A-8, NSN 8010-00-160-6911.
5. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
6. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: SS6124-09-100

FO0288A  
SA

FIGURE H-9. CORD ASSEMBLY

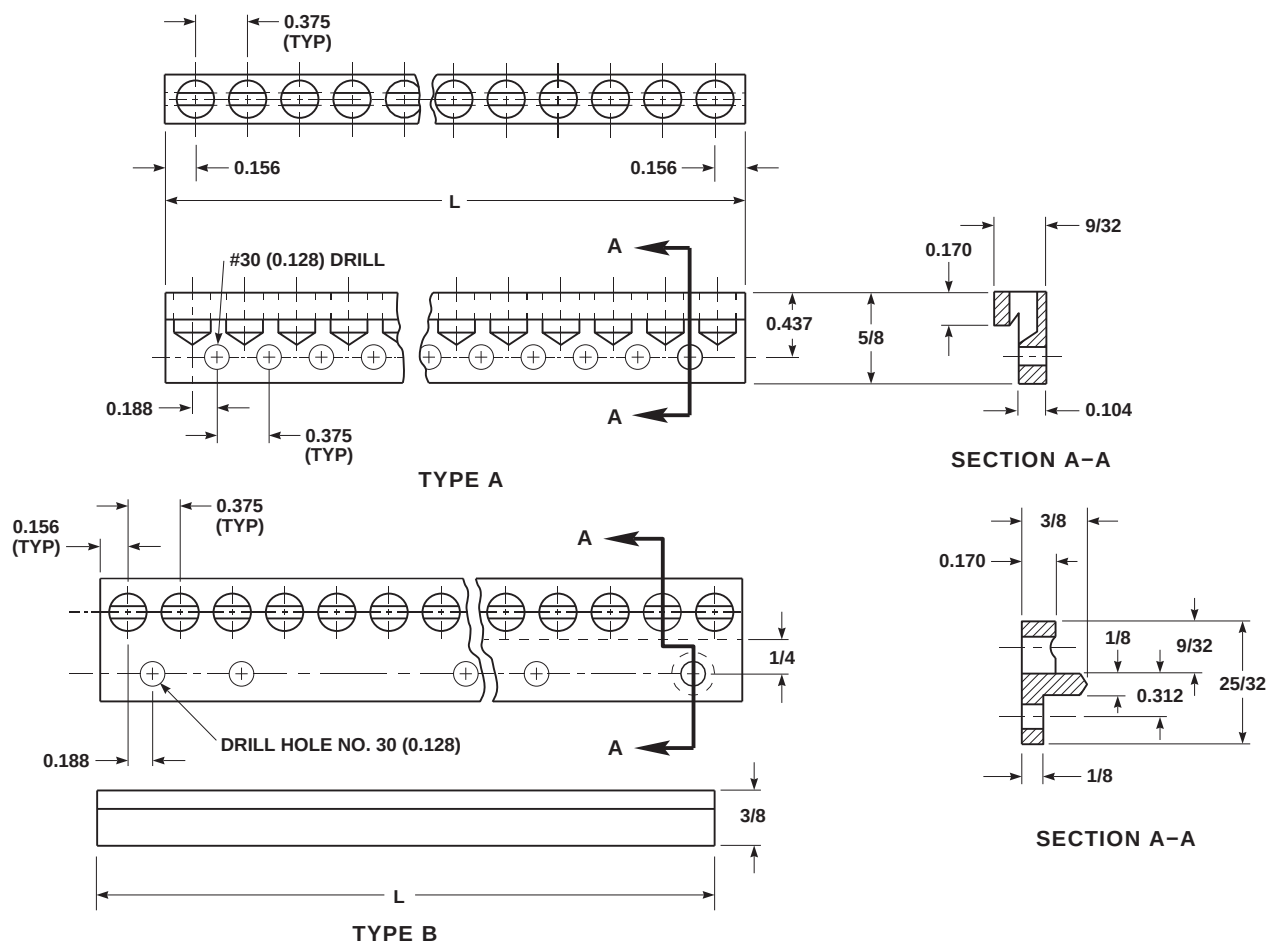

| PART NUMBER | NUMBER OF HOLES | L LENGTH | MAKE FROM NSN    |
|-------------|-----------------|----------|------------------|
| SS7001-7A   | 9               | 3.312    | 5325-00-036-9305 |
| SS7001-61C  | 63              | 23.562   | 5325-00-036-9305 |
| SS7001-15B  | 17              | 6.312    | 5325-00-036-9306 |
| SS7001-21B  | 23              | 8.562    | 5325-00-036-9306 |
| SS7001-24B  | 26              | 9.687    | 5325-00-036-9306 |

EXAMPLE: SS7001-7A - ANGLE TYPE STRIP 3.312 IN. LONG, WITH PROVISIONS FOR NINE FASTENERS.

EXAMPLE: SS7001-15B - FLAT TYPE STRIP 6.312 IN. LONG, WITH PROVISIONS FOR SEVENTEEN FASTENERS.

#### NOTES



1. MAKE FROM STRIP PANEL STOCK, 6061-T6 ALUMINUM ALLOY, QQ-A-200 / 8 PER CHART.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. DASH NUMBER DESIGNATES NUMBER OF FASTENER CONNECTION HOLES (CHART).
4. LETTER A IN DASH NUMBER DESIGNATES ANGLE TYPE STRIP. LETTER B IN DASH NUMBER DESIGNATES FLAT TYPE STRIP.
5. CUT STRIP TO REQUIRED LENGTH (CHART) AND FINISH ENDS AS SHOWN.
6. TREAT CUT EDGES WITH CORROSION RESISTANT COATING (ALODINE 1200S), ITEM 118, APPENDIX D.
7. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: SS7001-7A, -61C, -15B, -21B, -24B

FO0976B  
SA

FIGURE H-10. PANEL FASTENER STRIP



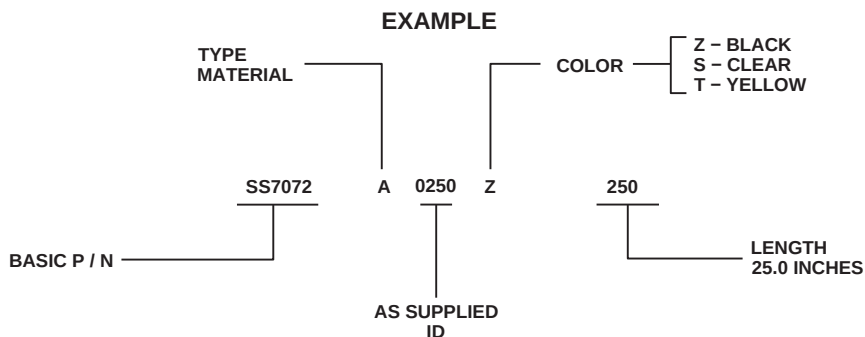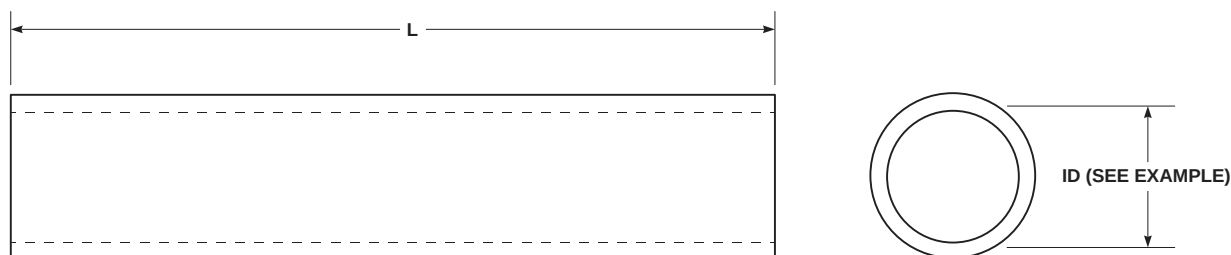

| PART NUMBER       | L LENGTH | PART NUMBER      | MAKE FROM NSN    |
|-------------------|----------|------------------|------------------|
| SS7072A0187ZXXX** |          | M23053 / 5-105-0 | 5970-00-954-1622 |
| SS7072A0250Z180   | 18.0     | M23053 / 5-106-0 | 5970-00-815-1295 |
| SS7072A0250Z250   | 25.0     | M23053 / 5-106-0 | 5970-00-815-1295 |
| SS7072A0375ZXXX** |          | M23053 / 5-107-0 | 5970-00-954-1624 |
| SS7072A0375Z050   | 5.0      | M23053 / 5-107-0 | 5970-00-954-1624 |
| SS7072A0500Z010   | 1.0      | M23053 / 5-108-0 | 5970-00-812-2967 |
| SS7072A0500Z150   | 15.0     | M23053 / 5-108-0 | 5970-00-812-2967 |
| SS7072A0500Z350   | 35.0     | M23053 / 5-108-0 | 5970-00-812-2967 |
| SS7072A0750ZXXX** |          | M23053 / 5-109-0 | 5970-00-914-3118 |
| SS7072A0750Z014   | 1.4      | M23053 / 5-109-0 | 5970-00-914-3118 |
| SS7072A0750Z021   | 2.1      | M23053 / 5-109-0 | 5970-00-914-3118 |
| SS7072A0750Z022   | 2.2      | M23053 / 5-109-0 | 5970-00-914-3118 |
| SS7072A0750Z028   | 2.8      | M23053 / 5-109-0 | 5970-00-914-3118 |
| SS7072A0750Z029   | 2.9      | M23053 / 5-109-0 | 5970-00-914-3118 |
| SS7072A0750Z030   | 3.0      | M23053 / 5-109-0 | 5970-00-914-3118 |
| SS7072A0750Z045   | 4.5      | M23053 / 5-109-0 | 5970-00-914-3118 |
| SS7072A0750Z053   | 5.3      | M23053 / 5-109-0 | 5970-00-914-3118 |
| SS7072A0750Z055   | 5.5      | M23053 / 5-109-0 | 5970-00-914-3118 |
| SS7072A0750Z063   | 6.3      | M23053 / 5-109-0 | 5970-00-914-3118 |
| SS7072A0750Z073   | 7.3      | M23053 / 5-109-0 | 5970-00-914-3118 |
| SS7072A0750Z098   | 9.8      | M23053 / 5-109-0 | 5970-00-914-3118 |
| SS7072A0750Z860   | 86.0     | M23053 / 5-109-0 | 5970-00-914-3118 |
| SS7072A1000Z012   | 1.2      | M23053 / 5-110-0 | 5970-00-815-1300 |
| SS7072A1000Z023   | 2.3      | M23053 / 5-110-0 | 5970-00-815-1300 |

**NOTES**

1. MAKE SLEEVING PER CHART.
2. IDENTIFY PARTS PER MIL-STD-130.
3. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.

PART NUMBER: SEE CHART

FN2091\_1  
SA**FIGURE H-11. INSULATION SLEEVE (SHEET 1 OF 2)**



| PART NUMBER       | L LENGTH | PART NUMBER       | MAKE FROM NSN    |
|-------------------|----------|-------------------|------------------|
| SS7072B0125S015   | 1.5      | M23053 / 8-004-C  | 5970-00-905-2068 |
| SS7072B0187S015   | 1.5      | +M23053 / 8-005-C | 5970-00-761-1795 |
| SS7072B0250S015   | 1.5      | M23053 / 8-006-C  | 5970-00-935-0082 |
| SS7072E0250Z720   | 72.0     | M23053 / 1-101-0  | 5970-00-063-1500 |
| SS7072E0375Z600   | 60.0     | M23053 / 1-102-0  | 5970-00-063-1499 |
| SS7072E0375Z720   | 72.0     | M23053 / 1-102-0  | 5970-00-063-1499 |
| SS7072E0500T600   | 60.0     | +M23053 / 1-103-0 | 5970-00-063-1495 |
| SS7072E0500Z008   | 0.8      | M23053 / 1-103-0  | 5970-00-063-1495 |
| SS7072E0500Z480   | 48.0     | M23053 / 1-103-0  | 5970-00-063-1495 |
| SS7072E0625ZXXX** |          | M23053 / 1-104-0  | 5970-01-044-4531 |
| SS7072E0625Z260   | 26.0     | M23053 / 1-104-0  | 5970-01-044-4531 |
| SS7072E0625Z300   | 30.0     | M23053 / 1-104-0  | 5970-01-044-4531 |
| SS7072E0625Z360   | 36.0     | M23053 / 1-104-0  | 5970-01-044-4531 |
| SS7072E0750Z720   | 72.0     | M23053 / 1-105-0  | 5970-00-063-1496 |
| SS7072E1000T500   | 50.0     | +M23053 / 1-107-0 | 5970-01-044-4532 |
| SS7072E1000T570   | 57.0     | +M23053 / 1-107-0 | 5970-01-044-4532 |
| SS7072E1000ZXXX** |          | M23053 / 1-107-0  | 5970-01-044-4532 |
| SS7072G02500020   | 2.0      | M23053 / 1-101-0  | 5970-00-063-1500 |
| SS7072L0125Z015   | 1.5      | M23053 / 4-101-0  | 5970-01-057-0992 |

\*\* LENGTH IS GREATER THAN 99.9 INCHES. DETERMINE LENGTH ON INSTALLATION.

+ ACCEPTABLE COLOR ALTERNATE.

FN2091\_2  
SA

**FIGURE H-11. INSULATION SLEEVE (SHEET 2 OF 2)**

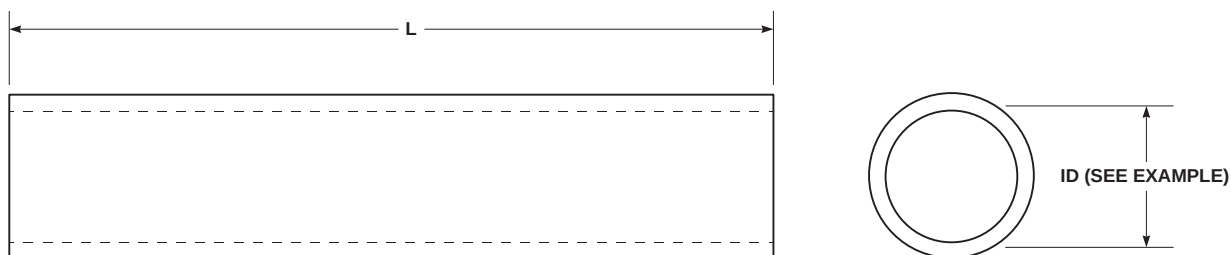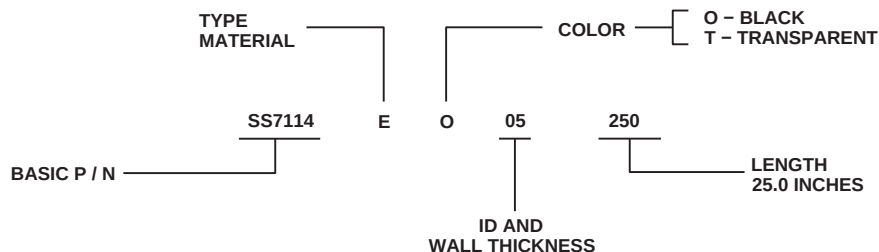**EXAMPLE****CHART A**

| CODE | INSIDE DIA | WALL THICK |       |       |
|------|------------|------------|-------|-------|
|      | MIN        | MAX        | MIN   | MAX   |
| 05   | 0.182      | 0.198      | 0.017 | 0.023 |
| 08   | 0.129      | 0.141      | 0.017 | 0.023 |
| A    | 0.313      | 0.334      | 0.022 | 0.028 |
| B    | 0.375      | 0.399      | 0.022 | 0.028 |
| C    | 0.438      | 0.462      | 0.022 | 0.028 |
| D    | 0.500      | 0.524      | 0.022 | 0.028 |
| G    | 0.875      | 0.911      | 0.030 | 0.040 |

**CHART B**


| PART NUMBER     | L LENGTH | MAKE FROM                            | NSN              |
|-----------------|----------|--------------------------------------|------------------|
| SS7114E005-0250 | 25.0     | TEMFLEX 105C (75037)                 | 5970-00-845-4910 |
| SS7114E005-0300 | 30.0     | TEMFLEX 105C (75037)                 | 5970-00-845-4910 |
| SS7114ETA-0720  | 72.0     | TEMFLEX 105C 6 AW 0 CLEAR (75037)    | 5970-00-189-5850 |
| SS7114ETB-0600  | 60.0     | TEMFLEX 105C 3/8 INCH CLEAR (75037)  | 5970-00-889-3844 |
| SS7114ETC-0480  | 48.0     | TEMFLEX 105C 7/16 INCH CLEAR (75037) | 5970-00-990-9142 |
| SS7114ETC-0840  | 84.0     | TEMFLEX 105C 7/16 INCH CLEAR (75037) | 5970-00-990-9142 |
| SS7114ETD-0565  | 56.5     | TEMFLEX 105C 1/2 INCH CLEAR (75037)  | 5970-00-685-9057 |
| SS7114ETG-0840  | 84.0     | TEMFLEX 105C 7/8 INCH CLEAR (75037)  | 5970-00-958-6760 |
| SS7114ET05-0840 | 84.0     | TEMFLEX 105C AW 6 CLEAR (75037)      | 5970-00-078-5977 |
| SS7114ET08-1610 | 161.0    | 8034668-145 (18876)                  | 5970-00-553-7120 |

**NOTES**

1. MAKE TUBING PER CHART B.
2. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: SEE CHART B

FN2092  
SA**FIGURE H-12. INSULATION TUBING**

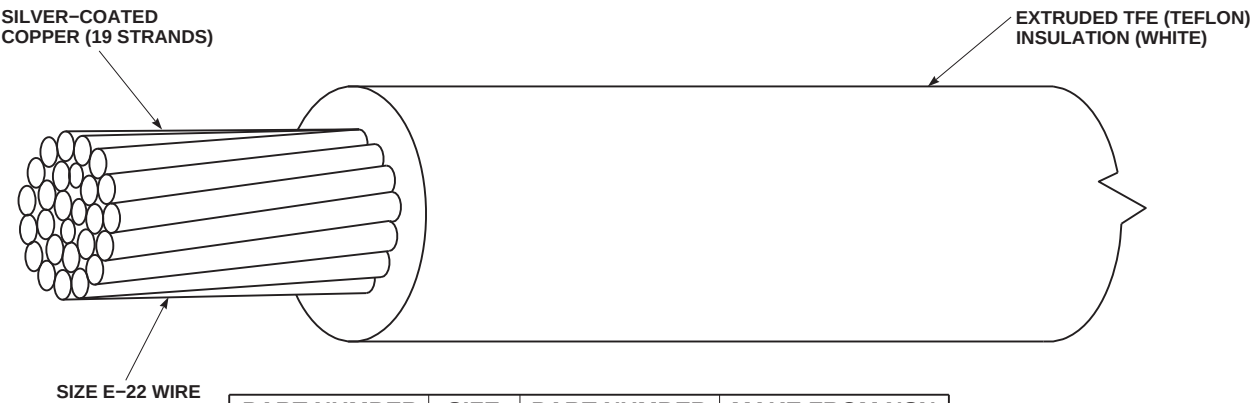

| PART NUMBER | SIZE | PART NUMBER                         | MAKE FROM NSN    |
|-------------|------|-------------------------------------|------------------|
| SS7311-22-9 | E-22 | M22759 / 11-229<br>M22759 / 11-16-9 | 6145-01-080-8298 |
| SS7311-16-9 | E-16 | M16878 / 4 BJE9                     | 6145-01-108-6907 |


NOTES

- 1. MAKE FROM TYPE E, SIZE (SEE CHART), SILVER-COATED COPPER WIRE WITH WHITE TFE INSULATION.
- 2. CUT WIRE TO REQUIRED LENGTH.
- 3. IDENTIFY PARTS PER MIL-STD-681.

PART NUMBER: SS7311-16-9  
SS7311-22-9

FN2093  
SA

FIGURE H-13. HIGH-TEMPERATURE ELECTRICAL WIRE

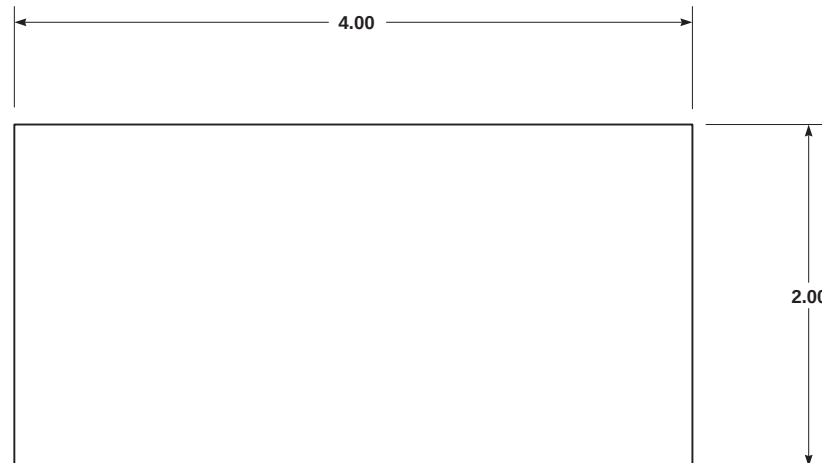
**NOTES**

1. MAKE FROM RUBBER SHEET, 0.032 INCH THICK, MIL-R-5847, CLASS I, GRADE 60, NSN 1560-01-096-5342.
2. IDENTIFY PARTS PER MIL-STD-190.

PART NUMBER: S6120-61188-016

FN2094  
SA

**FIGURE H-14. SEAL RETAINER STRIP**

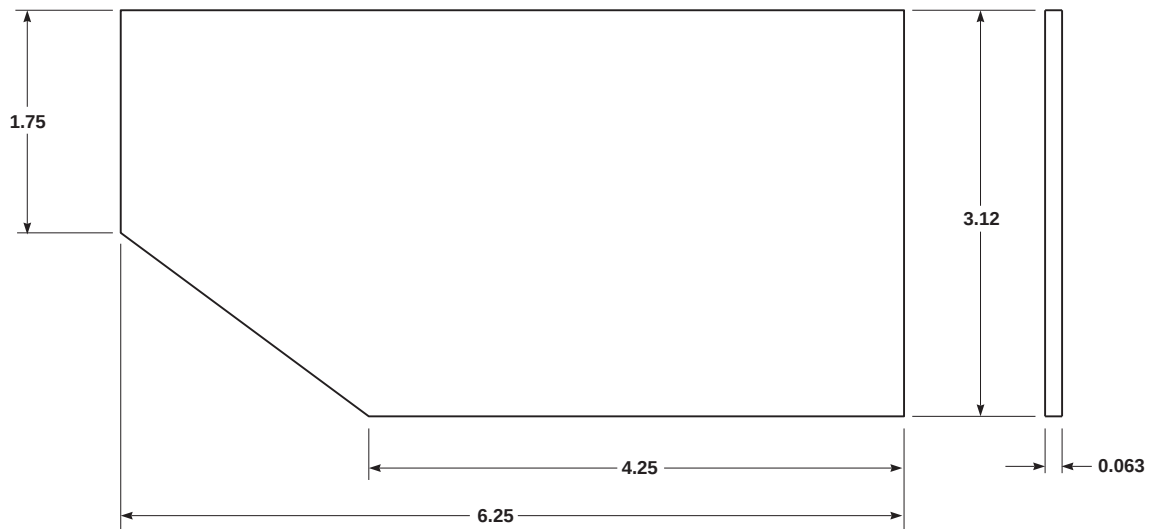


**NOTES**

1. MAKE FROM RUBBER SHEET, 0.063-INCH THICK, MIL-C-3133, GRADE SBE 11L, NSN 9320-00-580-6756.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70500-03050-165

FN2095  
SA

**FIGURE H-15. AFT BULKHEAD SEAL**

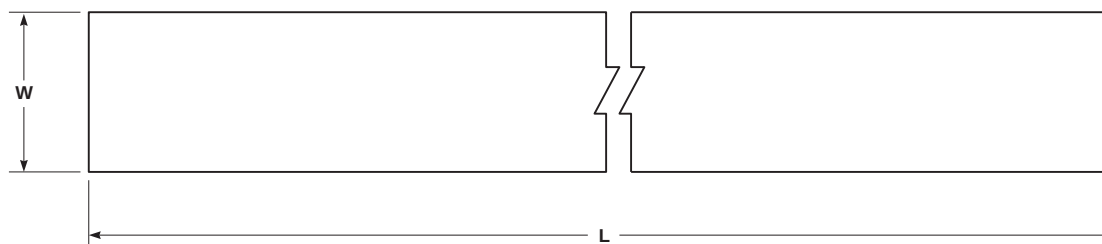

| NOMENCLATURE               | W WIDTH | L LENGTH | SIKORSKY<br>PART NUMBER |
|----------------------------|---------|----------|-------------------------|
| FLAP, CEILING CENTER PANEL | 1.19    | 3.90     | 70500-02061-121         |
|                            |         | 13.56    | 70500-02061-122         |
|                            |         | 6.36     | 70500-02061-123         |
| FLAP, CEILING CENTER PANEL | 1.50    | 15.59    | 70500-02062-124         |

#### NOTES

1. MAKE FROM VINYL-COATED NYLON, COLOR, AN 620 LIGHT GULL GRAY SPECIFICATION MIL-C-20696, TYPE I, CLASS 2, NSN 8305-00-205-1163.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70500-02061-121, -122, -123  
70500-02062-124

FN2096  
SA

**FIGURE H-16. CEILING CENTER PANEL FLAP**


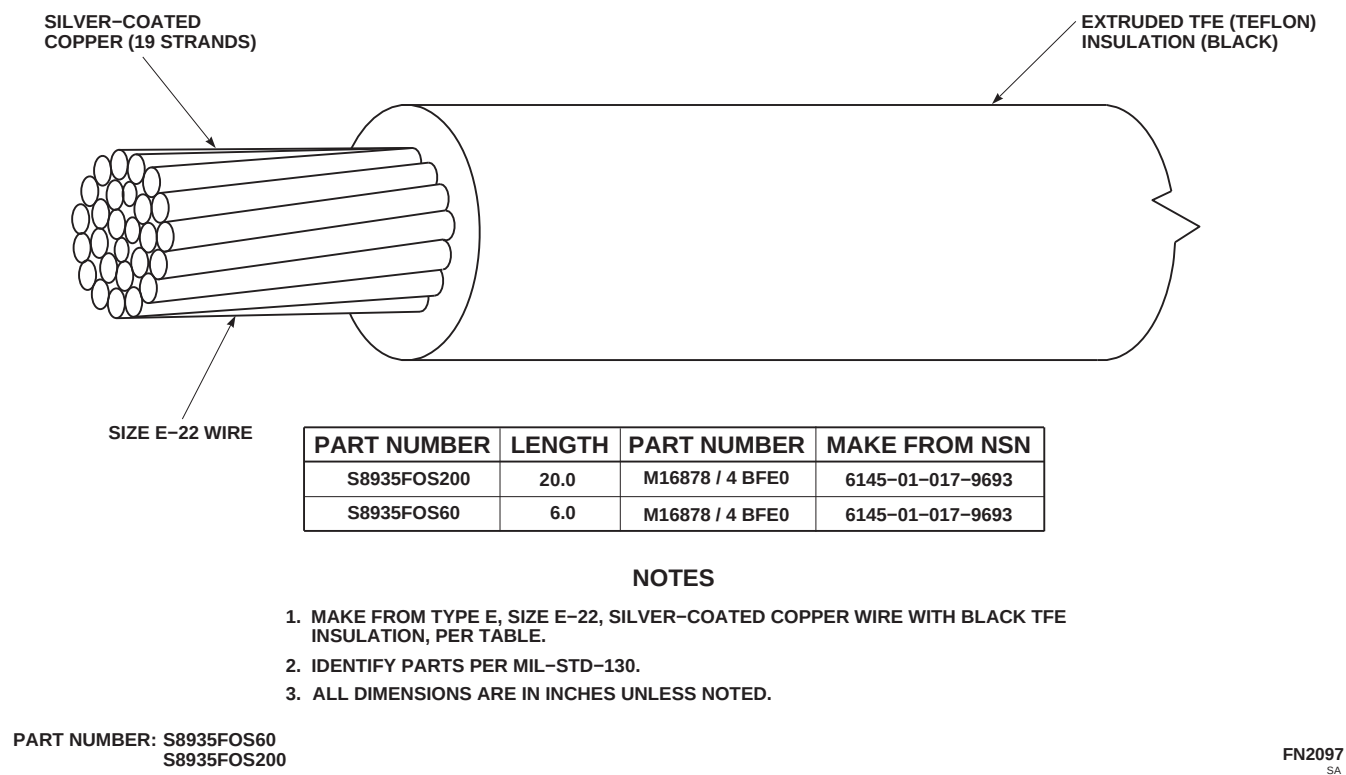


FIGURE H-17. HIGH-TEMPERATURE ELECTRICAL WIRE



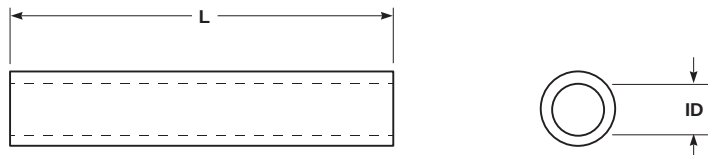

| PART NUMBER     | ID INSIDE DIAMETER | L LENGTH | PART NUMBER      | MAKE FROM NSN    |
|-----------------|--------------------|----------|------------------|------------------|
| S9352-8-9-100   | 0.250              | 1.00     | M23053 / 6-106-9 | 5970-01-147-3596 |
| S9352-10-9-600  | 0.187              | 6.00     | M23053 / 6-105-9 | 5970-00-067-9373 |
| S9352-10-9-2000 | 0.187              | 20.00    | M23053 / 6-105-9 | 5970-00-067-9373 |



#### NOTES

1. MAKE SLEEVE FROM WHITE, HEAT-SHRINKABLE, POLYOLEFHN TUBING, PER CHART.
2. IDENTIFY PARTS PER MIL-STD-130.
3. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.

PART NUMBER: S9352-8-9-100  
 S9352-10-9-600  
 S9352-10-9-2000

FN2098  
 SA

**FIGURE H-18. INSULATION**

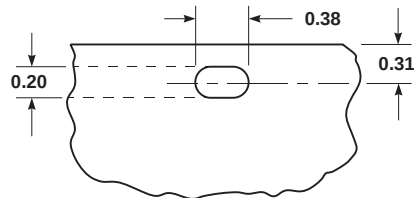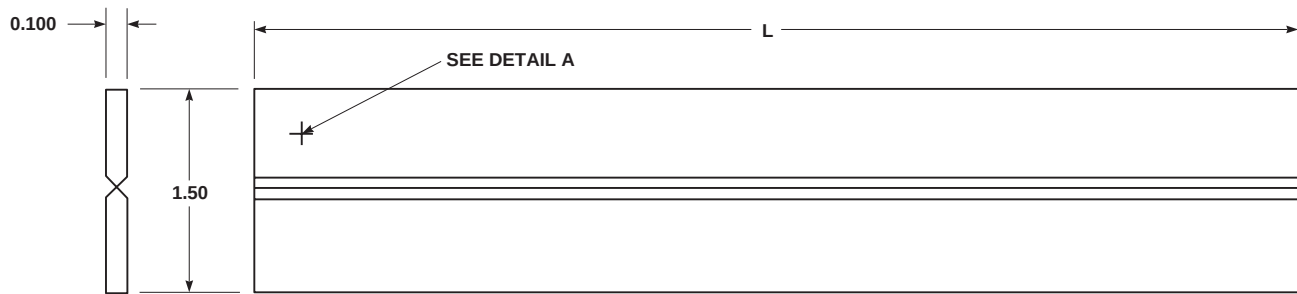

**DETAIL A**  
SLOTS (8 PLACES)  
FOR 70500-62062-107 ONLY

| PART NUMBER     | L LENGTH |
|-----------------|----------|
| 70500-02060-120 | 26.562   |
| 70500-02060-121 | 7.812    |
| 70500-02062-107 | 47.187   |
| 70500-02062-137 | 12.500   |
| 70500-02062-146 | 47.187   |
| 70500-02063-149 | 41.500   |
| 70500-02063-179 | 4.687    |
| 70500-02063-184 | 5.000    |
| 70500-02064-136 | 60.000   |


### NOTES

1. MAKE FROM GRAY THERMOPLASTIC POLYHINGE, NSN 9390-01-171-5986, PER CHART.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. IDENTIFY PARTS PER MIL-STD-130.
4. PICK UP FASTENER HOLE LOCATION ON INSTALLATION AND DRILL.

PART NUMBER: 70500-02060-121  
70500-02062-107, -137, -146  
70500-02063-149, -179, -184  
70500-02064-136

FO0289A  
SA

**FIGURE H-19. POLYHINGE**

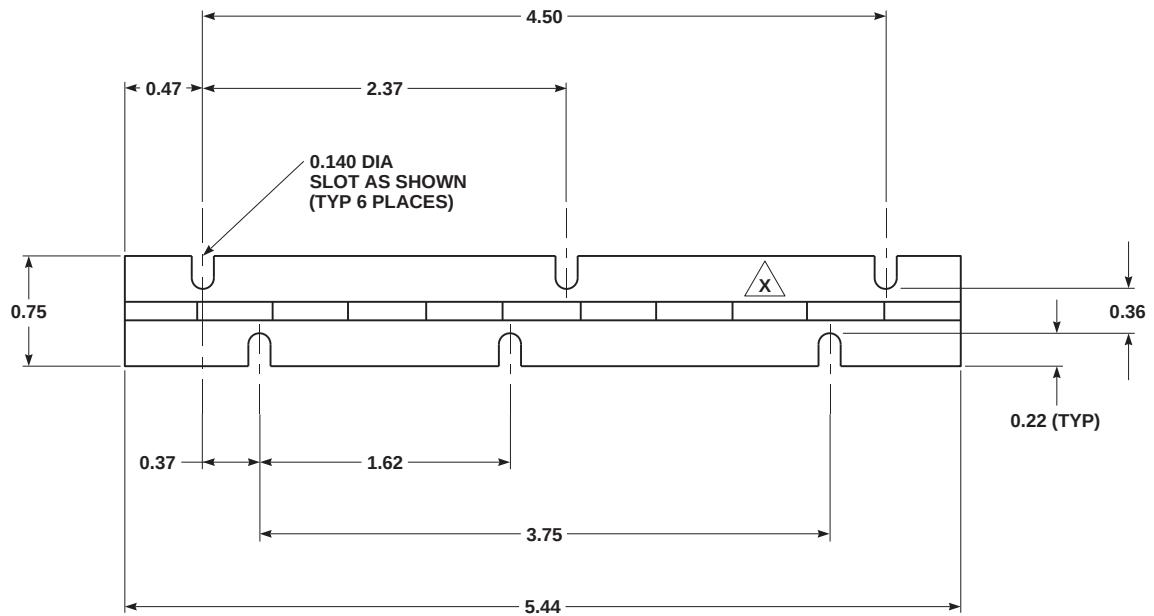


## NOTES

1. MAKE FROM UNANODIZED HINGE STOCK, MS20257-1, NSN 5340-00-057-2625.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. REMOVE ALL BURRS AND SHARP EDGES.
4. TREAT CUT EDGES WITH CORROSION RESISTANT COATING (ALODINE 1200S), ITEM 118, APPENDIX D.
5. IDENTIFY PARTS PER MIL-STD-130 IN LOCATION SHOWN BY +1d x +1d IN F / D.

PART NUMBER: 70700-20680-108

FN2099A  
SA


FIGURE H-20. TEST BOX ASSEMBLY HINGE

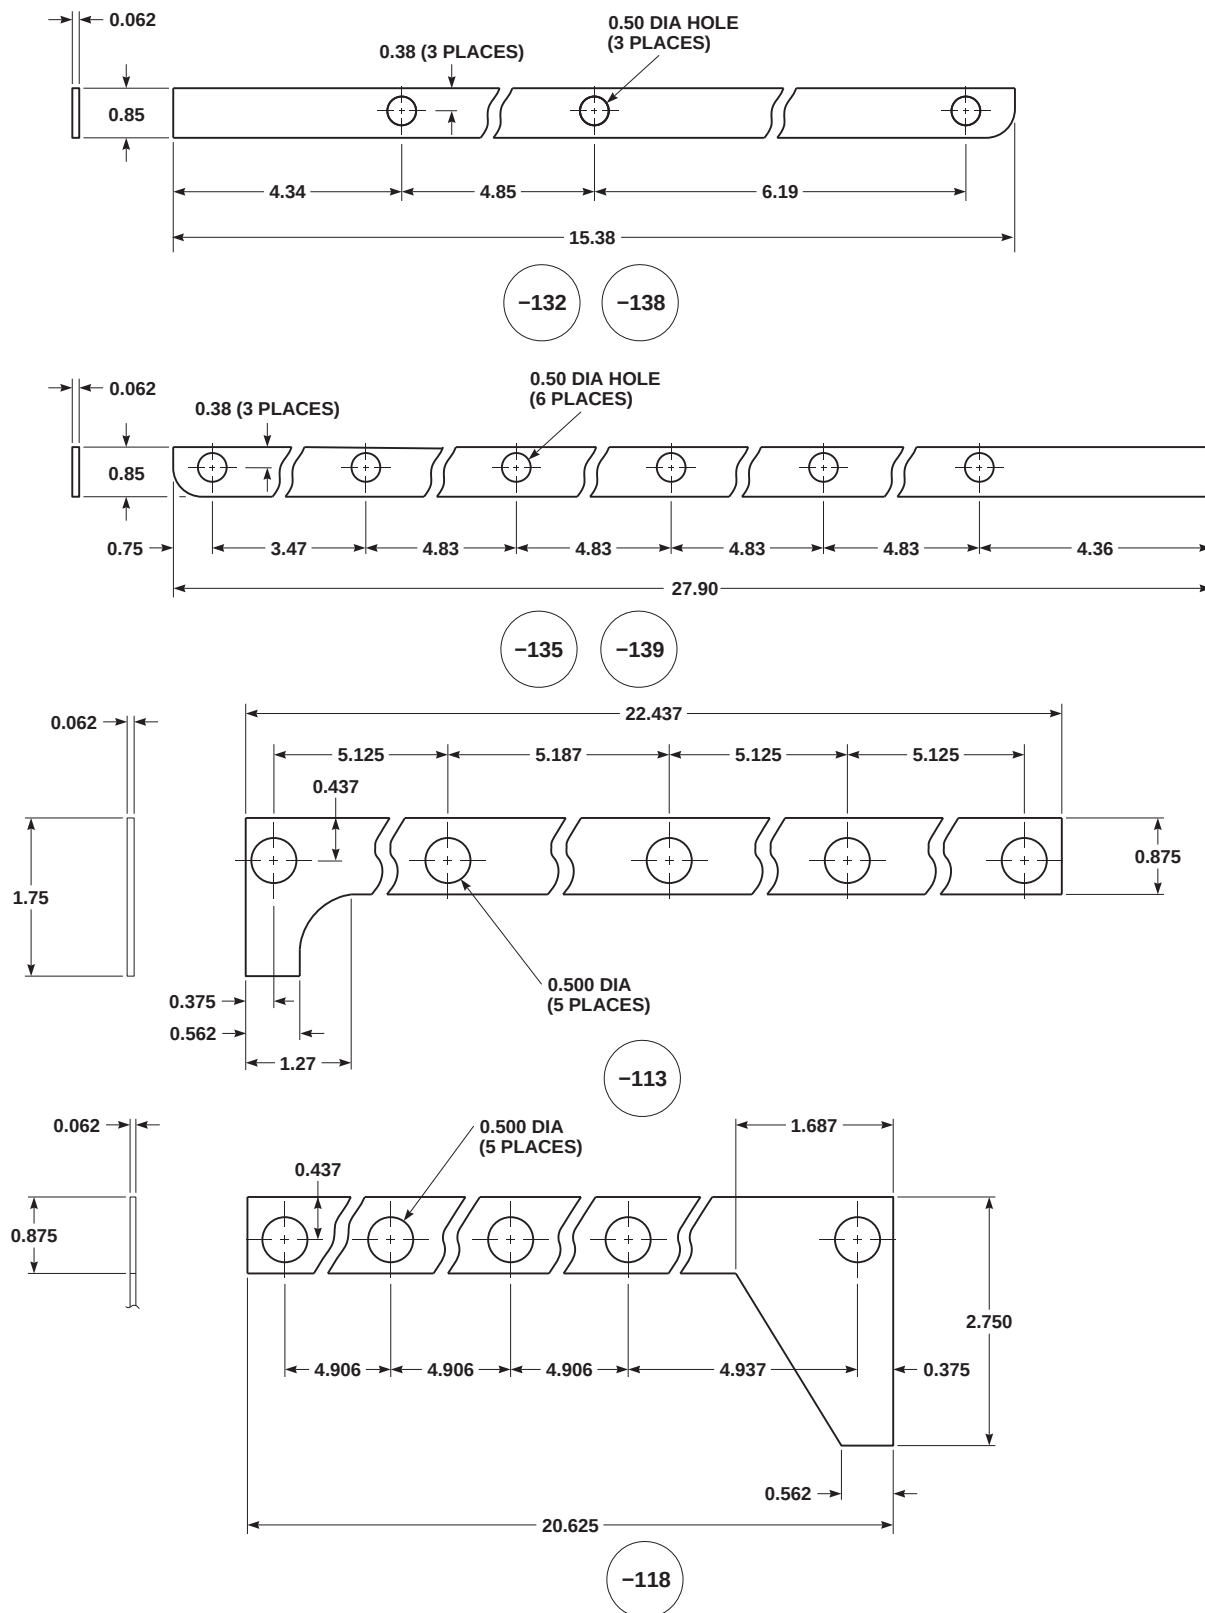

PART NUMBER: 70219-03002-113, -116, -117, -118, -132, -135, -138, -139

FB3618.1  
SA

FIGURE H-21. FUEL LINES AND PUMP ENCLOSURE SEAL (SHEET 1 OF 2)

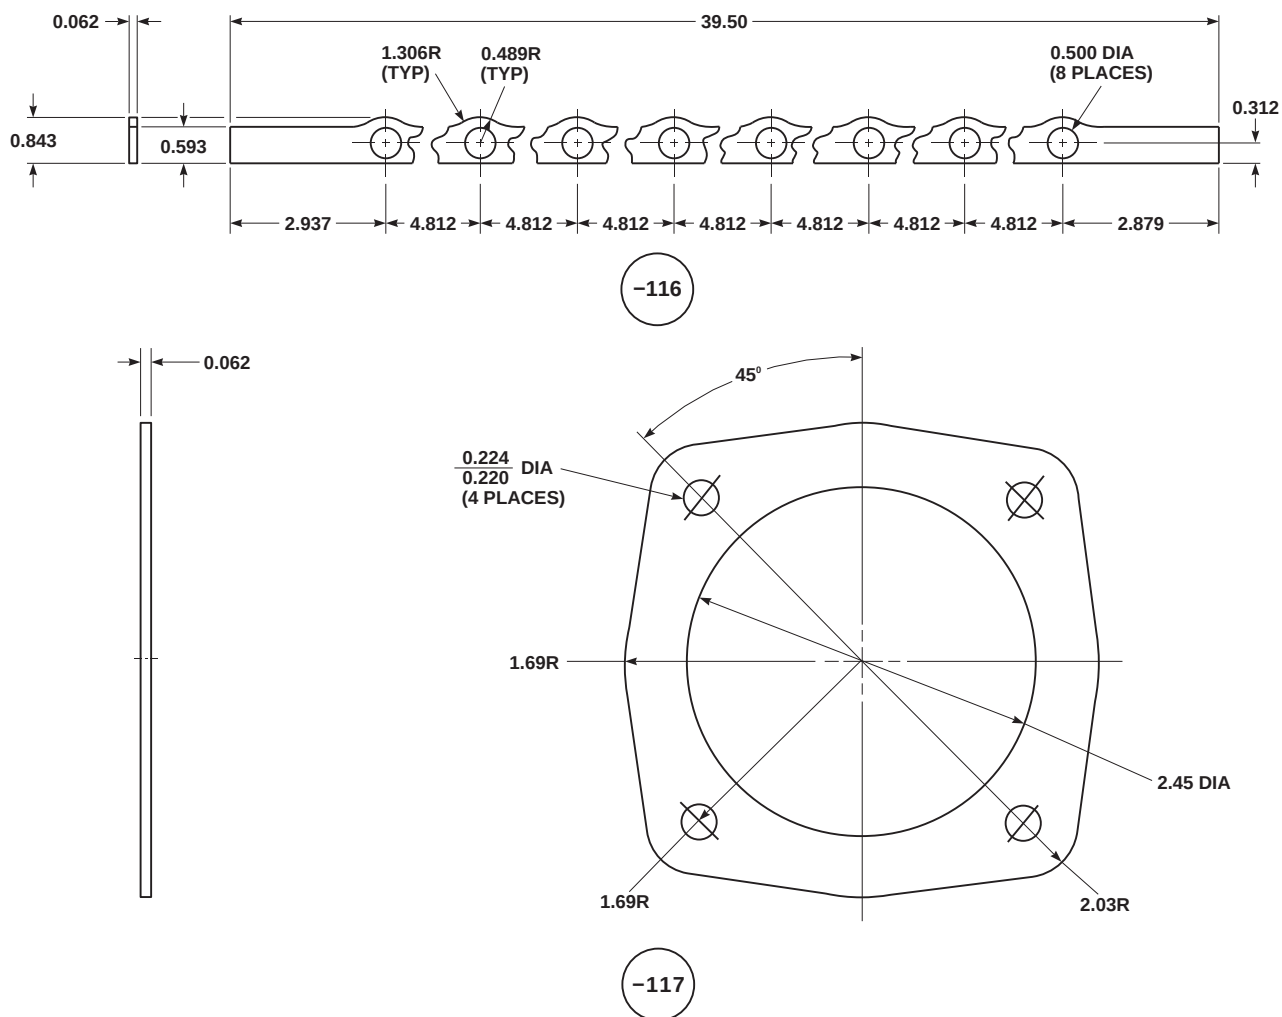

| NOMENCLATURE                        | SIKORSKY PART NUMBER |
|-------------------------------------|----------------------|
| FUEL LINES AND PUMP ENCLOSURE SEALS | 70219-03002-113      |
|                                     | 70219-03002-116      |
|                                     | 70219-03002-117      |
|                                     | 70219-03002-118      |
|                                     | 70219-03002-132      |
|                                     | 70219-03002-138      |
|                                     | 70219-03002-135      |
|                                     | 70219-03002-139      |

## NOTES


1. MAKE FROM SCE-7L, RUBBER SHEET, 0.062 INCH THICK, MIL-STD-670, NSN 9320-00-929-5316.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GREEN INK, TT-I-1795. USE 1/16 - 1/8 INCH HIGH SANS SERIF CHARACTERS.

EXAMPLE: P / N 70216-02401-107  
PART NUMBER

3Q 86  
THIRD QUARTER 1986

FB3618 2  
SA

FIGURE H-21. FUEL LINES AND PUMP ENCLOSURE SEAL (SHEET 2 OF 2)

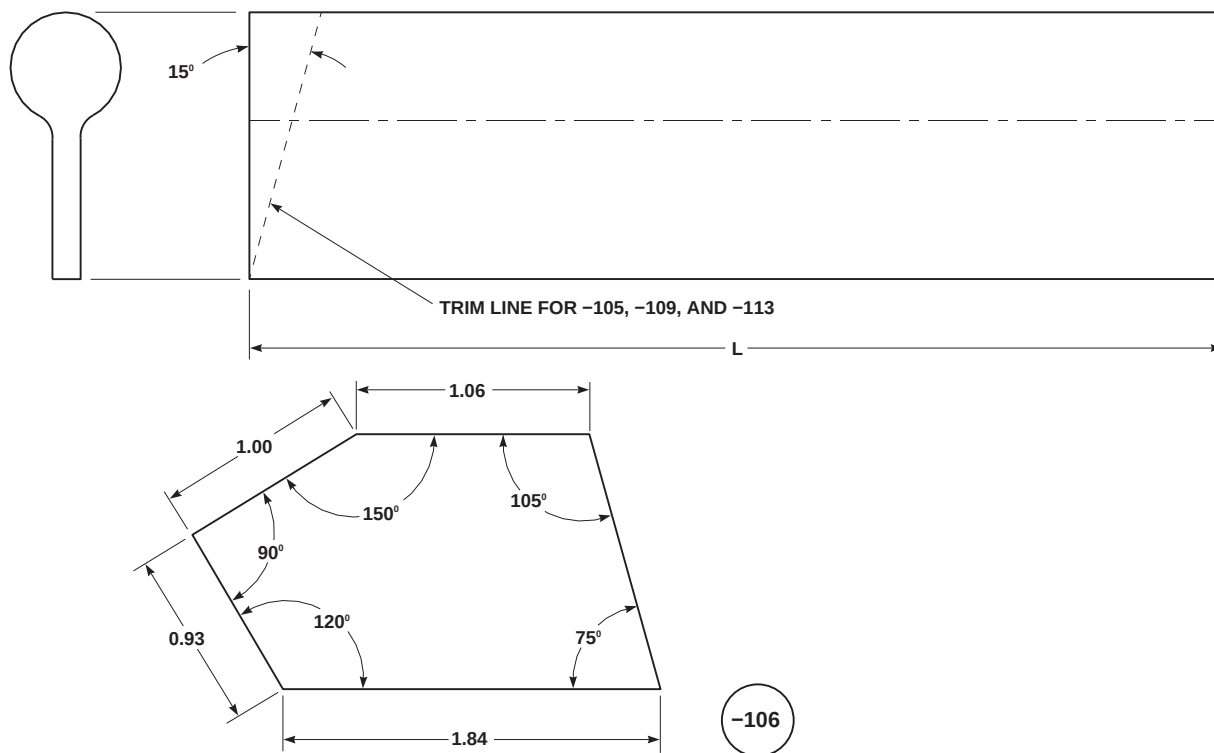

| NOMENCLATURE      | L LENGTH | SIKORSKY<br>PART NUMBER |
|-------------------|----------|-------------------------|
| APU FIREWALL SEAL | 17.53    | 70303-03023-105         |
| APU FIREWALL SEAL | AS SHOWN | 70303-03023-106         |
| APU FIREWALL SEAL | 18.12    | 70303-03023-109         |
| APU FIREWALL SEAL | 12.50    | 70303-03023-113         |


**NOTES**

1. MAKE FROM SEAL TAPE, STYLE JM150-13A, NSN 5330-00-849-7083.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. IDENTIFY PARTS PER MIL-STD-130.
4. TRIM SEALS AS REQUIRED TO BUTT JOIN WITH NO GAP.

PART NUMBER: 70303-03023-105, -106, -109, -113

FB3620  
SA

**FIGURE H-22. AUXILIARY POWER UNIT FIREWALL SEAL**

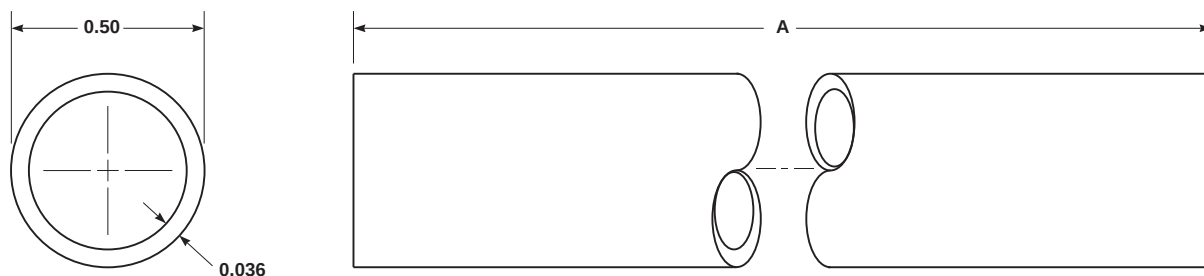

| NOMENCLATURE             | DIMENSION A | SIKORSKY<br>PART NUMBER |
|--------------------------|-------------|-------------------------|
| TAIL ROTOR CABLE CONDUIT | 95.00       | 70400-00510-101         |
|                          | 35.00       | 70400-00510-102         |


#### NOTES

1. MAKE FROM NYLON TUBING, L-P-410, TYPE LF, NSN 4720-01-008-9453.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70400-00510-101, -102

FB3621  
SA

**FIGURE H-23. TAIL ROTOR CABLE CONDUIT**

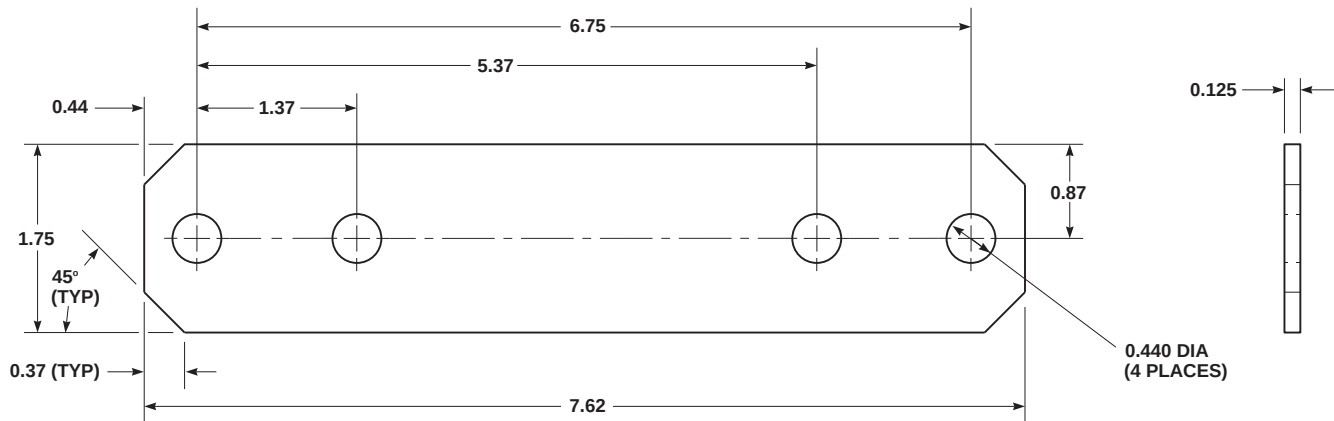

NOTES


1. MAKE FROM NYLON 6 / 6, L-P-410, NSN 9330-01-028-9334.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. PICK UP HOLES ON INSTALLATION.
4. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70700-20509-104

FB3622  
SA

FIGURE H-24. PLATE



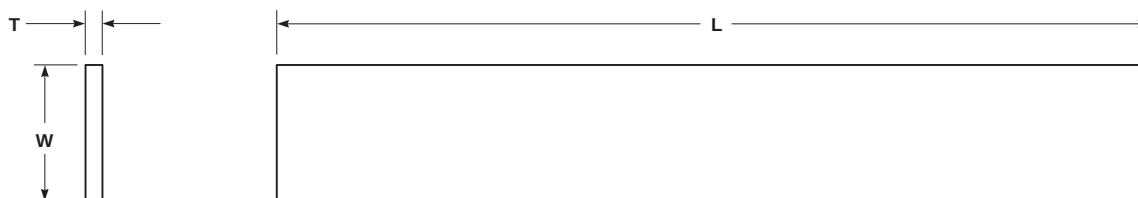

| NOMENCLATURE            | T THICKNESS | W WIDTH      | L LENGTH      | SIKORSKY<br>PART NUMBER                                                  |
|-------------------------|-------------|--------------|---------------|--------------------------------------------------------------------------|
| BATTERY BOX SEALS       | 0.062       | 0.32         | 21.50<br>8.67 | 70209-02532-102<br>70209-02532-103<br>70209-02532-104                    |
| ACCUMULATOR BRACKET     | 0.062       | 0.75         | 8.50          | 70209-03018-110<br>70209-03018-111<br>70209-03018-121<br>70209-03018-122 |
| CARGO HOOK ACCESS SEALS | 0.062       | 0.67<br>0.41 | 62.0<br>19.20 | 70214-02556-111<br>70214-02556-112<br>70214-02556-116                    |

## NOTES

1. MAKE FROM RUBBER, 0.062 INCH THICK, MIL-R-6855, CLASS II, TYPE B, GRADE 60, NSN 9320-01-157-9070.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GREEN INK, TT-I-1795. USE 1/16 - 1/8 INCH HIGH SANS SERIF CHARACTERS.


EXAMPLE: P / N 70216-02401-107                      3Q 86  
PART NUMBER                      THIRD QUARTER 1986

**PART NUMBER:** 70209-02532-102, -103, -104  
70209-03018-110, -111, -121, -122  
70214-02556-111, -112, -116

FB3623  
SA

**FIGURE H-25. SEALS - BATTERY, CARGO HOOK, ACCUMULATOR BRACKET**



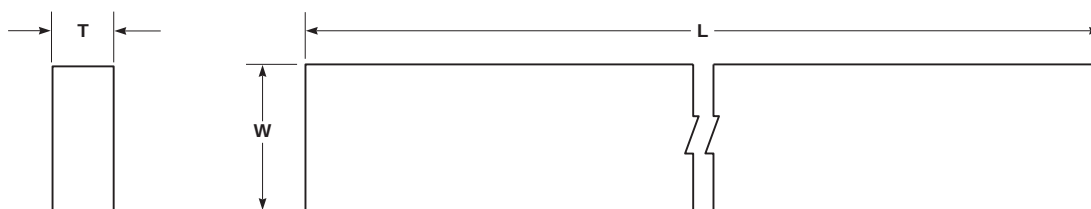

| NOMENCLATURE              | T THICKNESS | W WIDTH | L LENGTH | SIKORSKY<br>PART NUMBER |
|---------------------------|-------------|---------|----------|-------------------------|
| SUPPORT INSTALLATION SEAL | 0.375       | 0.75    | 6.86     | 70212-02137-145         |

## NOTES


1. MAKE FROM RUBBER, MIL-R-6130, TYPE 2, GRADE A, NSN 9320-00-108-6500.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GREEN INK, TT-I-1795. USE 1/16 - 1/8 INCH HIGH SANS SERIF CHARACTERS.

EXAMPLE: P / N 70216-02401-107      3Q 86  
PART NUMBER      THIRD QUARTER 1986

PART NUMBER: 70212-02137-145

FB3625  
SA

**FIGURE H-27. SUPPORT INSTALLATION SEAL**

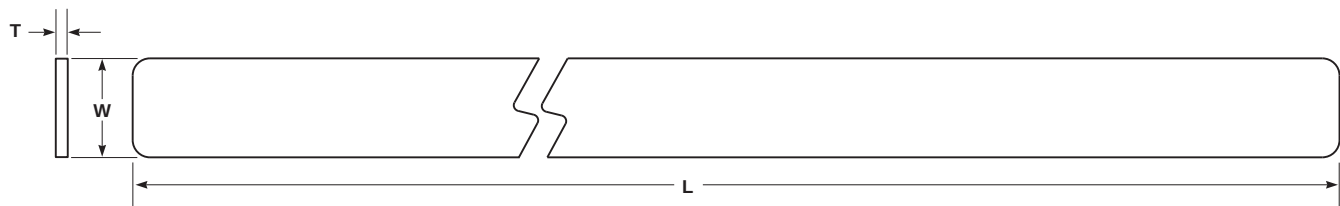

| NOMENCLATURE             | T THICKNESS | W WIDTH | L LENGTH | SIKORSKY<br>PART NUMBER |
|--------------------------|-------------|---------|----------|-------------------------|
| PYLON DOOR CHAFING STRIP | 0.062       | 0.84    | 14.53    | 70219-04500-102         |
|                          |             | 0.50    | 13.69    | 70219-04500-103         |
|                          |             | 0.75    | 22.50    | 70219-04500-104         |
|                          |             | 0.50    | 21.00    | 70219-04704-106         |
|                          |             | 0.71    | 37.00    | 70219-04704-107         |
|                          |             | 0.50    | 18.75    | 70219-04704-108         |
|                          |             | 0.50    | 16.87    | 70219-04704-111         |

NOTES


1. MAKE FROM GRADE SCE-11L RUBBER, 0.062 INCH THICK, MIL-C-3133, MIL-STD-670, NSN 9320-01-269-2863. ALTERNATE, RUBBER, 0.0625 INCH THICK, MIL-C-3133, MIL-STD-670, GRADE SBE-11L, NSN 9320-00-580-6756.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. TRIM TO FIT AS REQUIRED.
4. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GREEN INK, TT-I-1795. USE 1/16 - 1/8 INCH HIGH SANS SERIF CHARACTERS.

EXAMPLE: P / N 70216-02401-107                      3Q 86  
PART NUMBER                      THIRD QUARTER 1986

PART NUMBER: 70219-04500-102, -103, -104  
70219-04704-106, -107, -108, -111

FB3626  
SA

FIGURE H-28. PYLON DOOR CHAFING STRIP

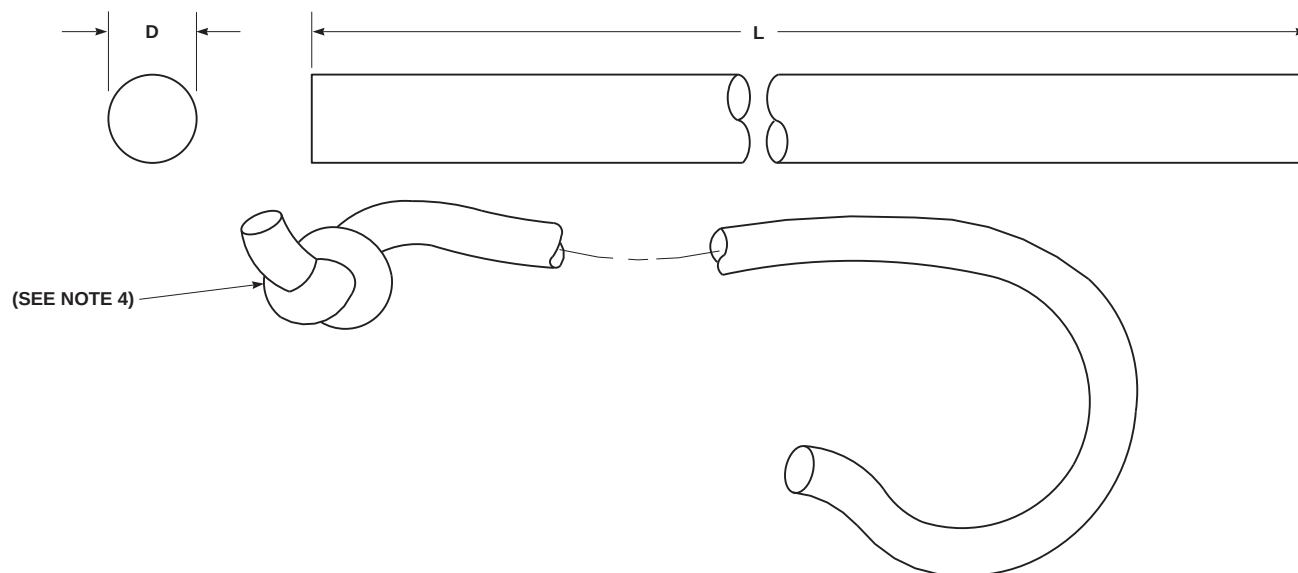

| NOMENCLATURE     | L LENGTH | D DIAMETER | SIKORSKY<br>PART NUMBER |
|------------------|----------|------------|-------------------------|
| ROPE PLUG HANDLE | 264.0    | 0.375      | 70700-20369-102         |
|                  | 108.0    |            | 70700-20507-104         |
|                  | 46.0     |            | 70700-20508-102         |
|                  | 31.0     |            | 70700-20509-103         |
|                  | 48.0     |            | 70700-20512-103         |
|                  | 36.0     |            | 70700-20512-106         |
|                  | 24.0     |            | 70700-20514-103         |
|                  | 48.0     |            | 70700-20515-102         |
|                  | 53.0     |            | 70700-20515-104         |


#### NOTES

1. MAKE FROM NYLON ROPE, MIL-R-17343, NSN 4020-00-641-8899.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. SINGLE ENDS TO PREVENT UNRAVELING.
4. INSTALL ROPE THROUGH 70700-20507-105 WASHER AND INLET PLUG. TIE AND HEAT-SEAL KNOT.
5. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70700-20369-102  
 70700-20507-104  
 70700-20508-102  
 70700-20509-103  
 70700-20512-103, -106  
 70700-20514-103  
 70700-20515-102, -104

FB3627  
SA

**FIGURE H-29. ROPE, PLUG HANDLE**

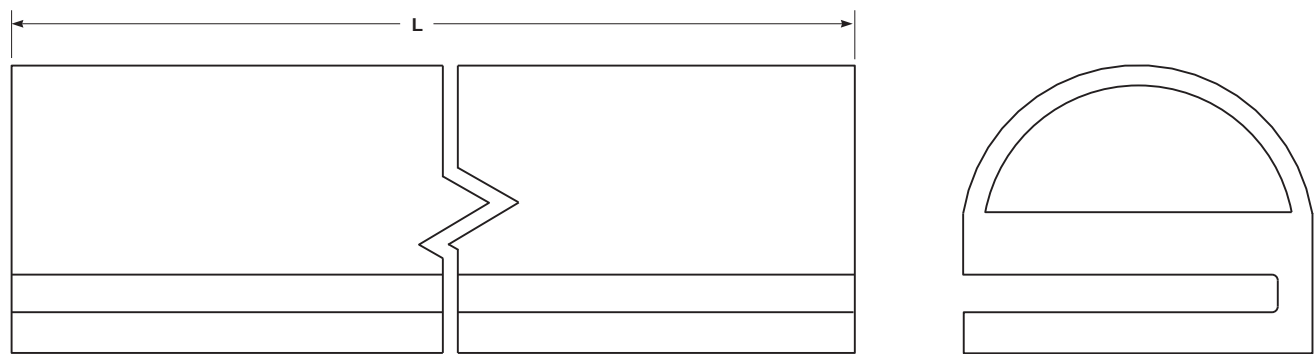

| NOMENCLATURE                 | L LENGTH | SIKORSKY<br>PART NUMBER |
|------------------------------|----------|-------------------------|
| CREW DOOR SEALS              | 189.00   | 76122-82279-003         |
| CREW CHIEF'S WINDOW<br>SEALS | 36.75    | 70216-02401-104         |
|                              | 36.75    | 70216-02402-110         |
|                              | 38.34    | 70216-02402-124         |
| CARGO DOOR,<br>WINDOW SEALS  | 106.00   | 70217-02701-101         |
|                              | 106.00   | 70217-02701-107         |
| MAIN ROTOR PYLON SEALS       | 36.00    | 70219-04200-135         |

NOTES


- 1. MAKE FROM RUBBER EXTRUSION, AMS 3240, S6122-82279-001, NSN 5330-00-938-7097.
- 2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
- 3. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GREEN INK, TT-I-1795. USE 1/16 - 1/8 INCH HIGH SANS SERIF CHARACTERS.

EXAMPLE: P / N 70216-02401-107      3Q 86  
PART NUMBER      THIRD QUARTER 1986

PART NUMBER: 70216-02401-104  
70216-02402-110, -124  
70217-02701-101, -107  
70219-04200-135  
76122-82279-003

FO0545B  
SA

FIGURE H-30. SEALS - COCKPIT DOOR, CREW CHIEF’S WINDOW, CABIN DOOR, AND RO-  
TOR PYLON

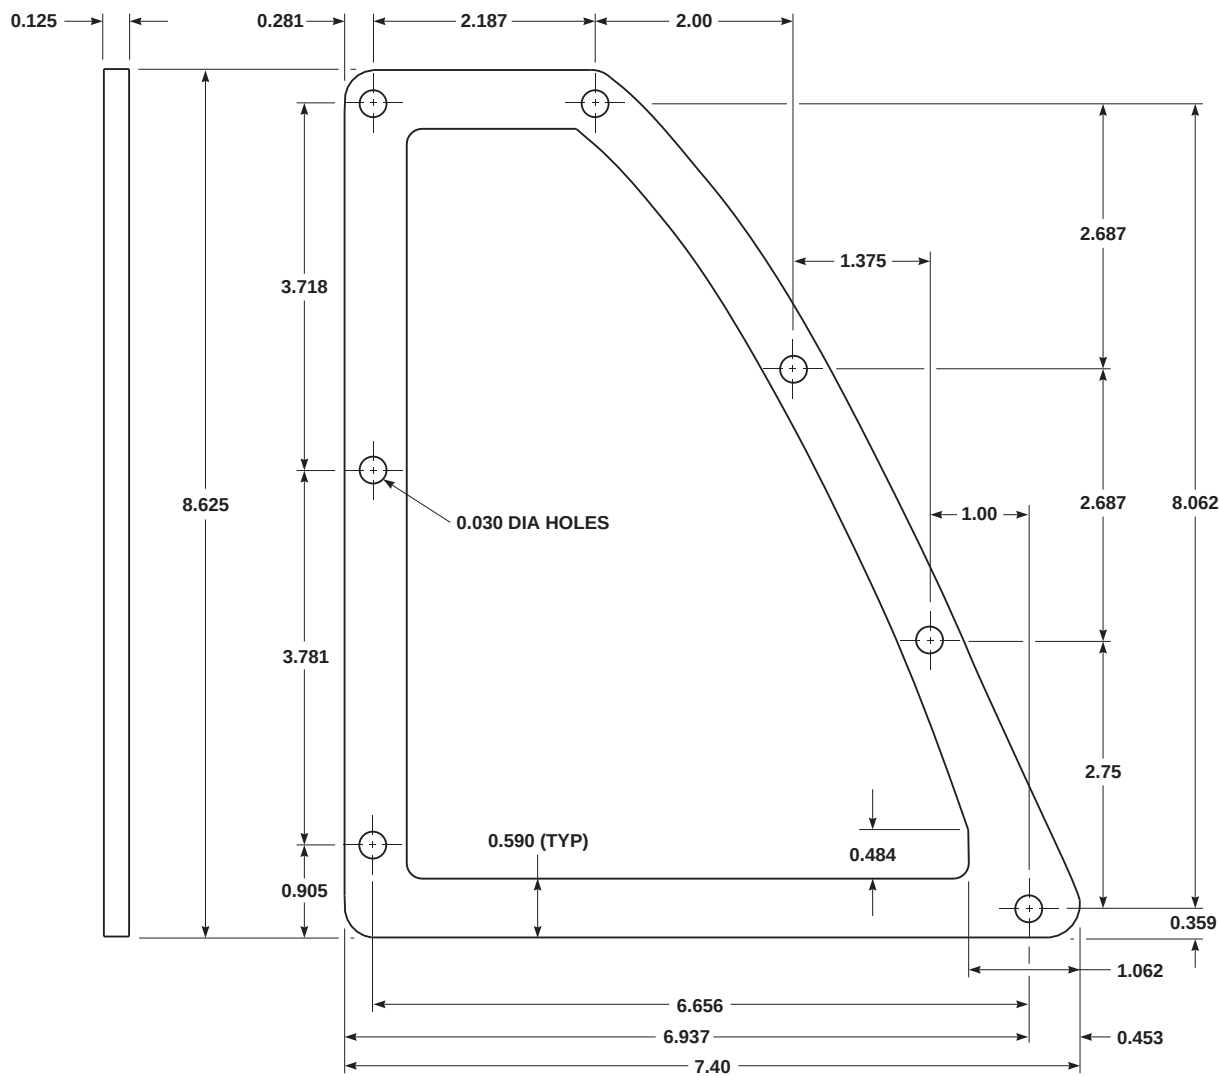

| NOMENCLATURE    | SIKORSKY<br>PART NUMBER |
|-----------------|-------------------------|
| CABIN DUCT SEAL | 70500-02057-102         |

## NOTES

1. MAKE FROM RUBBER, MIL-R-6855, TYPE A, CLASS 2, GRADE 40, 0.125 THICK, NSN 9320-00-241-9759.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GRAY INK, TT-I-1795. USE 1/16 - 1/8 INCH HIGH SANS SERIF CHARACTERS.

**EXAMPLE:**   P / N 70216-02401-107                      3Q 86  
                                  PART NUMBER                      THIRD QUARTER 1986


PART NUMBER: 70500-02057-102

AK1631  
SA

**FIGURE H-31. CABIN DUCT SEAL**

## Change 9

**H-63**

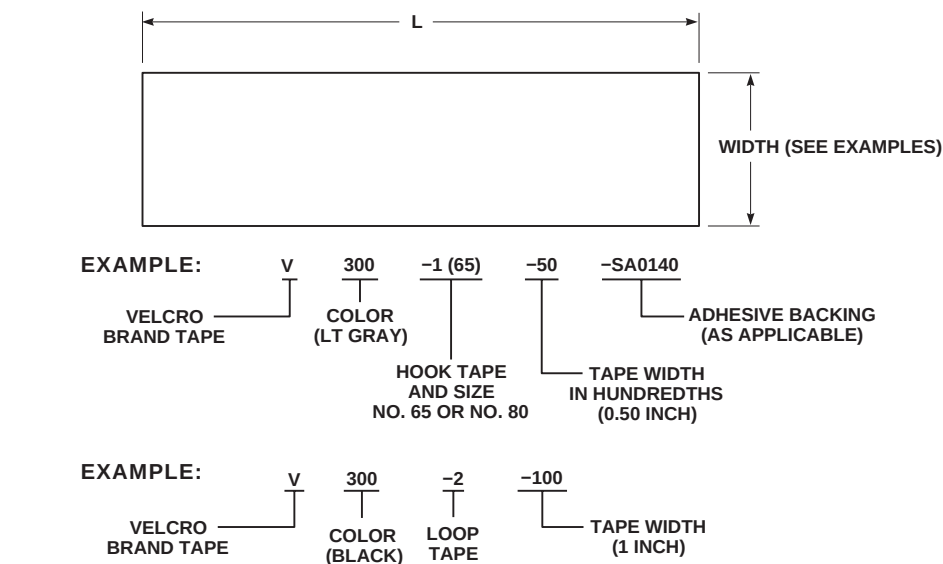

| PART NUMBER                 | L LENGTH | SIKORSKY<br>PART NUMBER | NSN              |
|-----------------------------|----------|-------------------------|------------------|
| V300-1(65)-50 (SEE NOTE 3)  | —        | —                       | 8315-00-168-3280 |
| V300-1(65)-63               | 43.68    | 70500-02053-119         | 8315-00-935-6762 |
|                             | 34.50    | 70500-02053-120         |                  |
|                             | 12.75    | 70500-02053-121         |                  |
|                             | 3.12     | 70500-02061-127         |                  |
|                             | 10.87    | 70500-02061-128         |                  |
|                             | 6.37     | 70500-02061-129         |                  |
|                             | 16.00    | 70500-02062-125         |                  |
| V300-1(65)-75               | —        | —                       | 8315-00-901-9717 |
| V300-1(65)-100              | —        | —                       | 8315-00-168-3280 |
| V300-1(65)-150 (SEE NOTE 4) | 0.81     | 70500-02063-124         | 8315-00-901-9717 |
|                             | 1.75     | 70500-02063-126         |                  |
|                             | 0.75     | 70500-02063-152         |                  |
|                             | 3.50     | 70500-02063-212         |                  |
|                             | 4.00     | 70500-02063-214         |                  |
|                             | 4.12     | 70500-02063-216         |                  |
|                             | 2.25     | 70500-02063-218         |                  |
|                             | 5.00     | 70500-02063-220         |                  |
|                             | 2.00     | 70500-02063-222         |                  |
|                             | 2.00     | 70500-02064-135         |                  |
|                             | 0.75     | 70500-02064-143         | 8315-00-935-6723 |
|                             | 5.00     | 70500-02064-212         |                  |
|                             | 5.00     | 70500-02064-214         |                  |
|                             | 5.50     | 70500-02064-216         |                  |
|                             | 9.62     | 70500-02064-221         |                  |
| V300-2-63                   | 57.31    | 70500-02053-122         | 8315-00-935-6723 |
|                             | 48.12    | 70500-02053-123         |                  |
|                             | 10.87    | 70500-02061-125         |                  |
|                             | 6.37     | 70500-02061-126         |                  |
|                             | 16.00    | 70500-02062-126         |                  |
| V300-2-75                   | —        | —                       | 8315-01-133-9781 |
| V300-2-150 (SEE NOTE 5)     | 0.81     | 70500-02063-125         | 8315-01-133-9781 |
|                             | 3.50     | 70500-02063-211         |                  |
|                             | 4.00     | 70500-02063-213         |                  |
|                             | 4.12     | 70500-02063-215         |                  |
|                             | 2.25     | 70500-02063-217         |                  |
|                             | 5.00     | 70500-02063-219         |                  |
|                             | 2.00     | 70500-02063-221         |                  |
|                             | 0.75     | 70500-02064-142         |                  |
|                             | 4.00     | 70500-02064-210         |                  |
|                             | 2.50     | 70500-02064-211         |                  |
|                             | 5.00     | 70500-02064-213         |                  |
|                             | 5.00     | 70500-02064-215         |                  |
|                             | 5.50     | 70500-02064-217         |                  |
|                             | 5.50     | 70500-02064-217         |                  |

AK1632.1  
SA

FIGURE H-32. VELCRO TAPE (SHEET 1 OF 3)



| PART NUMBER                          | L LENGTH | SIKORSKY<br>PART NUMBER | NSN              |
|--------------------------------------|----------|-------------------------|------------------|
| V300-1(65)-50-SA0140 (SEE NOTE 7)    | 95.00    | 70070-20014-102         | (SEE NOTE 6)     |
|                                      | 70.00    | 70070-20014-105         |                  |
|                                      | 70.00    | 70070-20014-108         |                  |
| V300-2-50-SA0140 (SEE NOTES 7 AND 9) | 72.00    | 70216-02401-126         | (SEE NOTE 6)     |
|                                      | 72.00    | 70216-02402-129         |                  |
|                                      | 98.00    | 70217-02705-107         |                  |
| V300-2-100-SA0140 (SEE NOTE 7)       | 0.75     | 70500-02063-153         | (SEE NOTE 6)     |
| V300-1(80)-75-SA0145 (SEE NOTE 8)    | 3.81     | 70217-01003-159         | (SEE NOTE 6)     |
|                                      | 14.28    | 70217-01003-161         |                  |
| V300-2-75-SA0145 (SEE NOTE 8)        | 3.81     | 70217-01003-158         | (SEE NOTE 6)     |
|                                      | 14.28    | 70217-01003-160         |                  |
| V300-1(65)-50 (SEE NOTE 10)          | 13.0     | 70070-20013-108         | (SEE NOTE 6)     |
|                                      | 23.0     |                         |                  |
|                                      | 19.0     | 70070-20013-112         |                  |
|                                      | 19.0     | 70070-20013-114         |                  |
|                                      | 6.5      | 70070-20013-116         |                  |
|                                      | 3.0      | 70070-20013-118         |                  |
|                                      | 9.5      | 70070-20013-120         |                  |
|                                      | 6.0      | 70070-20013-122         |                  |
|                                      | 8.0      | 70070-20013-124         |                  |
|                                      | 35.0     | 70070-20013-126         |                  |
|                                      | 1.75     | 70070-20013-134         |                  |
|                                      | 3.0      | 70070-20013-151         |                  |
| V330-1(65)-100                       | 4.0      | 70215-02312-105         | (SEE NOTE 6)     |
| V330-1(80)-50 (SEE NOTE 11)          | —        | —                       | 8315-00-935-6761 |
| V330-1(80)-100                       | —        | —                       | 8315-00-935-6761 |
| V330-1(80)-200                       | —        | —                       | 8315-00-926-4931 |
| V330-2-50 (SEE NOTE 12)              | 13.0     | 70070-20013-107         | 8315-00-978-0113 |
|                                      | 23.0     | 70070-20013-109         |                  |
|                                      | 19.0     | 70070-20013-111         |                  |
|                                      | 19.0     | 70070-20013-113         |                  |
|                                      | 6.5      | 70070-20013-115         |                  |
|                                      | 3.0      | 70070-20013-117         |                  |
|                                      | 9.5      | 70070-20013-119         |                  |
|                                      | 6.0      | 70070-20013-121         |                  |
|                                      | 8.0      | 70070-20013-123         |                  |
|                                      | 35.0     | 70070-20013-125         |                  |
|                                      | 1.75     | 70070-20013-133         |                  |
|                                      | 44.0     | 70070-20013-137         |                  |
|                                      | 36.0     | 70070-20013-138         |                  |
|                                      | 5.0      | 70070-20013-139         |                  |
|                                      | 3.5      | 70070-20013-140         |                  |
|                                      | 21.0     | 70070-20013-141         |                  |
|                                      | 3.0      | 70070-20013-150         |                  |
|                                      |          | 70070-20013-160         |                  |
|                                      |          | 70070-20013-161         |                  |
|                                      |          | 70070-20013-162         |                  |
|                                      |          | 70070-20013-163         |                  |
|                                      |          | 70070-20013-164         |                  |
| V330-2-63                            | —        | —                       | 8315-00-935-6763 |
| V330-2-75                            | —        | —                       | 8315-00-066-5054 |
| V330-2-200 (SEE NOTE 13)             | 4.0      | 70215-02312-104         | 8315-00-978-0113 |

AK1632\_2A  
SA

FIGURE H-32. VELCRO TAPE (SHEET 2 OF 3)


NOTES

1. MAKE VELCRO TAPE STRIPS, AS REQUIRED, PER CHART.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. MAKE FROM V300-1(65)-100.
4. MAKE FROM TWO STRIPS OF V300-1(65)-75.
5. MAKE FROM TWO STRIPS OF V300-2-75.
6. MADE BY HARTWELL CO., CAGE 83014.
7. SOLVENT-ACTIVATED ADHESIVE- BACKED TAPE FOR BONDING TO POROUS SURFACES.
8. SOLVENT-ACTIVATED ADHESIVE-BACKED TAPE FOR BONDING TO METAL SURFACES.
9. MAKE FROM V300-2-100-SA0140.
10. MAKE FROM V330-1(65)-100.
11. MAKE FROM V330-1(80)-100.
12. MAKE FROM V330-2-100.
13. MAKE FROM TWO STRIPS OF V330-2-100.
14. ATTACH VELCRO STRIPS, AS SPECIFIED, BOND OR SEW TAPE IN PLACE PER FED-STD-751.
15. IDENTIFY PARTS PER MIL-STD-130.


FO0290\_3A  
SA

FIGURE H-32. VELCRO TAPE (SHEET 3 OF 3)



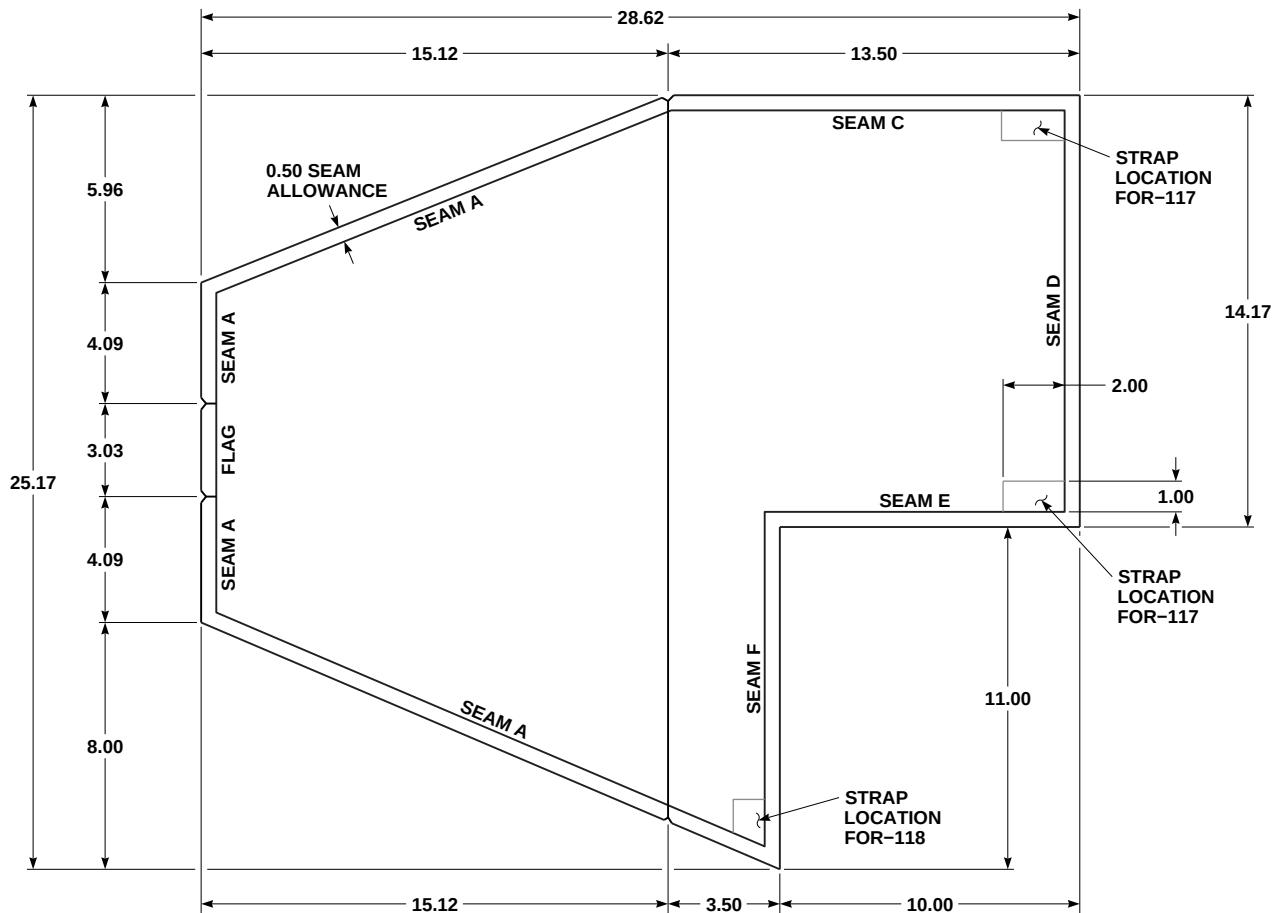


108

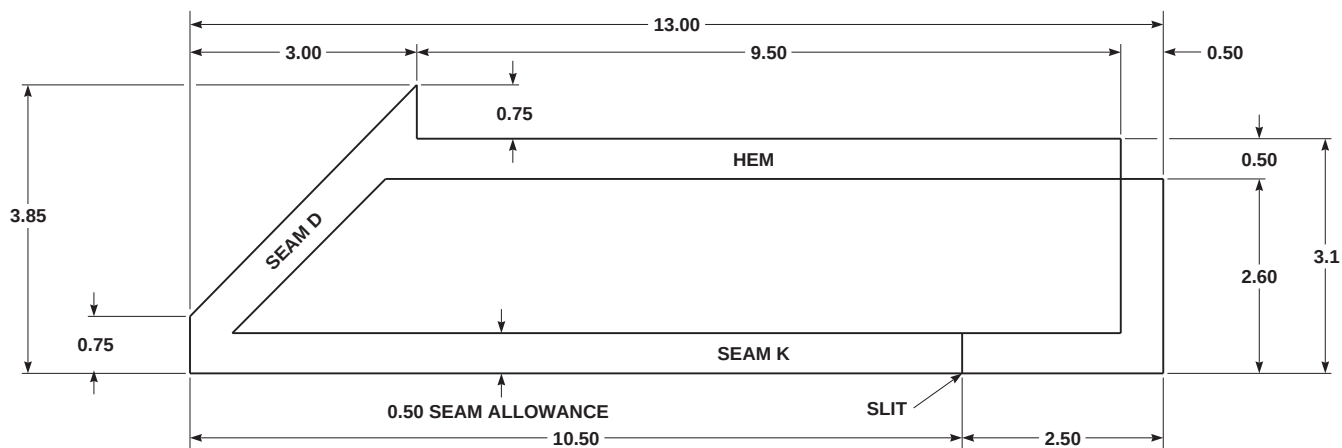


109

AK1633\_2  
SA

FIGURE H-33. OIL COOLER COVER ASSEMBLY (SHEET 2 OF 7)

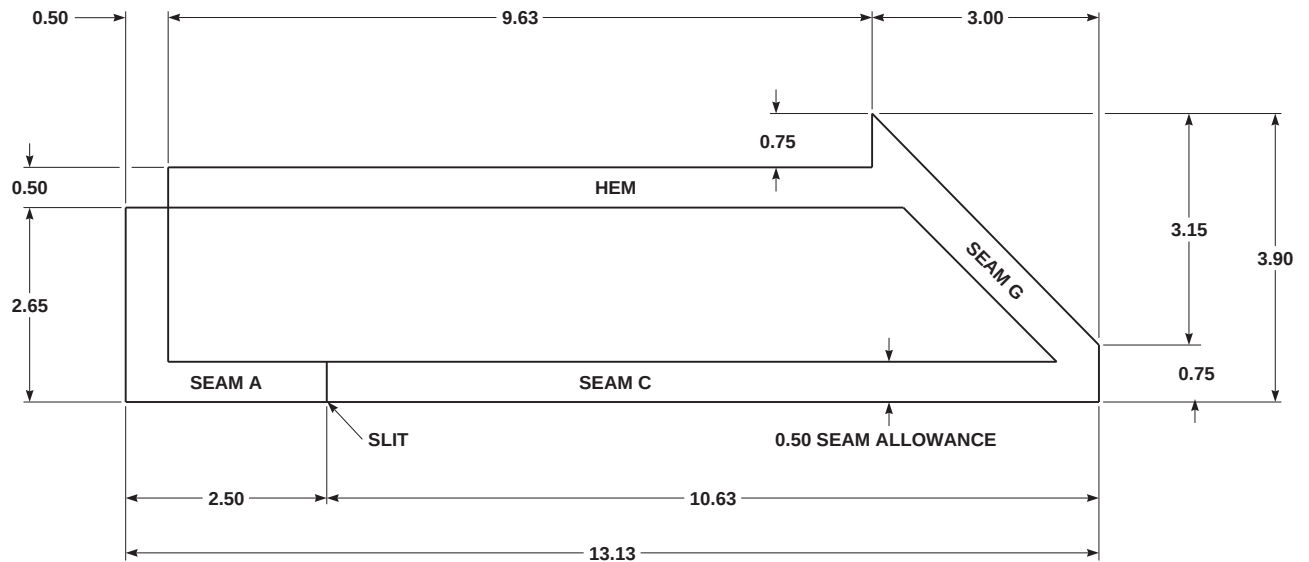


110

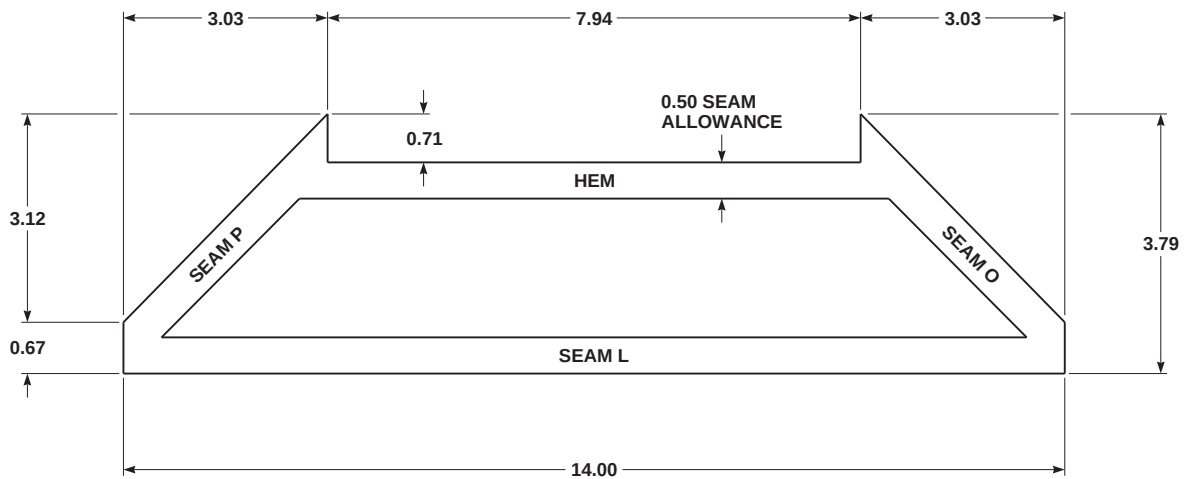


111

AK1633\_3  
SA

FIGURE H-33. OIL COOLER COVER ASSEMBLY (SHEET 3 OF 7)

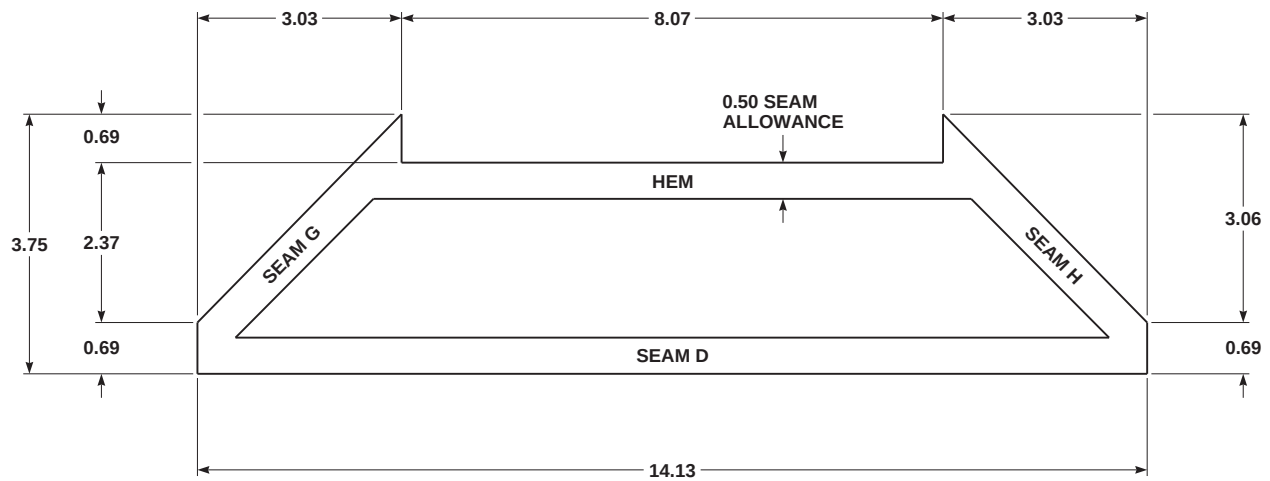


112

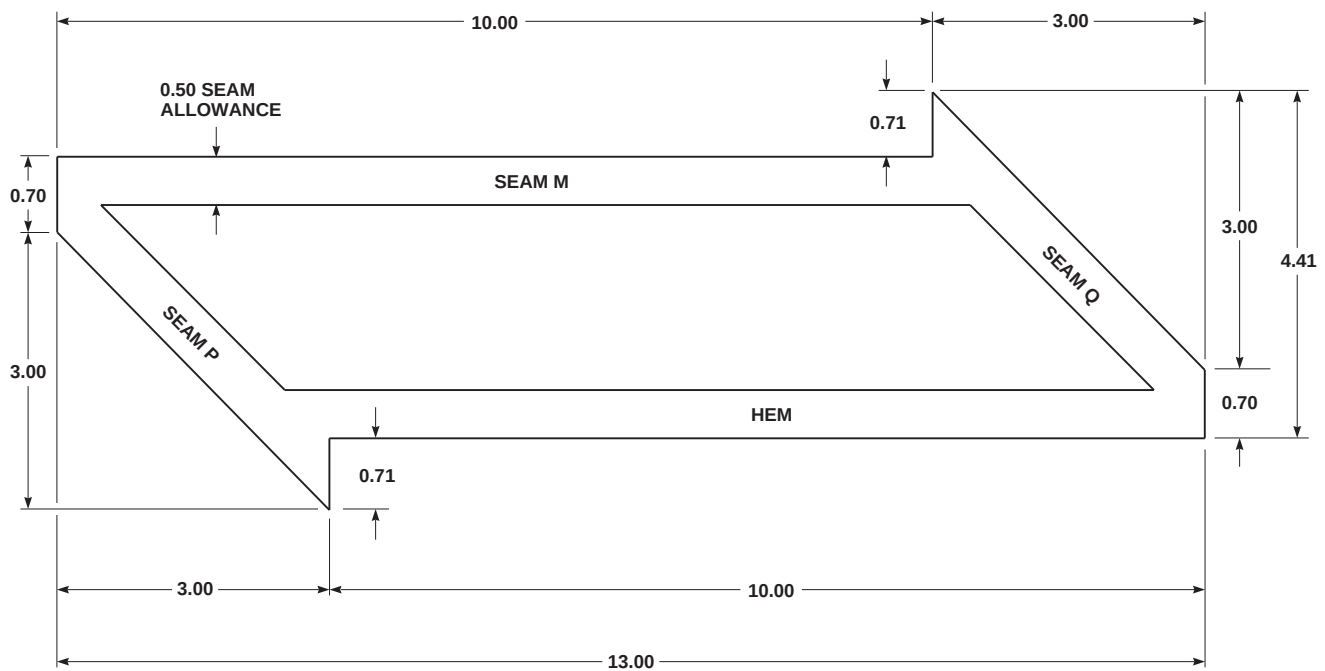


113

AK1633\_4  
SA

FIGURE H-33. OIL COOLER COVER ASSEMBLY (SHEET 4 OF 7)

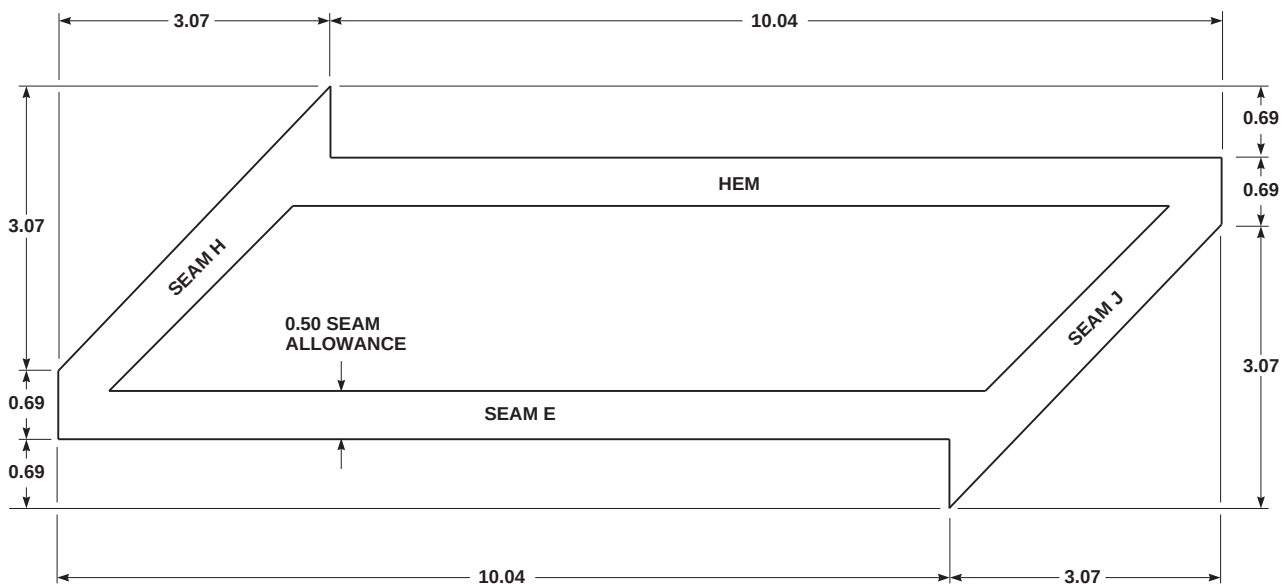



114

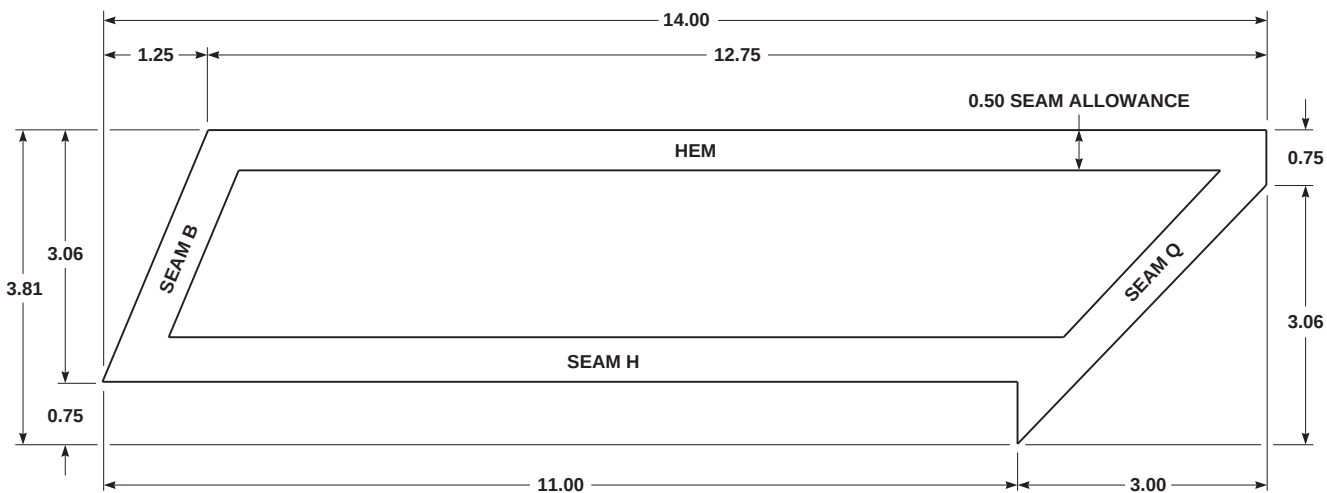

115

AK1633\_5  
SA


FIGURE H-33. OIL COOLER COVER ASSEMBLY (SHEET 5 OF 7)

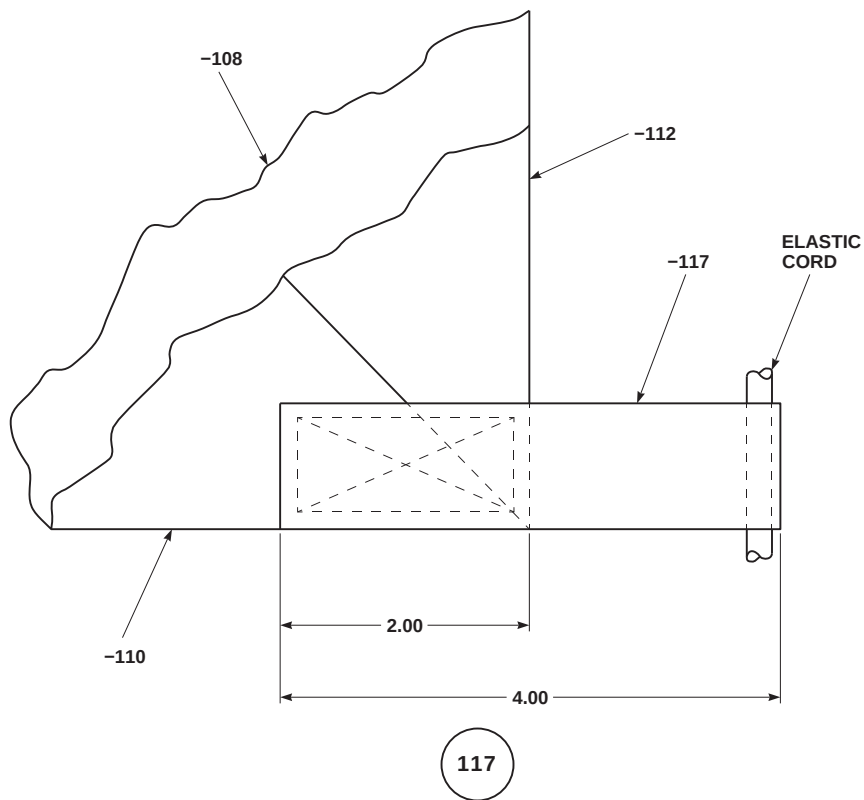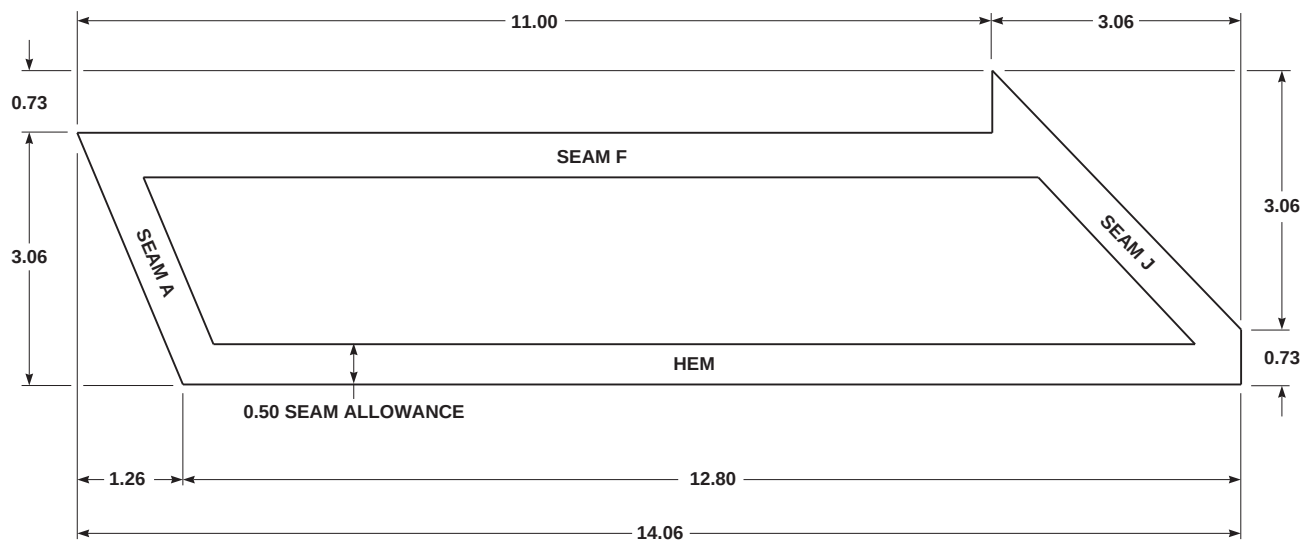

AK1633\_6  
SA

FIGURE H-33. OIL COOLER COVER ASSEMBLY (SHEET 6 OF 7)



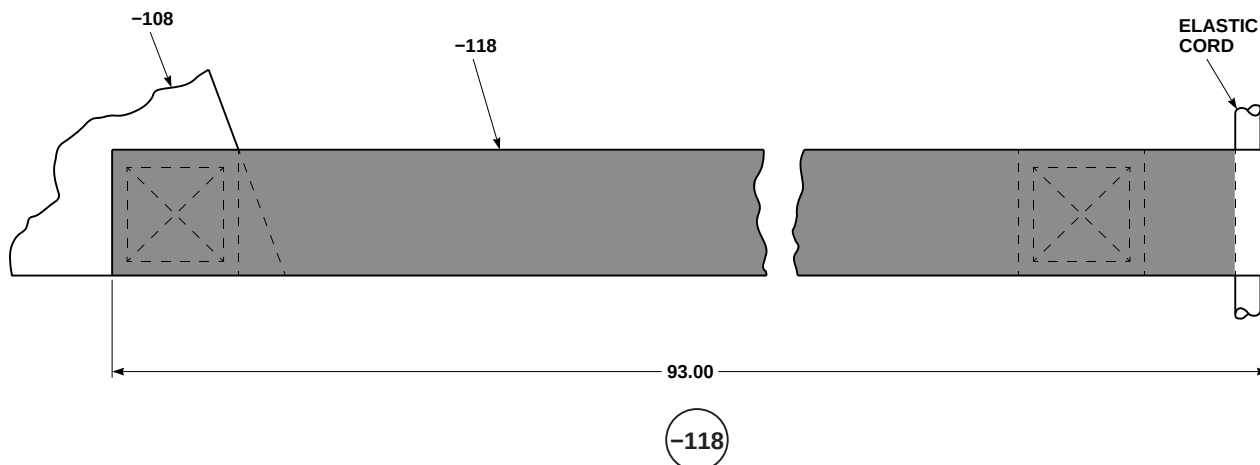

| NOMENCLATURE              | SIKORSKY<br>PART NUMBER |
|---------------------------|-------------------------|
| OIL COOLER COVER ASSEMBLY | 70700-20511-106         |
|                           | 70700-20511-107         |
|                           | 70700-20511-108         |
|                           | 70700-20511-109         |
|                           | 70700-20511-110         |
|                           | 70700-20511-111         |
|                           | 70700-20511-112         |
|                           | 70700-20511-113         |
|                           | 70700-20511-114         |
|                           | 70700-20511-115         |
|                           | 70700-20511-116         |
|                           | 70700-20511-117         |
|                           | 70700-20511-118         |


#### NOTES

1. MAKE FROM OLIVE DRAB VINYL-COATED NYLON CLOTH, MIL-C-20696, TYPE 1, CLASS 2, NSN 8305-00-286-7034.
2. ALL DIMENSIONS ARE IN INCHES,  $\pm 0.010$  UNLESS NOTED.
3. IDENTIFY PARTS PER MIL-STD-130.
4. ALL SEAMS AND STITCHING PER FED-STD-751.

PART NUMBER: 70700-20511-106, THRU -118

FB3443A  
SA

**FIGURE H-33. OIL COOLER COVER ASSEMBLY (SHEET 7 OF 7)**

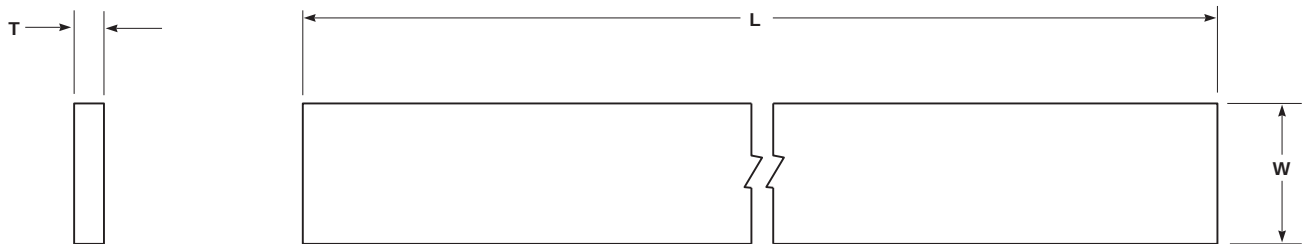

| NOMENCLATURE             | T THICKNESS | W WIDTH | L LENGTH | SIKORSKY<br>PART NUMBER |
|--------------------------|-------------|---------|----------|-------------------------|
| CREW CHIEF'S WINDOW SEAL | 0.125       | 0.69    | 36.44    | 70216-02402-139         |

## NOTES


1. MAKE FROM RUBBER, MIL-R-6130, GRADE A, TYPE 1, 0.125 INCH THICK, NSN 9320-00-291-0416.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GREEN INK, TT-I-1795. USE 1/16 TO 1/8 INCH HIGH SANS SERIF CHARACTERS.

EXAMPLE: P/N 70216-02401-107      3Q 86  
PART NUMBER      THIRD QUARTER 1986

**PART NUMBER: 70216-02402-139**

FB2113A  
SA

**FIGURE H-34. CREW CHIEF'S WINDOW SEAL**

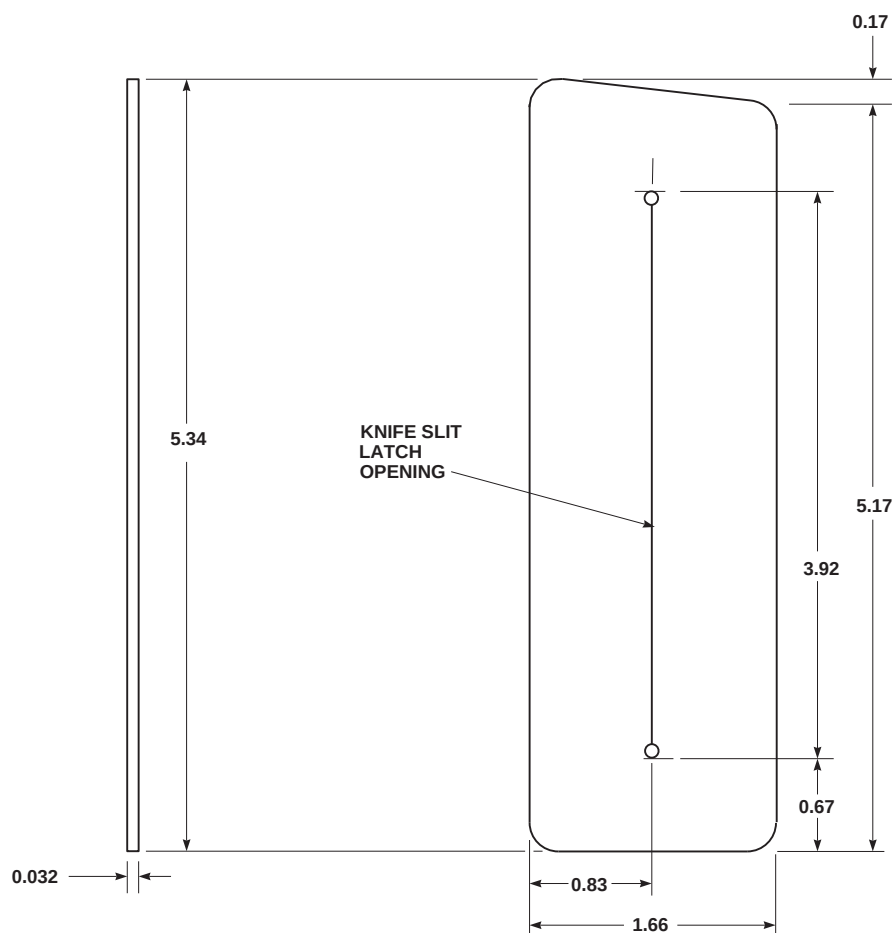

| NOMENCLATURE                   | SIKORSKY<br>PART NUMBER |
|--------------------------------|-------------------------|
| CREW CHIEF'S WINDOW LATCH SEAL | 70216-02402-122         |
|                                | 70216-02402-150         |
|                                | 70216-02402-158         |
|                                | 70216-02402-159         |
|                                | 70216-02402-160         |
|                                | 70216-02402-163         |
|                                | 70216-02402-164         |
|                                | 70216-02402-166         |
|                                | 70216-02402-167         |

### NOTES


1. MAKE FROM NEOPRENE, 0.032 INCH THICK, MIL-R-6855, CLASS 2, GRADE 60, NSN 9320-01-157-9069.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GREEN INK, TT-I-1795. USE 1/16 - 1/8 INCH HIGH SANS SERIF CHARACTERS.

EXAMPLE: P/N 70216-02401-107 3Q 86  
 PART NUMBER THIRD QUARTER 1986

PART NUMBER: 70219-02402-122, -150, -158, -159, -160, -163, -164, -166, -167

FN1986B  
SA

**FIGURE H-35. CREW CHIEF'S WINDOW LATCH SEAL**

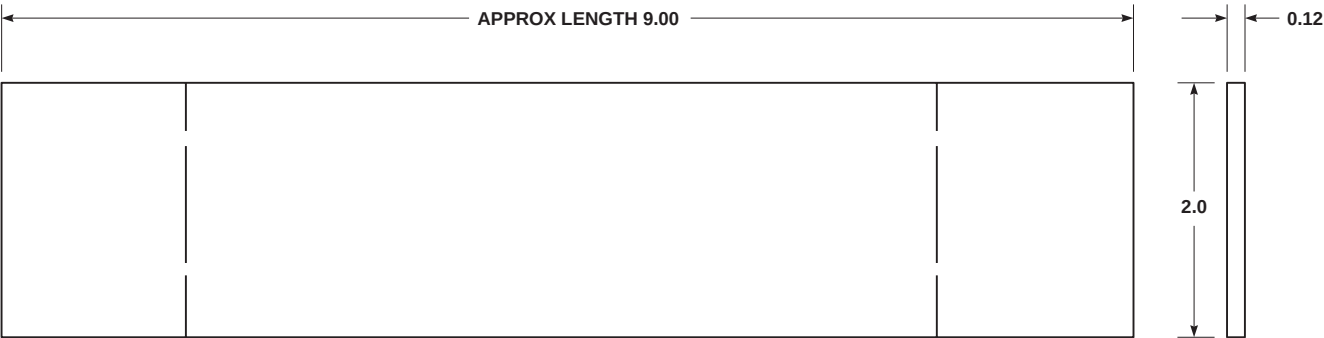

| NOMENCLATURE              | SIKORSKY<br>PART NUMBER            |
|---------------------------|------------------------------------|
| DUCT INSTALLATION GASKETS | 70500-02057-159<br>70500-02057-160 |

NOTES


- 1. MAKE FROM SHEET RUBBER, MIL-R-6130, GRADE A, TYPE 2, SOFT, NSN 9320-00-814-4583.
- 2. ALL DIMENSIONS ARE IN INCHES.
- 3. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GRAY INK, TT-I-1795. USE 1/16 - 1/8 INCH HIGH SANS SERIF CHARACTERS.
- 4. TRIM SEAL ON INSTALLATION.

EXAMPLE: P / N 70216-02401-107      3Q 86  
PART NUMBER      THIRD QUARTER 1986

PART NUMBER: 70500-02057-159, -160

AK1639A  
SA

FIGURE H-36. DUCT INSTALLATION GASKET

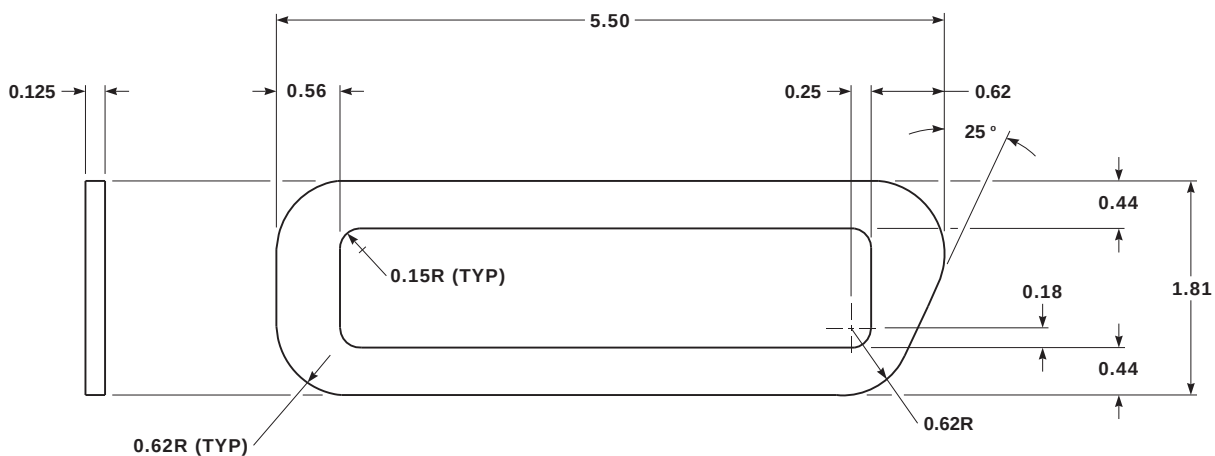

|                        |                         |
|------------------------|-------------------------|
| NOMENCLATURE           | SIKORSKY<br>PART NUMBER |
| DUCT INSTALLATION SEAL | 70500-02058-123         |

## NOTES

1. MAKE FROM RUBBER SHEET, MIL-R-6855, CLASS 1, GRADE 40, NSN 9320-00-059-6504.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GRAY INK, TT-I-1795. USE 1/16 - 1/8 INCH HIGH SANS SERIF CHARACTERS.


EXAMPLE: P / N 70216-02401-107      3Q 86  
PART NUMBER      THIRD QUARTER 1986

**PART NUMBER: 70500-02058-123**


AK1640  
SA

**FIGURE H-37. DUCT INSTALLATION SEAL**

Change 9 H-77

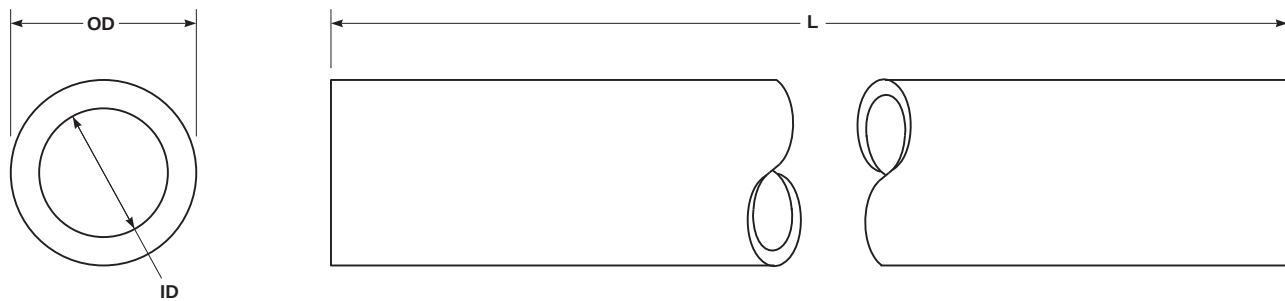

| NOMENCLATURE           | L LENGTH | OD OUTSIDE DIAMETER | ID INSIDE DIAMETER | SIKORSKY PART NUMBER |
|------------------------|----------|---------------------|--------------------|----------------------|
| HYDRAULIC DRAIN TUBING | 28.00    | 0.375               | 0.250              | 70651-03102-180      |
|                        | 34.00    |                     |                    | 70651-03102-181      |
|                        | 72.00    |                     |                    | 70651-03102-182      |
|                        | 66.00    |                     |                    | 70652-02251-174      |
|                        | 20.00    |                     |                    | 70652-02251-175      |

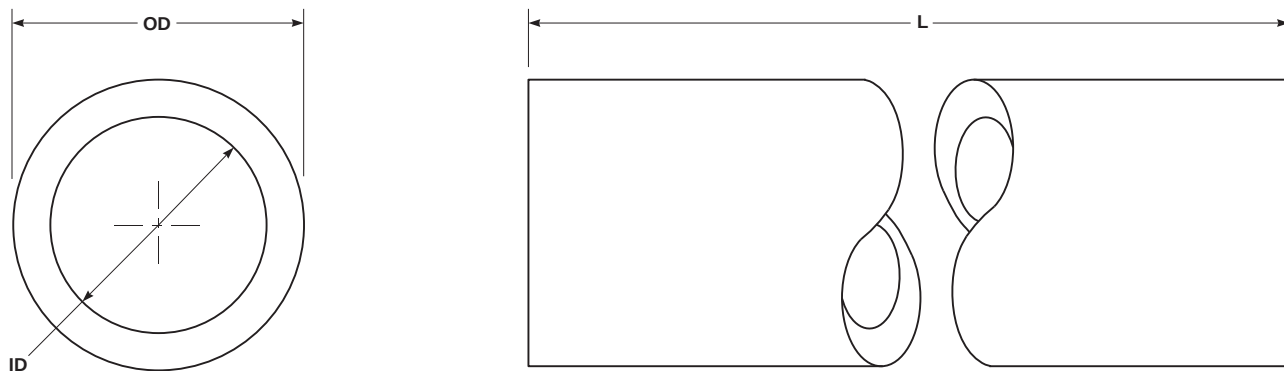


| NOMENCLATURE           | L LENGTH | OD OUTSIDE DIAMETER | ID INSIDE DIAMETER | SIKORSKY PART NUMBER |
|------------------------|----------|---------------------|--------------------|----------------------|
| HYDRAULIC DRAIN TUBING | 40.00    | 0.50                | 0.375              | 70652-02251-170      |
|                        | 72.00    |                     |                    | 70652-02251-171      |
|                        | 24.00    |                     |                    | 70652-02251-172      |
|                        | 2.50     |                     |                    | 70652-02251-177      |
|                        | 14.00    |                     |                    | 70652-02251-179      |
|                        | 76.00    |                     |                    | 70652-02251-180      |

#### NOTES

1. MAKE FROM URETHANE TUBING, NSN 4720-01-004-8081.
2. MAKE FROM URETHANE TUBING, NSN 4720-01-145-6685.
3. ALL DIMENSIONS ARE IN INCHES.
4. CUT ENDS STRAIGHT.
5. DO NOT PAINT.
6. IDENTIFY PARTS PER MIL-STD-130.

AA8912A  
SA

FIGURE H-38. HYDRAULIC DRAIN TUBING



| NOMENCLATURE | D DIAMETER | L LENGTH | SIKORSKY<br>PART NUMBER |
|--------------|------------|----------|-------------------------|
| ELASTIC CORD | 0.187      | 8.00     | 70700-20460-103         |
|              |            | 25.32    | 70700-20511-119         |
|              |            | 37.29    | 70700-20511-121         |


## NOTES

1. MAKE FROM ELASTIC CORD, MIL-C-5651, TYPE 3, NSN 8305-00-267-3116.
2. ALL DIMENSIONS ARE IN INCHES.

PART NUMBER: 70700-20460-103, 70700-20511-119, -121

AK1642  
SA

FIGURE H-39. ELASTIC CORD

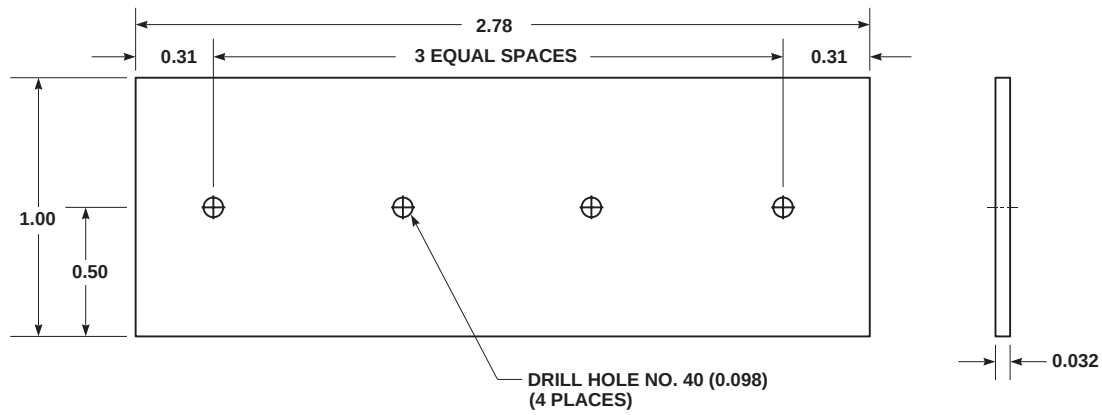

#### NOTES

1. MAKE FROM 7075-T6 ALCLAD SHEET 0.032 INCH THICK, QQ-A-250 / 13, NSN 9535-00-232-7535.
2. ALL DIMENSIONS ARE IN INCHES.
3. DRILL HOLES PER FIGURE.
4. BREAK SHARP EDGES AND DEBURR HOLES.
5. TREAT CUT EDGES WITH CORROSION RESISTANT COATING (ALODINE 1200S), ITEM 118, APPENDIX D.
6. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70217-01003-194

FO0291A  
SA

FIGURE H-40. STRAP



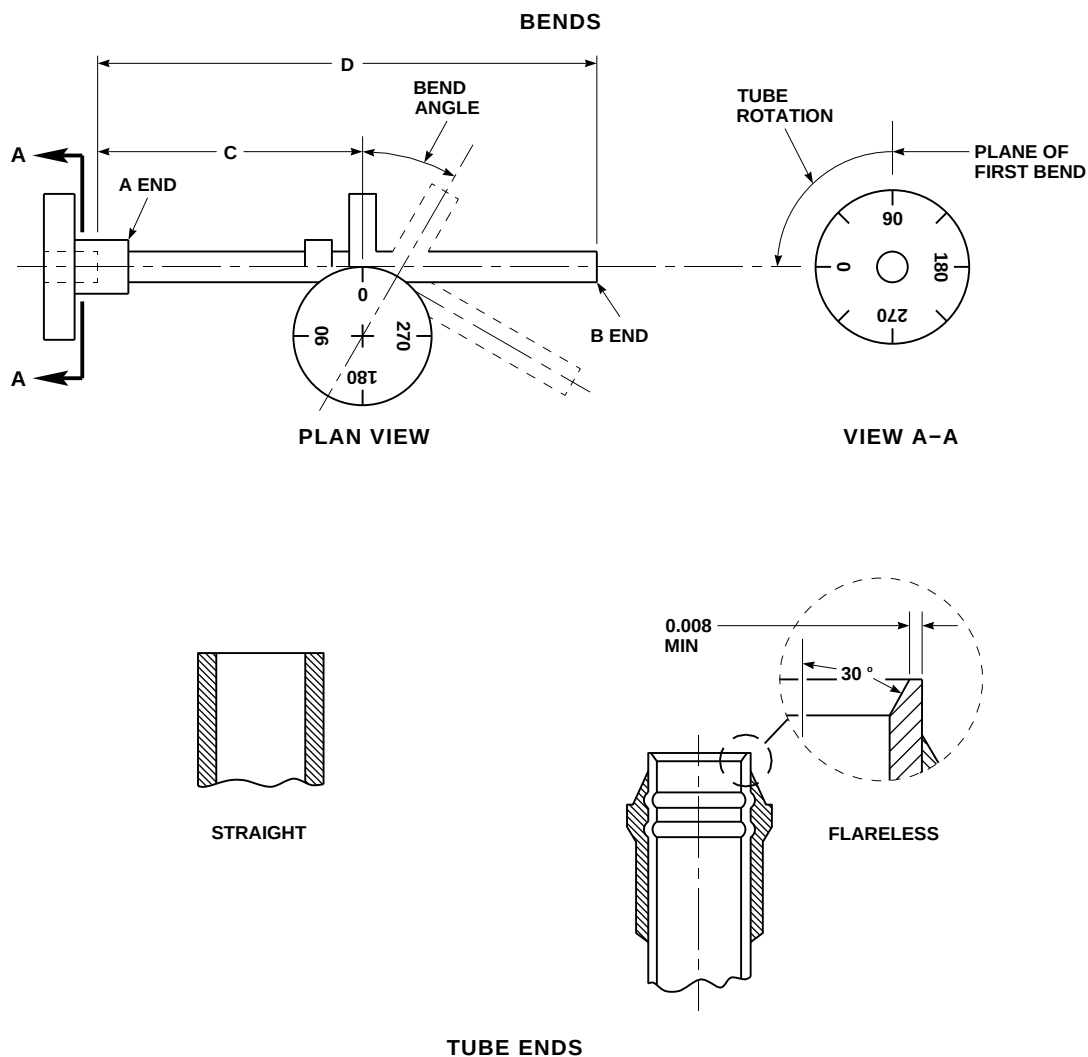


FIGURE H-41. HYDRAULIC TUBING (SHEET 1 OF 13)

AK1543\_1  
SA

## TUBE BEND DATA

| SPECIFICATION<br>AMS 5561 |          | MATERIAL<br>21-6-9 ST STL |                    | OD<br>0.250          | GAGE<br>0.016 | STRAIGHT LENGTH<br>54.316                                                   | FINISH SPEC<br>PASSIVATE (NOTE 3) |  |
|---------------------------|----------|---------------------------|--------------------|----------------------|---------------|-----------------------------------------------------------------------------|-----------------------------------|--|
| ENDS                      |          |                           |                    |                      | TYPE          | COLOR CODE                                                                  | CONNECTING POINTS                 |  |
| A                         | (NOTE 4) | D10036-4                  |                    | PERMA-SWAGE          | MIL-STD-1247  | FROM - UTILITY MODULE<br>90° PERMA-SWAGE ELBOW<br><br>TO - PERMASWAGE UNION |                                   |  |
| B                         | (NOTE 4) | D10021A-4                 |                    | PERMA-SWAGE          |               |                                                                             |                                   |  |
| BEND NO.                  | INCHES C | TUBE ROTATION (NOTE 1)    | BEND ANGLE DEGREES | BEND RADIUS (NOTE 2) | MFR NOTES     | FUNCTION                                                                    |                                   |  |
|                           |          |                           |                    |                      |               | APU RETURN                                                                  |                                   |  |
|                           |          |                           |                    |                      |               | NOTES                                                                       |                                   |  |
|                           |          |                           |                    |                      |               | 1. TUBE ROTATION, FROM PLANE OF FIRST BEND CCW VIEWED FROM B END, DEGREES.  |                                   |  |
|                           |          |                           |                    |                      |               | 2. MINIMUM BEND RADII PER MS33611.                                          |                                   |  |
|                           |          |                           |                    |                      |               | 3. FLUSH.                                                                   |                                   |  |
|                           |          |                           |                    |                      |               | 4. SQUARE CUT AND CHAMFER.                                                  |                                   |  |
| 1                         | 35.956   | 0                         | 21                 | 0.750                |               |                                                                             |                                   |  |
| 2                         | 32.139   | 176                       | 26                 | 0.750                |               |                                                                             |                                   |  |
| 3                         | 9.264    | 185                       | 13                 | 0.750                |               |                                                                             |                                   |  |
| 4                         | 3.143    | 96                        | 84                 | 0.750                |               |                                                                             |                                   |  |
| 5                         |          |                           |                    |                      |               |                                                                             |                                   |  |
| 6                         |          |                           |                    |                      |               |                                                                             |                                   |  |
| 7                         |          |                           |                    |                      |               |                                                                             |                                   |  |
| 8                         |          |                           |                    |                      |               |                                                                             |                                   |  |
| 9                         |          |                           |                    |                      |               |                                                                             |                                   |  |
| 10                        |          |                           |                    |                      |               |                                                                             |                                   |  |
| 11                        |          |                           |                    |                      |               |                                                                             |                                   |  |
| 12                        |          |                           |                    |                      |               |                                                                             |                                   |  |
|                           |          |                           |                    |                      |               |                                                                             |                                   |  |
| HELICOPTER SERIAL NOS     |          |                           |                    |                      |               | MFR CODE 78286                                                              |                                   |  |
| NEXT ASSY 70652-02250-012 |          |                           |                    |                      |               | TUBE PART NO. 70652-02252-149                                               |                                   |  |

FO0292\_2  
SA

FIGURE H-41. HYDRAULIC TUBING (SHEET 2 OF 13)

## TUBE BEND DATA

|                                  |                 |                                  |                           |                             |                               |                                                                                                                                                                             |                                          |  |
|----------------------------------|-----------------|----------------------------------|---------------------------|-----------------------------|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|--|
| <b>SPECIFICATION</b><br>AMS 5561 |                 | <b>MATERIAL</b><br>21-6-9 ST STL |                           | <b>OD</b><br>0.250          | <b>GAGE</b><br>0.016          | <b>STRAIGHT LENGTH</b><br>49.771                                                                                                                                            | <b>FINISH SPEC</b><br>PASSIVATE (NOTE 3) |  |
| <b>ENDS</b>                      |                 |                                  |                           |                             | <b>TYPE</b>                   | <b>COLOR CODE</b>                                                                                                                                                           | <b>CONNECTING POINTS</b>                 |  |
| <b>A</b>                         | (NOTE 4)        |                                  | D10036-4                  |                             | PERMA-SWAGE                   | MIL-STD-1247                                                                                                                                                                | FROM - PERMASWAGE UNION                  |  |
| <b>B</b>                         | (NOTE 4)        |                                  | D10036-4                  |                             | PERMA-SWAGE                   |                                                                                                                                                                             | TO - PERMASWAGE UNION                    |  |
| <b>BEND NO.</b>                  | <b>INCHES C</b> | <b>TUBE ROTATION (NOTE 1)</b>    | <b>BEND ANGLE DEGREES</b> | <b>BEND RADIUS (NOTE 2)</b> | <b>MFR NOTES</b>              | <b>FUNCTION</b>                                                                                                                                                             |                                          |  |
|                                  |                 |                                  |                           |                             |                               | FIRST STAGE TAIL ROTOR SERVO, PRESSURE                                                                                                                                      |                                          |  |
| 1                                | 32.001          | 0                                | 44                        | 0.750                       |                               | <b>NOTES</b><br>1. TUBE ROTATION, FROM PLANE OF FIRST BEND CCW VIEWED FROM B END, DEGREES.<br>2. MINIMUM BEND RADII PER MS33611.<br>3. FLUSH.<br>4. SQUARE CUT AND CHAMFER. |                                          |  |
| 2                                | 20.397          | 179                              | 35                        | 0.750                       |                               |                                                                                                                                                                             |                                          |  |
| 3                                |                 |                                  |                           |                             |                               |                                                                                                                                                                             |                                          |  |
| 4                                |                 |                                  |                           |                             |                               |                                                                                                                                                                             |                                          |  |
| 5                                |                 |                                  |                           |                             |                               |                                                                                                                                                                             |                                          |  |
| 6                                |                 |                                  |                           |                             |                               |                                                                                                                                                                             |                                          |  |
| 7                                |                 |                                  |                           |                             |                               |                                                                                                                                                                             |                                          |  |
| 8                                |                 |                                  |                           |                             |                               |                                                                                                                                                                             |                                          |  |
| 9                                |                 |                                  |                           |                             |                               |                                                                                                                                                                             |                                          |  |
| 10                               |                 |                                  |                           |                             |                               |                                                                                                                                                                             |                                          |  |
| 11                               |                 |                                  |                           |                             |                               |                                                                                                                                                                             |                                          |  |
| 12                               |                 |                                  |                           |                             |                               |                                                                                                                                                                             |                                          |  |
|                                  |                 |                                  |                           |                             |                               |                                                                                                                                                                             |                                          |  |
| HELICOPTER SERIAL NOS            |                 |                                  |                           |                             | MFR CODE 78286                |                                                                                                                                                                             |                                          |  |
| NEXT ASSY 70652-03250-013, -015  |                 |                                  |                           |                             | TUBE PART NO. 70652-03252-143 |                                                                                                                                                                             |                                          |  |

FO0292\_3  
SA

FIGURE H-41. HYDRAULIC TUBING (SHEET 3 OF 13)

## TUBE BEND DATA

| SPECIFICATION<br>AMS 5561       |          | MATERIAL<br>21-6-9 ST STL |                    | OD<br>0.250          | GAGE<br>0.016 | STRAIGHT LENGTH<br>49.517                                                                                                                                                   | FINISH SPEC<br>PASSIVATE (NOTE 3) |  |
|---------------------------------|----------|---------------------------|--------------------|----------------------|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|--|
| ENDS                            |          |                           |                    |                      | TYPE          | COLOR CODE                                                                                                                                                                  | CONNECTING POINTS                 |  |
| A                               | (NOTE 4) | D10036-4                  |                    | PERMA-SWAGE          | MIL-STD-1247  | FROM - PERMASWAGE UNION                                                                                                                                                     |                                   |  |
| B                               | (NOTE 4) | D10036-4                  |                    | PERMA-SWAGE          |               | TO - PERMASWAGE UNION                                                                                                                                                       |                                   |  |
| BEND NO.                        | INCHES C | TUBE ROTATION (NOTE 1)    | BEND ANGLE DEGREES | BEND RADIUS (NOTE 2) | MFR NOTES     | FUNCTION                                                                                                                                                                    |                                   |  |
|                                 |          |                           |                    |                      |               | FIRST STAGE TAIL ROTOR SERVO, RETURN                                                                                                                                        |                                   |  |
| 1                               | 27.887   | 0                         | 42                 | 0.750                |               | <b>NOTES</b><br>1. TUBE ROTATION, FROM PLANE OF FIRST BEND CCW VIEWED FROM B END, DEGREES.<br>2. MINIMUM BEND RADII PER MS33611.<br>3. FLUSH.<br>4. SQUARE CUT AND CHAMFER. |                                   |  |
| 2                               | 16.251   | 180                       | 34                 | 0.750                |               |                                                                                                                                                                             |                                   |  |
| 3                               |          |                           |                    |                      |               |                                                                                                                                                                             |                                   |  |
| 4                               |          |                           |                    |                      |               |                                                                                                                                                                             |                                   |  |
| 5                               |          |                           |                    |                      |               |                                                                                                                                                                             |                                   |  |
| 6                               |          |                           |                    |                      |               |                                                                                                                                                                             |                                   |  |
| 7                               |          |                           |                    |                      |               |                                                                                                                                                                             |                                   |  |
| 8                               |          |                           |                    |                      |               |                                                                                                                                                                             |                                   |  |
| 9                               |          |                           |                    |                      |               |                                                                                                                                                                             |                                   |  |
| 10                              |          |                           |                    |                      |               |                                                                                                                                                                             |                                   |  |
| 11                              |          |                           |                    |                      |               |                                                                                                                                                                             |                                   |  |
| 12                              |          |                           |                    |                      |               |                                                                                                                                                                             |                                   |  |
|                                 |          |                           |                    |                      |               |                                                                                                                                                                             |                                   |  |
| HELICOPTER SERIAL NOS           |          |                           |                    |                      |               | MFR CODE 78286                                                                                                                                                              |                                   |  |
| NEXT ASSY 70652-03250-013, -015 |          |                           |                    |                      |               | TUBE PART NO. 70652-03252-146                                                                                                                                               |                                   |  |

FO0292\_4  
SA

FIGURE H-41. HYDRAULIC TUBING (SHEET 4 OF 13)

## TUBE BEND DATA

| SPECIFICATION             |          | MATERIAL               |                    | OD                   | GAGE                          | STRAIGHT LENGTH |                                                                                                                                                                          | FINISH SPEC                  |  |
|---------------------------|----------|------------------------|--------------------|----------------------|-------------------------------|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|--|
| AMS 5561                  |          | 21-6-9 ST STL          |                    | 0.250                | 0.016                         | 89.481          |                                                                                                                                                                          | PASSIVATE (NOTE 3)           |  |
| ENDS                      |          |                        |                    |                      | TYPE                          | COLOR CODE      |                                                                                                                                                                          | CONNECTING POINTS            |  |
| A                         | (NOTE 4) |                        | D10036-4           |                      | PERMA-SWAGE                   | MIL-STD-1247    |                                                                                                                                                                          | FROM - 90° PERMA-SWAGE ELBOW |  |
| B                         | (NOTE 4) |                        | D9856-4            |                      | PERMA-SWAGE                   |                 |                                                                                                                                                                          | TO - PERMASWAGE UNION        |  |
| BEND NO.                  | INCHES C | TUBE ROTATION (NOTE 1) | BEND ANGLE DEGREES | BEND RADIUS (NOTE 2) | MFR NOTES                     |                 | FUNCTION                                                                                                                                                                 |                              |  |
|                           |          |                        |                    |                      |                               |                 | SECOND STAGE TAIL ROTOR SERVO, PRESSURE                                                                                                                                  |                              |  |
| 1                         | 75.911   | 0                      | 24                 | 0.750                |                               |                 | NOTES<br><br>1. TUBE ROTATION, FROM PLANE OF FIRST BEND CCW VIEWED FROM B END, DEGREES.<br>2. MINIMUM BEND RADII PER MS33611.<br>3. FLUSH.<br>4. SQUARE CUT AND CHAMFER. |                              |  |
| 2                         | 58.528   | 359                    | 14                 | 0.750                |                               |                 |                                                                                                                                                                          |                              |  |
| 3                         | 46.971   | 335                    | 15                 | 0.750                |                               |                 |                                                                                                                                                                          |                              |  |
| 4                         | 42.759   | 237                    | 84                 | 0.750                |                               |                 |                                                                                                                                                                          |                              |  |
| 5                         | 35.789   | 309                    | 15                 | 0.750                |                               |                 |                                                                                                                                                                          |                              |  |
| 6                         | 18.902   | 119                    | 32                 | 0.750                |                               |                 |                                                                                                                                                                          |                              |  |
| 7                         | 9.732    | 256                    | 18                 | 0.750                |                               |                 |                                                                                                                                                                          |                              |  |
| 8                         |          |                        |                    |                      |                               |                 |                                                                                                                                                                          |                              |  |
| 9                         |          |                        |                    |                      |                               |                 |                                                                                                                                                                          |                              |  |
| 10                        |          |                        |                    |                      |                               |                 |                                                                                                                                                                          |                              |  |
| 11                        |          |                        |                    |                      |                               |                 |                                                                                                                                                                          |                              |  |
| 12                        |          |                        |                    |                      |                               |                 |                                                                                                                                                                          |                              |  |
|                           |          |                        |                    |                      |                               |                 |                                                                                                                                                                          |                              |  |
| HELICOPTER SERIAL NOS     |          |                        |                    |                      |                               | MFR CODE 78286  |                                                                                                                                                                          |                              |  |
| NEXT ASSY 70652-03250-013 |          |                        |                    |                      | TUBE PART NO. 70652-03252-149 |                 |                                                                                                                                                                          |                              |  |

FO0292\_5  
SA

FIGURE H-41. HYDRAULIC TUBING (SHEET 5 OF 13)

Change 9

H-85

## TUBE BEND DATA

| SPECIFICATION<br>AMS 5561 |             | MATERIAL<br>21-6-9 ST STL |                       | OD<br>0.250             | GAGE<br>0.016 | STRAIGHT LENGTH<br>86.152     |                                                                            | FINISH SPEC<br>PASSIVATE (NOTE 3) |  |
|---------------------------|-------------|---------------------------|-----------------------|-------------------------|---------------|-------------------------------|----------------------------------------------------------------------------|-----------------------------------|--|
| ENDS                      |             |                           |                       |                         | TYPE          | COLOR CODE                    | CONNECTING POINTS                                                          |                                   |  |
| A                         | (NOTE 4)    |                           | D9856-4               |                         | PERMA-SWAGE   | MIL-STD-1247                  | FROM - 90° PERMA-SWAGE ELBOW<br><br>TO - PERMASWAGE UNION                  |                                   |  |
| B                         | (NOTE 4)    |                           | D10036-4              |                         | PERMA-SWAGE   |                               |                                                                            |                                   |  |
| BEND NO.                  | INCHES<br>C | TUBE ROTATION<br>(NOTE 1) | BEND ANGLE<br>DEGREES | BEND RADIUS<br>(NOTE 2) | MFR NOTES     |                               | FUNCTION                                                                   |                                   |  |
|                           |             |                           |                       |                         |               |                               | SECOND STAGE TAIL ROTOR SERVO, RETURN                                      |                                   |  |
|                           |             |                           |                       |                         |               |                               | NOTES                                                                      |                                   |  |
|                           |             |                           |                       |                         |               |                               | 1. TUBE ROTATION, FROM PLANE OF FIRST BEND CCW VIEWED FROM B END, DEGREES. |                                   |  |
|                           |             |                           |                       |                         |               |                               | 2. MINIMUM BEND RADII PER MS33611.                                         |                                   |  |
|                           |             |                           |                       |                         |               |                               | 3. FLUSH.                                                                  |                                   |  |
|                           |             |                           |                       |                         |               |                               | 4. SQUARE CUT AND CHAMFER.                                                 |                                   |  |
| 1                         | 73.902      | 0                         | 37                    | 0.750                   |               |                               |                                                                            |                                   |  |
| 2                         | 59.035      | 356                       | 7                     | 0.750                   |               |                               |                                                                            |                                   |  |
| 3                         | 45.221      | 354                       | 14                    | 0.750                   |               |                               |                                                                            |                                   |  |
| 4                         | 41.839      | 274                       | 88                    | 0.750                   |               |                               |                                                                            |                                   |  |
| 5                         | 20.660      | 174                       | 25                    | 0.750                   |               |                               |                                                                            |                                   |  |
| 6                         |             |                           |                       |                         |               |                               |                                                                            |                                   |  |
| 7                         |             |                           |                       |                         |               |                               |                                                                            |                                   |  |
| 8                         |             |                           |                       |                         |               |                               |                                                                            |                                   |  |
| 9                         |             |                           |                       |                         |               |                               |                                                                            |                                   |  |
| 10                        |             |                           |                       |                         |               |                               |                                                                            |                                   |  |
| 11                        |             |                           |                       |                         |               |                               |                                                                            |                                   |  |
| 12                        |             |                           |                       |                         |               |                               |                                                                            |                                   |  |
|                           |             |                           |                       |                         |               |                               |                                                                            |                                   |  |
| HELICOPTER SERIAL NOS     |             |                           |                       |                         |               | MFR CODE 78286                |                                                                            |                                   |  |
| NEXT ASSY 70652-03250-013 |             |                           |                       |                         |               | TUBE PART NO. 70652-03252-153 |                                                                            |                                   |  |

FO0292\_6  
SA

FIGURE H-41. HYDRAULIC TUBING (SHEET 6 OF 13)

## TUBE BEND DATA

|                                  |                 |                                  |                           |                             |                      |                                                                                                                                                                             |                                          |  |
|----------------------------------|-----------------|----------------------------------|---------------------------|-----------------------------|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|--|
| <b>SPECIFICATION</b><br>AMS 5561 |                 | <b>MATERIAL</b><br>21-6-9 ST STL |                           | <b>OD</b><br>0.250          | <b>GAGE</b><br>0.016 | <b>STRAIGHT LENGTH</b><br>49.083                                                                                                                                            | <b>FINISH SPEC</b><br>PASSIVATE (NOTE 3) |  |
| <b>ENDS</b>                      |                 |                                  |                           |                             | <b>TYPE</b>          | <b>COLOR CODE</b>                                                                                                                                                           | <b>CONNECTING POINTS</b>                 |  |
| <b>A</b>                         | (NOTE 4)        |                                  | D9856-6                   |                             | PERMA-SWAGE          | MIL-STD-1247                                                                                                                                                                | FROM - PERMASWAGE UNION                  |  |
| <b>B</b>                         | (NOTE 4)        |                                  | D10036-4                  |                             | PERMA-SWAGE          |                                                                                                                                                                             | TO - PERMASWAGE ELBOW                    |  |
| <b>BEND NO.</b>                  | <b>INCHES C</b> | <b>TUBE ROTATION (NOTE 1)</b>    | <b>BEND ANGLE DEGREES</b> | <b>BEND RADIUS (NOTE 2)</b> | <b>MFR NOTES</b>     | <b>FUNCTION</b>                                                                                                                                                             |                                          |  |
|                                  |                 |                                  |                           |                             |                      | SECOND STAGE TAIL ROTOR SERVO, RETURN                                                                                                                                       |                                          |  |
| 1                                | 28.043          | 0                                | 11                        | 0.750                       |                      | <b>NOTES</b><br>1. TUBE ROTATION, FROM PLANE OF FIRST BEND CCW VIEWED FROM B END, DEGREES.<br>2. MINIMUM BEND RADII PER MS33611.<br>3. FLUSH.<br>4. SQUARE CUT AND CHAMFER. |                                          |  |
| 2                                | 20.313          | 157                              | 7                         | 0.750                       |                      |                                                                                                                                                                             |                                          |  |
| 3                                | 10.438          | 150                              | 14                        | 0.750                       |                      |                                                                                                                                                                             |                                          |  |
| 4                                |                 |                                  |                           |                             |                      |                                                                                                                                                                             |                                          |  |
| 5                                |                 |                                  |                           |                             |                      |                                                                                                                                                                             |                                          |  |
| 6                                |                 |                                  |                           |                             |                      |                                                                                                                                                                             |                                          |  |
| 7                                |                 |                                  |                           |                             |                      |                                                                                                                                                                             |                                          |  |
| 8                                |                 |                                  |                           |                             |                      |                                                                                                                                                                             |                                          |  |
| 9                                |                 |                                  |                           |                             |                      |                                                                                                                                                                             |                                          |  |
| 10                               |                 |                                  |                           |                             |                      |                                                                                                                                                                             |                                          |  |
| 11                               |                 |                                  |                           |                             |                      |                                                                                                                                                                             |                                          |  |
| 12                               |                 |                                  |                           |                             |                      |                                                                                                                                                                             |                                          |  |
|                                  |                 |                                  |                           |                             |                      |                                                                                                                                                                             |                                          |  |
| HELICOPTER SERIAL NOS            |                 |                                  |                           |                             |                      | MFR CODE 78286                                                                                                                                                              |                                          |  |
| NEXT ASSY 70652-03250-012        |                 |                                  |                           |                             |                      | TUBE PART NO. 70652-03252-158                                                                                                                                               |                                          |  |

FO0292\_7  
SA

FIGURE H-41. HYDRAULIC TUBING (SHEET 7 OF 13)

Change 9

H-87

## TUBE BEND DATA

| SPECIFICATION<br>AMS 5561 |          | MATERIAL<br>21-6-9 ST STL |                    | OD<br>0.250          | GAGE<br>0.016                 | STRAIGHT LENGTH<br>46.778 |                                                                                                                                                             | FINISH SPEC<br>PASSIVATE (NOTE 3) |  |
|---------------------------|----------|---------------------------|--------------------|----------------------|-------------------------------|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|--|
| ENDS                      |          |                           |                    |                      | TYPE                          | COLOR CODE                | CONNECTING POINTS                                                                                                                                           |                                   |  |
| A                         | (NOTE 4) |                           | D9856-4            |                      | PERMA-SWAGE                   | MIL-STD-1247              | FROM - PERMASWAGE UNION                                                                                                                                     |                                   |  |
| B                         | (NOTE 4) |                           | D10036-4           |                      | PERMA-SWAGE                   |                           | TO - 90° PERMA-SWAGE ELBOW                                                                                                                                  |                                   |  |
| BEND NO.                  | INCHES C | TUBE ROTATION (NOTE 1)    | BEND ANGLE DEGREES | BEND RADIUS (NOTE 2) | MFR NOTES                     |                           | FUNCTION                                                                                                                                                    |                                   |  |
|                           |          |                           |                    |                      |                               |                           | SECOND STAGE TAIL ROTOR SERVO, PRESSURE                                                                                                                     |                                   |  |
|                           |          |                           |                    |                      |                               |                           | NOTES                                                                                                                                                       |                                   |  |
| 1                         | 36.958   | 0                         | 9                  | 0.750                |                               |                           | 1. TUBE ROTATION, FROM PLANE OF FIRST BEND CCW VIEWED FROM B END, DEGREES.<br>2. MINIMUM BEND RADII PER MS33611.<br>3. FLUSH.<br>4. SQUARE CUT AND CHAMFER. |                                   |  |
| 2                         | 27.913   | 328                       | 13                 | 0.750                |                               |                           |                                                                                                                                                             |                                   |  |
| 3                         | 19.623   | 145                       | 19                 | 0.750                |                               |                           |                                                                                                                                                             |                                   |  |
| 4                         |          |                           |                    |                      |                               |                           |                                                                                                                                                             |                                   |  |
| 5                         |          |                           |                    |                      |                               |                           |                                                                                                                                                             |                                   |  |
| 6                         |          |                           |                    |                      |                               |                           |                                                                                                                                                             |                                   |  |
| 7                         |          |                           |                    |                      |                               |                           |                                                                                                                                                             |                                   |  |
| 8                         |          |                           |                    |                      |                               |                           |                                                                                                                                                             |                                   |  |
| 9                         |          |                           |                    |                      |                               |                           |                                                                                                                                                             |                                   |  |
| 10                        |          |                           |                    |                      |                               |                           |                                                                                                                                                             |                                   |  |
| 11                        |          |                           |                    |                      |                               |                           |                                                                                                                                                             |                                   |  |
| 12                        |          |                           |                    |                      |                               |                           |                                                                                                                                                             |                                   |  |
|                           |          |                           |                    |                      |                               |                           |                                                                                                                                                             |                                   |  |
| HELICOPTER SERIAL NOS     |          |                           |                    |                      |                               | MFR CODE 78286            |                                                                                                                                                             |                                   |  |
| NEXT ASSY 70652-03250-012 |          |                           |                    |                      | TUBE PART NO. 70652-03252-159 |                           |                                                                                                                                                             |                                   |  |

FO0292\_8  
SA

FIGURE H-41. HYDRAULIC TUBING (SHEET 8 OF 13)



## TUBE BEND DATA

|                                  |                 |                                  |                           |                             |                               |                                                                                                                                                                             |                                          |  |
|----------------------------------|-----------------|----------------------------------|---------------------------|-----------------------------|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|--|
| <b>SPECIFICATION</b><br>AMS 5561 |                 | <b>MATERIAL</b><br>21-6-9 ST STL |                           | <b>OD</b><br>0.250          | <b>GAGE</b><br>0.016          | <b>STRAIGHT LENGTH</b><br>40.307                                                                                                                                            | <b>FINISH SPEC</b><br>PASSIVATE (NOTE 3) |  |
| <b>ENDS</b>                      |                 |                                  |                           |                             | <b>TYPE</b>                   | <b>COLOR CODE</b>                                                                                                                                                           | <b>CONNECTING POINTS</b>                 |  |
| <b>A</b>                         | (NOTE 4)        |                                  | D10036-4                  |                             | PERMA-SWAGE                   | MIL-STD-1247                                                                                                                                                                | FROM - PERMASWAGE UNION                  |  |
| <b>B</b>                         | (NOTE 4)        |                                  | D10036-4                  |                             | PERMA-SWAGE                   |                                                                                                                                                                             | TO - PERMASWAGE UNION                    |  |
| <b>BEND NO.</b>                  | <b>INCHES C</b> | <b>TUBE ROTATION (NOTE 1)</b>    | <b>BEND ANGLE DEGREES</b> | <b>BEND RADIUS (NOTE 2)</b> | <b>MFR NOTES</b>              | <b>FUNCTION</b>                                                                                                                                                             |                                          |  |
|                                  |                 |                                  |                           |                             |                               | FIRST STAGE TAIL ROTOR SERVO, RETURN                                                                                                                                        |                                          |  |
| 1                                | 25.890          | 0                                | 11                        | 0.750                       |                               | <b>NOTES</b><br>1. TUBE ROTATION, FROM PLANE OF FIRST BEND CCW VIEWED FROM B END, DEGREES.<br>2. MINIMUM BEND RADII PER MS33611.<br>3. FLUSH.<br>4. SQUARE CUT AND CHAMFER. |                                          |  |
| 2                                |                 |                                  |                           |                             |                               |                                                                                                                                                                             |                                          |  |
| 3                                |                 |                                  |                           |                             |                               |                                                                                                                                                                             |                                          |  |
| 4                                |                 |                                  |                           |                             |                               |                                                                                                                                                                             |                                          |  |
| 5                                |                 |                                  |                           |                             |                               |                                                                                                                                                                             |                                          |  |
| 6                                |                 |                                  |                           |                             |                               |                                                                                                                                                                             |                                          |  |
| 7                                |                 |                                  |                           |                             |                               |                                                                                                                                                                             |                                          |  |
| 8                                |                 |                                  |                           |                             |                               |                                                                                                                                                                             |                                          |  |
| 9                                |                 |                                  |                           |                             |                               |                                                                                                                                                                             |                                          |  |
| 10                               |                 |                                  |                           |                             |                               |                                                                                                                                                                             |                                          |  |
| 11                               |                 |                                  |                           |                             |                               |                                                                                                                                                                             |                                          |  |
| 12                               |                 |                                  |                           |                             |                               |                                                                                                                                                                             |                                          |  |
|                                  |                 |                                  |                           |                             |                               |                                                                                                                                                                             |                                          |  |
| HELICOPTER SERIAL NOS            |                 |                                  |                           |                             | MFR CODE 78286                |                                                                                                                                                                             |                                          |  |
| NEXT ASSY 70652-03250-012, -014  |                 |                                  |                           |                             | TUBE PART NO. 70652-03252-160 |                                                                                                                                                                             |                                          |  |

FO0292\_9  
SA

FIGURE H-41. HYDRAULIC TUBING (SHEET 9 OF 13)

Change 9

H-89

## TUBE BEND DATA

| SPECIFICATION<br>AMS 5561       |          | MATERIAL<br>21-6-9 ST STL |                    | OD<br>0.250          | GAGE<br>0.016 | STRAIGHT LENGTH<br>39.012                                                                                                                                                   |                   | FINISH SPEC<br>PASSIVATE (NOTE 3) |  |
|---------------------------------|----------|---------------------------|--------------------|----------------------|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-----------------------------------|--|
| ENDS                            |          |                           |                    |                      | TYPE          | COLOR CODE                                                                                                                                                                  | CONNECTING POINTS |                                   |  |
| A                               | (NOTE 4) | D10036-4                  |                    | PERMA-SWAGE          | MIL-STD-1247  | FROM - PERMASWAGE UNION                                                                                                                                                     |                   |                                   |  |
| B                               | (NOTE 4) | D10036-4                  |                    | PERMA-SWAGE          |               | TO - PERMASWAGE UNION                                                                                                                                                       |                   |                                   |  |
| BEND NO.                        | INCHES C | TUBE ROTATION (NOTE 1)    | BEND ANGLE DEGREES | BEND RADIUS (NOTE 2) | MFR NOTES     | FUNCTION                                                                                                                                                                    |                   |                                   |  |
|                                 |          |                           |                    |                      |               | FIRST STAGE TAIL ROTOR SERVO, PRESSURE                                                                                                                                      |                   |                                   |  |
| 1                               | 11.070   | 0                         | 14                 | 0.750                |               | <b>NOTES</b><br>1. TUBE ROTATION, FROM PLANE OF FIRST BEND CCW VIEWED FROM B END, DEGREES.<br>2. MINIMUM BEND RADII PER MS33611.<br>3. FLUSH.<br>4. SQUARE CUT AND CHAMFER. |                   |                                   |  |
| 2                               |          |                           |                    |                      |               |                                                                                                                                                                             |                   |                                   |  |
| 3                               |          |                           |                    |                      |               |                                                                                                                                                                             |                   |                                   |  |
| 4                               |          |                           |                    |                      |               |                                                                                                                                                                             |                   |                                   |  |
| 5                               |          |                           |                    |                      |               |                                                                                                                                                                             |                   |                                   |  |
| 6                               |          |                           |                    |                      |               |                                                                                                                                                                             |                   |                                   |  |
| 7                               |          |                           |                    |                      |               |                                                                                                                                                                             |                   |                                   |  |
| 8                               |          |                           |                    |                      |               |                                                                                                                                                                             |                   |                                   |  |
| 9                               |          |                           |                    |                      |               |                                                                                                                                                                             |                   |                                   |  |
| 10                              |          |                           |                    |                      |               |                                                                                                                                                                             |                   |                                   |  |
| 11                              |          |                           |                    |                      |               |                                                                                                                                                                             |                   |                                   |  |
| 12                              |          |                           |                    |                      |               |                                                                                                                                                                             |                   |                                   |  |
|                                 |          |                           |                    |                      |               |                                                                                                                                                                             |                   |                                   |  |
| HELICOPTER SERIAL NOS           |          |                           |                    |                      |               | MFR CODE 78286                                                                                                                                                              |                   |                                   |  |
| NEXT ASSY 70652-03250-012, -014 |          |                           |                    |                      |               | TUBE PART NO. 70652-03252-161                                                                                                                                               |                   |                                   |  |

FO0292\_10  
SA

FIGURE H-41. HYDRAULIC TUBING (SHEET 10 OF 13)

## TUBE BEND DATA

|                                  |                 |                                  |                           |                             |                      |                                                                                                                                                                             |                                          |  |
|----------------------------------|-----------------|----------------------------------|---------------------------|-----------------------------|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|--|
| <b>SPECIFICATION</b><br>AMS 5561 |                 | <b>MATERIAL</b><br>21-6-9 ST STL |                           | <b>OD</b><br>0.250          | <b>GAGE</b><br>0.016 | <b>STRAIGHT LENGTH</b><br>83.00                                                                                                                                             | <b>FINISH SPEC</b><br>PASSIVATE (NOTE 3) |  |
| <b>ENDS</b>                      |                 |                                  |                           |                             | <b>TYPE</b>          | <b>COLOR CODE</b>                                                                                                                                                           | <b>CONNECTING POINTS</b>                 |  |
| <b>A</b>                         | (NOTE 4)        |                                  | D10036-4                  |                             | PERMA-SWAGE          | MIL-STD-1247                                                                                                                                                                | FROM - PERMASWAGE UNION                  |  |
| <b>B</b>                         | (NOTE 4)        |                                  | D10036-4                  |                             | PERMA-SWAGE          |                                                                                                                                                                             | TO - PERMASWAGE UNION                    |  |
| <b>BEND NO.</b>                  | <b>INCHES C</b> | <b>TUBE ROTATION (NOTE 1)</b>    | <b>BEND ANGLE DEGREES</b> | <b>BEND RADIUS (NOTE 2)</b> | <b>MFR NOTES</b>     | <b>FUNCTION</b>                                                                                                                                                             |                                          |  |
|                                  |                 |                                  |                           |                             |                      | FIRST STAGE AND SECOND STAGE TAIL ROTOR SERVO, RETURN                                                                                                                       |                                          |  |
| 1                                | STRAIGHT        | TUBE                             |                           |                             |                      | <b>NOTES</b><br>1. TUBE ROTATION, FROM PLANE OF FIRST BEND CCW VIEWED FROM B END, DEGREES.<br>2. MINIMUM BEND RADII PER MS33611.<br>3. FLUSH.<br>4. SQUARE CUT AND CHAMFER. |                                          |  |
| 2                                |                 |                                  |                           |                             |                      |                                                                                                                                                                             |                                          |  |
| 3                                |                 |                                  |                           |                             |                      |                                                                                                                                                                             |                                          |  |
| 4                                |                 |                                  |                           |                             |                      |                                                                                                                                                                             |                                          |  |
| 5                                |                 |                                  |                           |                             |                      |                                                                                                                                                                             |                                          |  |
| 6                                |                 |                                  |                           |                             |                      |                                                                                                                                                                             |                                          |  |
| 7                                |                 |                                  |                           |                             |                      |                                                                                                                                                                             |                                          |  |
| 8                                |                 |                                  |                           |                             |                      |                                                                                                                                                                             |                                          |  |
| 9                                |                 |                                  |                           |                             |                      |                                                                                                                                                                             |                                          |  |
| 10                               |                 |                                  |                           |                             |                      |                                                                                                                                                                             |                                          |  |
| 11                               |                 |                                  |                           |                             |                      |                                                                                                                                                                             |                                          |  |
| 12                               |                 |                                  |                           |                             |                      |                                                                                                                                                                             |                                          |  |
|                                  |                 |                                  |                           |                             |                      |                                                                                                                                                                             |                                          |  |
| HELICOPTER SERIAL NOS            |                 |                                  |                           |                             |                      | MFR CODE 78286                                                                                                                                                              |                                          |  |
| NEXT ASSY 70652-05250-011, -012  |                 |                                  |                           |                             |                      | TUBE PART NO. 70652-05251-149                                                                                                                                               |                                          |  |

FO0292\_11  
SA

FIGURE H-41. HYDRAULIC TUBING (SHEET 11 OF 13)

Change 9

H-91

## TUBE BEND DATA




| SPECIFICATION<br>AMS 5561       |          | MATERIAL<br>21-6-9 ST STL |                    | OD<br>0.250          | GAGE<br>0.016 | STRAIGHT LENGTH<br>49.771                                                  |                   | FINISH SPEC<br>PASSIVATE (NOTE 3) |  |
|---------------------------------|----------|---------------------------|--------------------|----------------------|---------------|----------------------------------------------------------------------------|-------------------|-----------------------------------|--|
| ENDS                            |          |                           |                    |                      | TYPE          | COLOR CODE                                                                 | CONNECTING POINTS |                                   |  |
| A                               | (NOTE 4) | D10036-4                  |                    | PERMA-SWAGE          | MIL-STD-1247  | FROM - PERMASWAGE UNION                                                    |                   |                                   |  |
| B                               | (NOTE 4) | D10036-4                  |                    | PERMA-SWAGE          |               | TO - PERMASWAGE UNION                                                      |                   |                                   |  |
| BEND NO.                        | INCHES C | TUBE ROTATION (NOTE 1)    | BEND ANGLE DEGREES | BEND RADIUS (NOTE 2) | MFR NOTES     | FUNCTION                                                                   |                   |                                   |  |
|                                 |          |                           |                    |                      |               | FIRST STAGE TAIL ROTOR SERVO, PRESSURE                                     |                   |                                   |  |
|                                 |          |                           |                    |                      |               | NOTES                                                                      |                   |                                   |  |
| 1                               | 1.77     | 0                         | 32.6               | 0.750                |               | 1. TUBE ROTATION, FROM PLANE OF FIRST BEND CCW VIEWED FROM B END, DEGREES. |                   |                                   |  |
| 2                               | 1.87     | 110.3                     | 22.0               | 0.750                |               | 2. MINIMUM BEND RADII PER MS33611.                                         |                   |                                   |  |
| 3                               |          |                           |                    |                      |               | 3. FLUSH.                                                                  |                   |                                   |  |
| 4                               |          |                           |                    |                      |               | 4. SQUARE CUT AND CHAMFER.                                                 |                   |                                   |  |
| 5                               |          |                           |                    |                      |               |                                                                            |                   |                                   |  |
| 6                               |          |                           |                    |                      |               |                                                                            |                   |                                   |  |
| 7                               |          |                           |                    |                      |               |                                                                            |                   |                                   |  |
| 8                               |          |                           |                    |                      |               |                                                                            |                   |                                   |  |
| 9                               |          |                           |                    |                      |               |                                                                            |                   |                                   |  |
| 10                              |          |                           |                    |                      |               |                                                                            |                   |                                   |  |
| 11                              |          |                           |                    |                      |               |                                                                            |                   |                                   |  |
| 12                              |          |                           |                    |                      |               |                                                                            |                   |                                   |  |
|                                 |          |                           |                    |                      |               |                                                                            |                   |                                   |  |
| HELICOPTER SERIAL NOS           |          |                           |                    |                      |               | MFR CODE 78286                                                             |                   |                                   |  |
| NEXT ASSY 70652-03250-013, -015 |          |                           |                    |                      |               | TUBE PART NO. 70652-03252-143                                              |                   |                                   |  |

FO0292\_12  
SA

FIGURE H-41. HYDRAULIC TUBING (SHEET 12 OF 13)

| SPECIFICATION<br>AMS 5561       |          | MATERIAL<br>21-6-9 ST STL |                    | OD<br>0.250             | GAGE<br>0.016                 | STRAIGHT LENGTH<br>71.865 |                                                                                                                                                                          | FINISH SPEC<br>PASSIVATE<br>(NOTE 3) |         |
|---------------------------------|----------|---------------------------|--------------------|-------------------------|-------------------------------|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|---------|
| ENDS                            |          |                           |                    |                         | TYPE                          | COLOR CODE                |                                                                                                                                                                          | CONNECTING POINTS                    |         |
| A                               | (NOTE 4) |                           | D10036-4           |                         | PERMASWAGE                    | MIL-STD-1247              |                                                                                                                                                                          | FROM - PERMASWAGE UNION              |         |
| B                               | (NOTE 4) |                           | D10021A-4          |                         | PERMASWAGE                    |                           |                                                                                                                                                                          | TO - PERMASWAGE ELBOW                |         |
| BEND NO.                        | INCHES C | TUBE ROTATION<br>(NOTE 1) | BEND ANGLE DEGREES | BEND RADIUS<br>(NOTE 2) | MFR NOTES                     |                           | FUNCTION                                                                                                                                                                 |                                      |         |
|                                 |          |                           |                    |                         |                               |                           | FIRST STAGE TAIL ROTOR SERVO, PRESSURE                                                                                                                                   |                                      |         |
| 1                               | 70.105   | 0                         | 37                 | 0.750                   |                               |                           | NOTES<br><br>1. TUBE ROTATION, FROM PLANE OF FIRST BEND CCW VIEWED FROM B END, DEGREES.<br>2. MINIMUM BEND RADII PER MS33611.<br>3. FLUSH.<br>4. SQUARE CUT AND CHAMFER. |                                      |         |
| 2                               | 48.994   | 178                       | 38                 | 0.750                   |                               |                           |                                                                                                                                                                          |                                      |         |
| 3                               | 44.932   | 239                       | 47                 | 0.750                   |                               |                           |                                                                                                                                                                          |                                      |         |
| 4                               | 34.282   | 56                        | 50                 | 0.750                   |                               |                           |                                                                                                                                                                          |                                      |         |
| 5                               | 9.166    | 37                        | 64                 | 0.750                   |                               |                           |                                                                                                                                                                          |                                      |         |
| 6                               | 5.106    | 226                       | 150                | 0.750                   |                               |                           |                                                                                                                                                                          |                                      |         |
| 7                               |          |                           |                    |                         |                               |                           |                                                                                                                                                                          |                                      |         |
| 8                               |          |                           |                    |                         |                               |                           |                                                                                                                                                                          |                                      |         |
| 9                               |          |                           |                    |                         |                               |                           |                                                                                                                                                                          |                                      |         |
| 10                              |          |                           |                    |                         |                               |                           |                                                                                                                                                                          |                                      |         |
| 11                              |          |                           |                    |                         |                               |                           |                                                                                                                                                                          |                                      |         |
| 12                              |          |                           |                    |                         |                               |                           |                                                                                                                                                                          |                                      |         |
| HELICOPTER SERIAL NOS           |          |                           |                    |                         |                               |                           | SHEET 58                                                                                                                                                                 |                                      | ITEM 44 |
|                                 |          |                           |                    |                         |                               | MFR CODE 78286            |                                                                                                                                                                          |                                      |         |
| NEXT ASSY 70652-05250-011, -012 |          |                           |                    |                         | TUBE PART NO. 70652-05251-143 |                           |                                                                                                                                                                          |                                      |         |

FIGURE H-41. HYDRAULIC TUBING (SHEET 13 OF 13)

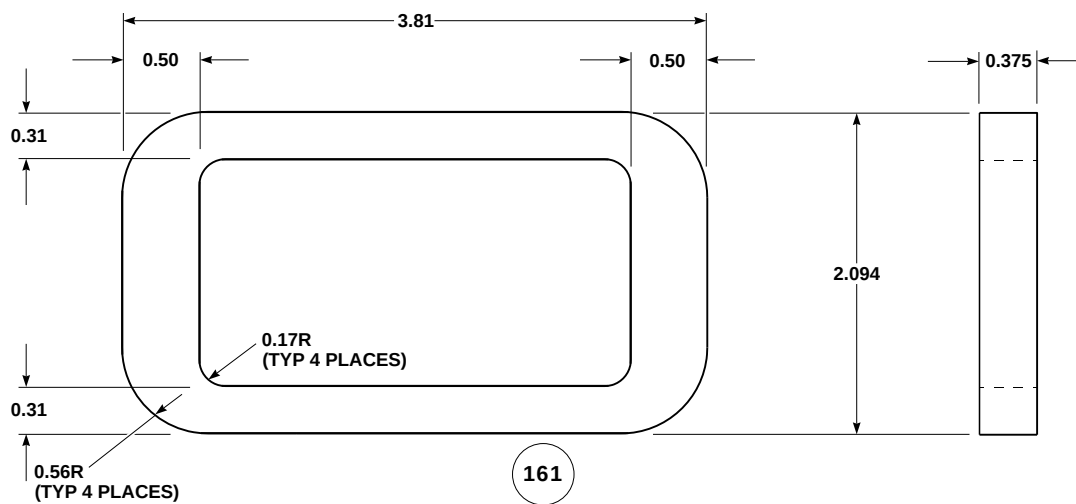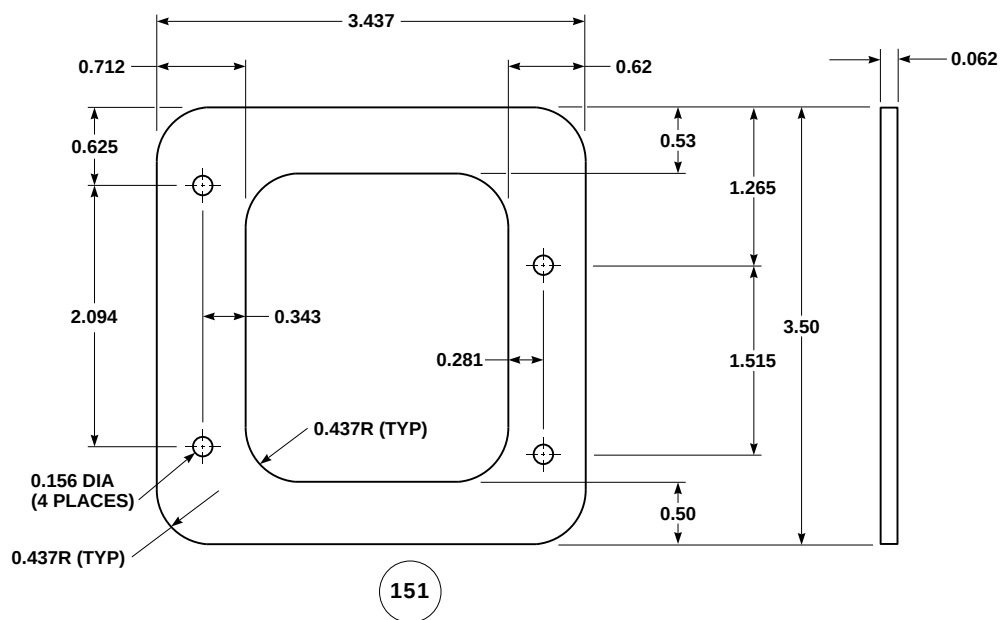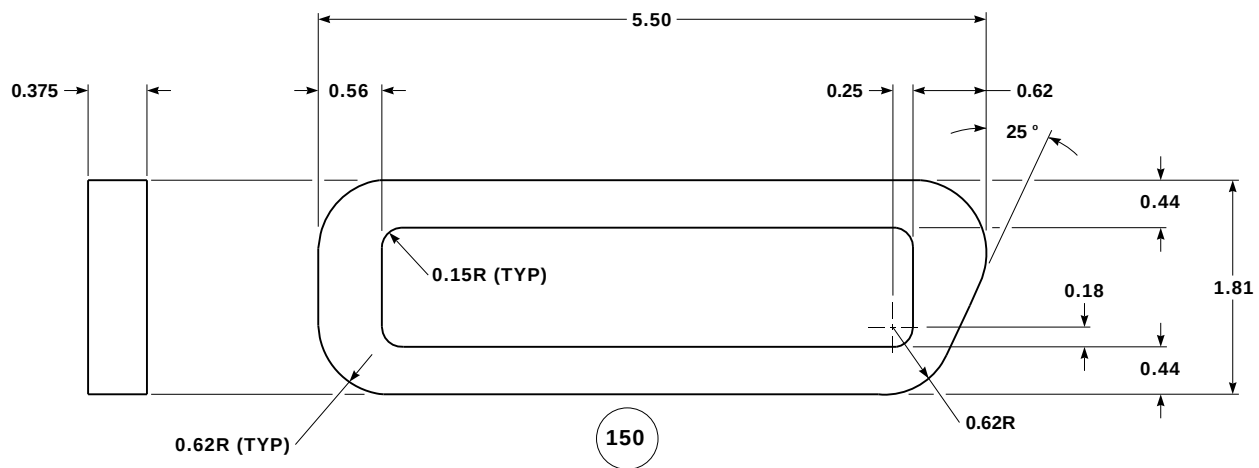

AK1645\_1  
SA

FIGURE H-42. DUCT INSTALLATION SEAL (SHEET 1 OF 2)

| NOMENCLATURE | SIKORSKY PART NUMBER |
|--------------|----------------------|
| SEAL         | 70500-02058-150      |
|              | 70500-02058-151      |
|              | 70500-02058-161      |

## NOTES


1. MAKE -150, -161 FROM SHEET RUBBER, MIL-R-6130, TYPE 2, GRADE A, SOFT, 0.375 INCH THICK, NSN 5330-00-232-2420.
2. ALL DIMENSIONS ARE IN INCHES.
3. MAKE -151 FROM SHEET RUBBER, MIL-R-6855, CLASS 2, TYPE A, GRADE 40, 0.062 INCH THICK, NSN 9320-00-057-9820.
4. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GRAY INK, TT-I-1795. USE 1/16 - 1/8 - INCH HIGH SANS SERIF CHARACTERS.

EXAMPLE: P / N 70216-02401-107 3Q 86  
PART NUMBER THIRD QUARTER 1986

PART NUMBER: 70500-02058-150, -151, -161

AK1645\_2  
SA

**FIGURE H-42. DUCT INSTALLATION SEAL (SHEET 2 OF 2)**

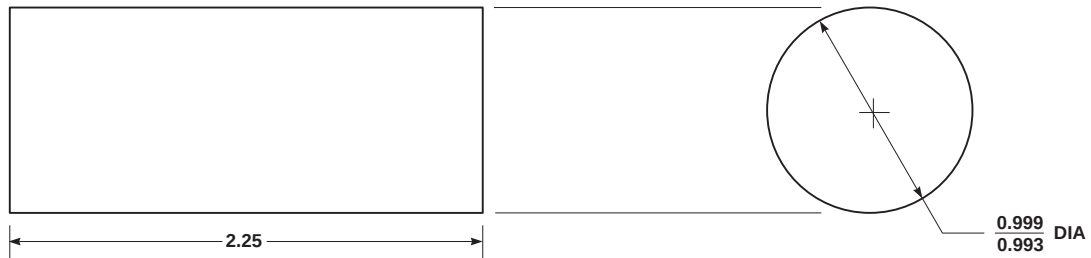

#### NOTES


1. MAKE FROM AN16-33 BOLT, NSN 5306-00-145-6790.
2. CUT THREADED PORTION AND HEAD FROM BOLT TO REQUIRED SIZE, AS SHOWN.
3. ALL DIMENSIONS ARE IN INCHES.
4. BREAK ALL SHARP EDGES TO 0.005 - 0.015 RADIUS.
5. CADMIUM-PLATE ENDS, AS REQUIRED, PER QQ-P-416, TYPE II, CLASS 3.
6. IDENTIFY PARTS PER MIL-STD-130.
7. FOR ALTERNATE MATERIAL, USE NONCORROSION RESISTANT STEEL ROD, 1 INCH DIAMETER, MIL-S-5626, NSN 9510-00-596-3933.

PART NUMBER: 1420-BH-001

AK1648  
SA

FIGURE H-43. LOCATING TOOL

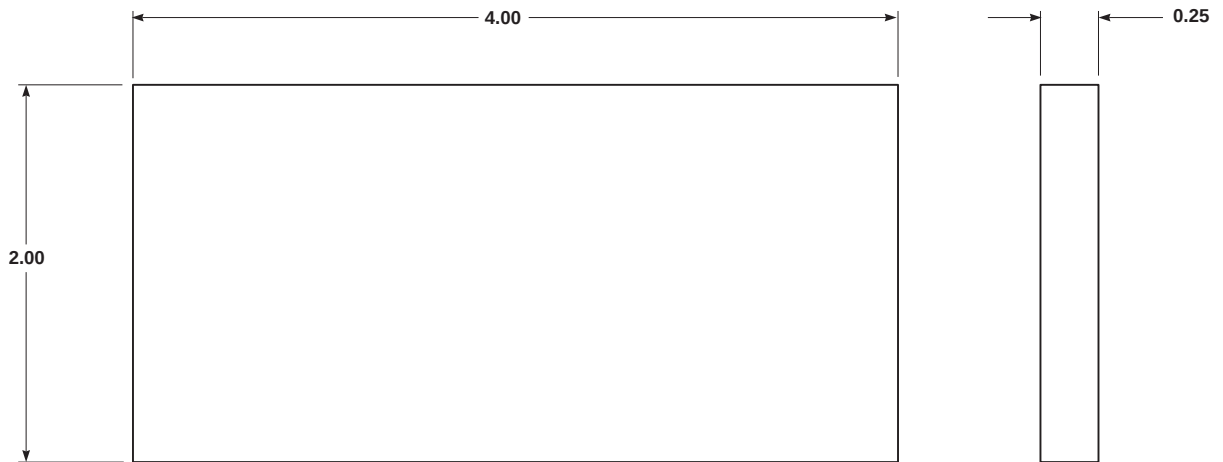


**NOTES**

1. MAKE FROM 0.25 THICK STEEL STOCK, MIL-S-5626, NSN 9510-00-596-2176.
2. ALL DIMENSIONS ARE IN INCHES.
3. BREAK ALL SHARP EDGES TO 0.005 - 0.015 RADIUS.
4. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 1420-BH-002

AK1649  
SA**FIGURE H-44. SIZING BLOCK**

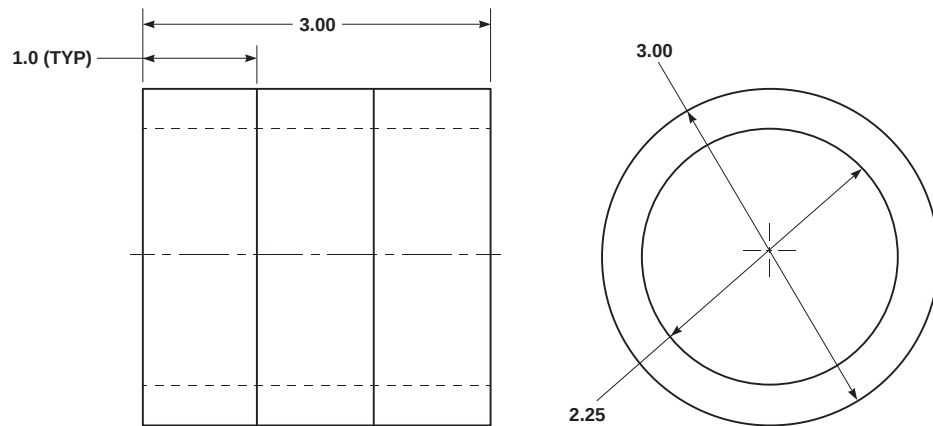


**NOTES**

1. MAKE FROM 1 INCH THICK PHENOLIC SHEET, MIL-P-15035, NSN 9330-00-585-8678.
2. CUT THREE RINGS FROM PHENOLIC SHEET AS SHOWN IN FIGURE.
3. ALL DIMENSIONS ARE IN INCHES.
4. SURFACE FINISH 125 ALL MATCHED SURFACES.
5. BREAK ALL SHARP EDGES TO 0.005 - 0.015 RADIUS.
6. ASSEMBLE AND BOND RINGS, AS SHOWN, USING GENERAL PURPOSE CEMENT EC847, NSN 8040-00-262-9011.
7. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 1420-BH-007

AK1650  
SA

**FIGURE H-45. OIL PUMP INSTALLATION TOOL**

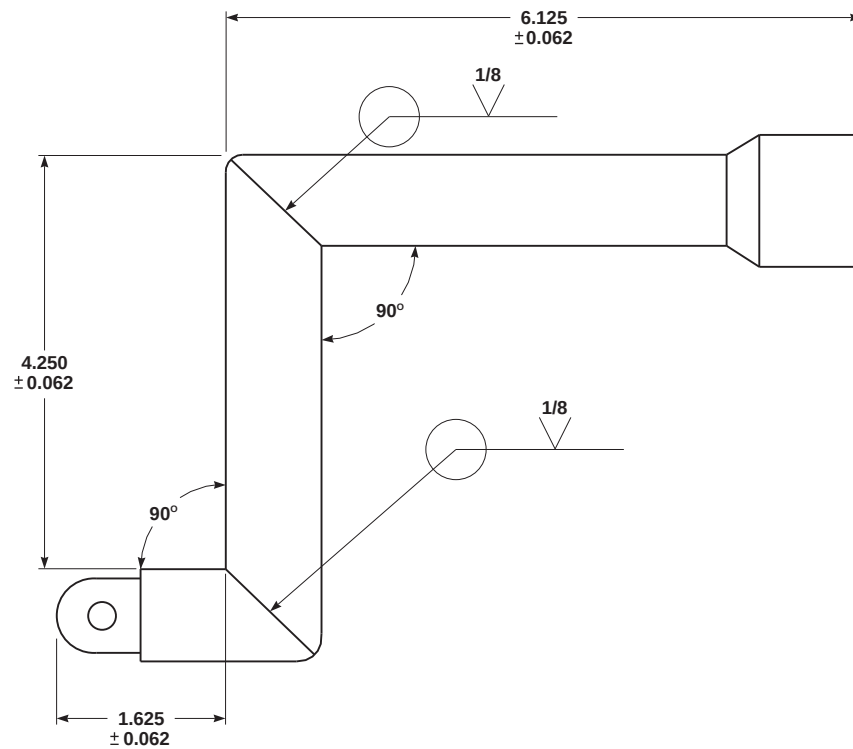


#### NOTES

1. MAKE FROM 16 INCH LONG, 3/4 INCH DRIVE EXTENSION, GGG-W-641, TYPE IV, CLASS 4, STYLE A, NSN 5120-00-227-8079.
2. CUT DRIVE EXTENSION AND WELD PER FIGURE.
3. ALL DIMENSIONS ARE IN INCHES.
4. GRIND WELDS TO A SMOOTH CONTOUR.
5. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 1420-BH-008

FO0293  
SA

**FIGURE H-46. MOUNTING BOLT ADAPTER**

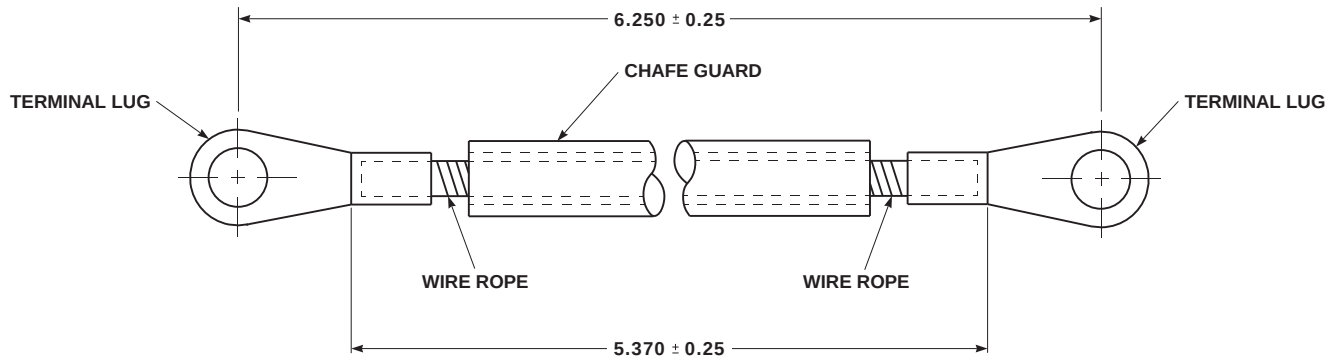


#### NOTES

1. MAKE FROM:
  - A. WIRE ROPE, FLEXIBLE, MIL-W-83420, TYPE I, COMPOSITION A OR B, NSN 4010-01-005-4775.
  - B. TERMINAL LUG, MS25036-113, NSN 5940-00-113-8183.
  - C. CHAFE GUARD (INSULATION SLEEVE) MIL-I-7444, TYPE I, NSN 5970-00-846-3165.
2. ALL DIMENSIONS ARE IN INCHES.
3. CUT WIRE ROPE AND CHAFE GUARD TO REQUIRED LENGTH, AS SHOWN. SLIDE CHAFE GUARD OVER WIRE ROPE AND ASSEMBLE TERMINAL LUGS TO EACH END. CRIMP LUGS TO WIRE ROPE PER MS3316.
4. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 1420-BH-009

AK1652  
SA

FIGURE H-47. CELL PULLER

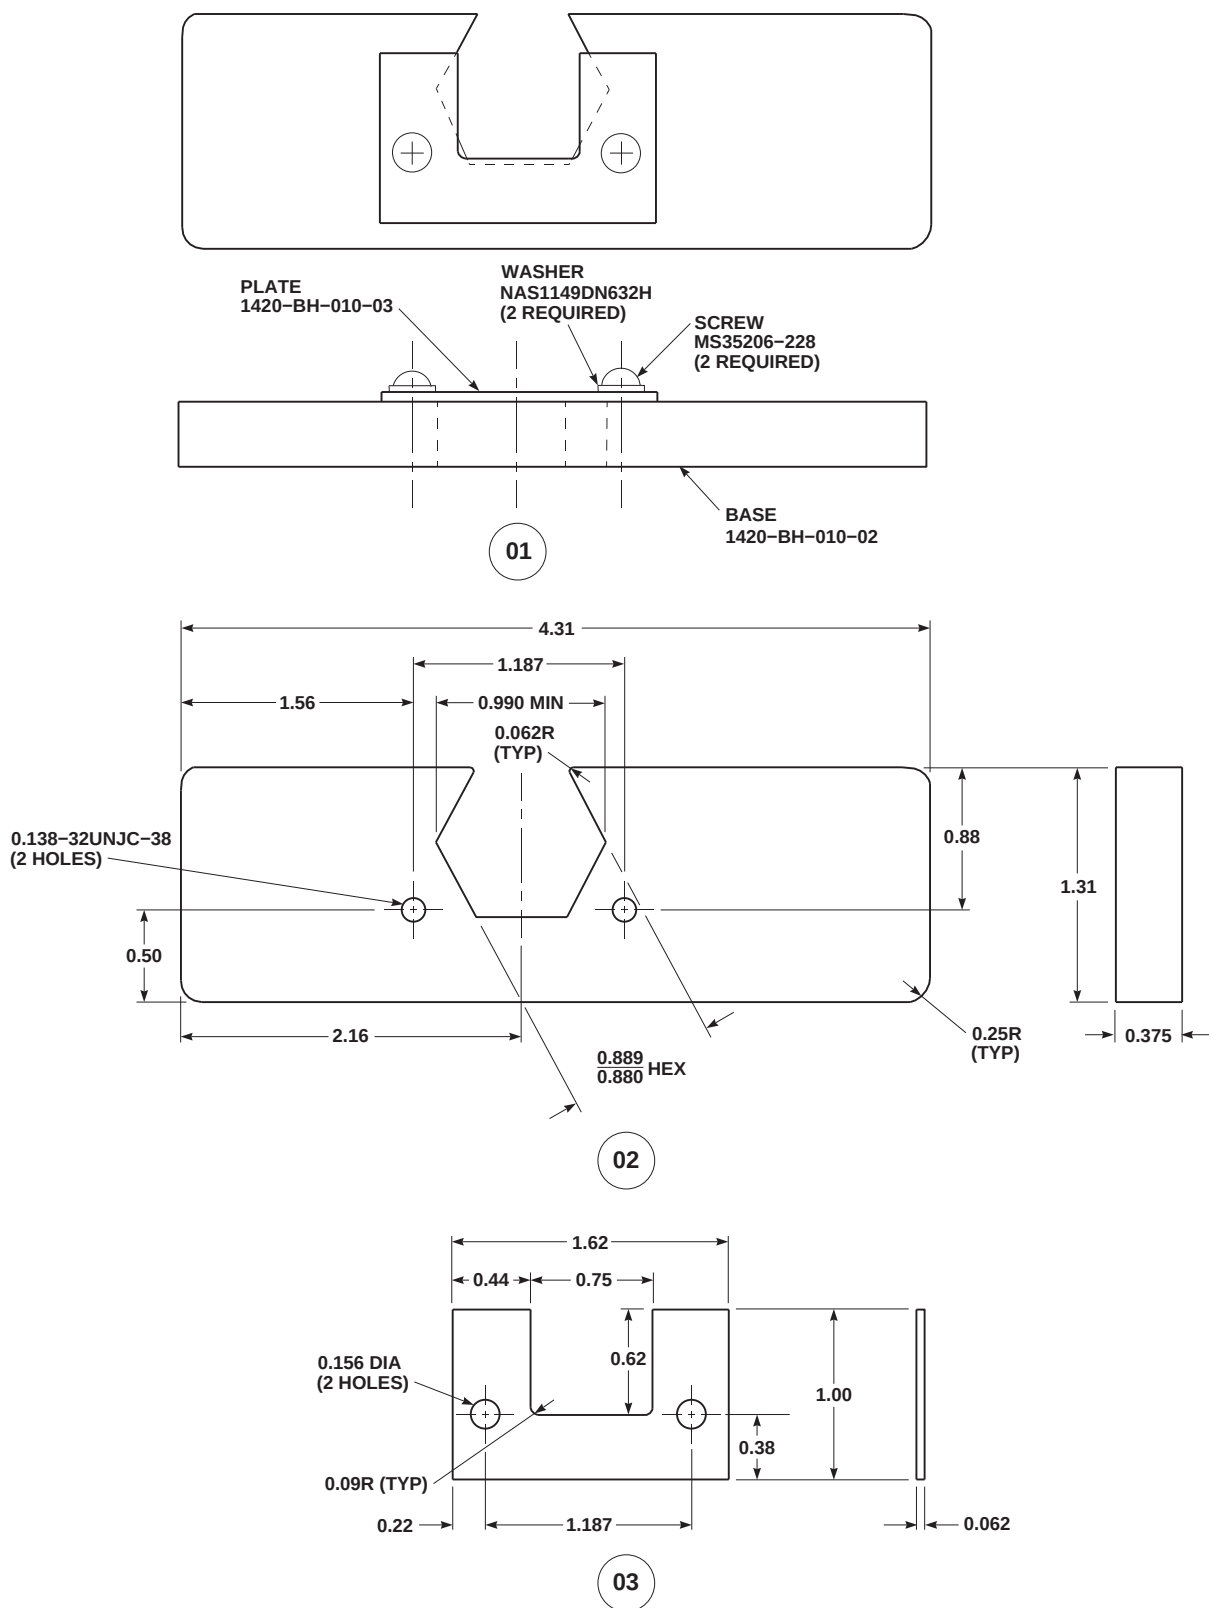

FO0294\_1  
SA

FIGURE H-48. FLIGHT CONTROL QUICK-DISCONNECT WRENCH (SHEET 1 OF 2)

| PART NUMBER    | DESCRIPTION | MATERIAL                               | QUANTITY | NSN              |
|----------------|-------------|----------------------------------------|----------|------------------|
| 1420-BH-010-02 | BASE        | 0.375 6061-T6 AL. ALLOY, QQ-A-250 / 11 | 1        | 9535-01-029-8266 |
| 1420-BH-010-03 | PLATE       | 0.062 6061-T6 AL. ALLOY, QQ-A-250 / 11 | 1        | 9535-01-084-4448 |
| NAS1149DN632H  | WASHER      | —                                      | 2        | 5310-00-167-0738 |
| MS35206-228    | SCREW       | —                                      | 2        | 5305-00-984-4988 |


## NOTES

1. MAKE BASE, 1420-BH-010-02, PER FIGURE. DRILL TWO HOLES, AS SHOWN. USE MATERIAL LISTED IN CHART.
2. MAKE PLATE, 1420-BH-010-03, PER FIGURE. DRILL TWO HOLES AS SHOWN. USE MATERIAL LISTED IN CHART.
3. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
4. TOLERANCE: ANGULAR,  $\pm 0^{\circ} 30'$ .  
LINEAR (EXCEPT HOLES), .XX =  $\pm 0.03$ , .XXX =  $\pm 0.010$ .
5. SURFACE FINISH 125 ALL MACHINED SURFACES.
6. BREAK SHARP EDGES TO 0.005 – 0.015 RADIUS.
7. ATTACH PLATE TO BASE USING WASHER (2), NAS1149DN632H, AND SCREW (2), MS35206-228, TO MAKE 1420-BH-010-01 WRENCH.
8. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 1420-BH-010-01

FO0294\_2A  
SA

## FIGURE H-48. FLIGHT CONTROL QUICK-DISCONNECT WRENCH (SHEET 2 OF 2)

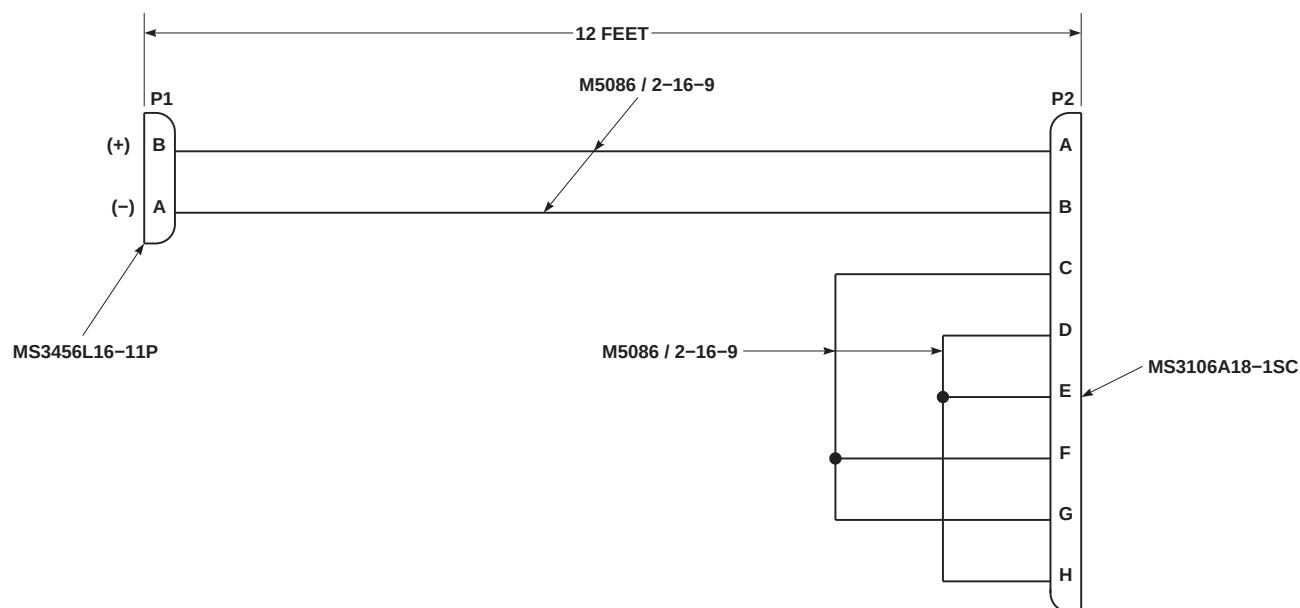

02

## POWER CABLE ASSEMBLY

CHART A

| PART NUMBER    | DESCRIPTION               | QUANTITY | NSN              |
|----------------|---------------------------|----------|------------------|
| MS3456L16-11P  | CONNECTOR, P1             | 1        | 5935-01-PAC-6669 |
| MS3106A18-1SC  | CONNECTOR, P2             | 1        | 5935-01-284-3967 |
| M5086 / 2-16-9 | WIRE, ELECTRICAL, 16 GAGE | 16 FEET  | 6145-00-578-6605 |


## NOTES

1. MAKE 1420-BH-011-02 POWER CABLE ASSEMBLY PER FIGURE, USING MATERIALS LISTED IN CHART A, OR APPROVED EQUIVALENT.
2. IDENTIFY P1 AND P2 CONNECTORS PER FIGURE AND MIL-STD-130.

PART NUMBER: 1420-BH-011-02

FA5317 1  
SA

FIGURE H-49. PITOT-STATIC TEST SET (SHEET 1 OF 3)

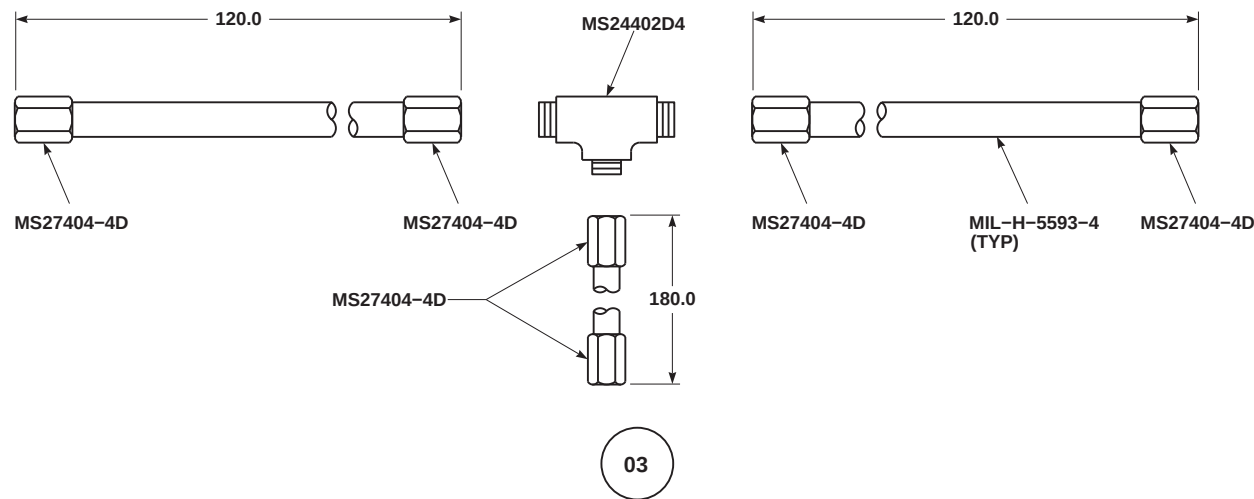

TEE AIR HOSE ASSEMBLY (AFCS)

CHART B

| PART NUMBER  | DESCRIPTION                 | QUANTITY  | NSN              |
|--------------|-----------------------------|-----------|------------------|
| MS24402D4    | TEE, TUBE, 1/4 INCH TUBE OD | 1         | 4730-00-722-1207 |
| MS27404-4D   | ADAPTER, 1/4 INCH TUBE OD   | 6         | 4730-00-497-4281 |
| MIL-H-5593-4 | HOSE, FLEXIBLE, 1/4 INCH ID | 300.0 IN. | 4720-00-540-1962 |

NOTES


1. MAKE 1420-BH-011-03 TEE AIR HOSE ASSEMBLY (AFCS) PER FIGURE, USING MATERIALS LISTED IN CHART B, OR APPROVED EQUIVALENT.
2. IDENTIFY ASSEMBLY WITH PART NUMBER AND NOMENCLATURE, 1420-BH-011-03, TEE AIR HOSE ASSEMBLY (AFCS), PER MIL-STD-130.
3. CAP ENDS OF HOSE WHEN NOT IN USE.

PART NUMBER: 1420-BH-011-03

AK1654\_2  
SA

FIGURE H-49. PITOT-STATIC TEST SET (SHEET 2 OF 3)



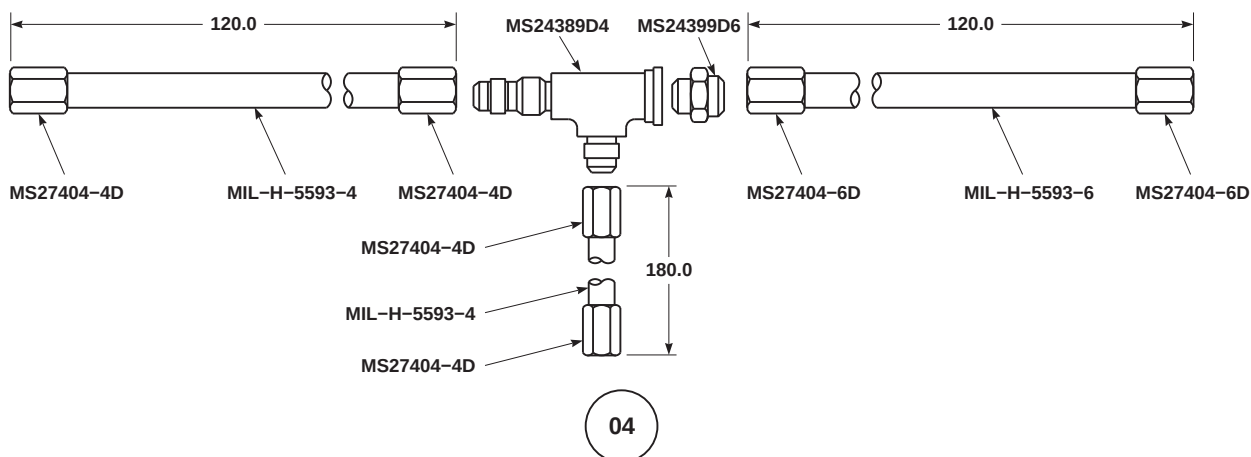

TEE AIR HOSE ASSEMBLY (PITOT STATIC/IFF)

CHART C

| PART NUMBER  | DESCRIPTION                 | QUANTITY  | NSN              |
|--------------|-----------------------------|-----------|------------------|
| MS24389D4    | TEE, TUBE, 1/4 INCH TUBE OD | 1         | 4730-00-804-8683 |
| MS24399D6    | REDUCER, 3/8 INCH TUBE OD   | 1         | 4730-00-752-9336 |
| MS27404-4D   | ADAPTER, 1/4 INCH TUBE OD   | 4         | 4730-00-497-4281 |
| MS27404-6D   | ADAPTER, 3/8 INCH TUBE OD   | 2         | 4730-00-278-5686 |
| MIL-H-5593-4 | HOSE, FLEXIBLE, 1/4 INCH ID | 300.0 IN. | 4720-00-540-1962 |
| MIL-H-5593-6 | HOSE, FLEXIBLE, 3/8 INCH ID | 120.0 IN. | 4720-00-720-1096 |

## NOTES

1. MAKE TEE AIR HOSE ASSEMBLY (PITOT-STATIC / IFF), 1420-BH-011-04, PER FIGURE, USING MATERIAL LISTED IN CHART C, OR APPROVED EQUIVALENT.
2. IDENTIFY ASSEMBLY WITH PART NUMBER AND NOMENCLATURE, TEE AIR HOSE ASSEMBLY (PITOT-STATIC / IFF), 1420-BH-001-04, PER MIL-STD-130.
3. ASSEMBLIES, 1420-BH-011-02, 1420-BH-011-03, AND 1420-BH-011-04, MAKE UP PITOT-STATIC TEST SET, 1420-BH-011-01.
4. CAP ENDS OF HOSE WHEN NOT IN USE.

PART NUMBER: 1420-BH-011-04

CHART D: ADTS 505


| ITEM | PART NUMBER      | DESCRIPTION                     | QUANTITY | NSN              |
|------|------------------|---------------------------------|----------|------------------|
| A    | MS2439907        | REDUCER, TUBE                   | 1        | 4370-00-684-7157 |
| B    | MS27404-4D       | ADAPTER, STRAIGHT, TUBE TO HOSE | 1        | 4730-00-497-4281 |
| C    | AS 505-53-3124MO | RED HOSE, ST / OPN AN4, 3M      | 1        | N / A            |

## NOTES

1. WHEN USING ADTS 505, ITEMS A AND B ARE TO BE DRAWN FROM DEFENSE STOCK.
2. ASSEMBLE ITEMS A AND B TOGETHER THEN ATTACH COMPONENT ASSY TO BARE END OF ITEM C (RED HOSE ADTS 505) AND TIGHTEN FIRMLY.
3. ATTACH COMPLETED RED HOSE ASSEMBLY TO ADTS 505 STATIC PORT USING AN4 FITTING SUPPLIED WITH RED HOSE, ITEM C FROM ADTS 505 TEST SET.

FA5317\_3  
SA

FIGURE H-49. PITOT-STATIC TEST SET (SHEET 3 OF 3)

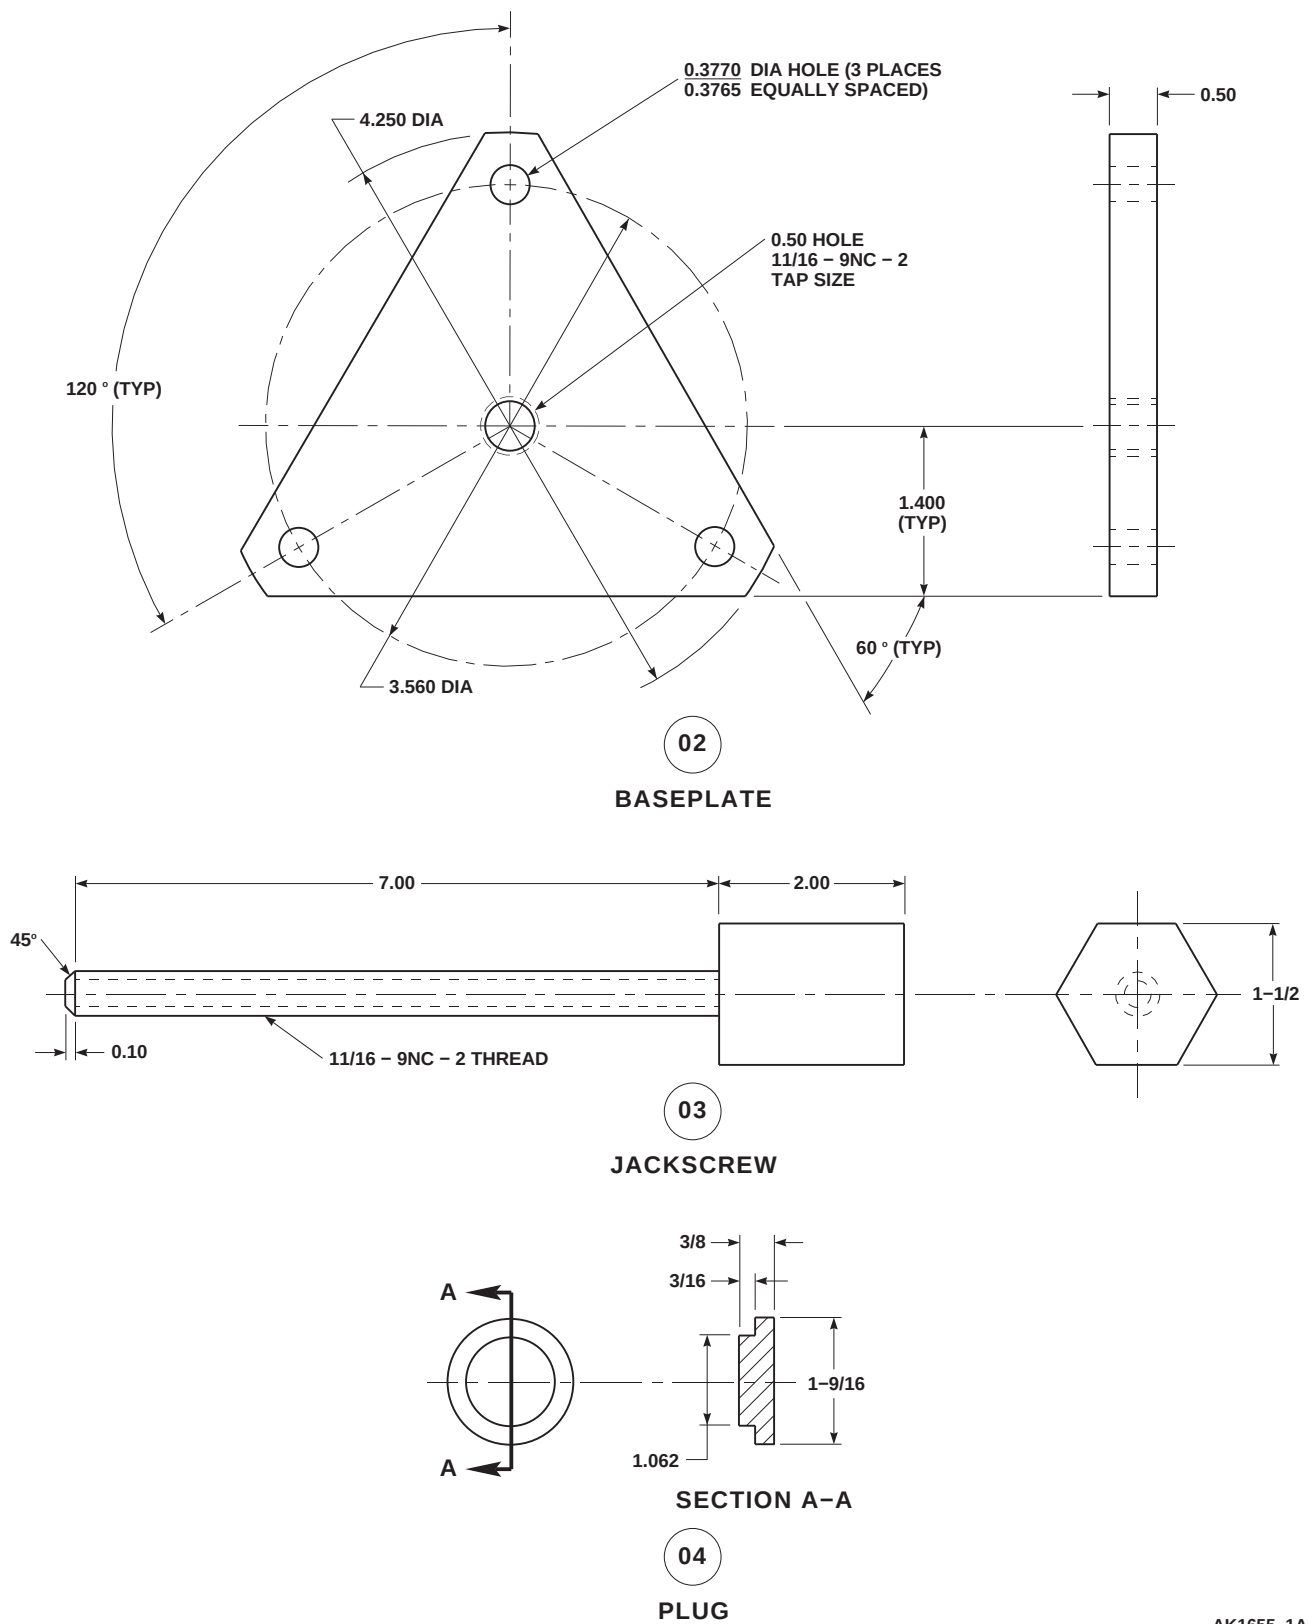

AK1655\_1A  
SA

FIGURE H-50. FLANGE PULLER (SHEET 1 OF 2)

| PART NUMBER    | DESCRIPTION | MAKE FROM MATERIAL                             | MAKE FROM NSN    |
|----------------|-------------|------------------------------------------------|------------------|
| 1420-BH-012-02 | BASE PLATE  | 0.50 4130 STEEL PLATE, MIL-S-18729             | 9515-00-294-9916 |
| 1420-BH-012-03 | JACKSCREW   | 1-1/2 INCH HEXAGON BAR, 4130 STEEL, MIL-S-6758 | 9510-00-528-5000 |
| 1420-BH-012-04 | PLUG        | 1-9/16 DIA ROD, 4130 STEEL, MIL-S-6758         | 9510-00-993-5836 |


## NOTES

1. MAKE 1420-BH-012-02 BASE PLATE, 1420-BH-012-03 JACKSCREW AND 1420-BH-012-04 PLUG PER FIGURE, USING MATERIALS LISTED IN CHART. DRILL AND TAP BASE PLATE AND THREAD JACKSCREW TO 11/16-9NC-2 THREAD SIZE PER INSTRUCTIONS IN FIGURE.
2. ALL DIMENSIONS ARE IN INCHES.
3. TOLERANCE: ANGULAR,  $\pm 0^{\circ} 30'$ .  
LINEAR, .XX =  $\pm 0.03$ , .XXX =  $\pm 0.010$ , X/X =  $\pm 1/32$ .
4. SURFACE FINISH 125 / ALL MACHINED SURFACES.
5. BREAK SHARP EDGES TO 0.005 - 0.015 RADIUS.
6. ASSEMBLE 1420-BH-012-02, 1420-BH-012-03, AND 1420-BH-012-04 TO MAKE 1420-BH-012-01 FLANGE PULLER.
7. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 1420-BH-012-01

AK1655\_2  
SA

## FIGURE H-50. FLANGE PULLER (SHEET 2 OF 2)

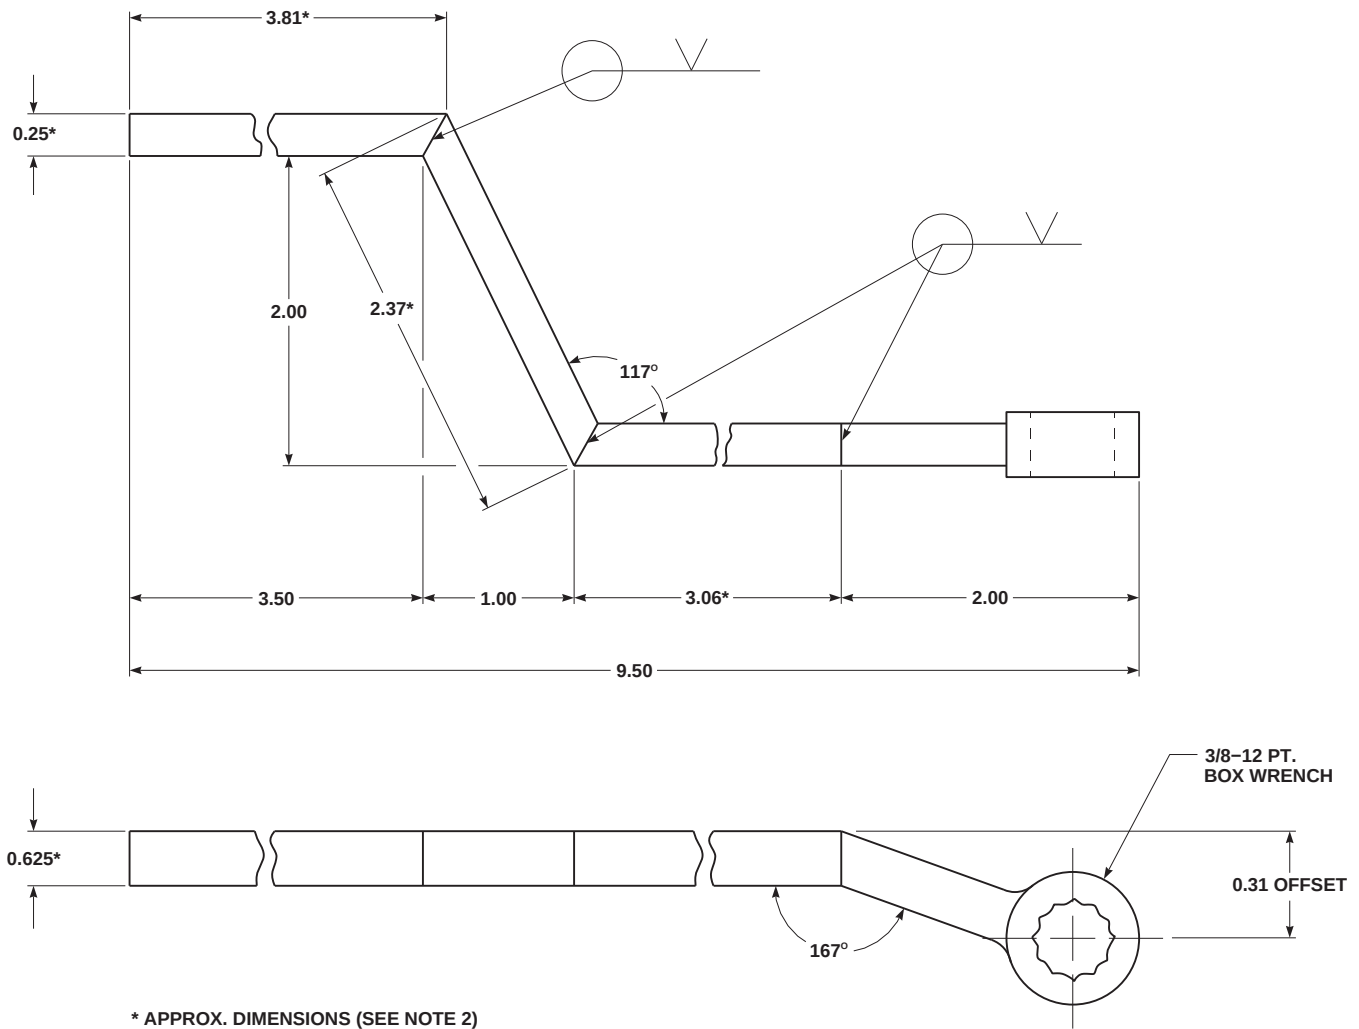


#### NOTES

1. USE HEAD OF 3/8 INCH BOX WRENCH, 12-POINT, PER GGG-W-1437, TYPE III, OR EQUIVALENT, NSN 5120-00-935-7362. CUT WRENCH AS SHOWN IN FIGURE AND STRAIGHTEN ANGULAR OFFSET.
2. MAKE HANDLE FROM 4130 STEEL BAR STOCK, MIL-S-18729, NSN 9510-01-032-3708. WIDTH AND THICKNESS DIMENSIONS OF BAR STOCK, AS SHOWN IN FIGURE, ARE APPROXIMATE. EXACT DIMENSIONS WILL DEPEND UPON CROSS-SECTIONAL DIMENSIONS OF MATING PART OF BOX END WRENCH USED. MAINTAIN DIMENSIONS NOT MARKED BY ASTERISK (\*).
3. TOLERANCE:  $\pm 0.05$  FOR FABRICATED HANDLE.
4. CUT BAR STOCK TO REQUIRED SIZES AND WELD PARTS PER INFORMATION IN FIGURE.
5. GRIND WELDS TO A SMOOTH CONTOUR.
6. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 1420-BH-013

AK1656  
SA

FIGURE H-51. PIVOT BEARING REPLACEMENT WRENCH

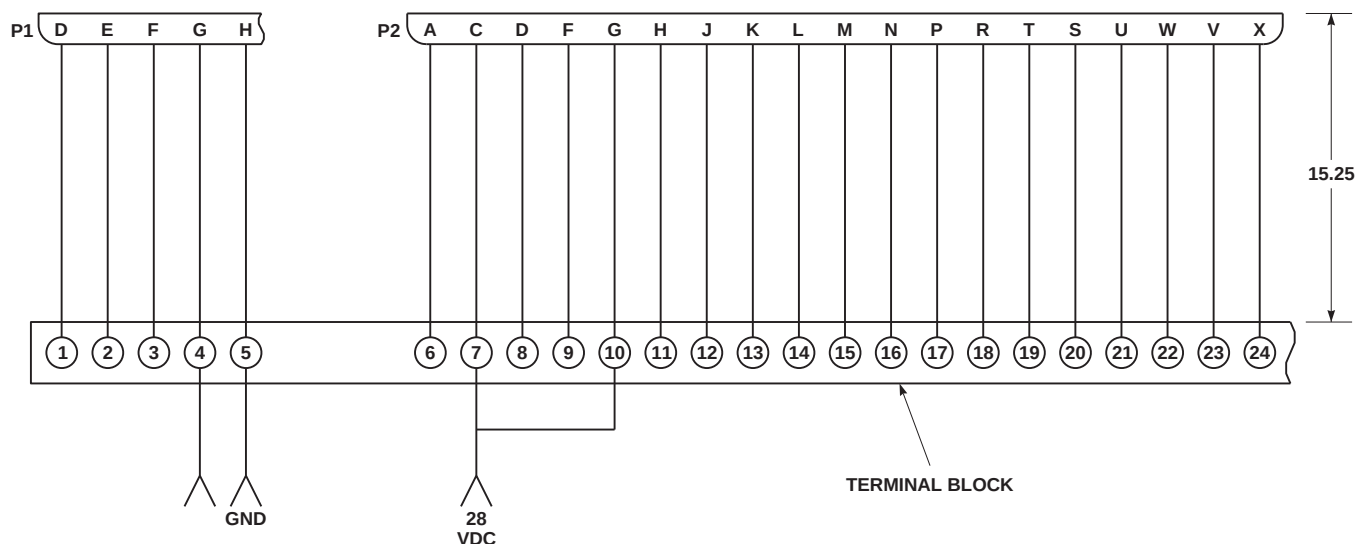

| PART NUMBER                  | DESCRIPTION                              | QUANTITY | NSN                                                  |
|------------------------------|------------------------------------------|----------|------------------------------------------------------|
| MS27212-1-28 OR EQUIVALENT   | TERMINAL BLOCK                           | 1        | 5440-00-132-2761 (10 PT)<br>5440-00-950-1610 (20 PT) |
| MS3476W12-8S                 | CONNECTOR, P1                            | 1        | 5935-01-108-8438                                     |
| MS3476W16-26S                | CONNECTOR, P2                            | 1        | 5935-01-106-3899                                     |
| M7078 / 3-20-7 OR EQUIVALENT | ELECTRICAL WIRE, 20-GAGE, MIL-C-7078 / 3 | 15 INCH  | 6145-01-293-1822                                     |


## NOTES

1. MAKE SWITCH PANEL TEST HARNESS AS SHOWN IN FIGURE, USING MATERIALS LISTED IN CHART, SELECT TERMINAL BLOCK, AS REQUIRED.
2. ALL DIMENSIONS ARE IN INCHES.
3. TIE WIRES TOGETHER OR COVER WITH APPROVED INSULATION TUBING.
4. IDENTIFY TEST HARNESS AND CONNECTORS P1 AND P2 PER FIGURE AND MIL-STD-130.

PART NUMBER: 1730-BH-001-01

AK1657B  
SA

FIGURE H-52. SWITCH PANEL TEST HARNESS

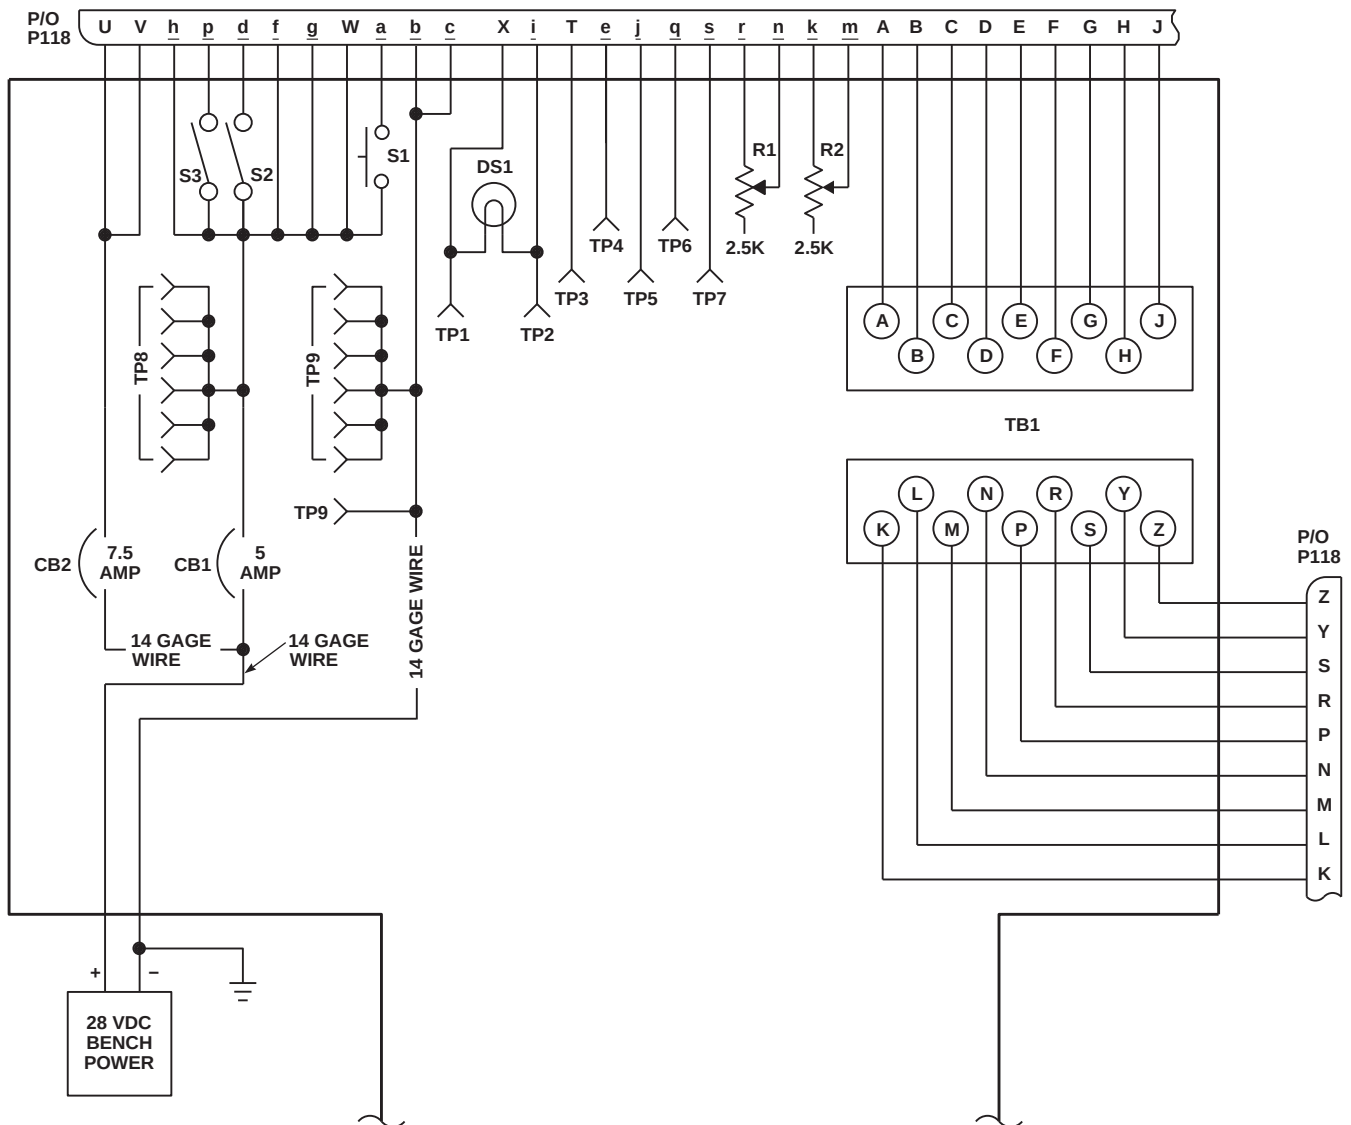

AK1658 1  
SA

FIGURE H-53. CAUTION ADVISORY TEST ADAPTER (SHEET 1 OF 3)

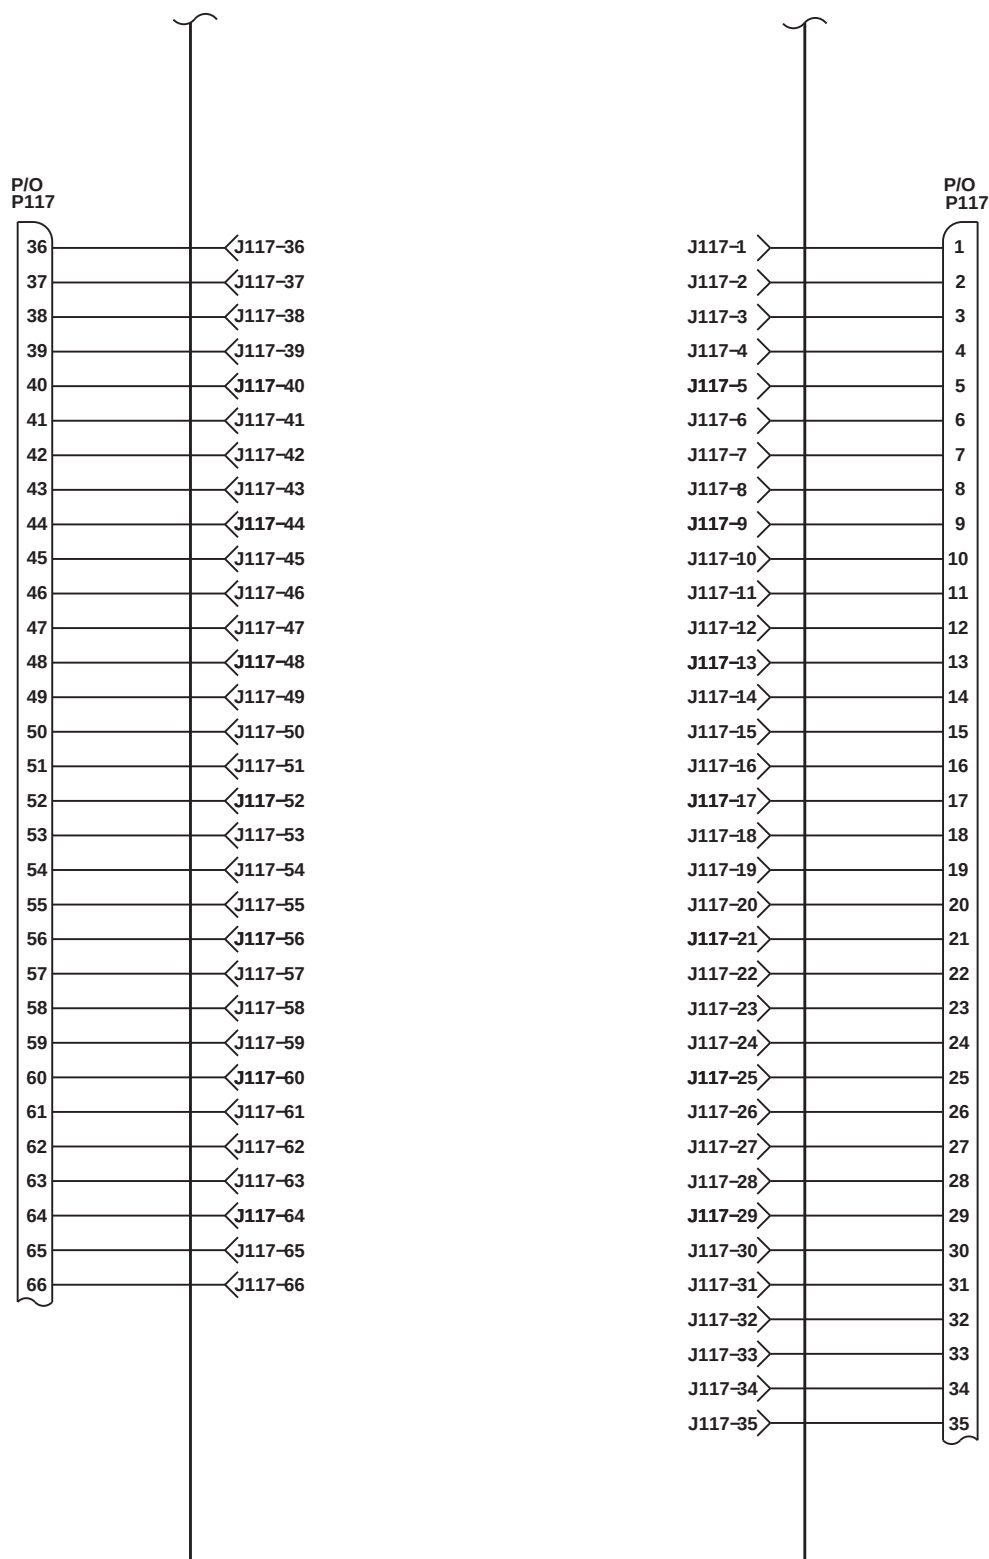
AK1658 2  
SA

FIGURE H-53. CAUTION ADVISORY TEST ADAPTER (SHEET 2 OF 3)

| PART NUMBER                  | DESCRIPTION                                        | QUANTITY | NSN              |
|------------------------------|----------------------------------------------------|----------|------------------|
| MS16108-8A                   | TEST POINT, TP1 THRU TP9                           | 9        | 5935-00-768-4232 |
| MS24509-5                    | CIRCUIT BREAKER, CB1                               | 1        | 5925-00-850-7244 |
| MS24509-7.5                  | CIRCUIT BREAKER, CB2                               | 1        | 5925-01-065-2956 |
| MS25089-5CR                  | SWITCH, S1                                         | 1        | 5930-00-578-2325 |
| MS25098-22                   | SWITCH, S2 AND S3                                  | 2        | 5930-00-172-2869 |
| MS27212-2-10                 | TERMINAL BLOCK, TB1                                | 2        | 5940-00-544-6306 |
| OR EQUIVALENT                | —                                                  | —        | —                |
| MS27467T9F-35S               | CONNECTOR P117                                     | 1        | 5935-00-521-2548 |
| MS3476L20-41S                | CONNECTOR P118                                     | 1        | 5935-00-009-3157 |
| M5086 / 2-14 OR EQUIVALENT   | ELECTRICAL WIRE, 14 GAGE PER MIL-W-5086 / 2        | AS REQ'D | 6145-00-815-8505 |
| M5086 / 2-20-9 OR EQUIVALENT | ELECTRICAL WIRE, 20 GAGE PER MIL-W-5068 / 2        | AS REQ'D | 6145-00-952-9290 |
| RV4LAYS252A                  | RESISTORS R1 AND R2                                | 2        | 5905-00-539-2567 |
| OR EQUIVALENT                | —                                                  | —        | —                |
| MS25237-327                  | LAMP                                               | 1        | 6240-00-155-7836 |
| 1010J6-100                   | SLEEVING, TEXTILE, TUBE INSULATION 3/4 ID YELLOW   | AS REQ'D | 5970-00-687-0298 |
| —                            | ALUMINUM BOX, 12.0 x 12.0 x 12.0 INCH (SEE NOTE 3) | 1        | —                |
| M39024 / 10-02               | TEST JACKS - RED                                   | 60       | 5935-00-687-8090 |
| M39024 / 10-03               | TEST JACKS - BLACK                                 | 18       | 5935-00-169-9437 |
| —                            | —                                                  | —        | 5935-00-762-0312 |

#### NOTES



1. MAKE TEST ADAPTER PER FIGURE USING MATERIALS LISTED IN CHART.
2. TEST POINTS BLACK: J117-13, J117-14, J117-18, J117-26, J117-29, J117-30, J117-34, J117-42, J117-45, J117-53, J117-61, J117-62, TP9 (6 JACKS). ALL OTHER TEST POINTS ARE RED.
3. BOX CAN BE PURCHASED FROM ZERO MFG. CO. 14501 49TH ST., NORTH CLEARWATER, FLORIDA 33520, OR LOCALLY FABRICATE USING 12 x 12 x 12, 050-2024-T3 ALCLAD, QQ-A-250 / 5, NSN 935-00-084-4450.
4. IDENTIFY PARTS PER MIL-STD-130.
5. USE 20 GAGE WIRE FOR ALL CONNECTIONS EXCEPT WHERE NOTED IN FIGURE.
6. COVER WIRES WITH INSULATION TUBING.

PART NUMBER: 1730-B4-002-01

AK1658\_3A  
SA


#### FIGURE H-53. CAUTION ADVISORY TEST ADAPTER (SHEET 3 OF 3)



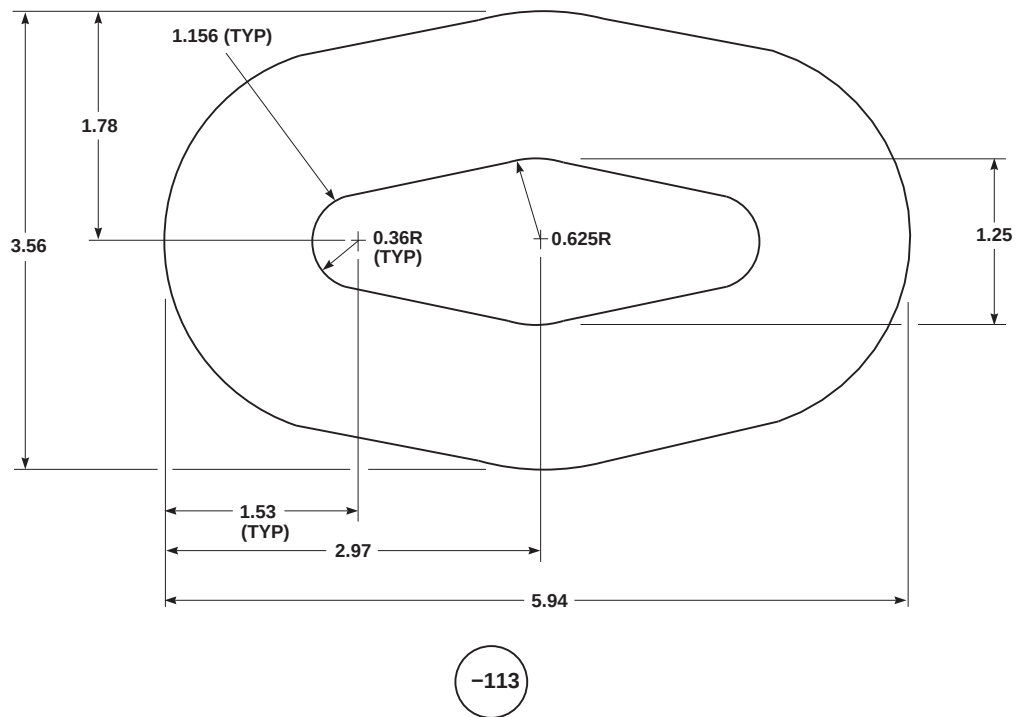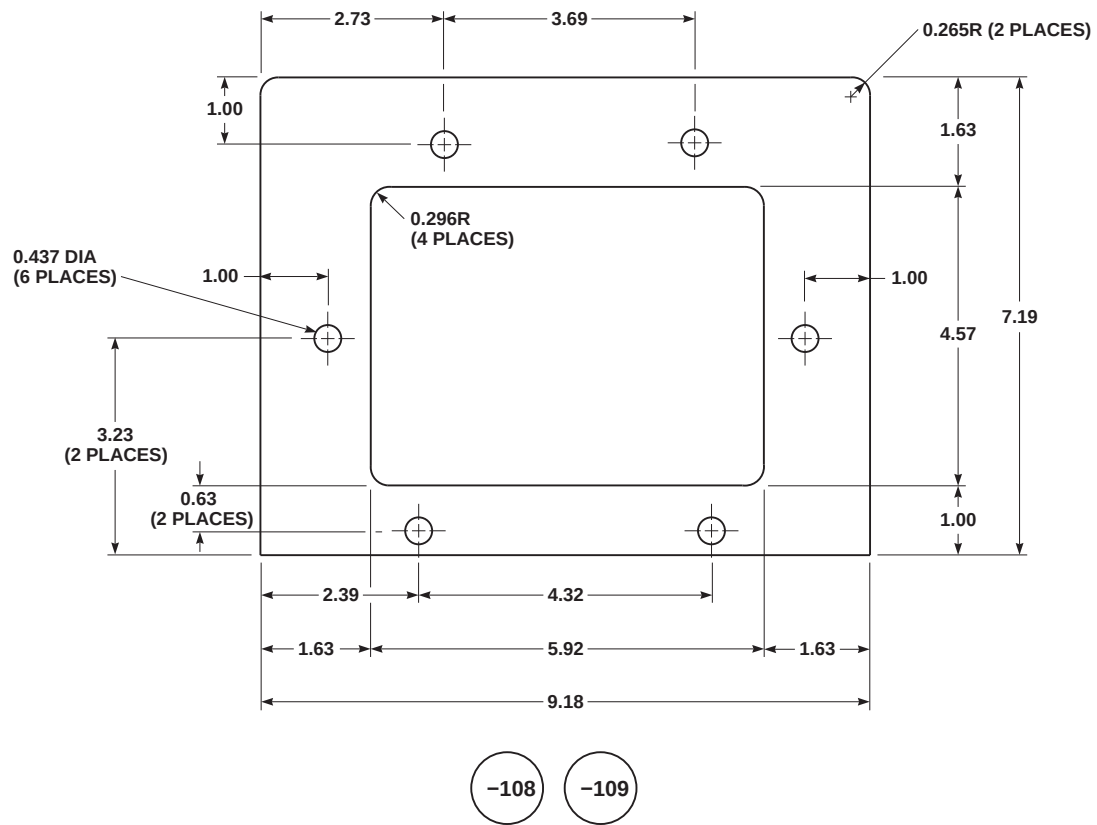

AK1659\_1A  
SA

FIGURE H-54. TRANSMISSION DRIP PAN SEAL (SHEET 1 OF 2)

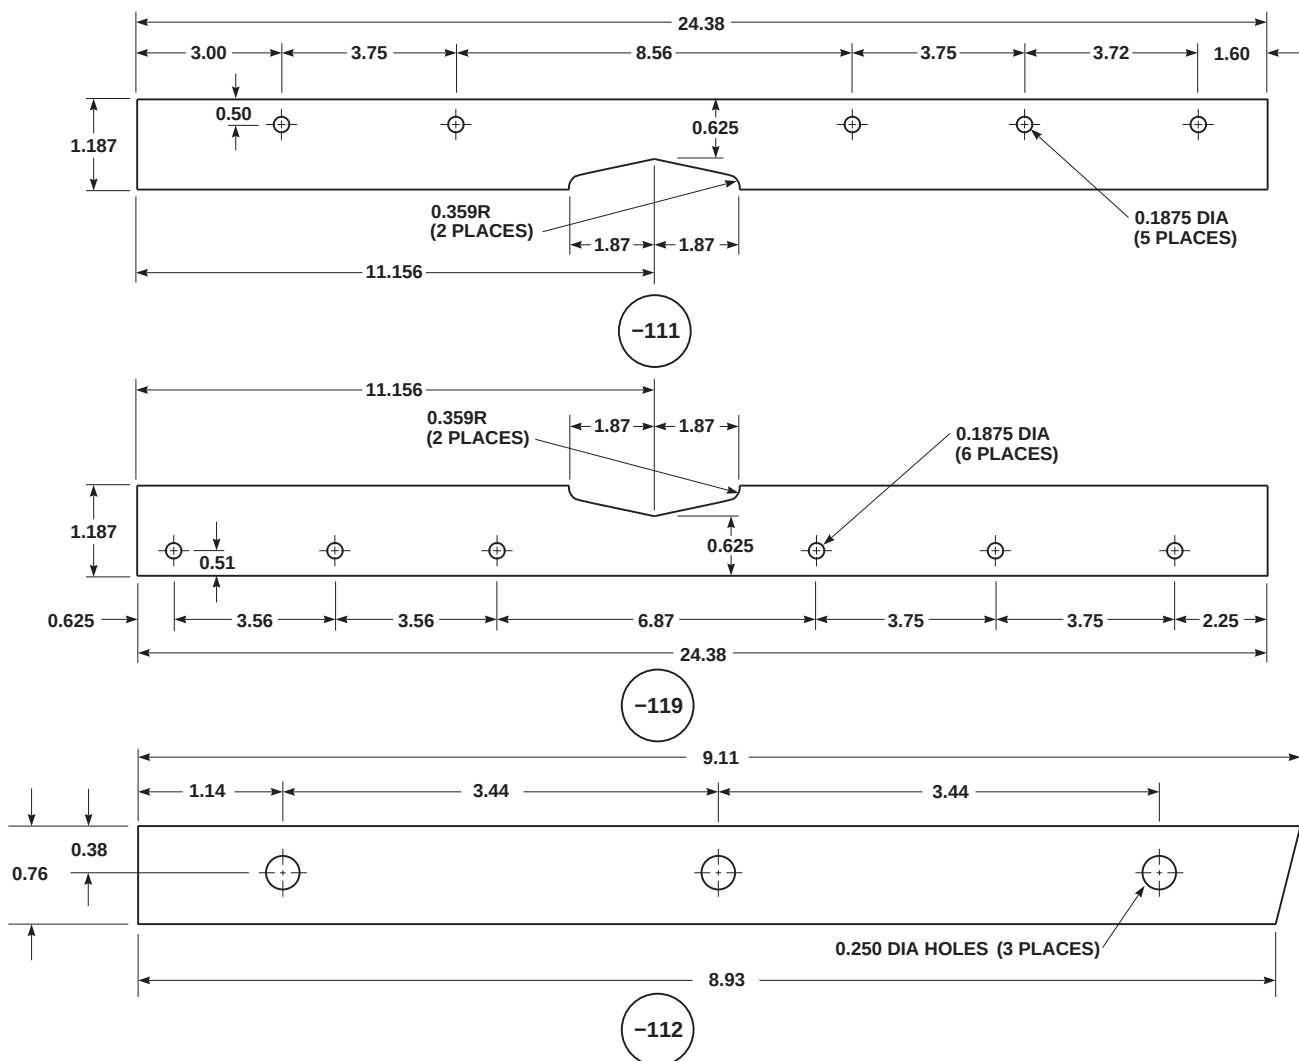

| NOMENCLATURE               | SIKORSKY<br>PART NUMBER |
|----------------------------|-------------------------|
| TRANSMISSION DRIP PAN SEAL | 70070-50005-108         |
|                            | 70070-50005-109         |
|                            | 70070-50005-111         |
|                            | 70070-50005-112         |
|                            | 70070-50005-113         |
|                            | 70070-50005-119         |

#### NOTES


1. MAKE -108, -109 FROM NITRILE RUBBER, 0.062 INCH THICK, MIL-R-6855, CLASS 1, GRADE 60, NSN 9320-00-241-9742.
2. MAKE -113 FROM RUBBER, 0.125 INCH THICK, MIL-STD-670, SCE-3L, CD1079E, NSN 9320-01-154-2225.
3. MAKE -111, -119 FROM RUBBER, 0.312 INCH THICK, MIL-STD-670, SCE-3L, CD1079E, NSN 9320-00-181-0016.
4. MAKE -112 FROM RUBBER, 0.187 INCH THICK, MIL-C-3133, SCE-3L, CD1079, NSN 9320-00-815-9734.
5. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
6. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE YELLOW INK, TT-I-1795. USE 1/16 - 1/8 INCH HIGH SANS SERIF CHARACTERS.

EXAMPLE: P / N 70216-02401-107 3Q 86  
PART NUMBER THIRD QUARTER 1986

PART NUMBER: 70070-50005-108, -109, -111, -112, -113, -119

FO0563\_2A  
SA

FIGURE H-54. TRANSMISSION DRIP PAN SEAL (SHEET 2 OF 2)

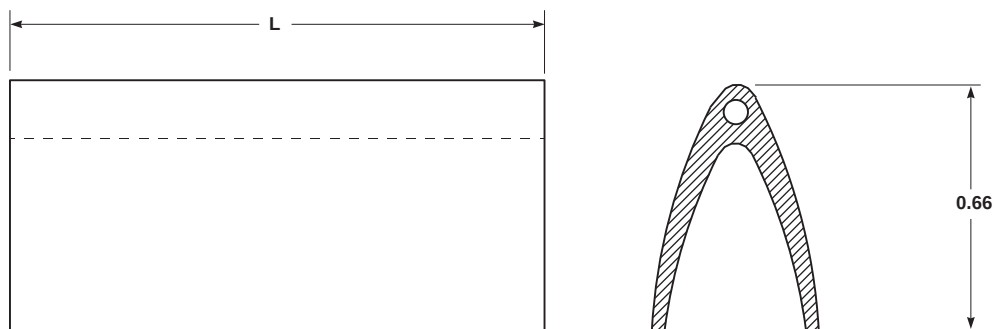

| SIKORSKY<br>PART NUMBER | L LENGTH | HEIGHT |
|-------------------------|----------|--------|
| 70205-06052-111         | 3.50     | 0.66   |
| 70205-06052-112         | 4.50     | 0.66   |
| 70205-06052-113         | 2.50     | 0.66   |

#### NOTES


1. MAKE FROM 0.015 THICK EXTRUDED NEOPRENE, CLASS 2, GRADE 60, MIL-R-6855, P / N 11-222106, FSCM 02921.
2. CUT SEAL TO REQUIRED LENGTH AS SHOWN IN CHART.
3. ALL DIMENSIONS ARE IN INCHES.
4. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GREEN INK, TT-I-1795. USE 1/16 - 1/8 INCH HIGH SANS SERIF CHARACTERS.

EXAMPLE: P / N 70216-02401-107      3Q 86  
                                  PART NUMBER      THIRD QUARTER 1986

PART NUMBER: 70205-06052-111, -112, -113

AK1661  
SA

FIGURE H-55. SEAL

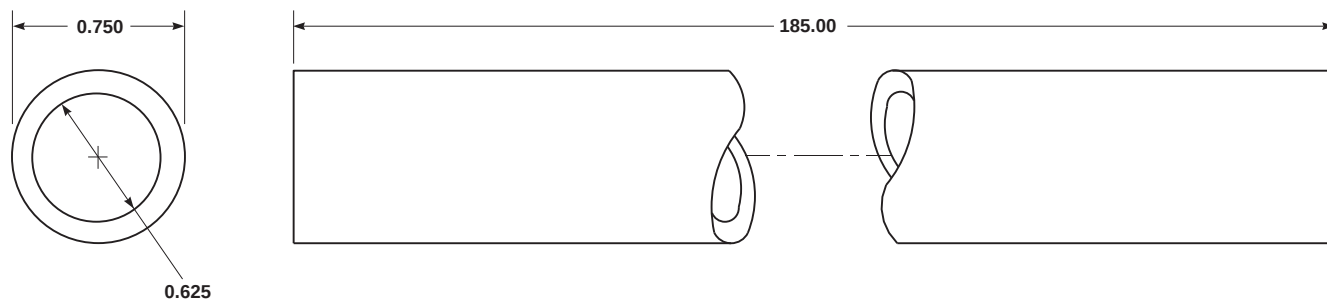


#### NOTES

1. MAKE FROM URETHANE TUBING, (TYGOTHANE) FSCM 34384.
2. ALL DIMENSIONS ARE IN INCHES.
3. CUT ENDS STRAIGHT.
4. DO NOT PAINT.
5. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70070-50006-107, -108

AK1662  
SA

**FIGURE H-56. TRANSMISSION DRAIN TUBING**

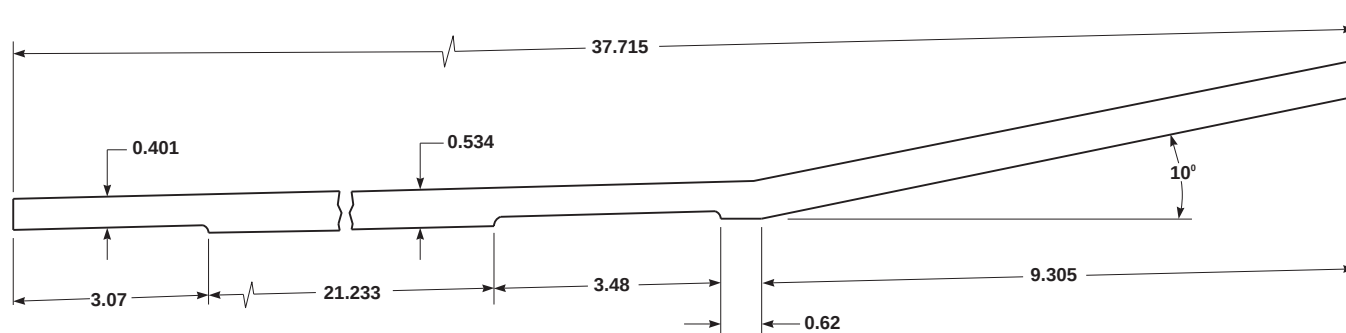

## NOTES


1. MAKE FROM 0.062 INCH THICK RUBBER SHEET, MIL-C-3133, GRADE SCE-11L, MIL-STD-670, NSN 9320-00-269-2863, OR GRADE SBE 11L, NSN 9320-01-580-6756.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GREEN INK, TT-I-1795. USE 1/16 - 1/8 INCH HIGH SANS SERIF CHARACTERS.

EXAMPLE: P / N 70216-02401-107      3Q 86  
PART NUMBER      THIRD QUARTER 1986

**PART NUMBER: 70219-04704-105**

AK1663  
SA

**FIGURE H-57. CHAFING STRIP**

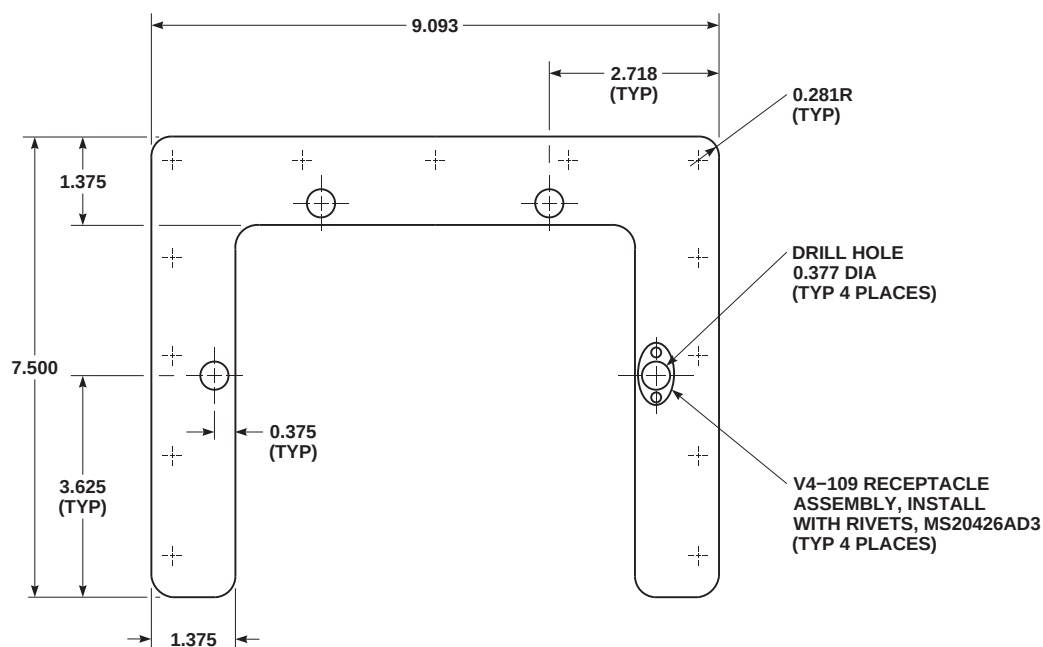

| PART NUMBER | DESCRIPTION                               | QUANTITY | NSN              |
|-------------|-------------------------------------------|----------|------------------|
| -           | 0.050 7075-T6 ALCLAD SHEET, QQ-A-250 / 13 | AR       | 9535-00-086-9465 |
| V4-109      | RECEPTACLE ASSEMBLY                       | 4        | 5350-00-947-0160 |
| MS20426AD3  | RIVET                                     | 8        | -                |

## NOTES


1. MAKE STRAP PER FIGURE AND CHART.
2. ALL DIMENSIONS ARE IN INCHES.
3. DRILL HOLES (4 PLACES) USING LETTER V DRILL.
4. BREAK SHARP EDGES AND DEBURR ALL HOLES.
5. INSTALL RECEPTACLE ASSEMBLIES.
6. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70500-02060-124

FO0295  
SA

FIGURE H-58. STRAP

#20 GAGE, 19 X 32 STRAND  
SILVER COATED COPPER

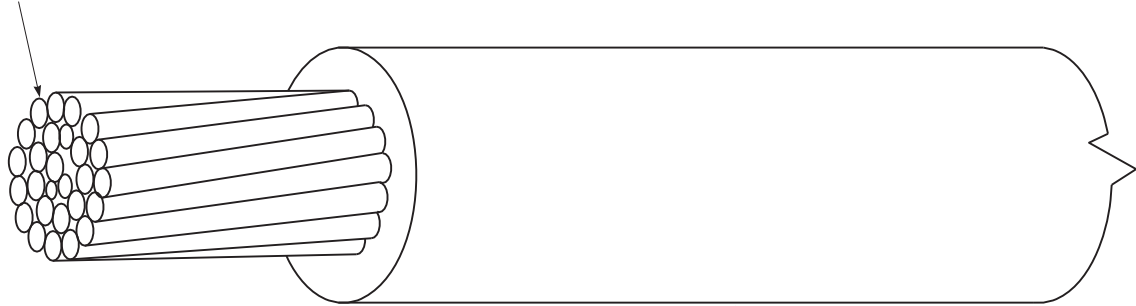

FLUOROCARBON / POLYAMIDE  
INSULATION-OPAQUE  
DARK YELLOW


#### NOTES

1. MAKE FROM M81381 / 11-20N, NSN 6145-01-133-2326.
2. CUT WIRE TO REQUIRED SIZE.
3. IDENTIFY PARTS PER MIL-W-5088.

PART NUMBER: 10-615393

AK1665  
SA

**FIGURE H-59. ELECTRICAL WIRE**

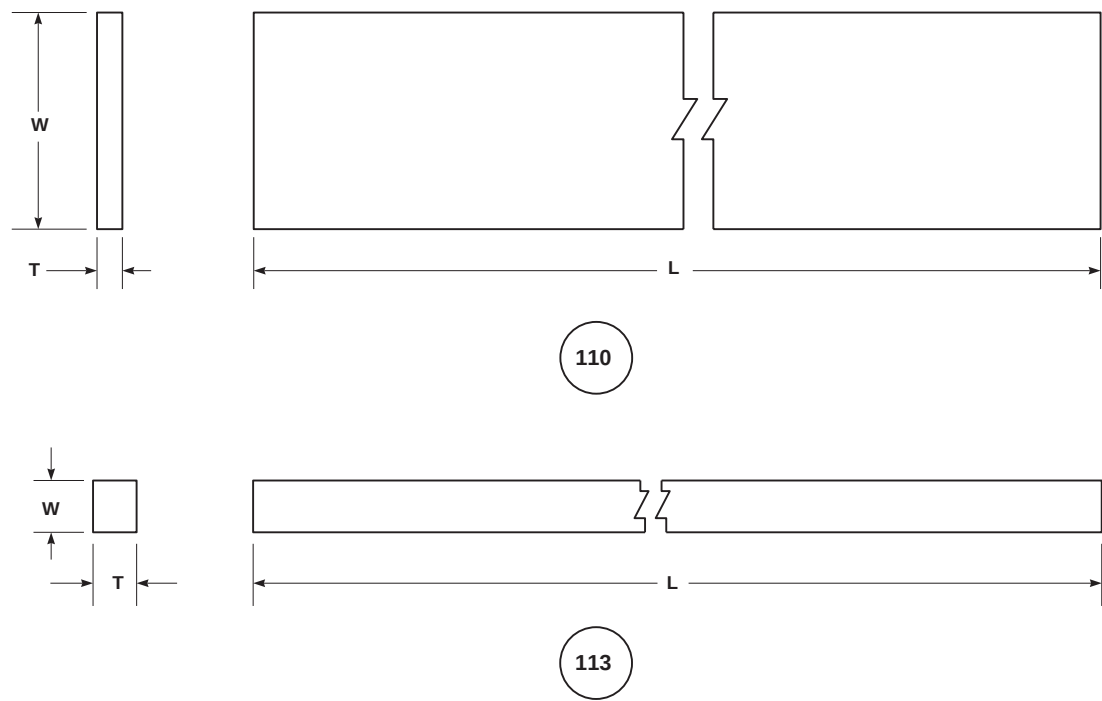

| NOMENCLATURE           | T THICKNESS | W WIDTH | L LENGTH | SIKORSKY<br>PART NUMBER |
|------------------------|-------------|---------|----------|-------------------------|
| CARGO HOOK ACCESS SEAL | 0.093       | 0.84    | 19.20    | 70214-02556-110         |
|                        | 0.188       | 0.20    | 19.20    | 70214-02556-113         |

NOTES

- 1. MAKE -110 FROM MIL-STD-670, SCE 7L RUBBER, 0.093 INCH THICK, NSN 9320-01-154-2224.
- 2. MAKE -113 FROM MIL-C-3133, SCE 11L RUBBER, 0.188 INCH THICK, NSN 9320-00-282-8284.  
ALTERNATE, MIL-C-3133, SCE 7L RUBBER, 0.188 INCH THICK, NSN 9320-00-815-9734.
- 3. ALL DIMENSIONS ARE IN INCHES.
- 4. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GREEN INK, TT-I-1795. USE 1/16 - 1/8 INCH HIGH SANS SERIF CHARACTERS.


EXAMPLE: P / N 70216-02401-107      3Q 86  
PART NUMBER      THIRD QUARTER 1986

PART NUMBER: 70214-02556-110, -113

AK1666  
SA

FIGURE H-60. CARGO HOOK ACCESS SEAL



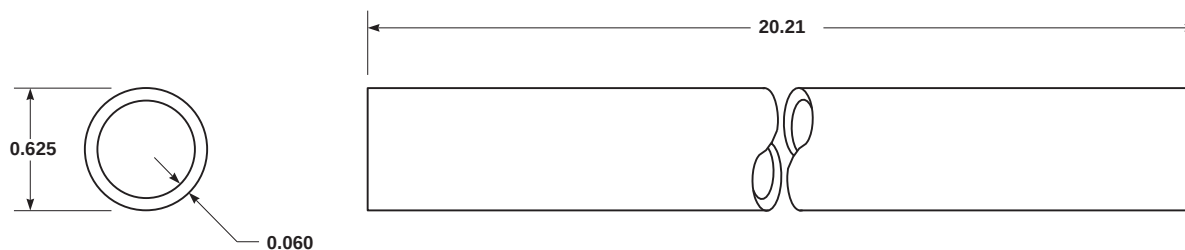


| NOMENCLATURE       | SIKORSKY PART NUMBER |
|--------------------|----------------------|
| CEILING PANEL TUBE | 70500-02063-123      |

**NOTES**

1. MAKE FROM LP-390 TYPE 3 POLYETHYLENE TUBING, 0.625 INCH OD, 0.060 INCH WALL, NSN 4710-00-889-4534.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-130.
4. CUT ENDS STRAIGHT.

PART NUMBER: 70500-02063-123

AK1669  
SA**FIGURE H-61. CEILING PANEL TUBE**

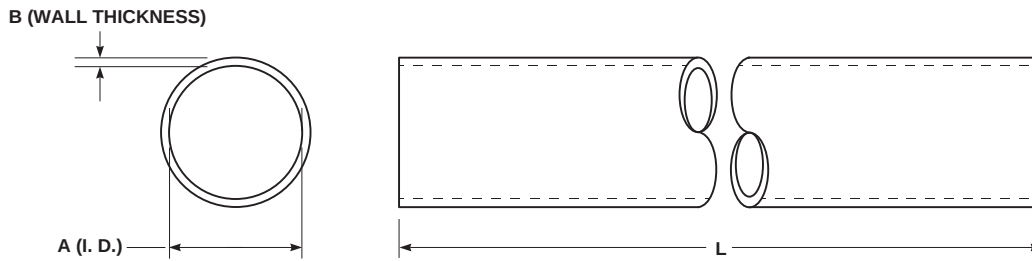

| SIKORSKY<br>PART NUMBER | A     | B     | L     | MAKE FROM MATERIAL          | MAKE FROM NSN    |
|-------------------------|-------|-------|-------|-----------------------------|------------------|
| 70217-01010-101         | 0.500 | 0.032 | 24.00 | TEMFLEX 105C 1/2 INCH CLEAR | FSCM 75037       |
| 70217-01010-108         | 0.500 | 0.020 | 24.00 | KYNAR CONVOLEX TUBING       | 9330-01-089-0116 |
| 70217-01010-113         | 0.750 | 0.020 | 24.00 | KYNAR CONVOLEX TUBING       | 9330-01-089-0118 |


## NOTES

1. MAKE TUBE PER MATERIAL AND DIMENSIONS LISTED IN CHART.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70217-01010-101, -108, -113

FA2092  
SA

FIGURE H-62. NOSE DOOR DRAIN TUBE

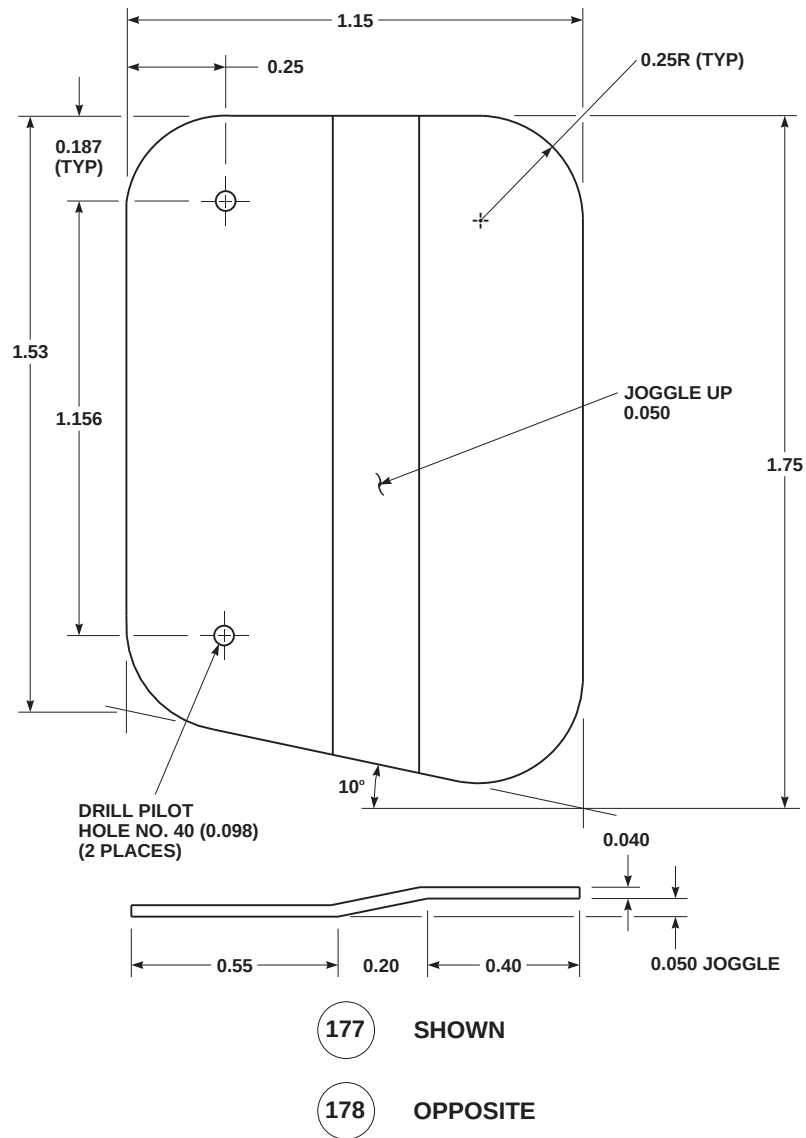


## NOTES

1. MAKE FROM 7075-T6 ALCLAD SHEET, 0.040 INCH THICK, QQ-A-250 / 13, NSN 9535-00-084-4581.
2. ALL DIMENSIONS ARE IN INCHES.
3. FORM JOGGLE, USING 3/16 INCH RADIUS.
4. DRILL PILOT HOLES PER FIGURE.
5. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70217-01003-177, -178

FO0296  
SA

FIGURE H-63. CLIP

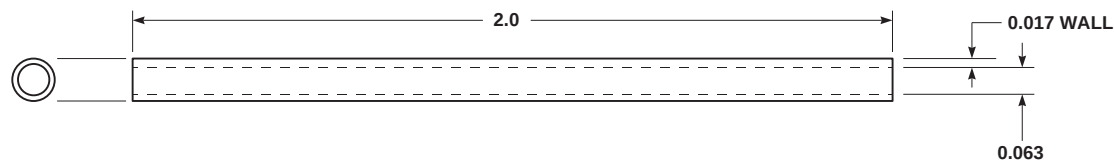

| PART NUMBER  | MAKE FROM MATERIAL | MAKE FROM NSN    |
|--------------|--------------------|------------------|
| 10-90604-201 | M23053 / 5-102-0   | 5970-00-812-2968 |


NOTES

- 1. MAKE SLEEVE PER FIGURE, USING MATERIAL LISTED IN CHART.
- 2. ALL DIMENSIONS ARE IN INCHES.
- 3. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 10-90604-201



AK1672  
SA

FIGURE H-64. INSULATION SLEEVE

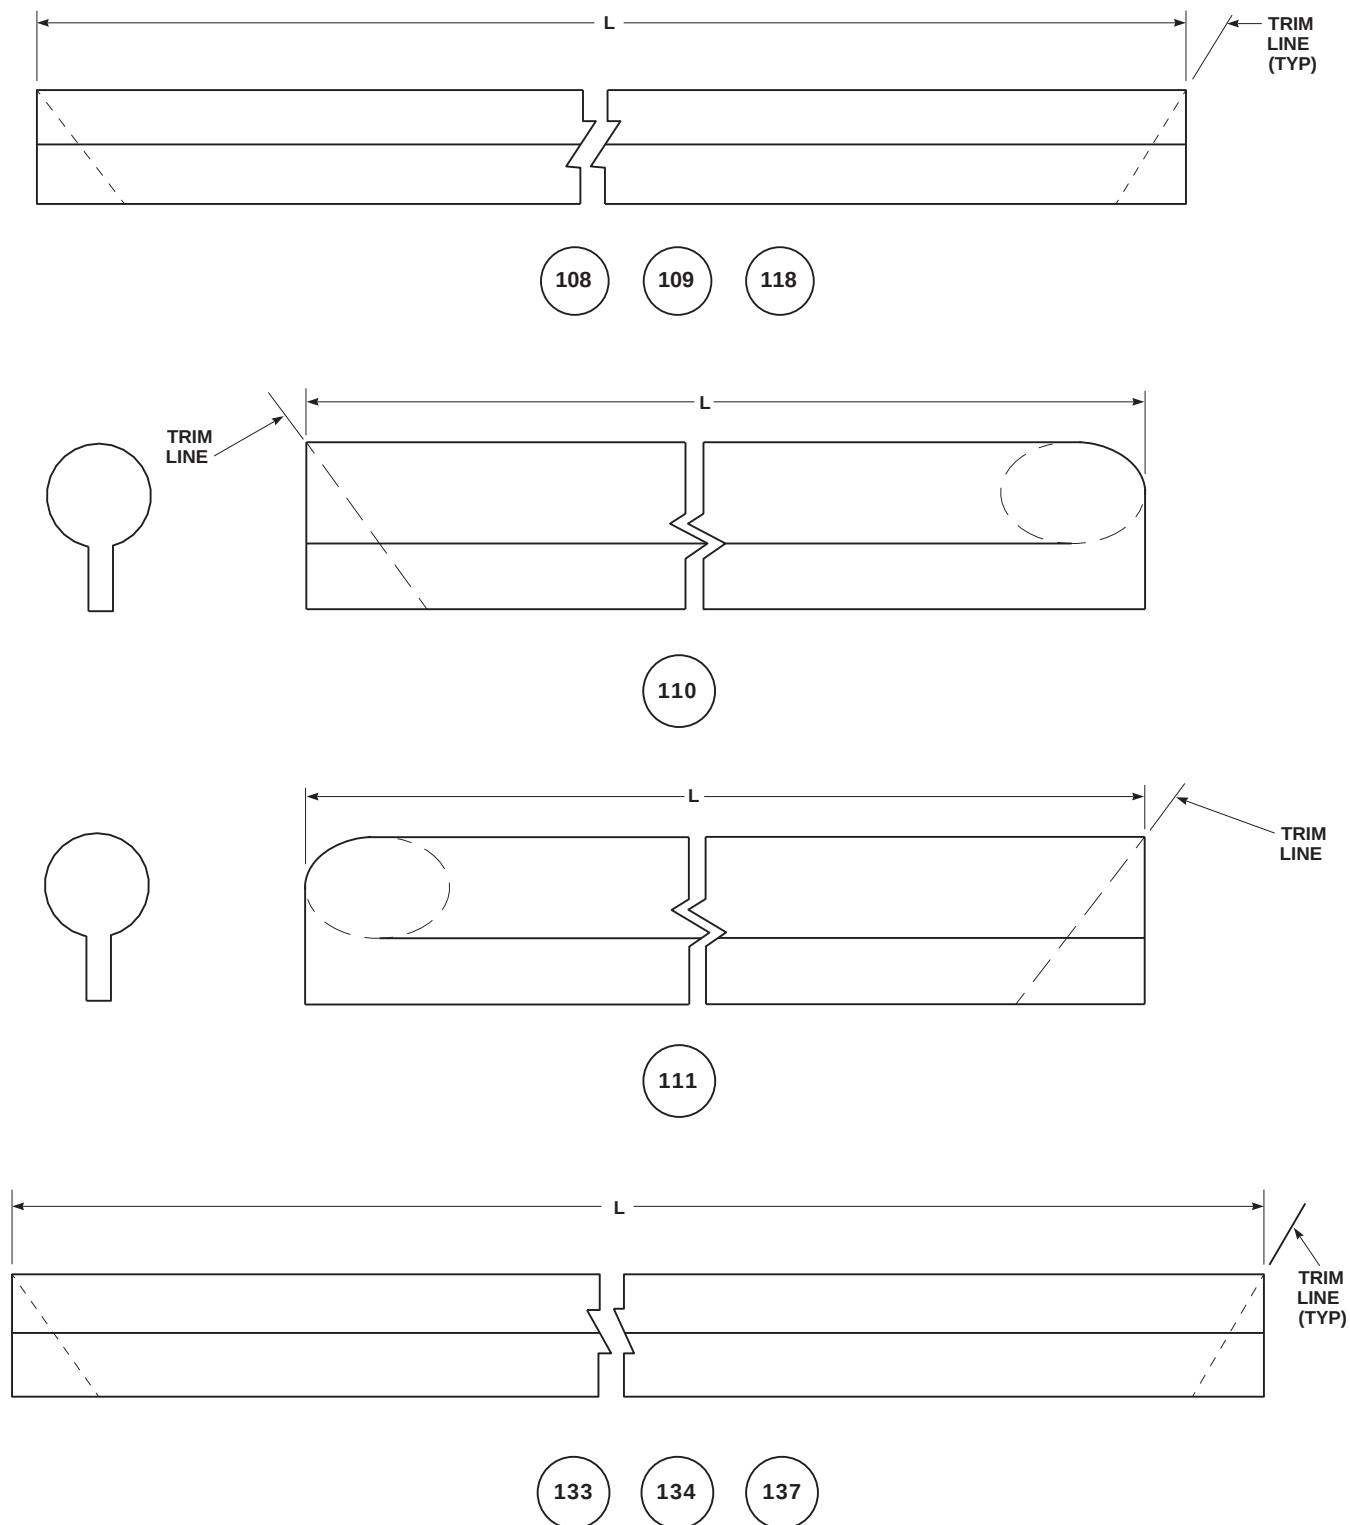

AK1673.1  
SA

FIGURE H-65. ENGINE INLET FIREWALL SEAL (SHEET 1 OF 2)

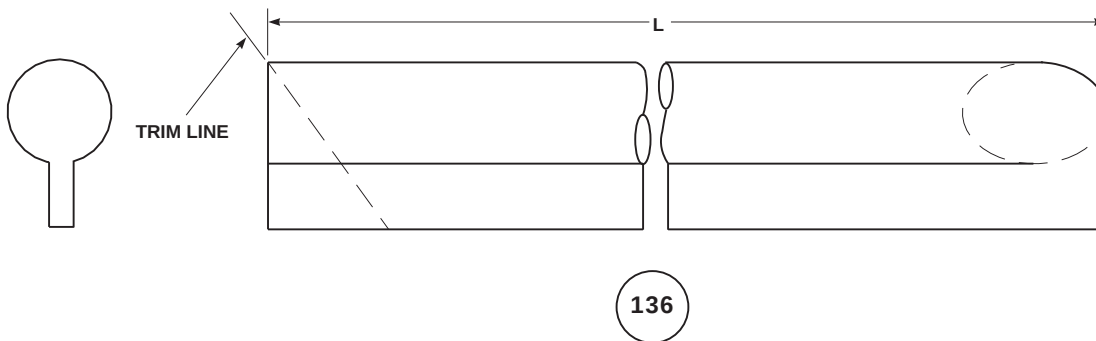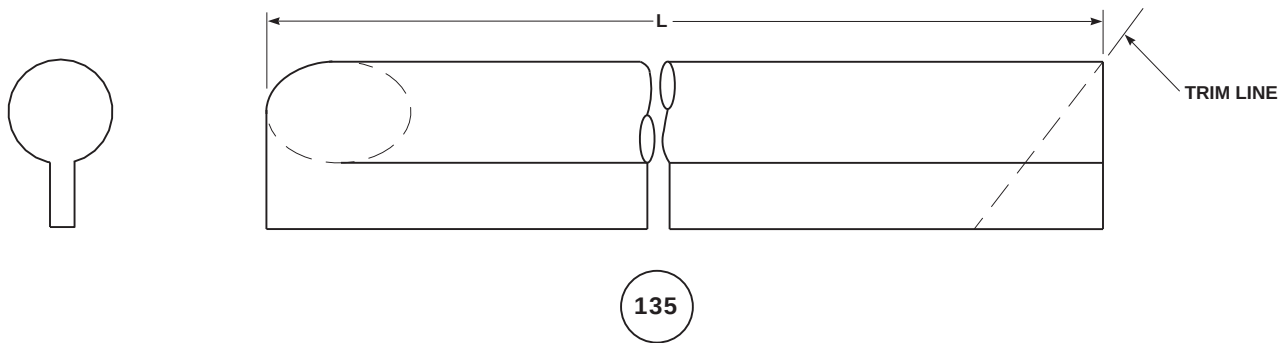

| NOMENCLATURE | L LENGTH | SIKORSKY<br>PART NUMBER |
|--------------|----------|-------------------------|
| SEAL         | 11.250   | 70302-10013-108         |
|              | 11.250   | 70302-10013-109         |
|              | 8.250    | 70302-10013-110         |
|              | 6.03     | 70302-10013-111         |
|              | 6.03     | 70302-10013-118         |
|              | 11.250   | 70302-10013-133         |
|              | 11.250   | 70302-10013-134         |
|              | 8.250    | 70302-10013-137         |
|              | 6.03     | 70302-10013-135         |
|              | 6.03     | 70302-10013-136         |


#### NOTES

1. MAKE -108, -109, -110, -111, -118 FROM SEAL TAPE, STYLE JM150-13A, NSN 5330-00-849-7083.
2. TRIM SEAL SECTIONS AS REQUIRED TO BUTT JOIN WITH NO GAP.
3. MAKE -133, -134, -135, -136, -137 FROM SEAL TAPE, HASKON 8338-3, NSN 5330-01-174-2936.
4. ALL DIMENSIONS ARE IN INCHES.
5. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70302-10013-108, -109, -110, -111, -118, -133, -134, -137, -135, -136


AK1673\_2  
SA

**FIGURE H-65. ENGINE INLET FIREWALL SEAL (SHEET 2 OF 2)**

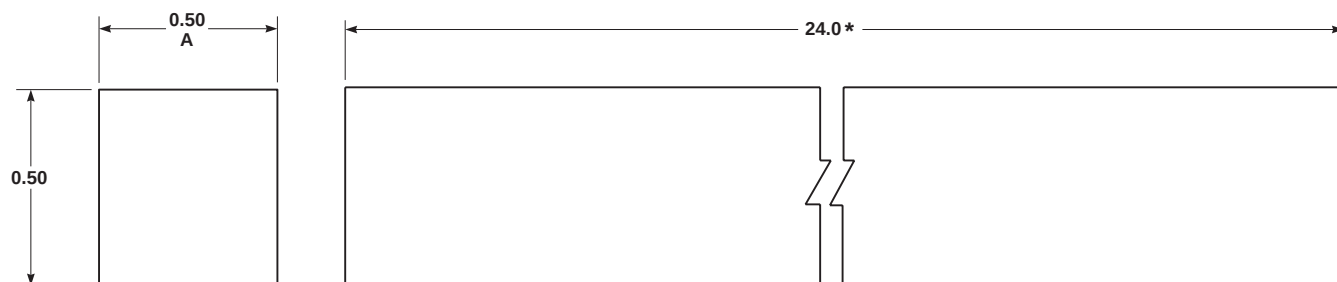


\* OVERSIZE-TRIM TO FIT UPON INSTALLATION

114 154

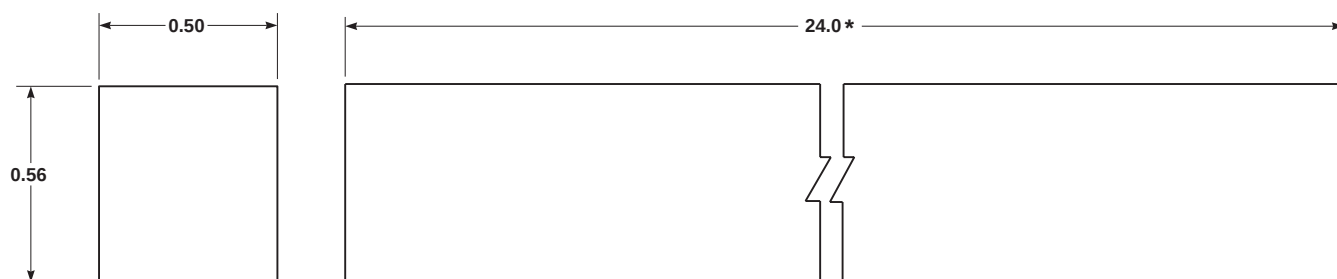

\* OVERSIZE-TRIM TO FIT UPON INSTALLATION

113 151

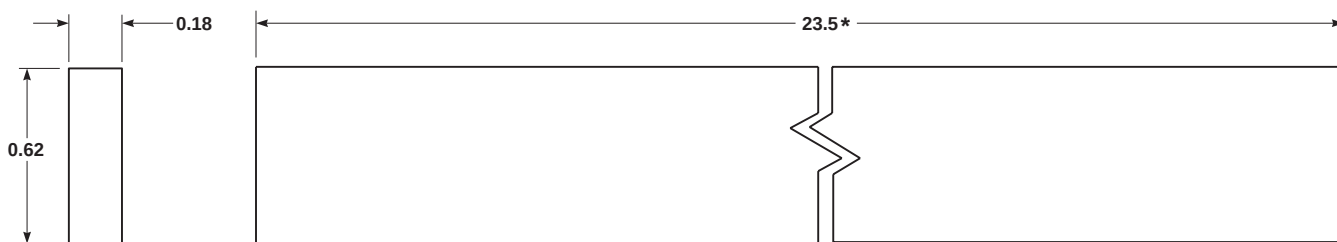

\* OVERSIZE-TRIM TO FIT UPON INSTALLATION

115

#### NOTES


1. MAKE -114, -154 FROM 0.50 THICK RUBBER, CLASS 1, GRADE 40, MIL-R-6855, NSN 9320-00-848-7302.
2. MAKE -113, -151 FROM SCE-3LCD RUBBER, MIL-STD-670, NSN 5330-01-100-1889.
3. MAKE -115 FROM SCE-3LCD RUBBER, MIL-STD-670, NSN 5330-01-100-1888.
4. ALL DIMENSIONS ARE IN INCHES.
5. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GREEN INK, TT-I-1795. USE 1/16-1/8-INCH HIGH SANS SERIF CHARACTERS.

EXAMPLE: P / N 70216-02401-107 3Q 86  
PART NUMBER THIRD QUARTER 1986

PART NUMBER: 70500-03050-113, -114, -115, -151, -154

AK1677  
SA

FIGURE H-66. GASKET

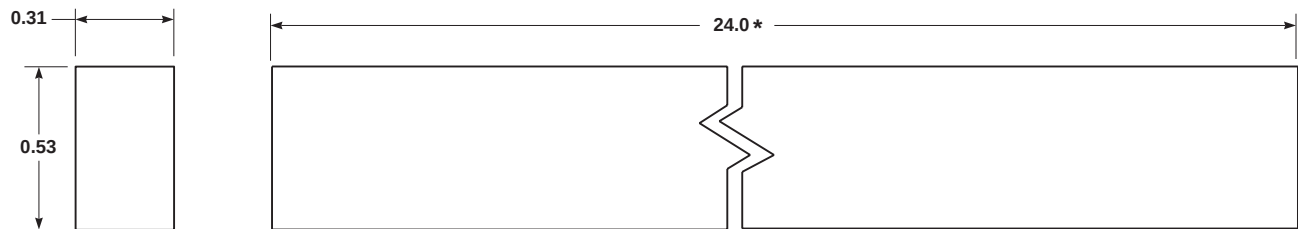

\* OVERSIZE-TRIM TO FIT UPON INSTALLATION

#### NOTES

1. MAKE FROM GRADE M RUBBER, MIL-R-46089, NSN 5330-01-100-1708.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GREEN INK, TT-I-1795. USE 1/16-1/8-INCH HIGH SANS SERIF CHARACTERS.

EXAMPLE: P / N 70216-02401-107 3Q 86  
 PART NUMBER THIRD QUARTER 1986

PART NUMBER: 70500-03050-108, -153

AK1680  
SA

FIGURE H-67. SEAL




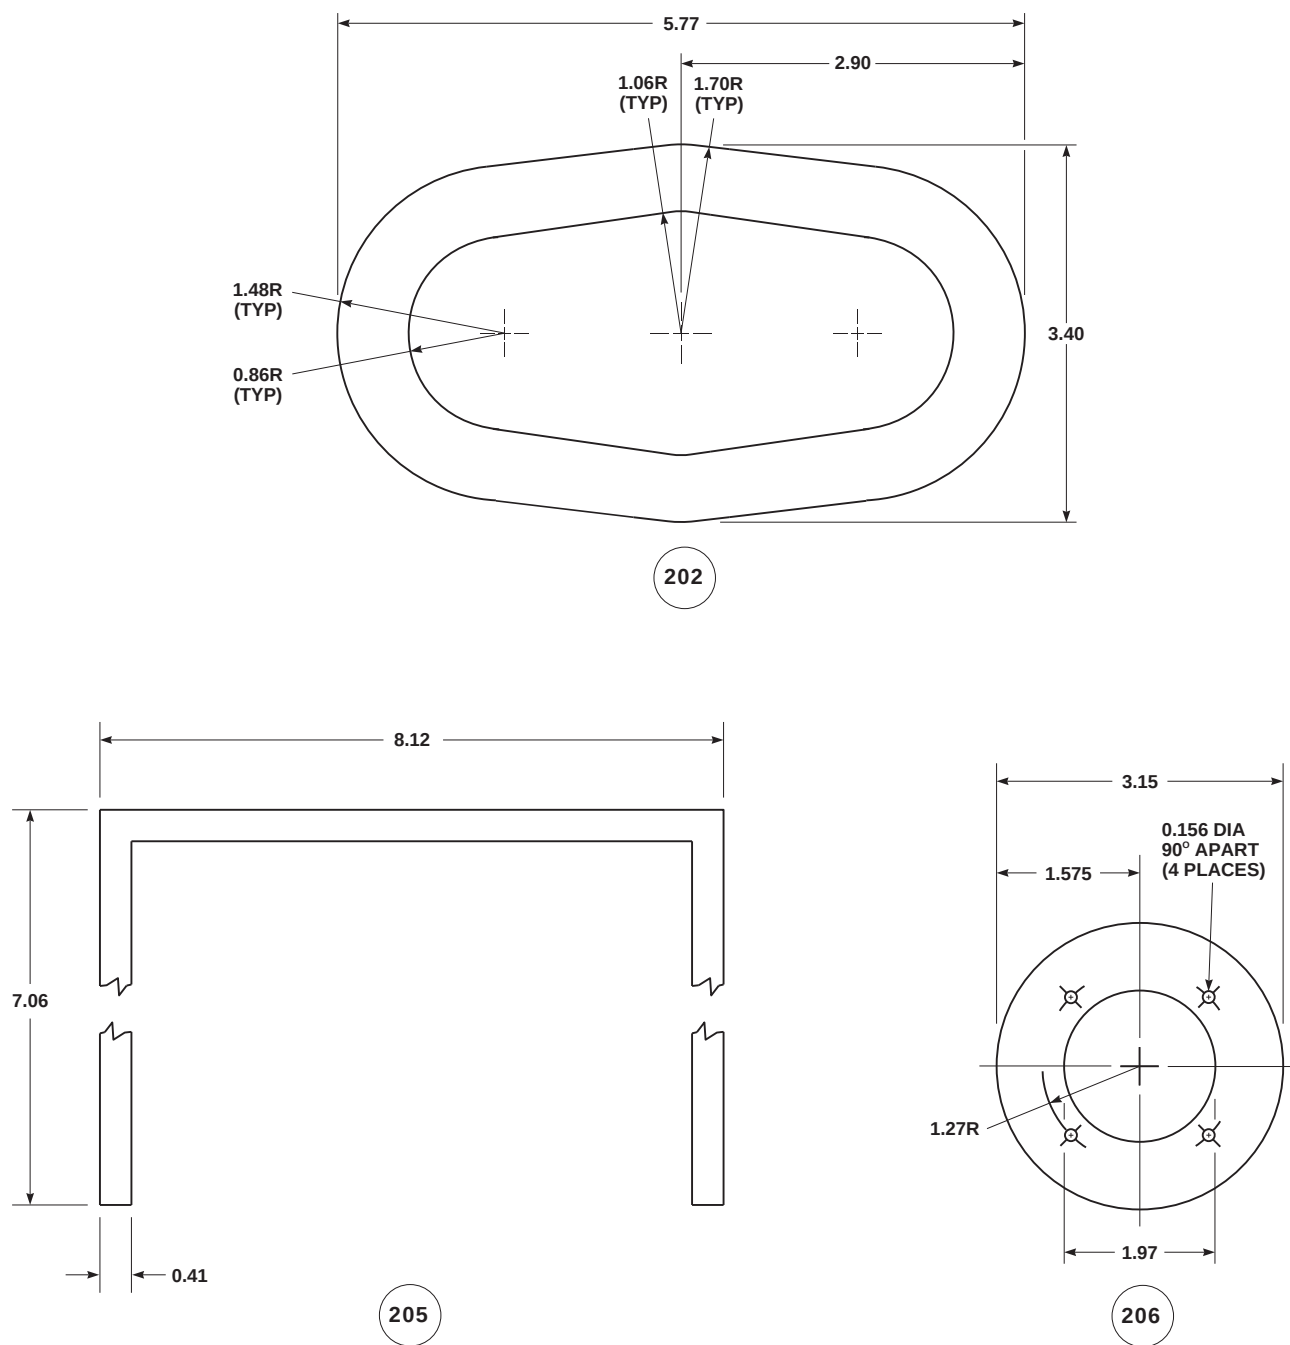


FIGURE H-68. CEILING DRIP PAN SEAL (SHEET 1 OF 2)

AK1681\_1  
SA

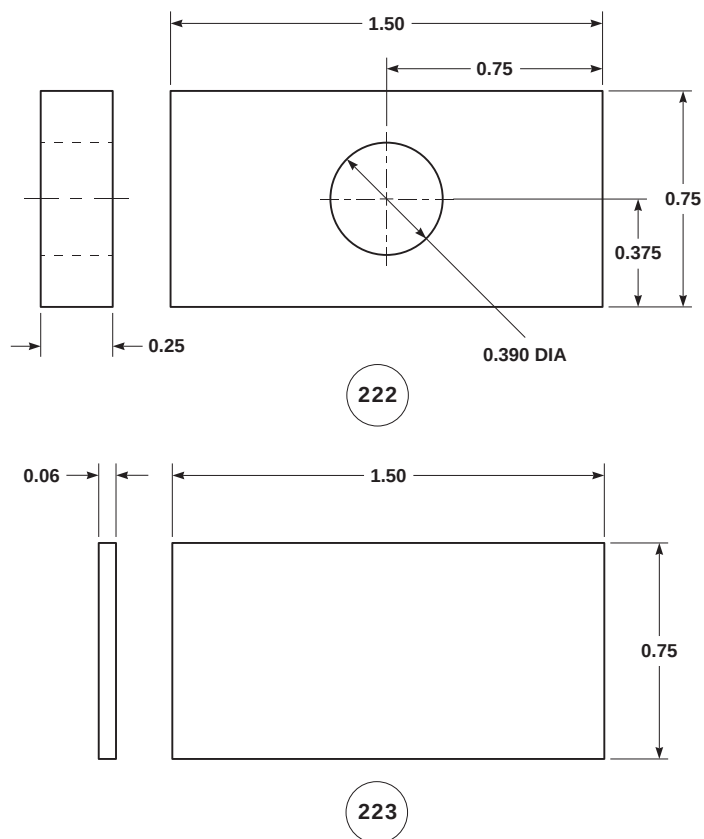

| NOMENCLATURE          | T THICKNESS | DIMENSIONS | SIKORSKY PART NUMBER |
|-----------------------|-------------|------------|----------------------|
| CEILING DRIP PAN SEAL | 0.250       | AS SHOWN   | 70500-02060-202      |
|                       | 0.125       | AS SHOWN   | 70500-02060-205      |
|                       | 0.125       | AS SHOWN   | 70500-02060-206      |
|                       | 0.250       | AS SHOWN   | 70500-02060-222      |
|                       | 0.060       | AS SHOWN   | 70500-02060-223      |

## NOTES



1. MAKE -202 FROM MIL-STD-670 SCE 3L CD1079E, 0.25 INCH THICK, NSN 9320-00-234-4073.
2. MAKE -205, -206 FROM MIL-STD-670, SCE 3L CD1079, 0.125 INCH THICK, NSN 9320-01-154-2225.
3. MAKE -222 FROM NITRILE RUBBER, MIL-R-6855, CLASS1, GRADE 40, 0.25 INCH THICK, NSN 9320-01-157-9071.
4. MAKE -223 FROM NITRILE RUBBER, MIL-R-6855, CLASS 1, GRADE 40, 0.06 INCH THICK, NSN 9320-00-241-9741.
5. ALL DIMENSIONS ARE IN INCHES.
6. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE YELLOW INK, TT-I-1795. USE 1/16 - 1/8 - INCH HIGH SANS SERIF CHARACTERS.

EXAMPLE:  $\frac{P / N 70216-02401-107}{PART NUMBER}$   $\frac{3Q 86}{THIRD QUARTER 1986}$

PART NUMBER: 70500-02060-202, -205, -206, -222, -223

AK1681\_2  
SA

FIGURE H-68. CEILING DRIP PAN SEAL (SHEET 2 OF 2)

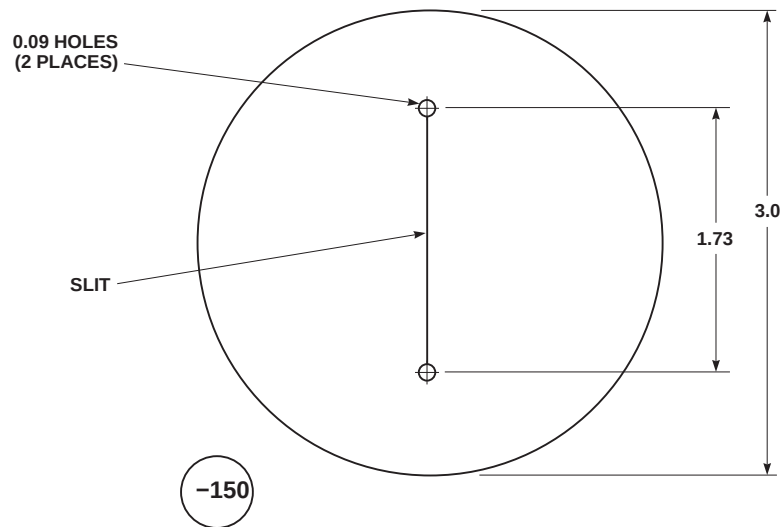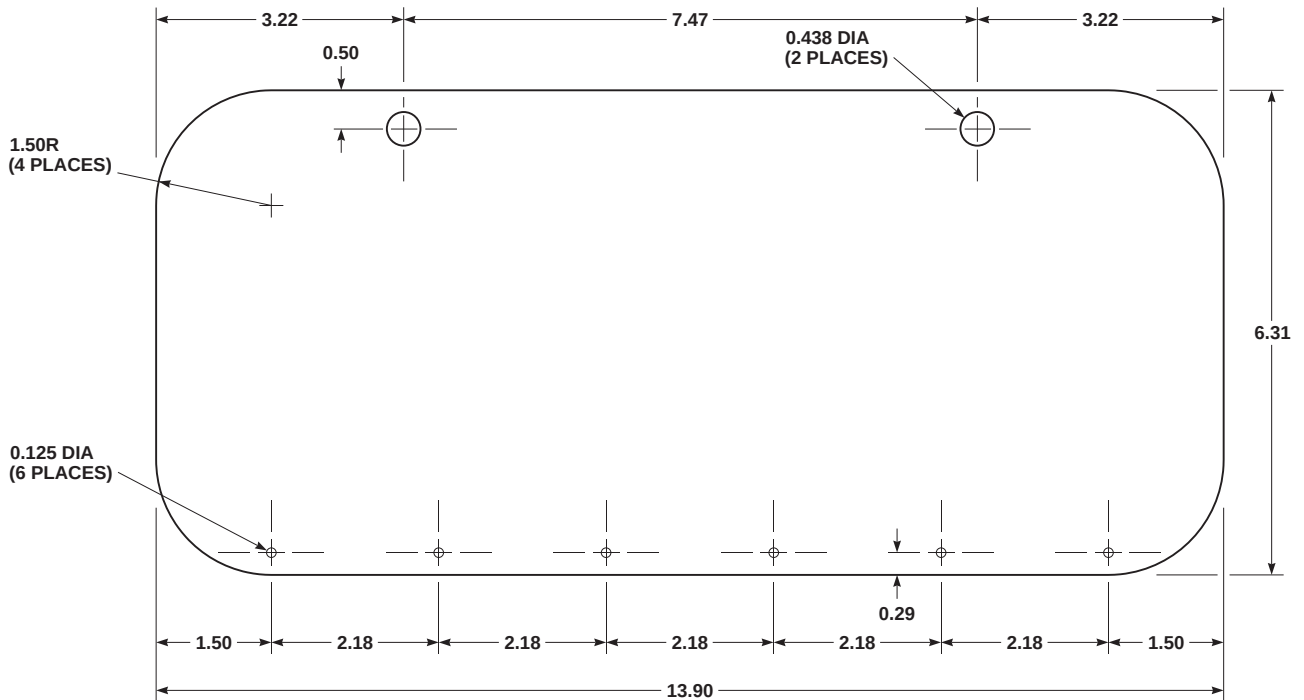

| NOMENCLATURE         | SIKORSKY<br>PART NUMBER |
|----------------------|-------------------------|
| CEILING PANEL GASKET | 70500-02062-136         |
|                      | 70500-02062-150         |


#### NOTES

1. MAKE -136 FROM CEL ACETATE BUTERATE, 0.125 INCH THICK, NSN 9320-01-024-1549.
2. MAKE -150 FROM RUBBER, 0.062 INCH THICK, MIL-R-6855, CLASS 1, GRADE 60, NSN 9320-00-241-9742, ALTERNATE RUBBER, 0.062 INCH THICK, MIL-R-6855, CLASS 2, GRADE 60, NSN 9320-01-157-9070.
3. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
4. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70500-02062-136, -150

FO0297A  
SA

FIGURE H-69. CEILING PANEL GASKET

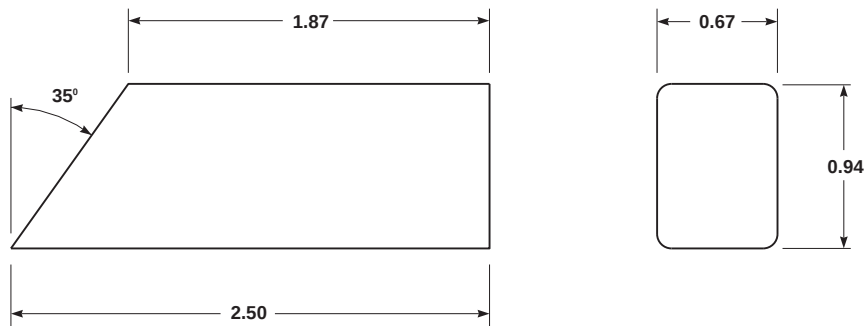

### NOTES


1. MAKE SEAL PER FIGURE FROM EXTRUDED SILICONE SPONGE RUBBER, S1509-20016-1, AMS 3195, NSN 5330-01-162-2778.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GREEN INK, TT-I-1795. USE 1/16 - 1/8 INCH HIGH SANS SERIF CHARACTERS.

EXAMPLE: P/N 70216-02401-107 3Q 86  
 PART NUMBER THIRD QUARTER 1986

PART NUMBER: 70215-02312-106

FO0298A  
 SA

**FIGURE H-70. MAIN LANDING GEAR FAIRING SEAL**

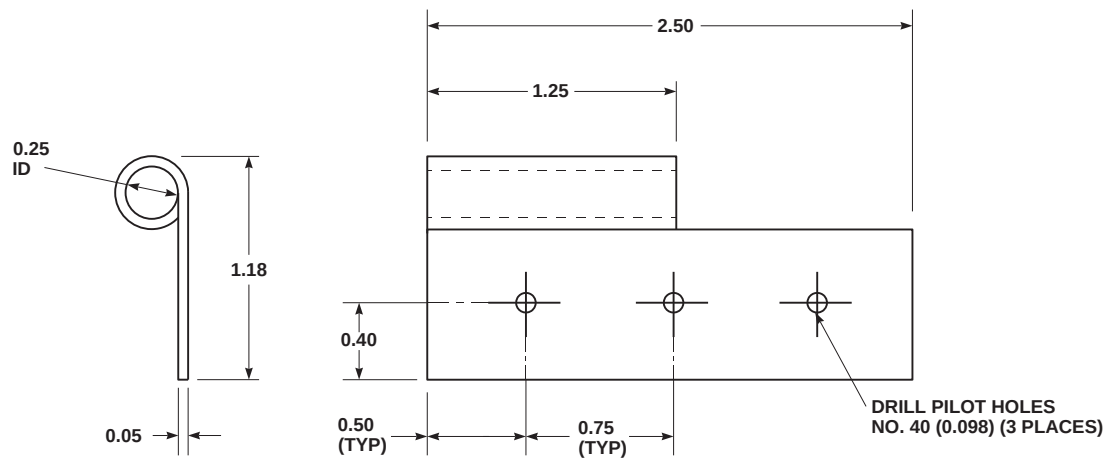


### NOTES

1. MAKE FROM HINGE HALF, H1004D13NL, NSN 5340-01-116-4537.
2. DRILL PILOT HOLES PER FIGURE.
3. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
4. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70500-02068-118

FO0299A  
SA

**FIGURE H-71. SIDEWALL PANEL HINGE**

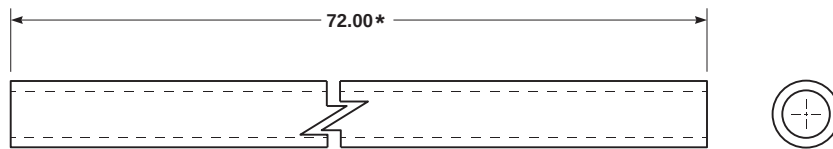

\* OVERSIZE - TRIM UPON INSTALLATION


#### NOTES

1. MAKE FROM TYGOTHANE-1/4 TUBING, 0.375 OD x 0.250 ID PER MIL-R-83397, NSN 4720-01-004-8081.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70070-30112-164

AK1689  
SA

FIGURE H-72. TUBE

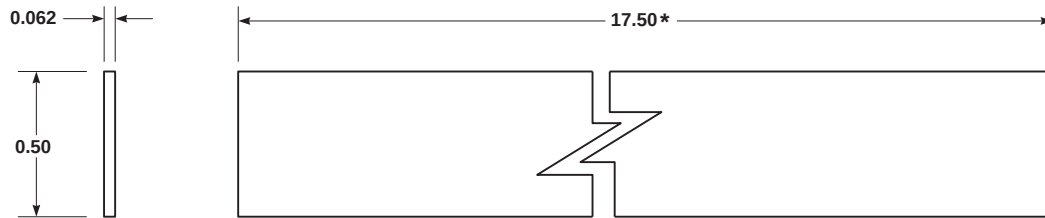

\* OVERSIZE - TRIM ON INSTALLATION

#### NOTES


1. MAKE SEAL FROM 0.062 INCH THICK, SCE 7L RUBBER SHEET, PER MIL-STD-670, NSN 9320-00-012-3481.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GREEN INK, TT-I-1795. USE 1/16-1/8-INCH HIGH SANS SERIF CHARACTERS.

EXAMPLE: P / N 70216-02401-107 3Q 86  
 PART NUMBER THIRD QUARTER 1986

PART NUMBER: 70500-02054-104

AK1690  
SA

**FIGURE H-73. COVER SEAL**

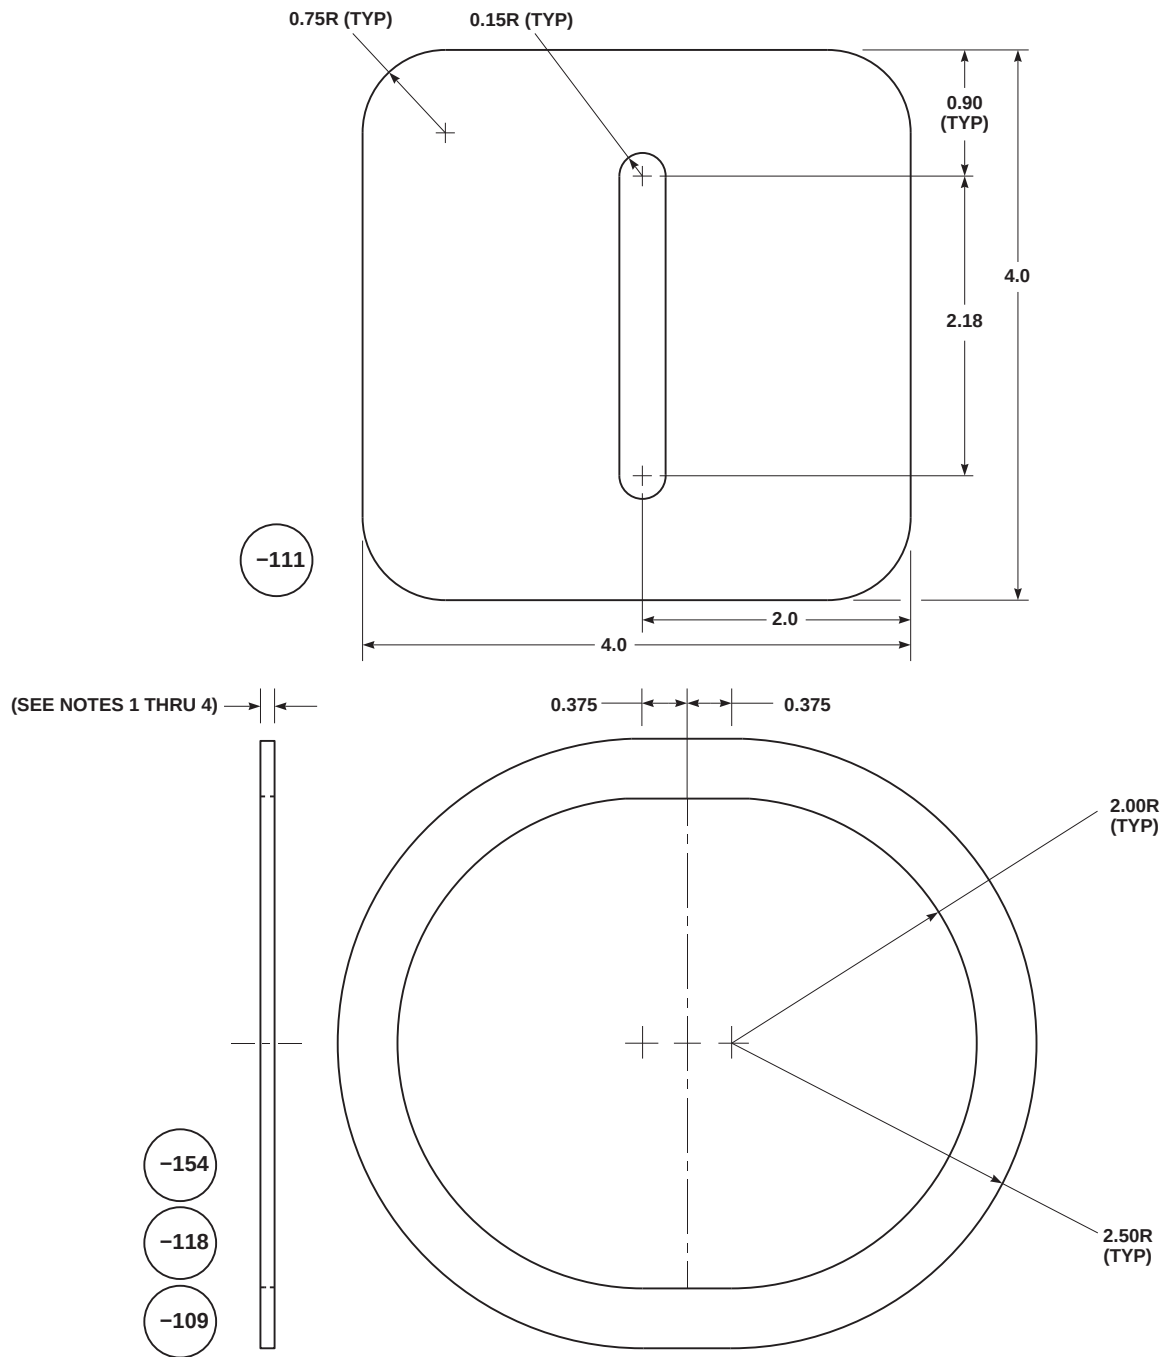

PART NUMBER 70500-02070-109, -111, -118, -154

AK1691\_1  
SA

FIGURE H-74. DRIP PAN SEAL (SHEET 1 OF 2)




## NOTES

1. MAKE -111 FROM 0.125 INCH THICK, CLASS 1, GRADE 40, NITRILE RUBBER SHEET, MIL-R-6855, NSN 9320-00-059-6504.
2. MAKE -109 FROM 0.125 INCH THICK, SCE-3L RUBBER SHEET, MIL-STD-670, NSN 9320-01-154-2225.
3. MAKE -118 FROM 0.062 INCH THICK, CLASS I, GRADE 4, NITRILE RUBBER SHEET, MIL-R-6855.
4. MAKE -154 FROM 0.125 INCH THICK, GRADE M, SILICONE STONE, MIL-R-46089.
5. ALL DIMENSIONS ARE IN INCHES.
6. CUT SLOT IN SEAL AS SHOWN IN FIGURE.
7. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE YELLOW INK, TT-I-1795. USE 1/16 - 1/8 INCH HIGH SANS SERIF CHARACTERS.

EXAMPLE: P / N 70216-02401-107      3Q 86  
                                 PART NUMBER      THIRD QUARTER 1986

AK1691\_2  
SA

## FIGURE H-74. DRIP PAN SEAL (SHEET 2 OF 2)

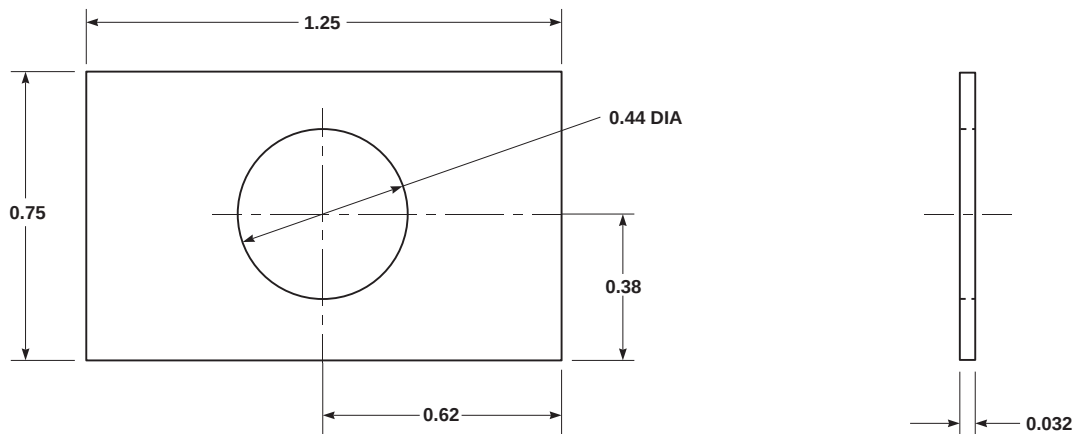

NOTES


1. MAKE FROM NITRILE RUBBER, MIL-R-6855, CLASS 2, GRADE 60, 0.032 INCH THICK, NSN 9320-01-157-9069. ALTERNATE NITRATE RUBBER, MIL-R-6855, CLASS 1, GRADE 60, 0.032-INCH THICK, NSN 9320-01-102-3060.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE YELLOW INK, TT-I-1795. USE 1/16-1/8-INCH HIGH SANS SERIF CHARACTERS.

EXAMPLE:  $\frac{P / N 70216-02401-107}{\text{PART NUMBER}}$   $\frac{3Q 86}{\text{THIRD QUARTER 1986}}$

PART NUMBER: 70500-02071-111


AK1693  
SA

FIGURE H-75. DRIP PAN SEAL

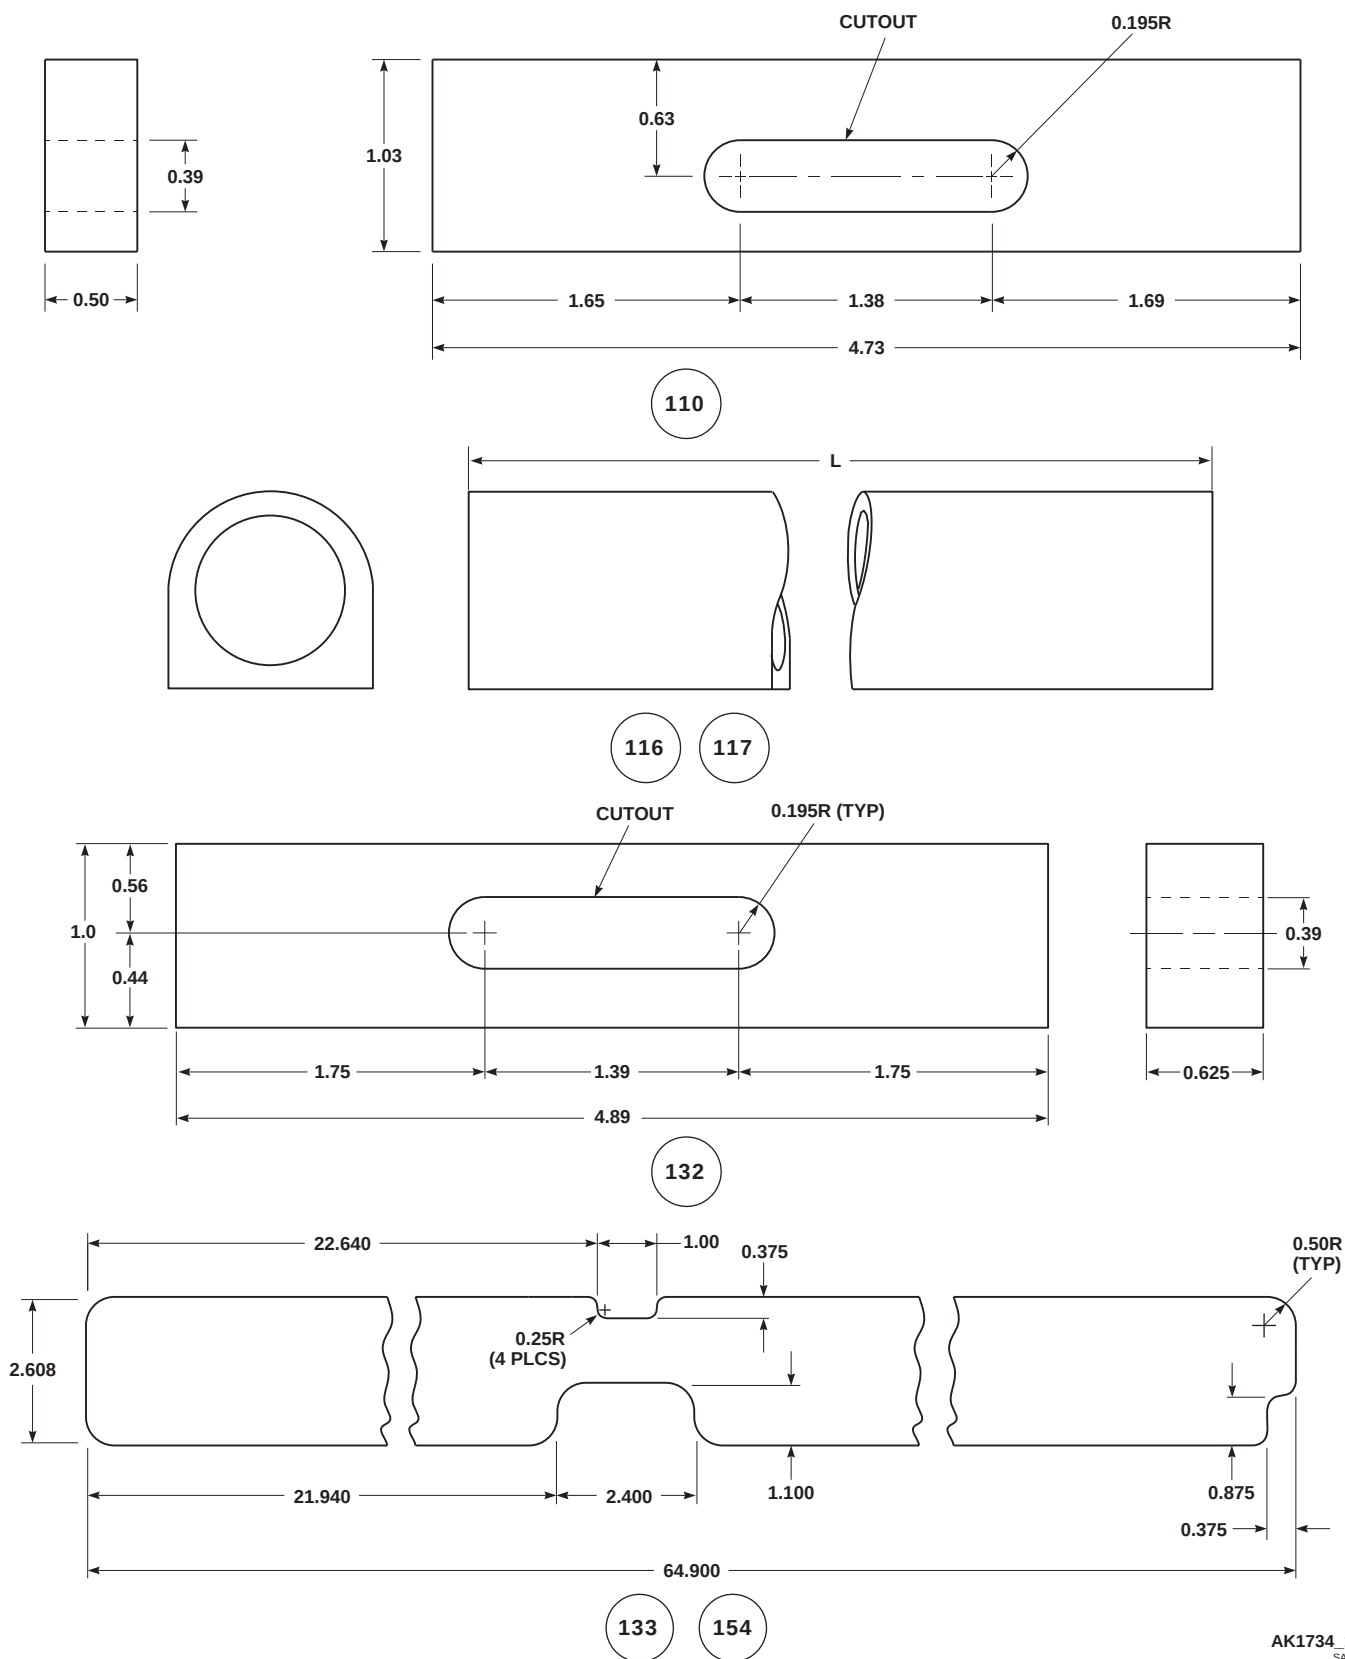


AK1734 1  
SA

FIGURE H-76. CABIN DOOR SEAL (SHEET 1 OF 3)

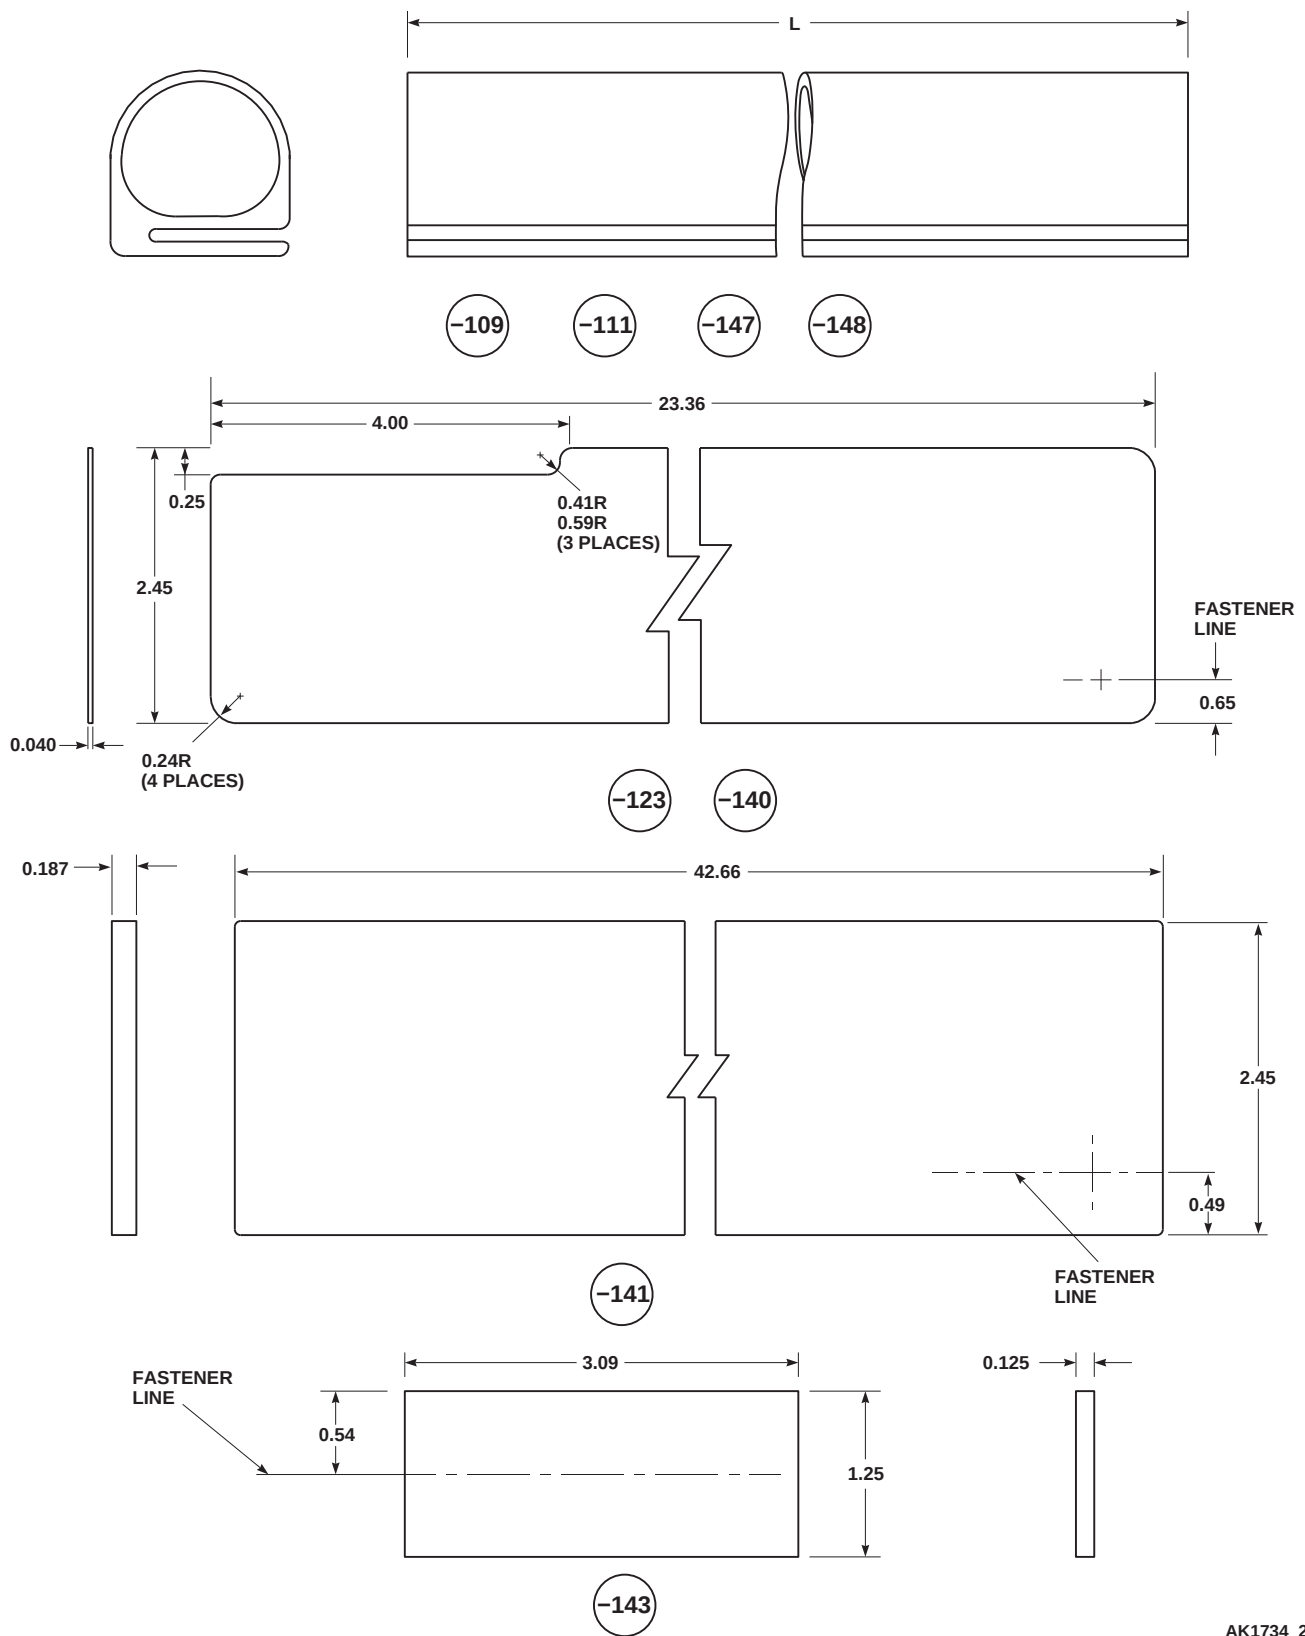

AK1734\_2A  
SA

FIGURE H-76. CABIN DOOR SEAL (SHEET 2 OF 3)

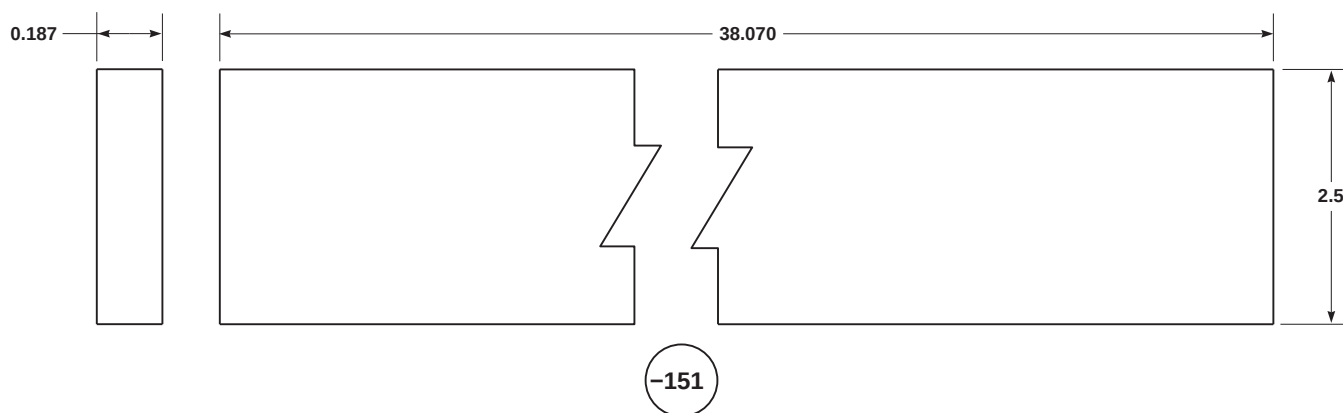

| NOMENCLATURE    | L LENGTH | SIKORSKY<br>PART NUMBER |
|-----------------|----------|-------------------------|
| SEAL CABIN DOOR | 36.34    | 70217-02721-109         |
|                 | 15.20    | 70217-02721-110         |
|                 | 4.73     | 70217-02721-111         |
|                 | 37.19    | 70217-02721-116         |
|                 | 16.11    | 70217-02721-117         |
|                 | 23.36    | 70217-02721-123         |
|                 | 4.89     | 70217-02721-132         |
|                 | 64.90    | 70217-02721-133         |
|                 | 23.36    | 70217-02721-140         |
|                 | 42.66    | 70217-02721-141         |
|                 | 3.09     | 70217-02721-143         |
|                 | 36.88    | 70217-02721-147         |
|                 | 17.21    | 70217-02721-148         |
|                 | 38.070   | 70217-02721-151         |
|                 | 64.90    | 70217-02721-154         |

## NOTES

1. MAKE -110 FROM SYNTHETIC RUBBER, 0.50 INCH THICK, MIL-R-6155, TYPE A, GRADE 40, NSN 9320-00-848-7302.
2. MAKE -116, -117 FROM EXTRUDED RUBBER, MUELLER DIE NO. 5629, NSN 1560-01-177-5120.
3. MAKE -132 FROM SOFT RUBBER, 0.625 INCH THICK, MIL-R-6130, TYPE 1, GRADE C, CAGE 81349.
4. MAKE -133 FROM POLYAMIDE PLASTIC, 0.040 INCH THICK, L-P-410, NSN 9330-01-195-2949.
5. MAKE -154 FROM URETHANE, BLACK, 0.060 INCH THICK, MIL-R-83397, TYPE 2, DUROMETER 90, NSN 5330-01-256-6362.
6. MAKE -123, -147, -148 FROM EXTRUDED RUBBER SEAL, DIE NO. 8487, NSN 5330-01-179-9496.
7. MAKE -140 FROM NYLATRON G.S., 0.040 INCH THICK, L-P-410, NSN 9330-01-195-9249.
8. MAKE -141, -151, FROM RUBBER, SBE11F2, 0.187 INCH THICK, P / N 4310-ECH, CAGE 59502. ALTERNATE RUBBER, 0.187 INCH THICK, MIL-STD-670, SCEIL, P / N 4311-N, CAGE 59502.
9. PICK UP FASTENER HOLES ON INSTALLATION.
10. TRIM SEAL TO FIT, AS REQUIRED.
11. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
12. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GREEN INK, TT-I-1795. USE 1/16 - 1/8 INCH HIGH SANS SERIF CHARACTERS.

EXAMPLE: P/N 70216-02401-107  
PART NUMBER

3Q 86  
THIRD QUARTER 1986

PART NUMBER: 70217-02721-109, -110, -111, -116, -117, -123, -132, -133, -140, -141, -143, -147, -148, -151, -154

FN1981\_3B  
SA

FIGURE H-76. CABIN DOOR SEAL (SHEET 3 OF 3)


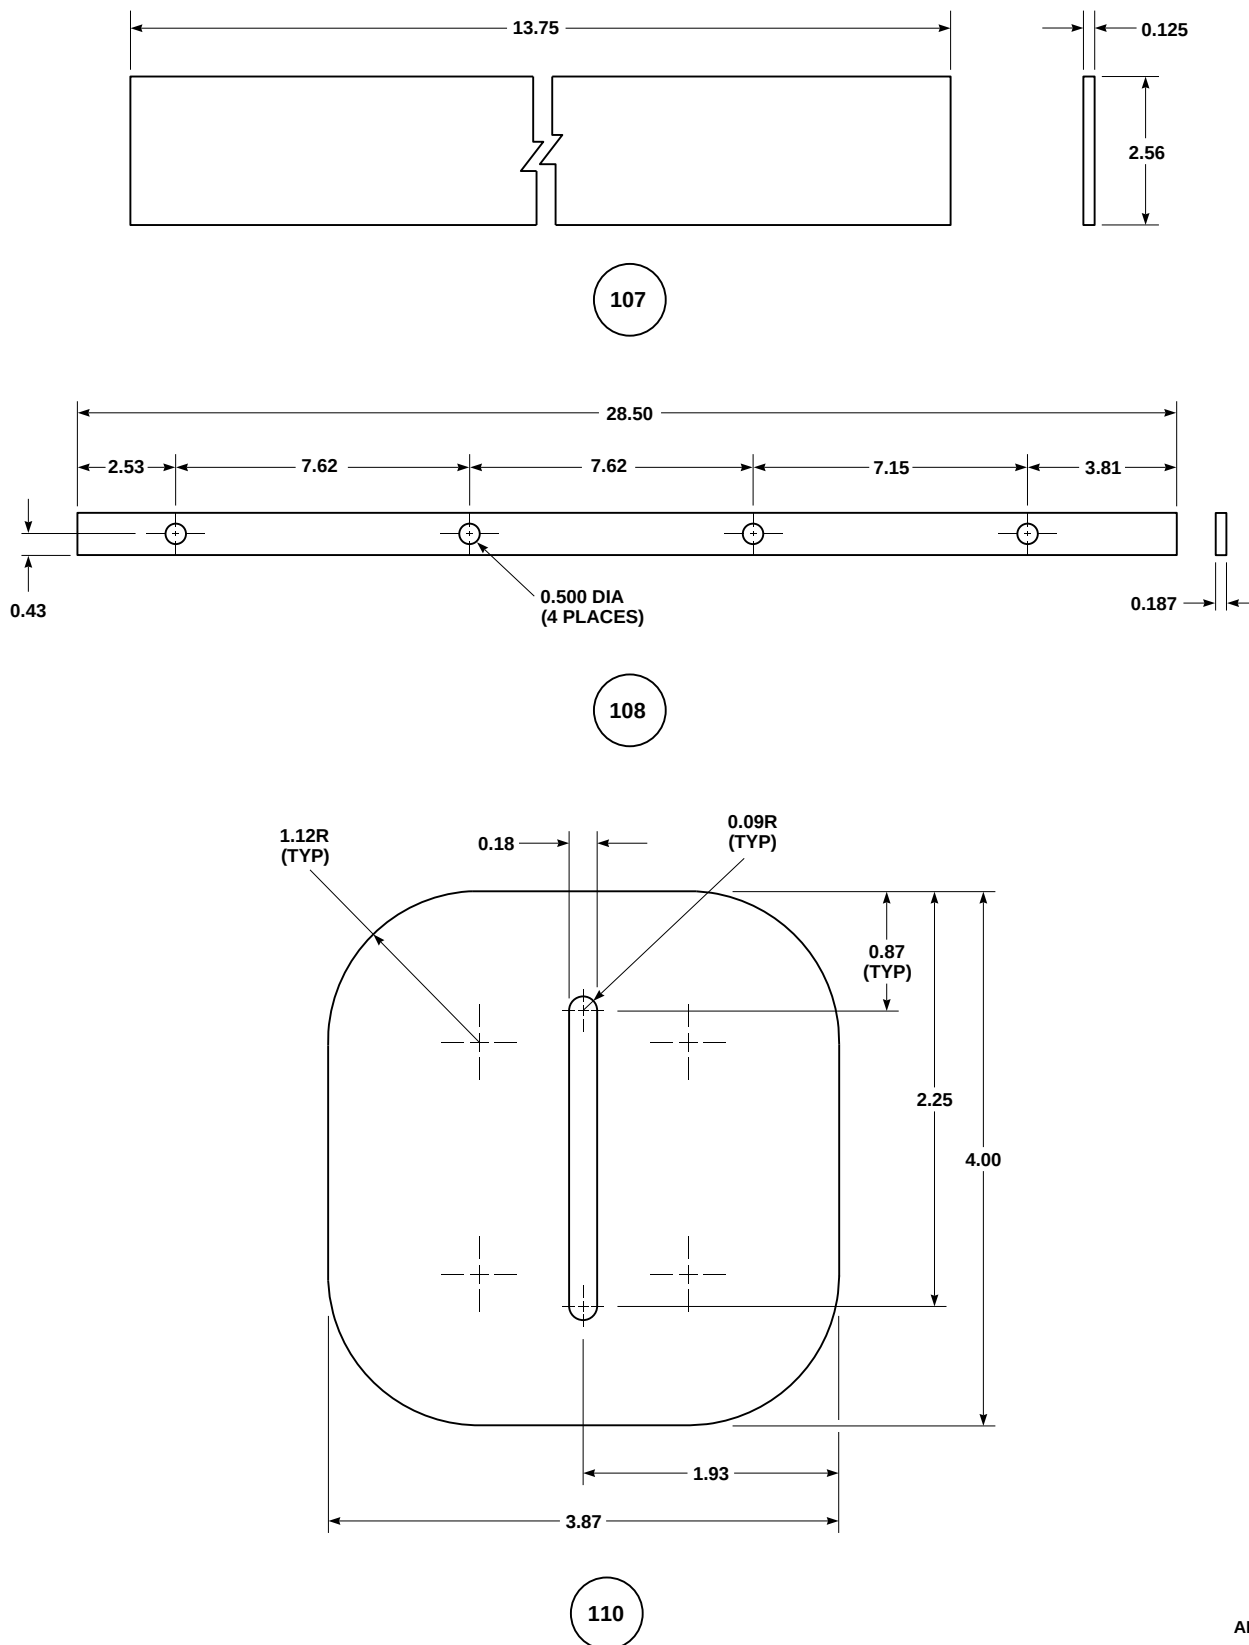


FIGURE H-77. CEILING PANEL SEAL (SHEET 1 OF 2)

AK1695\_1  
SA



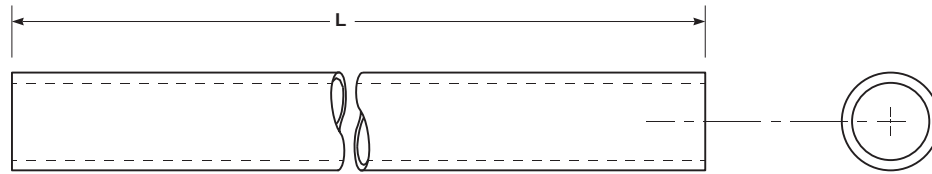

| SIKORSKY PART NUMBER               | L LENGTH     | MAKE FROM                             | NSN NUMBER       |
|------------------------------------|--------------|---------------------------------------|------------------|
| 70550-02151-101<br>70550-02151-102 | 6.50<br>8.25 | TEMFLEX 105C 1/2 IN. ID CLEAR (75037) | 5970-00-685-9057 |


**NOTES**

1. MAKE FROM CLEAR TUBING, 0.50 ID X 0.062 WALL THICKNESS, USING LENGTH AND MATERIAL LISTED IN CHART.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. DEBURR BOTH ENDS TO FORM SMOOTH ROUNDED SURFACE.
4. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70550-02151-101, -102

FO0546A  
SA**FIGURE H-78. ELECTRICAL WIRE**



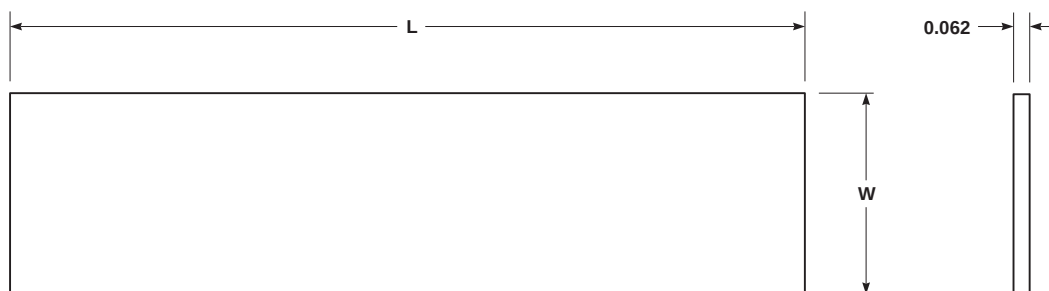

| SIKORSKY PART NUMBER | L LENGTH | W WIDTH |
|----------------------|----------|---------|
| 70700-20395-107      | 4.50     | 2.36    |
| 70700-20395-108      | 18.00    | 5.50    |

#### NOTES


1. MAKE FROM 0.062 INCH THICK, CLASS 2, GRADE 50, RUBBER MIL-R-6855, NSN 9320-00-202-1322.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GREEN INK, TT-I-1795. USE 1/16-1/8-INCH HIGH SANS SERIF CHARACTERS.

EXAMPLE: P / N 70216-02401-107 3Q 86  
 PART NUMBER THIRD QUARTER 1986

PART NUMBER: 70700-20395-107, -108

AK1697  
SA

**FIGURE H-79. GRIP**

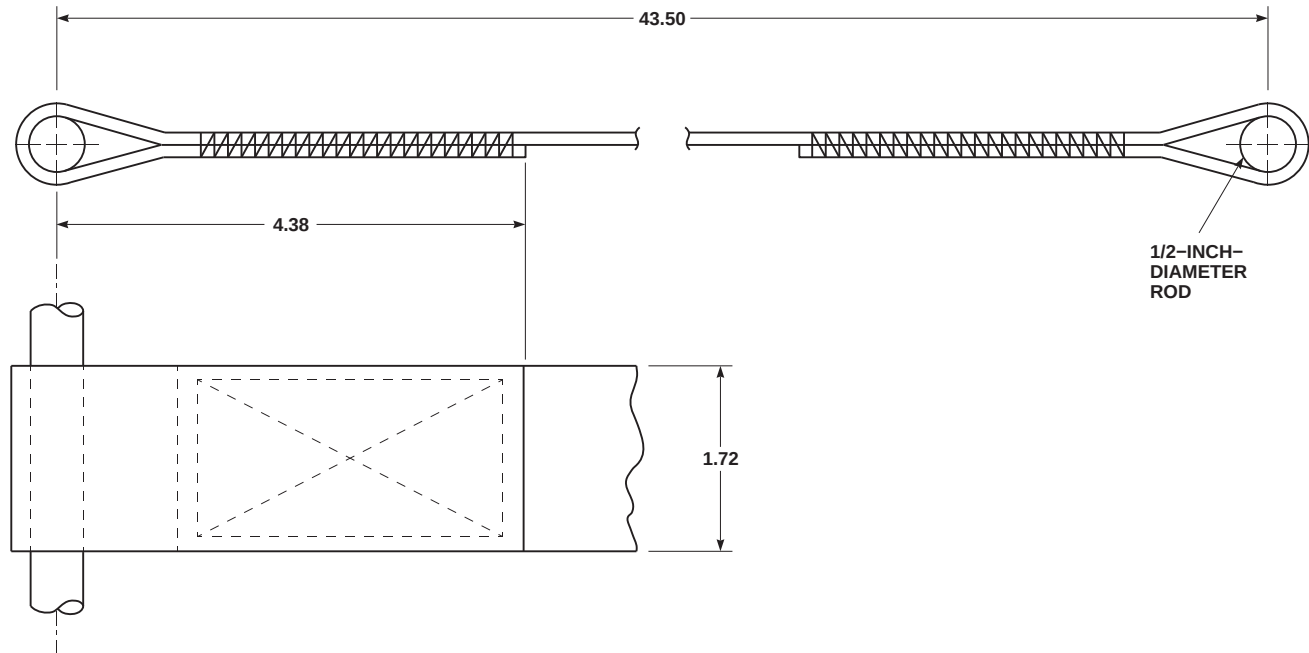


#### NOTES

1. MAKE FROM 1.72-INCH-WIDE NYLON WEBBING PER MIL-W-4088, TYPE XIII COLOR OLIVE DRAB, NSN 8305-00-260-4585. OVERALL LENGTH BEFORE SEWING IS 53.83 INCHES.
2. ALL DIMENSIONS ARE IN INCHES.
3. STITCHING SHALL BE DONE IN ACCORDANCE WITH FED-STD-NO. 751. ALL SEWING TO BE DONE WITH STITCH 301. THERE SHALL BE NO LESS THAN 8 OR MORE THAN 10 STITCHES PER INCH. ENDS OF ALL STITCHING SHALL BE BACK STITCHED NOT LESS THAN 1/2 INCH.
4. STITCH ENDS USING FED. SPEC V-T-295 NYLON THREAD TYPE I, CLASS 2, SIZE E, NSN 8310-00-262-2772.
5. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70700-20420-116

AK1698  
SA

**FIGURE H-80. NYLON WEBBING STRAP**

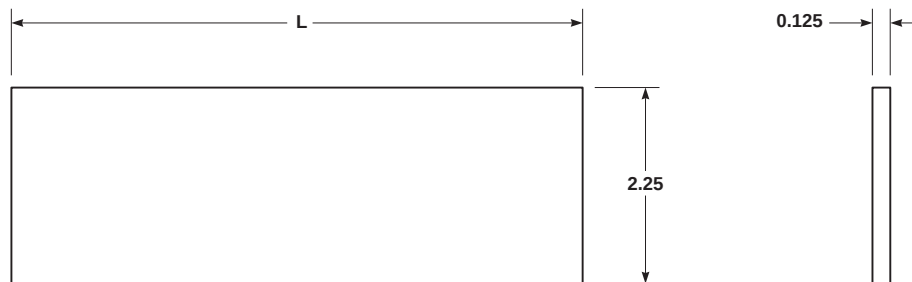

| NOMENCLATURE | SIKORSKY PART NUMBER | L LENGTH |
|--------------|----------------------|----------|
| PAD          | 70700-20313-106      | 20.50    |
|              | 70700-20313-107      | 9.50     |
|              | 70700-20313-108      | 12.312   |

## NOTES


1. MAKE FROM 0.125 INCH THICK, TYPE 2, GRADE A, MEDIUM RUBBER, MIL-R-61308, NSN 9320-01-180-0251.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GREEN INK, TT-I-1795. USE 1/16-1/8-INCH HIGH SANS SERIF CHARACTERS.

EXAMPLE: P / N 70216-02401-107 3Q 86  
PART NUMBER THIRD QUARTER 1986

**PART NUMBER: 70700-20313-106, -107, -108**

AK1699  
SA

**FIGURE H-81. PAD**

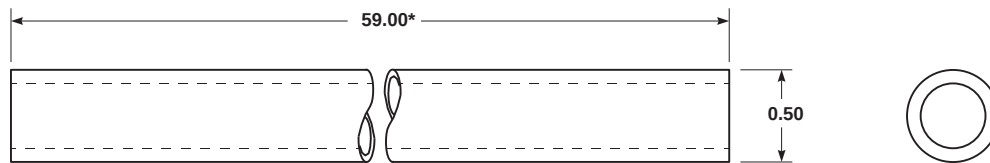

\* TRIM ON INSTALLATION


#### NOTES

1. MAKE FROM 0.500 x 0.020 WALL CONVOLEX TUBING, NSN 9330-01-089-0116.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70500-02065-103

AK1700  
SA

FIGURE H-82. TUBE

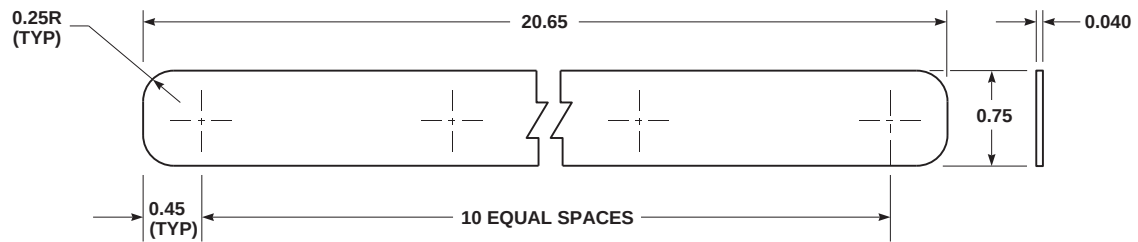


## NOTES

1. MAKE FROM 0.040 INCH THICK, 7075-T6 ALCLAD SHEET, QQ-A-250 / 13, NSN 9535-00-084-4581.
2. ALL DIMENSIONS ARE IN INCHES.
3. LOCATE HOLES ON INSTALLATION.
4. TREAT CUT EDGES WITH CORROSION RESISTANT COATING (ALODINE 1200S), ITEM 118, APPENDIX D.
5. FINISH PER MIL-P-23377 EPOXY PRIMER, NSN 8010-00-082-2477, 1 COAT, FED. SPEC TT-L-20 DULL BLACK LACQUER, NSN 8010-00-664-7651, 2 COATS.
6. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70500-02068-123

FA2335  
SA

FIGURE H-83. STIFFENER

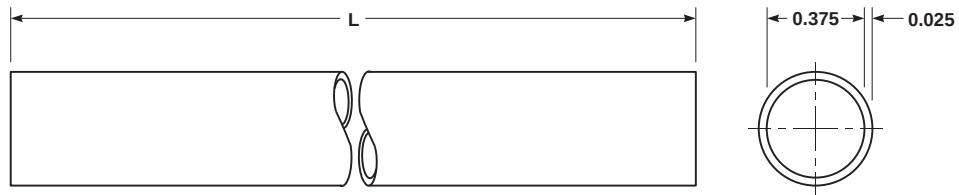

| SIKORSKY PART NUMBER | L LENGTH | MAKE FROM                                 | NSN              |
|----------------------|----------|-------------------------------------------|------------------|
| 70551-07000-103      | 67.25    | TEMFLEX 105C 3/8 INCH ID<br>CLEAR (75037) | 5970-00-889-3844 |


**NOTES**

1. MAKE PARTS FROM 0.375 ID X 0.025 WALL THICKNESS TUBING USING MATERIAL AND LENGTH FROM CHART.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70551-07000-103

AK1702  
SA

**FIGURE H-84. TAIL ROTOR PYLON CONDUIT**

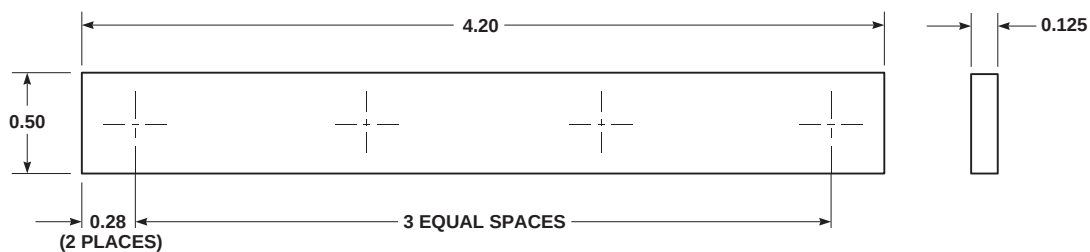

## NOTES


1. MAKE FROM 0.125-INCH-THICK SPONGE, SCE 3L, MIL-STD-670, NSN 9320-01-154-2225.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GREEN INK, TT-I-1795. USE 1/16 - 1/8-INCH HIGH SANS SERIF CHARACTERS.

EXAMPLE: P / N 70216-02401-107 3Q 86  
 PART NUMBER THIRD QUARTER 1986

PART NUMBER: 70217-02701-113

AK1703  
SA

FIGURE H-85. SEAL

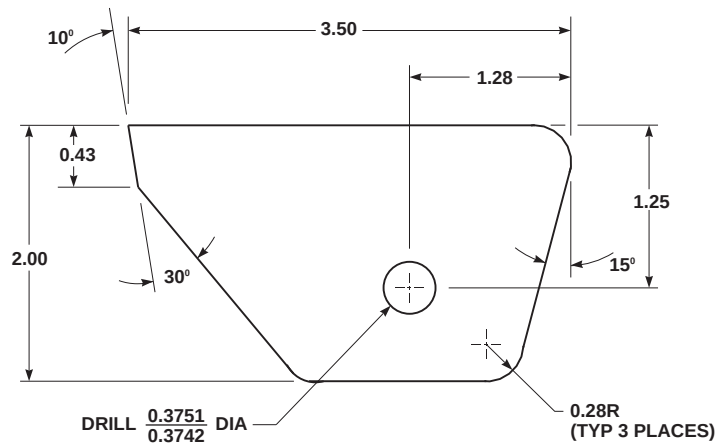

#### NOTES


1. MAKE PARTS FROM 0.040 INCH THICK, 7075-T6 ALCLAD SHEET, QQ-A-250 / 13, NSN 9535-00-084-4581.
2. DRILL BUSHING HOLE TO DIMENSION SHOWN IN FIGURE.
3. CHEMICAL SURFACE TREAT CUT EDGES AND DRILLED HOLES PER MIL-C-5541.
4. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70217-01003-151

AK1705  
SA

FIGURE H-86. CREW DOOR DOUBLER

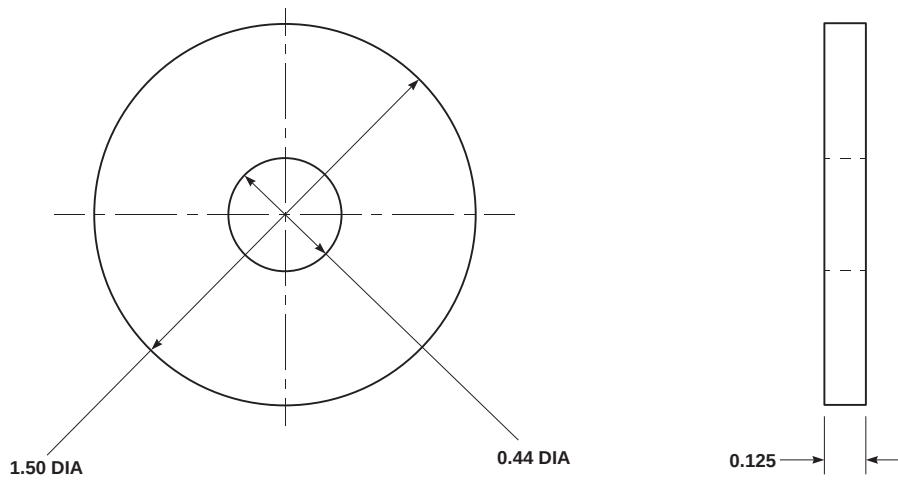


**NOTES**

1. MAKE FROM 0.125 INCH THICK NYLON 6/6, L-P-410, NSN 9330-01-028-9334.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70700-20507-105

AK1706  
SA**FIGURE H-87. WASHER**

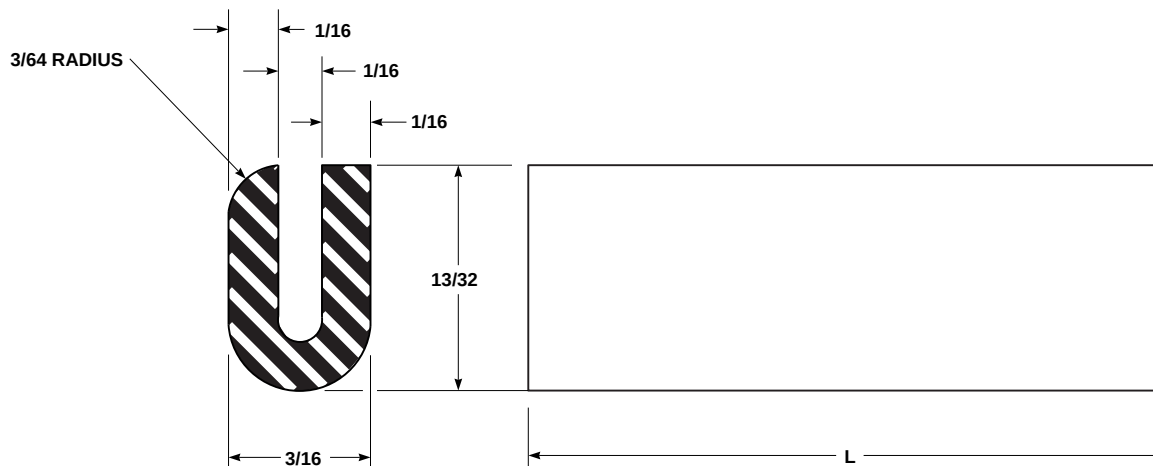

| SIKORSKY PART NUMBER | L LENGTH |
|----------------------|----------|
| SS2940-1             | 1.00 IN. |
| SS2940-2             | 2.00 IN. |

#### NOTES


1. MAKE FROM SS2940-120 SYNTHETIC RUBBER EDGING, RS709ABDFFZ, MIL-R-3065, FSCM 78286.
2. ALL DIMENSIONS ARE IN INCHES.
3. DASH NUMBER REPRESENTS LENGTH OF EDGING IN INCHES.
4. CUT EDGING TO REQUIRED SIZE PER CHART.
5. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GREEN INK, TT-I-1795. USE 1/16-1/8-INCH HIGH SANS SERIF CHARACTERS.

EXAMPLE:  $\frac{P / N 70216-02401-107}{PART NUMBER}$   $\frac{3Q 86}{THIRD QUARTER 1986}$

PART NUMBER: SS2940-1, SS2940-2

AK1707  
SA

FIGURE H-88. RUBBER EDGING

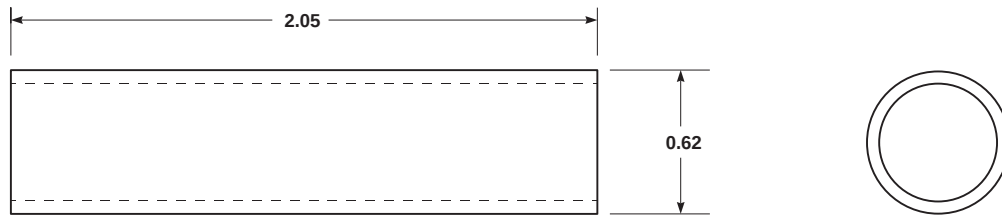
**NOTES**

1. MAKE FROM 0.62-INCH-DIAMETER OD x 0.049-INCH THICK WALL, 6061-T6 ALUMI-NUM ALLOY TUBING, WW-T-700 / 6, NSN 4710-01-044-6567.
2. ALL DIMENSIONS ARE IN INCHES.
3. DEBURR INSIDE AND OUTSIDE OF CUT ENDS.
4. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70500-02073-101

AK1708  
SA**FIGURE H-89. DRIP PAN TUBE**



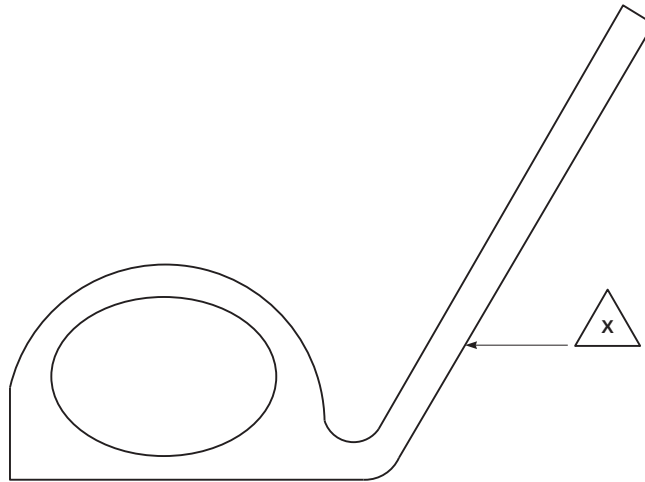

## NOTES


1. MAKE FROM 38010-70023-101 EXTRUDED NITRILE RUBBER, CLASS 1, GRADE 40, MIL-R-6855, FSCM 78286.
2. ALL DIMENSIONS ARE IN INCHES.
3. MINIMUM LENGHT 80.0 INCHES. TRIM TO FIT ON INSTALLATION.
4. IDENTIFY PARTS PER MIL-STD-190 AT LOCATION MARKED BY +1d x +1d in F / D. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GREEN INK, TT-I-1795. USE 1/16 - 1/8-INCH HIGH SANS SERIF CHARACTERS.

EXAMPLE:  $\frac{P / N 70216-02401-107}{\text{PART NUMBER}}$   $\frac{3Q 86}{\text{THIRD QUARTER 1986}}$

PART NUMBER: 70308-03602-109

AK1710  
SA

**FIGURE H-91. HIRSS INLET DOOR SEAL**

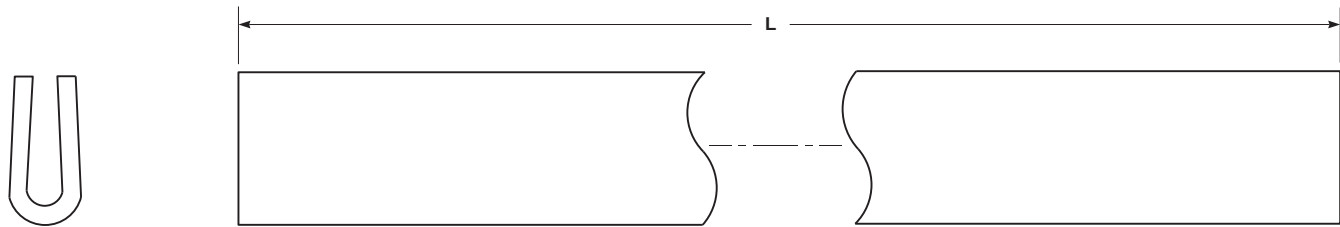

| NOMENCLATURE            | L LENGTH | SIKORSKY PART NUMBER |
|-------------------------|----------|----------------------|
| BATTERY BOX COVER SEALS | 1.87     | 70209-02532-105      |
|                         | 1.75     | 70209-02532-106      |
|                         | 4.87     | 70209-02532-107      |
|                         | 10.87    | 70209-02532-110      |
|                         | 11.75    | 70209-02532-111      |
|                         | 1.37     | 70209-02532-112      |
|                         | 2.00     | 70209-02532-113      |

NOTES


- 1. MAKE FROM SYNTHETIC RUBBER EXTRUSION, DIE NO. 535, FSCM 19864. CUT TO LENGTH PER DIMENSIONS IN CHART.
- 2. ALL DIMENSIONS ARE IN INCHES.
- 3. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GREEN INK, TT-I-1795. USE 1/16-1/8-INCH HIGH SANS SERIF CHARACTERS.

EXAMPLE: P / N 70216-02401-107 3Q 86  
PART NUMBER THIRD QUARTER 1986

PART NUMBER: 70209-02532-105 THRU -107 AND -110 THRU -113

AK1711  
SA

FIGURE H-92. BATTERY BOX COVER SEALS

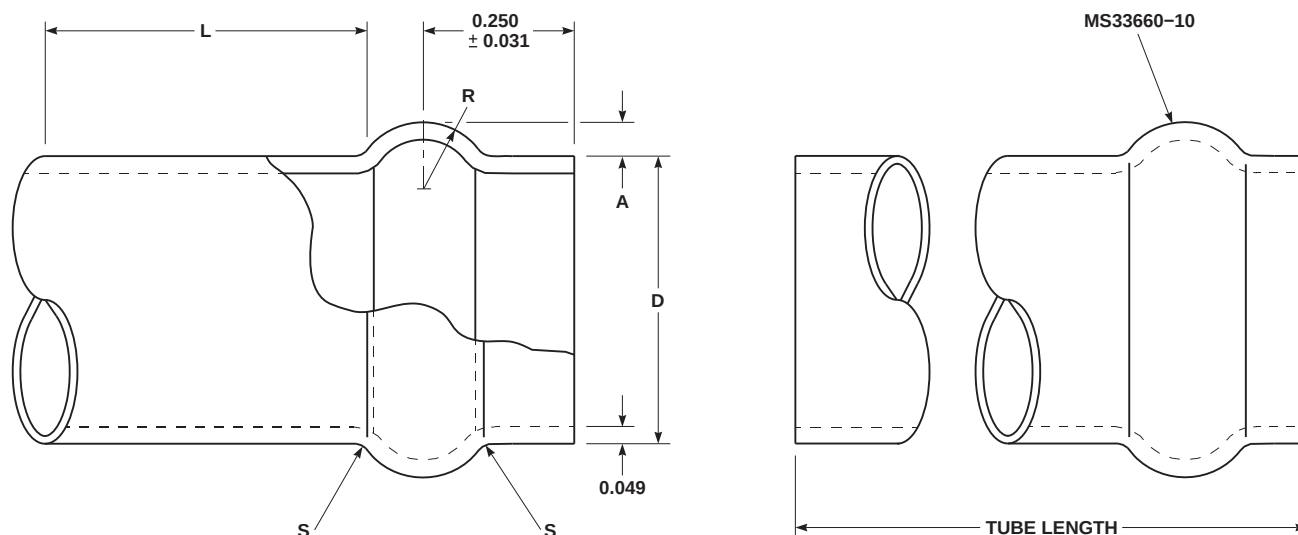

TYPE A END

CHART A

|            | D (SEE NOTE 7) | A                                 | L                  | R                       | S               |                      |
|------------|----------------|-----------------------------------|--------------------|-------------------------|-----------------|----------------------|
| BEAD SIZE  | TUBE OD        | TOLERANCE FOR LENGTH L TYPE A END | BEAD HEIGHT ±0.003 | LENGTH MIN (SEE NOTE 7) | BEAD RADIUS MAX | BEAD EDGE RADIUS MAX |
| MS33660-10 | 0.625          | + 0.003<br>- 0.010                | 0.038              | 0.750                   | 0.125           | 0.062                |

CHART B

| SIKORSKY PART NUMBER | TUBE LENGTH |
|----------------------|-------------|
| 70500-02071-109      | 7.00 INCH   |
| 70500-02071-110      | 5.25 INCH   |


## NOTES

1. MAKE FROM 0.625 OD X 0.049 WALL THICKNESS, 5052-0 ALUMINUM ALLOY TUBING WW-T-700 / 4, FSCM 81349.
2. FORM BEAD AS SHOWN, PER MS33660-10 AND CHART A.
3. ALL DIMENSIONS ARE IN INCHES.
4. CUT TUBE LENGTH PER CHART B, AND DEBURR CUT ENDS.
5. TREAT CUT EDGES WITH CORROSION RESISTANT COATING (ALODINE 1200S), ITEM 118, APPENDIX D.
6. IDENTIFY PARTS PER MIL-STD-130.
7. TUBE OD, AFTER BEADING, SHALL BE MAINTAINED FOR DISTANCE L.

PART NUMBER: 70500-02071-109, -110

FA2336  
SA

FIGURE H-93. BEADED TUBE

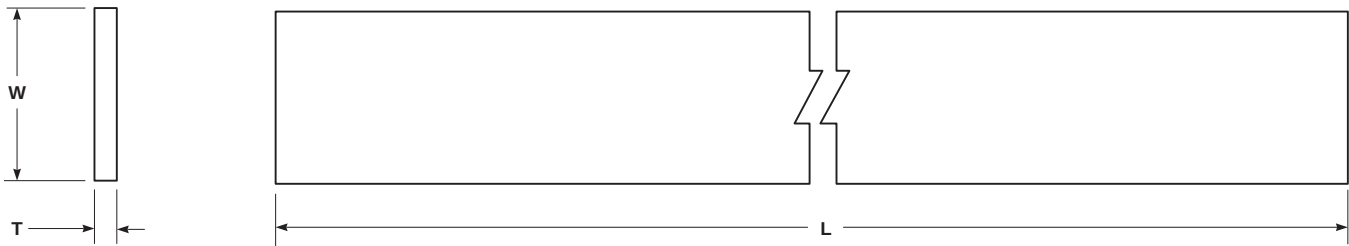

| SIKORSKY PART NUMBER | T THICKNESS | W WIDTH | L LENGTH | NSN              |
|----------------------|-------------|---------|----------|------------------|
| 70216-01007-117      | 0.25        | 0.65    | 13.19    | 5330-01-105-5866 |
| 70216-01007-118      | 0.06        | 0.32    | 13.03    | 5330-01-105-5866 |
| 70216-01007-158      | 0.12        | 0.49    | 12.78    | 9320-00-202-1935 |
| 70216-01007-174      | 0.06        | 0.49    | 4.70     | 9320-00-080-7382 |

NOTES

- 1. MAKE FROM SCE-7L RUBBER, MIL-STD-670, PER CHART.
- 2. ALL DIMENSIONS ARE IN INCHES.
- 3. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GREEN INK, TT-I-1795. USE 1/16-1/8-INCH HIGH SANS SERIF CHARACTERS.


EXAMPLE: P / N 70216-02401-107 3Q 86  
PART NUMBER THIRD QUARTER 1986

PART NUMBER: 70216-01007-117, -118, -158, -174

AK1715  
SA

FIGURE H-94. VENT WINDOW SEALS



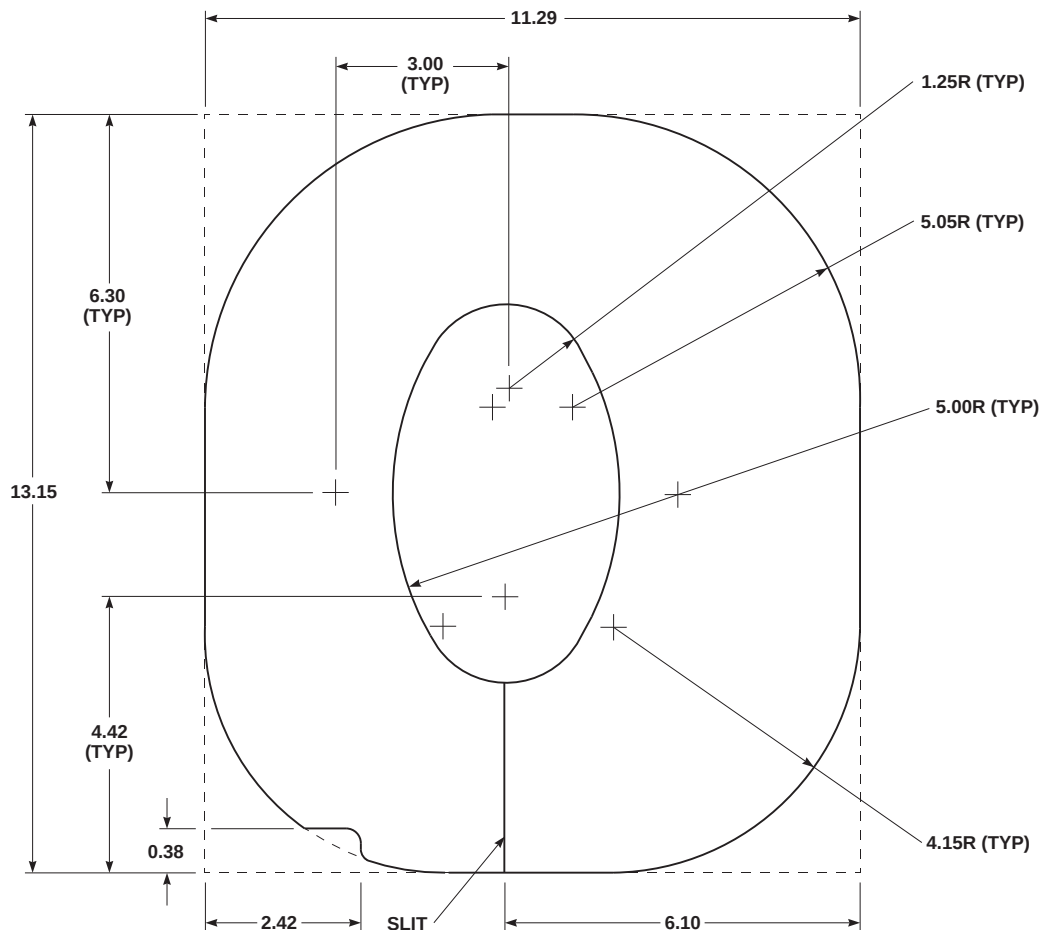

| NOMENCLATURE              | SIKORSKY PART NUMBER |
|---------------------------|----------------------|
| MAIN GEAR STRUT WELL SEAL | 70215-02312-102      |

## NOTES


1. MAKE FROM 0.25-INCH-THICK NON-POROUS SKINNED RUBBER, CLASS 1, GRADE 40, MIL-R-6855, NSN 9320-01-157-9071.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GREEN INK, TT-I-1795. USE 1/16-1/8-INCH HIGH SANS SERIF CHARACTERS.

EXAMPLE: P / N 70216-02401-107 3Q 86  
 PART NUMBER THIRD QUARTER 1986

PART NUMBER: 70215-02312-102

AK1714  
SA

FIGURE H-95. MAIN GEAR STRUT WELL SEAL

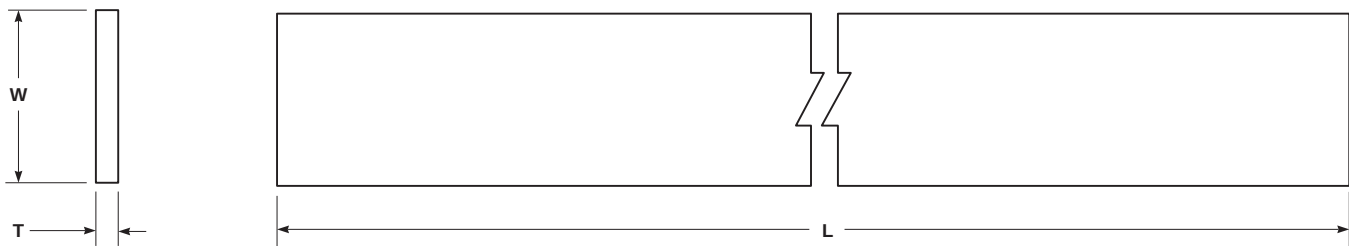

| NOMENCLATURE                     | T THICKNESS | W WIDTH | L LENGTH | SIKORSKY PART NUMBER |
|----------------------------------|-------------|---------|----------|----------------------|
| CABIN DOOR JETTISON WINDOW SEALS | 0.062       | 0.532   | 102.25   | 70217-02705-108      |
|                                  |             |         | 102.25   | 70217-02705-112      |
|                                  |             |         | 19.00    | 70217-02705-115      |

NOTES


- 1. MAKE FROM 0.062-INCH-THICK RUBBER, TYPE 2, GRADE A, MEDIUM, MIL-STD-670B SCE7L, NSN 9320-00-012-3481.
- 2. ALL DIMENSIONS ARE IN INCHES.
- 3. CUT SEALS TO SIZE PER CHART. CUT OVERSIZE TO ALLOW FOR FINAL FIT ON INSTALLATION.
- 4. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GREEN INK, TT-I-1795. USE 1/16-1/8-INCH HIGH SANS SERIF CHARACTERS.

EXAMPLE: P / N 70216-02401-107 3Q 86  
PART NUMBER THIRD QUARTER 1986

PART NUMBER: 70217-02705-108, -112, -115

FN1987  
SA

FIGURE H-96. CABIN DOOR JETTISON WINDOW SEALS

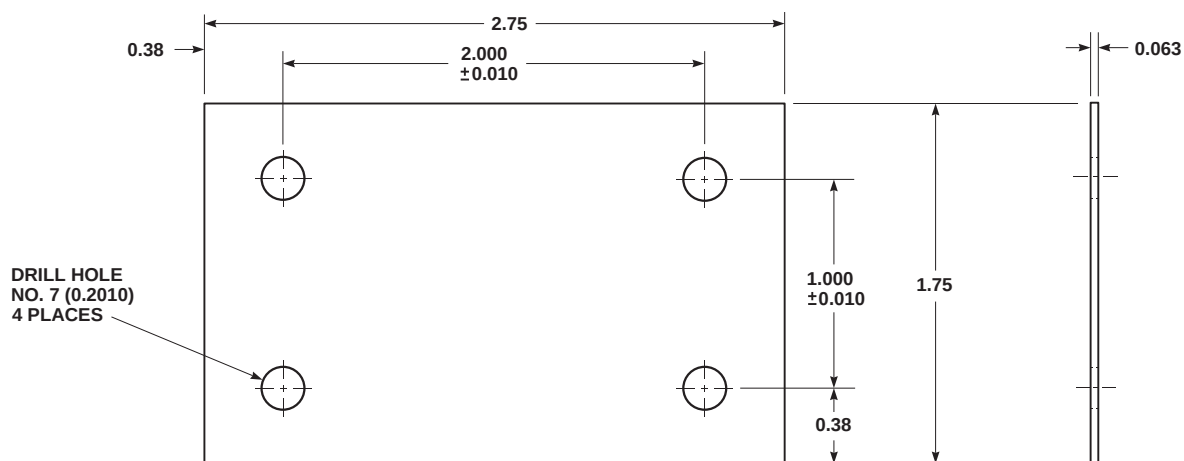


## NOTES

1. MAKE FROM 7075-T6 ALCLAD SHEET, 0.063 INCH THICK, QQ-A-250 / 13, NSN 9535-00-086-9860.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. DRILL HOLES PER FIGURE.
4. BREAK SHARP EDGES AND DEBURR ALL HOLES.
5. ANODIZE, TWO COATS, PER MIL-A-8625.
6. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70217-01010-111

FO0300B  
SA

FIGURE H-97. SHIM

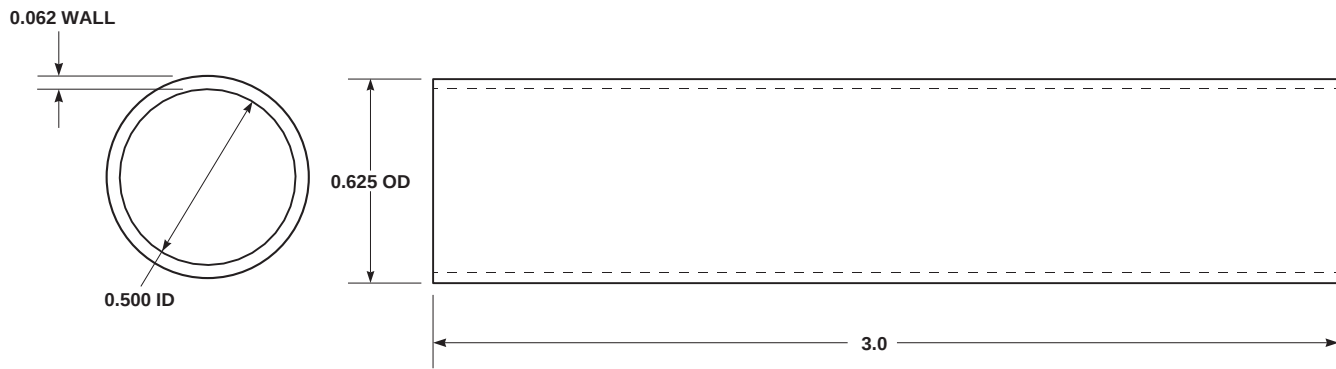


**NOTES**

1. MAKE FROM TYGON R-2807 PLASTIC TUBING, FSCM 34384.
2. CUT TO LENGTH, AS SHOWN.
3. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70217-01010-110

AK1719  
SA

**FIGURE H-98. SEAL SPLICE**

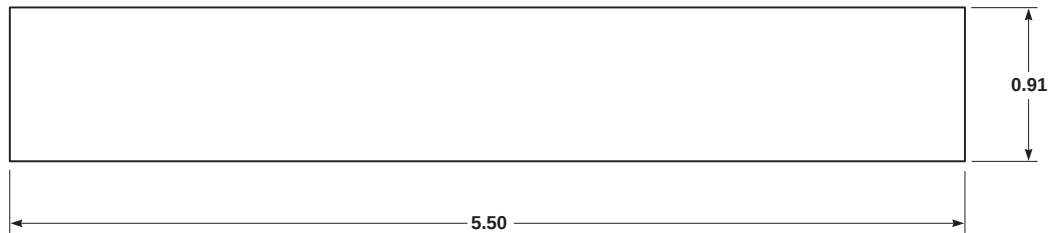

| NOMENCLATURE        | SIKORSKY PART NUMBER |
|---------------------|----------------------|
| CEILING PANEL STRAP | 70500-02063-151      |


**NOTES**

1. MAKE FROM NYLON WEBBING, CLASS 1, MIL-W-4088, COLOR GRAY, NSN 8305-01-015-5342.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70500-02063-151

AK1720  
SA

**FIGURE H-99. CEILING PANEL STRAP**

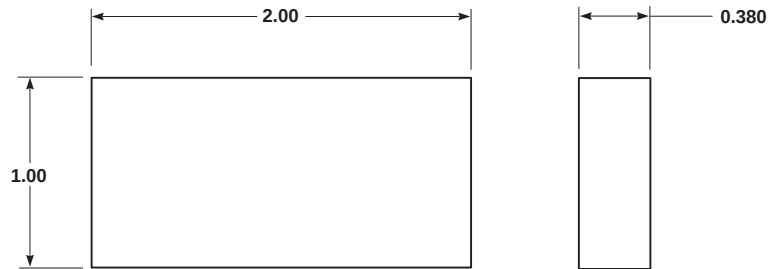

#### NOTES


1. MAKE FROM NEOPRENE FOAM, SCE-3L, MIL-STD-670, NSN 9320-00-181-0016.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GREEN INK, TT-I-1795. USE 1/16 - 1/8-INCH HIGH SANS SERIF CHARACTERS.

EXAMPLE:  $\frac{P / N 70216-02401-107}{PART NUMBER}$   $\frac{3Q 86}{THIRD QUARTER 1986}$

PART NUMBER: 70215-02312-119

AK1721  
SA

**FIGURE H-100. MAIN LANDING GEAR FAIRING BUMPER**

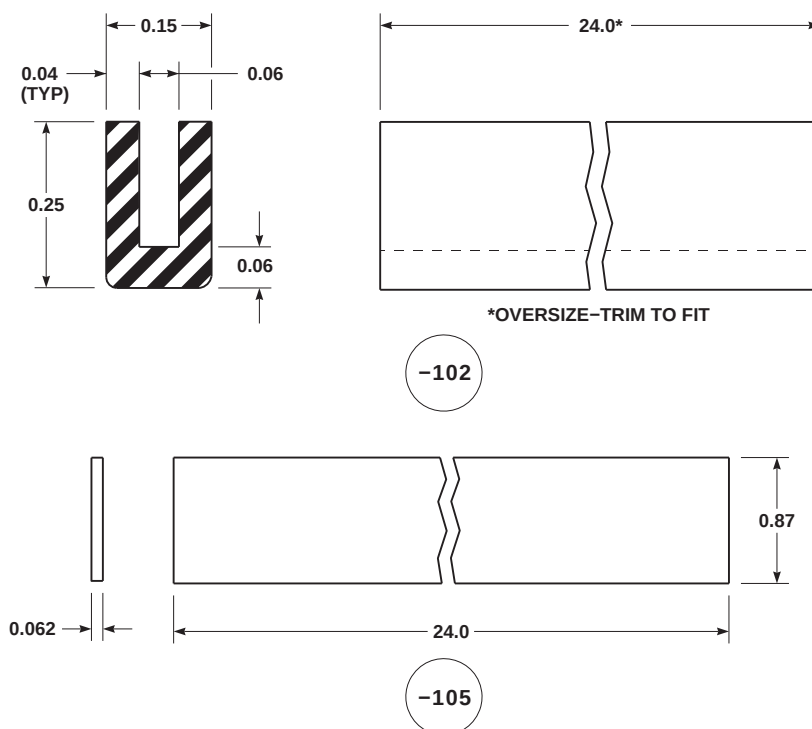

## NOTES

1. MAKE -102 SEAL FROM EXTRUDED STYRENE BUTADIENE RUBBER EDGING, SS2940-120, NSN 9390-01-251-7688, CAGE 83473.
2. MAKE -105 SEAL (ALTERNATE SEAL) FROM 0.062 INCH THICK RUBBER, MIL-R-6855, CLASS 2, GRADE 60, NSN 9320-01-157-9070.
3. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
4. ALTERNATE MATERIAL FOR -102 IS SYNTHETIC RUBBER EDGING, SS2940-24, LISTED IN THIS APPENDIX. REFER TO INDEX.
5. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GREEN INK, TT-I-1795. USE 1/16 - 1/8 INCH HIGH SANS SERIF CHARACTERS.

EXAMPLE: P/N 70216-02401-107      3Q 86  
PART NUMBER      THIRD QUARTER 1986


**PART NUMBER: 70215-02531-102, -105**

FO0547A  
SA

**FIGURE H-101. EDGING SEAL**

## Change 9

H-167

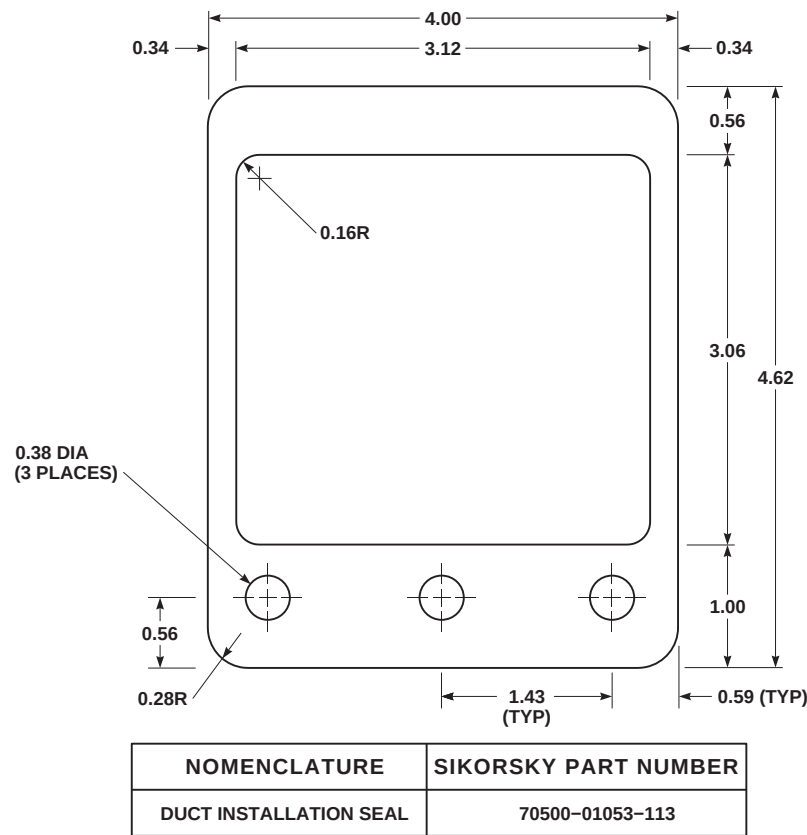

NOTES

- 1. MAKE FROM 0.032-INCH-THICK RUBBER, CLASS 2, GRADE 60, MIL-R-6855, NSN 9320-01-157-9069.
- 2. ALL DIMENSIONS ARE IN INCHES.
- 3. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GRAY INK, TT-I-1795. USE 1/16-1/8-INCH HIGH SANS SERIF CHARACTERS.


EXAMPLE: P / N 70216-02401-107 3Q 86  
PART NUMBER THIRD QUARTER 1986

PART NUMBER: 70500-01053-113


AK1723  
SA

FIGURE H-102. DUCT INSTALLATION SEAL



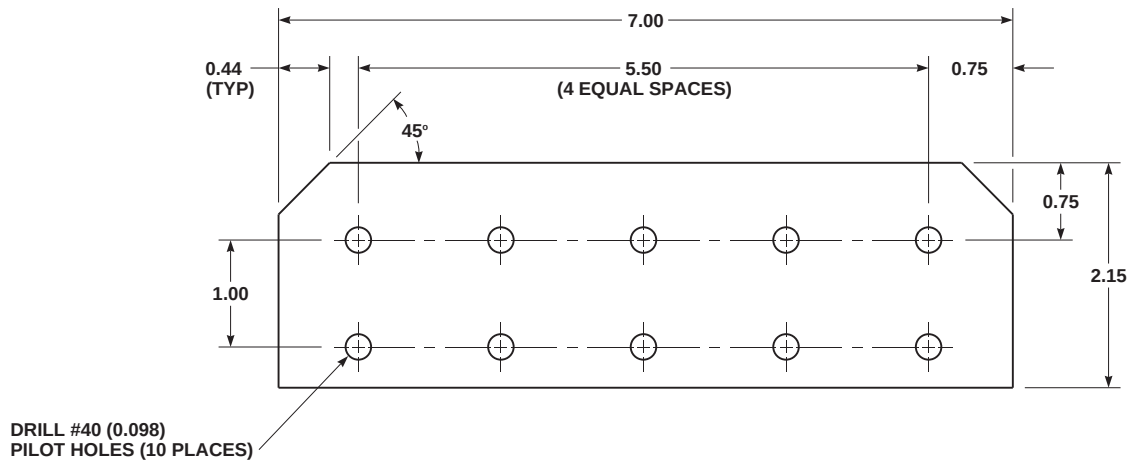

110

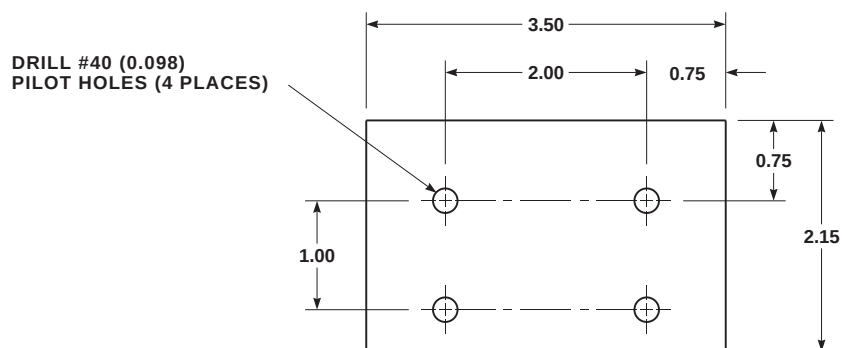

109


## NOTES

1. MAKE -109 AND -110 LINERS FROM 0.03-INCH THICK SYNTHANE GME, MIL-P-15037, NSN 5970-00-912-1907.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-130.
4. ON INSTALLATION OPEN PILOT HOLES TO 0.406-INCH DIAMETER TO MATCH VIBRATION ABSORBER HOLES.

PART NUMBER: 70219-02114-109, -110

AK1724  
SA

FIGURE H-103. VIBRATION ABSORBER LINERS

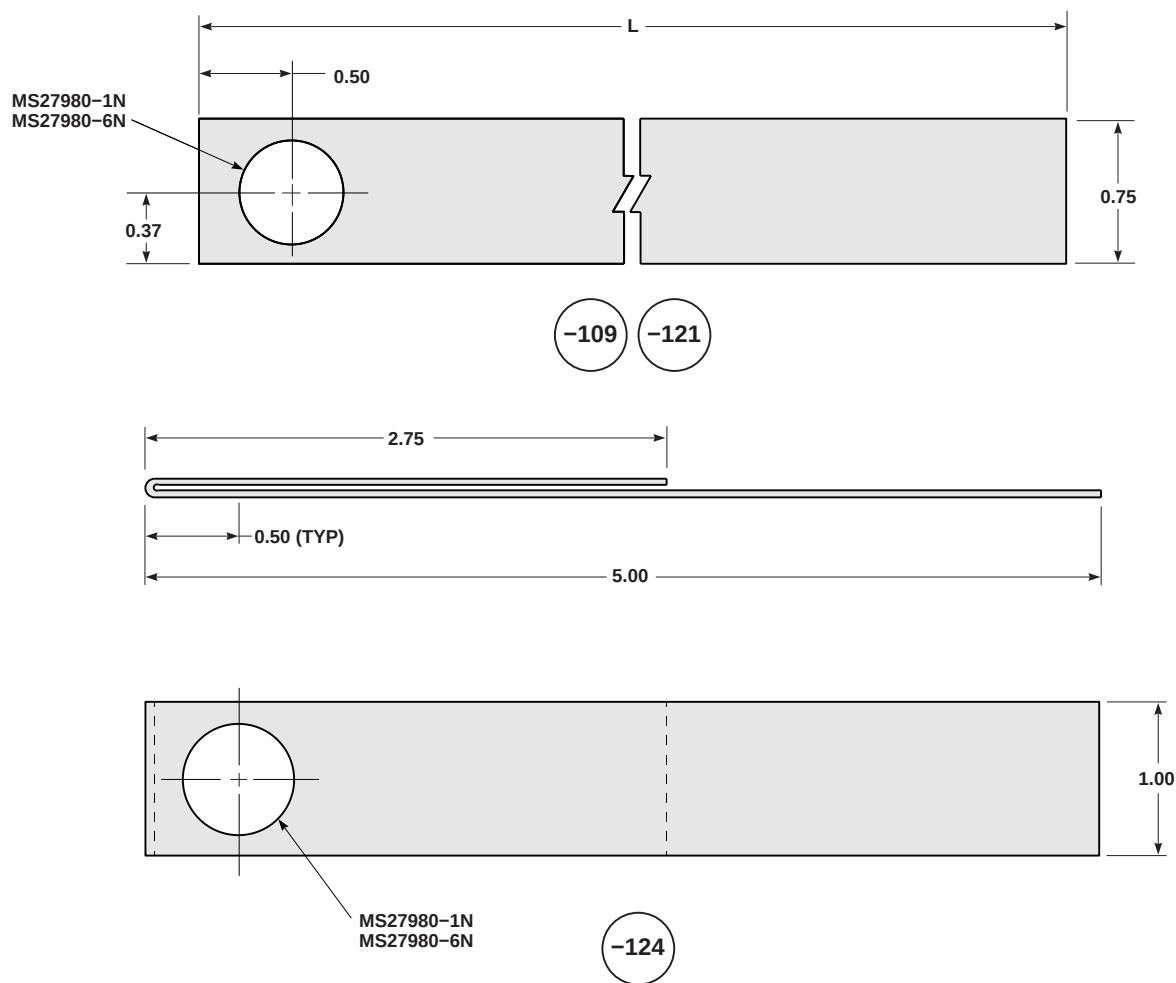

| NOMENCLATURE          | L LENGTH | SIKORSKY<br>PART NUMBER |
|-----------------------|----------|-------------------------|
| SIDE WALL PANEL STRAP | 5.06     | 70500-02068-109         |
|                       | 10.00    | 70500-02068-121         |
|                       |          | 70500-02068-124         |


## NOTES

1. MAKE -109, -121 FROM GRAY NYLON WEBBING, 0.750 INCH WIDE, MIL-W-4088, TYPE 1A, NSN 5340-01-097-5199.
2. CUT WEBBING TO REQUIRED SIZE AND INSTALL SNAP FASTENER, MS27980-1N, NSN 5325-00-276-4953, AND MS27980-6N, NSN 5325-00-276-4946.
3. MAKE -124 FROM GRAY NYLON WEBBING, 1.00 INCH WIDE, MIL-W-4088, TYPE 1A, NSN 8305-01-015-5342.
4. CUT WEBBING TO 7.75 INCH LENGTH AND FOLD AS SHOWN.
5. INSTALL SNAP FASTENER, MS27980-1N, NSN 5325-00-276-4953, AND MS27980-6N, NSN 5325-00-276-4946.
6. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
7. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70500-02068-109, -121, -124

FO0301A  
SA

FIGURE H-104. STRAP

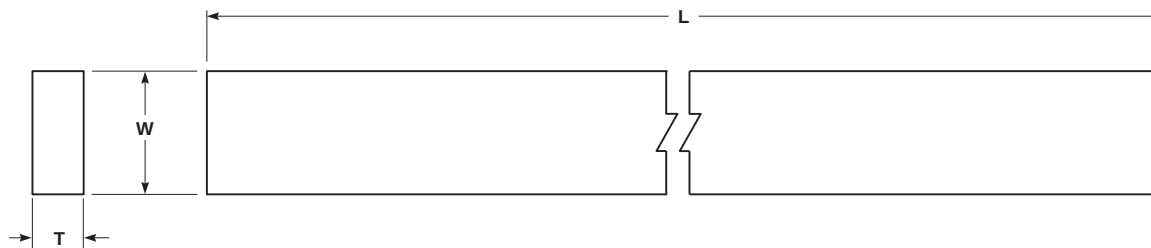

| NOMENCLATURE           | T THICKNESS | W WIDTH | L LENGTH | SIKORSKY PART NUMBER |
|------------------------|-------------|---------|----------|----------------------|
| ENGINE AIR INLET SEALS | 0.050       | 1.50    | 20.0     | 70302-10019-101      |
|                        |             |         | 15.0     | 70302-10019-102      |
|                        |             |         | 28.0     | 70302-10019-103      |
|                        |             |         | 26.0     | 70302-10019-104      |
|                        |             |         | 3.0      | 70302-10019-105      |

#### NOTES


1. MAKE FROM 0.050-INCH-THICK RUBBER, TYPE 2, CLASS 1, MIL-R-83248, FSCM 81349.
2. ALL DIMENSIONS ARE IN INCHES.
3. CUT SEALS TO LENGTH PER CHART.
4. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GREEN INK, TT-I-1795. USE 1/16-1/8-INCH HIGH SANS SERIF CHARACTERS.

EXAMPLE: P / N 70216-02401-107 3Q 86  
 PART NUMBER THIRD QUARTER 1986

PART NUMBER: 70302-10019-101, -102, -103, -104, -105

AK1727  
28.0

**FIGURE H-105. ENGINE AIR INLET SEAL**

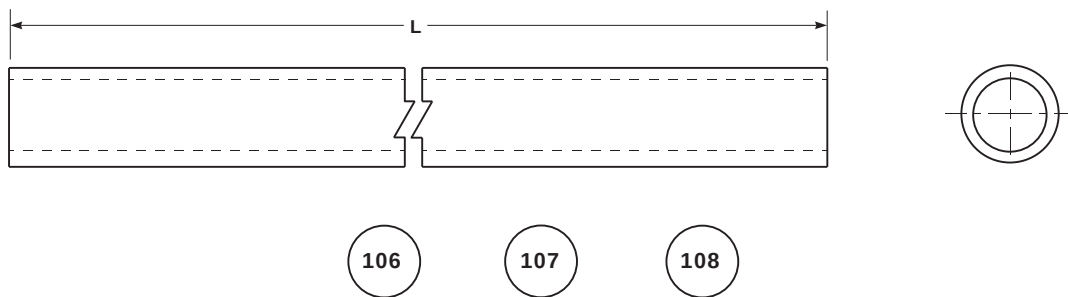

| SIKORSKY PART NUMBER | L LENGTH |
|----------------------|----------|
| 70500-02073-106      | 38.00    |
| 70500-02073-107      | 44.00    |
| 70500-02073-108      | 56.00    |


**NOTES**

1. MAKE FROM 0.750 OD X 0.625 ID COMMERCIAL URETHANE TUBING (TYGOTHANE), NSN 4720-01-176-6328.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70500-02073-106, -107, -108

AK1728  
SA

**FIGURE H-106. DRAIN TUBE**

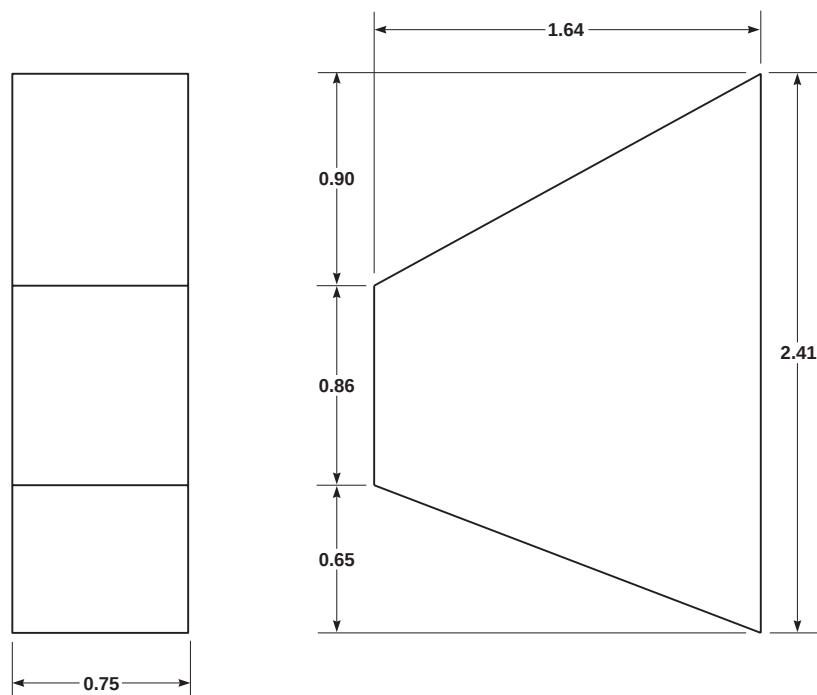

## NOTES


1. MAKE FROM 0.750-INCH-THICK RUBBER, TYPE 2, GRADE A MEDIUM, MIL-R-6130, FSCM 81349.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GREEN INK, TT-I-1795. USE 1/16 - 1/8-INCH HIGH SANS SERIF CHARACTERS.

EXAMPLE: P / N 70216-02401-107 3Q 86  
 PART NUMBER THIRD QUARTER 1986

PART NUMBER: 70302-02142-110

AK1729  
SA

FIGURE H-107. ENGINE FAIRING SEAL

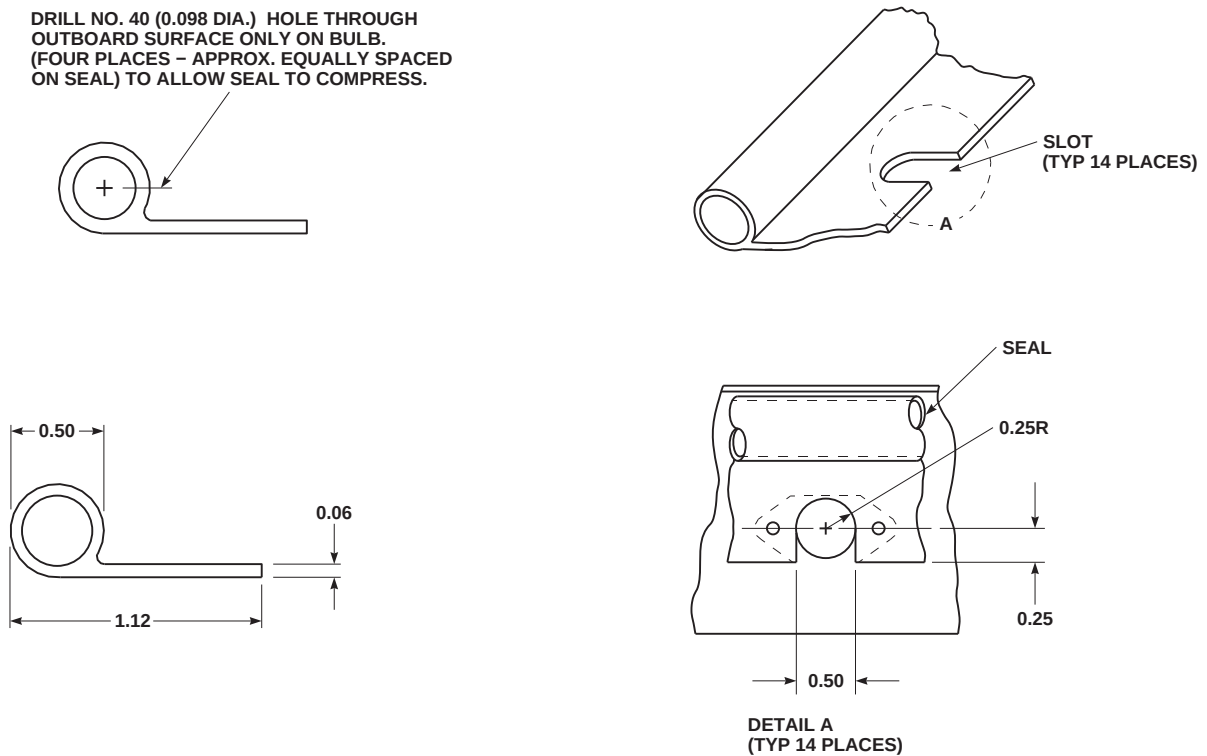

## NOTES


1. MAKE SEAL FROM NO. MBC-26038 SILICONE RUBBER EXTRUSION, CAGE 02921.
2. ALL DIMENSIONS ARE IN INCHES.
3. APPROXIMATE LENGTH OF SEAL IS 120 INCHES. TRIM TO FIT ON INSTALLATION. FLAT PORTION OF SEAL MAY BE SLIT, AS REQUIRED, TO ALLOW EASE OF FORMING CORNER RADII.
4. PICK UP SLOT LOCATION ON INSTALLATION AND CUT SLOTS PER DETAIL A.
5. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE YELLOW INK, TT-I-1795. USE 1/16 - 1/8-INCH HIGH SANS SERIF CHARACTERS.

EXAMPLE: P / N 70216-02401-107 3Q 86  
PART NUMBER THIRD QUARTER 1986

PART NUMBER: 70500-02070-149

AK1730A  
SA

FIGURE H-108. DRAIN PAN SEAL

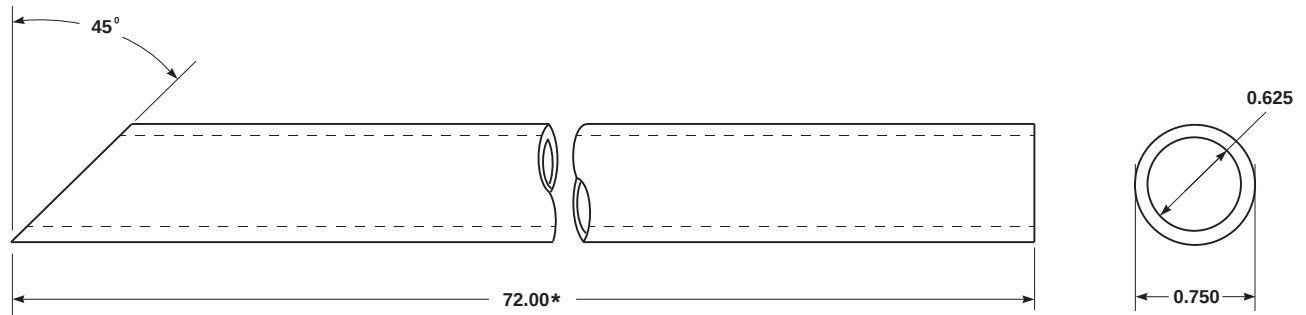

**\* OVERSIZE-TRIM ON INSTALLATION**

#### NOTES

1. MAKE FROM 0.750 OD X 0.625 ID URETHANE TUBING (TYGOTHANE), NSN 4720-01-176-6328.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70500-02076-101

AK1731  
SA

**FIGURE H-109. DRAIN TUBE**


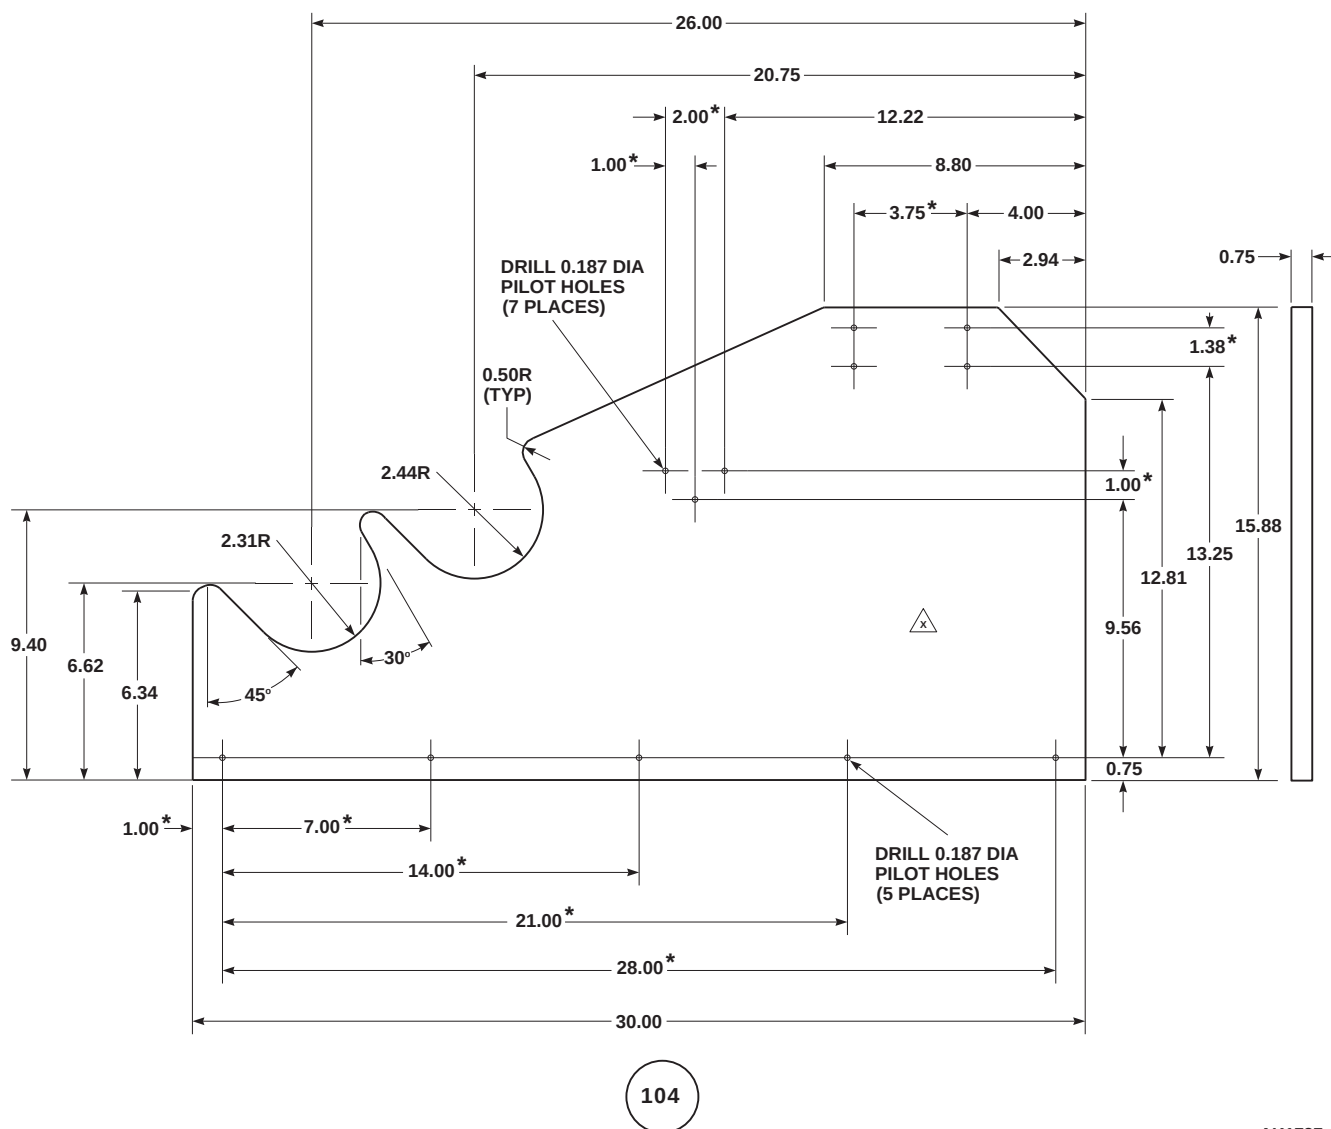


FIGURE H-110. PLYWOOD FRAME (SHEET 1 OF 2)

AK1737\_1  
SA



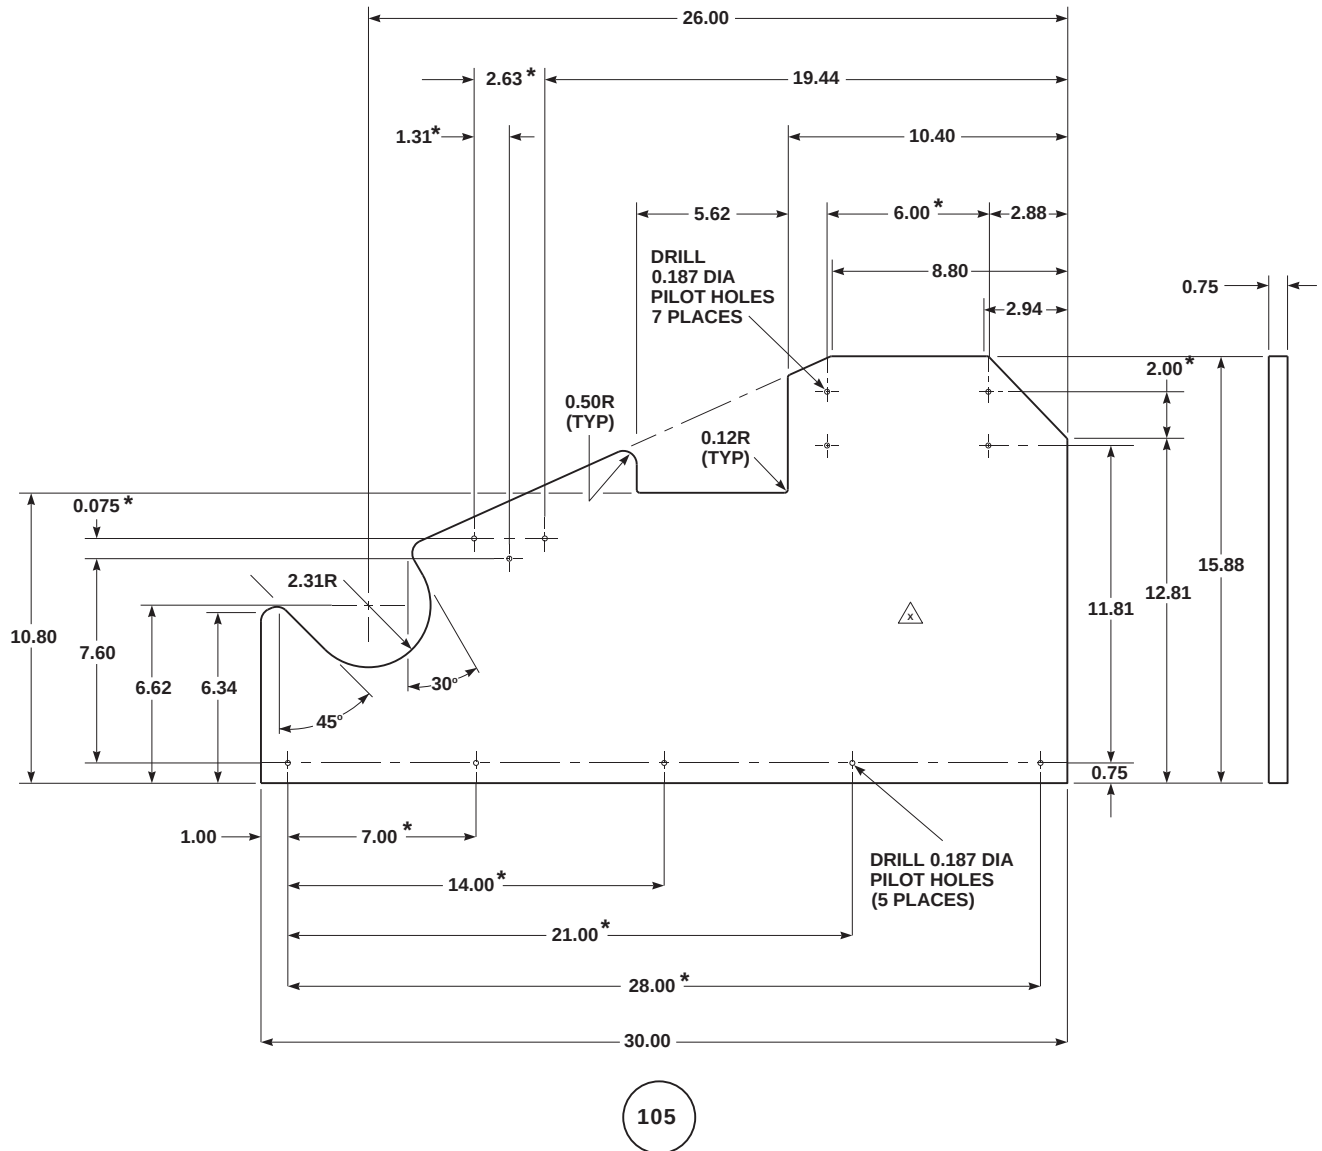

## NOTES

1. MAKE FROM 0.75 INCH THICK EXTERIOR GRADE PLYWOOD, A-A-1417, NSN 5530-00-051-0512.
2. ALL DIMENSIONS ARE IN INCHES.
3. DIMENSIONS MARKED WITH ASTERISK (\*) ARE BASIC DIMENSIONS AND SHOULD BE HELD TO  $\pm 0.03$  INCH.
4. DRILL 0.187 INCH DIAMETER PILOT HOLES AS SHOWN IN FIGURE, HOLES ARE TO BE OPENED TO 0.312 INCH DIAMETER ON ASSEMBLY.
5. FINISH: 1 COAT RK147 VARNISH, FSCM 81439.  
1 COAT EPOXY PRIMER, MIL-P-23377, NSN 8010-00-082-2477.  
2 COATS POLYURETHANE, MIL-C-81773, YELLOW PER FED. STD 595, NSN 8010-00-181-8208.
6. IDENTIFY PARTS PER MIL-STD-130 IN LOCATION SHOWN BY +1d X +1d IN F / D.


PART NUMBER: 70700-20313-104, -105

AK1737\_2  
SA

FIGURE H-110. PLYWOOD FRAME (SHEET 2 OF 2)

Change 9

H-177

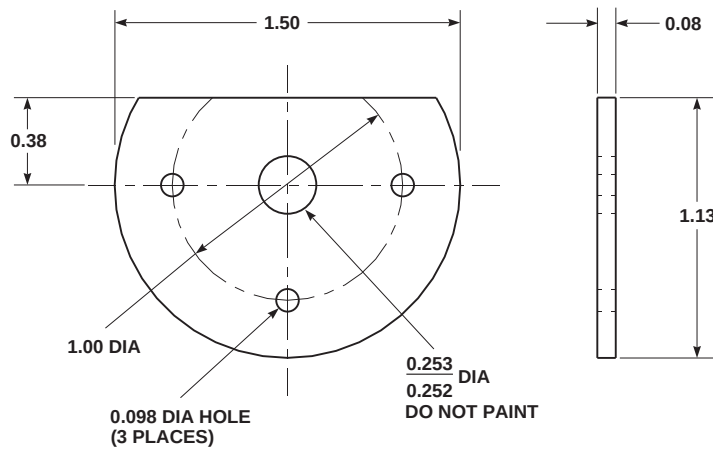


#### NOTES

1. MAKE FROM 0.080-INCH-THICK 7075-T6 ALCLAD ALUMINUM SHEET, QQ-A-250 / 13, NSN 9535-00-232-7542.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70217-01000-114

AK1740  
SA

FIGURE H-111. DOUBLER

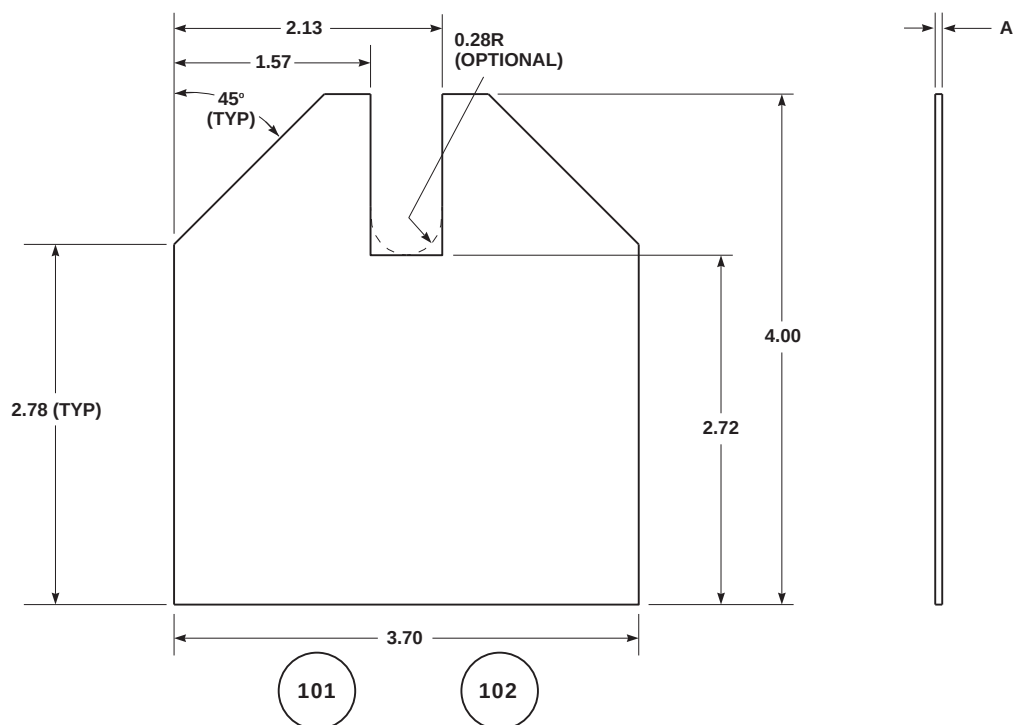

| SIKORSKY PART NUMBER | DIMENSION A |
|----------------------|-------------|
| 70102-11109-101      | 0.004       |
| 70102-11109-102      | 0.005       |


#### NOTES

1. MAKE FROM 302 STAINLESS STEEL, MIL-S-5059, FSCM 81349 USING THICKNESS LISTED IN CHART.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-130.
4. THIS IS CHECKING SHIM ONLY AND MUST BE REMOVED FROM HELICOPTER AFTER TAIL ROTOR INSTALLATION IS COMPLETED.

PART NUMBER: 70102-11109-101, -102

AK1741  
SA

**FIGURE H-112. CHECKING SHIM**

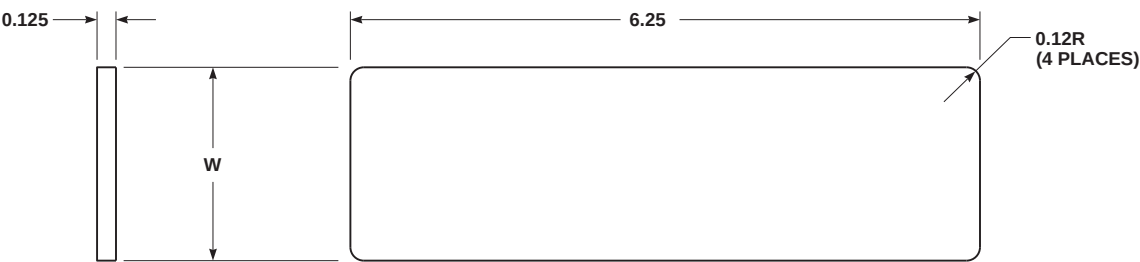

| SIKORSKY PART NUMBER | DIMENSION W |
|----------------------|-------------|
| 70700-20677-102      | 1.38        |
| 70700-20677-103      | 2.00        |


NOTES

- 1. MAKE FROM 0.125-INCH-THICK 2024-T351 ALUMINUM ALLOY QQ-A-250 / 5, NSN 9535-00-232-0418.
- 2. ALL DIMENSIONS ARE IN INCHES.
- 3. CUT WIDTH OF WEAR STRIPS PER CHART.
- 4. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70700-20677-102, -103

AK1744  
SA

FIGURE H-113. WEAR STRAP

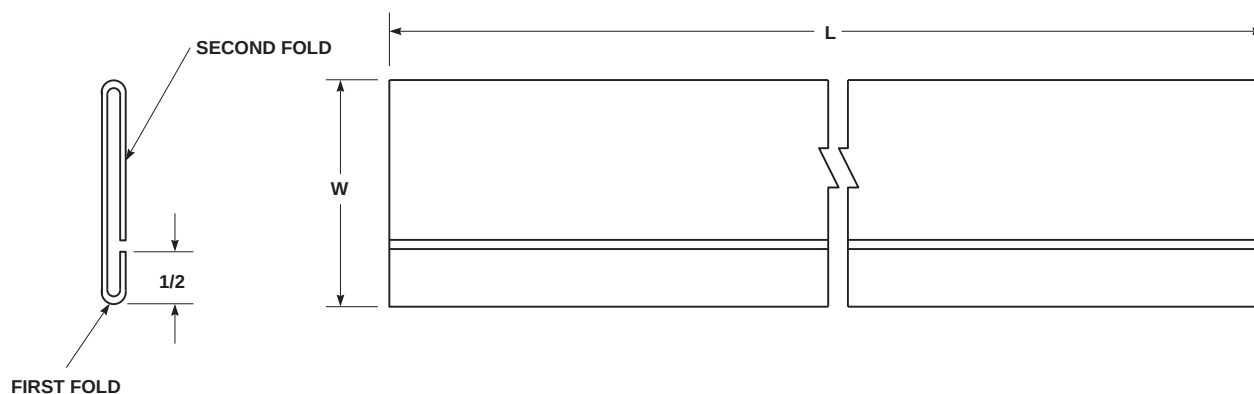

| NOMENCLATURE            | W WIDTH | L LENGTH | SIKORSKY PART NUMBER |
|-------------------------|---------|----------|----------------------|
| CONTROLS ENCLOSURE FLAP | 4.25    | 58.50    | 70500-02053-117      |
| CONTROLS ENCLOSURE FLAP | 4.25    | 50.00    | 70500-02053-118      |


#### NOTES

1. MAKE FROM SS9232-024 PLASTIC SHEET, NSN 9330-01-115-7085.
2. FOLD ENDS 0.50 INCH AND SEW PER FED. STD 751. USE THREAD, V-T-295, NSN 8310-00-559-5212.
3. FOLD FLAP LENGTHWISE TO 0.50 INCH AND SEW PER FED. STD 751. USE THREAD, V-T-295, NSN 8310-00-559-5212.
4. MAKE SECOND LENGTHWISE FOLD TO BUTT AGAINST FIRST FOLD AND SEW PER FED. STD 751. USE THREAD, V-T-295, NSN 8310-00-559-5212.
5. ALL DIMENSIONS ARE IN INCHES.
6. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70500-02053-117, -118

AK1745  
SA

**FIGURE H-114. CONTROLS ENCLOSURE FLAP**

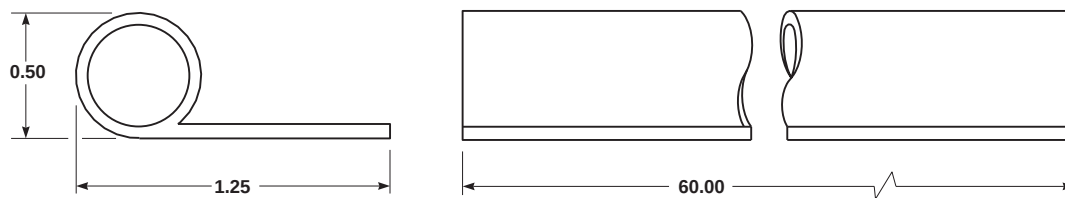


**NOTES**

1. MAKE FROM BULK SEAL, DIE NO. JM151-18A, FSCM 75165.
2. ALL DIMENSION ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70308-03010-105

AK1746  
SA

**FIGURE H-115. EXHAUST FAIRING BULKHEAD SEAL**

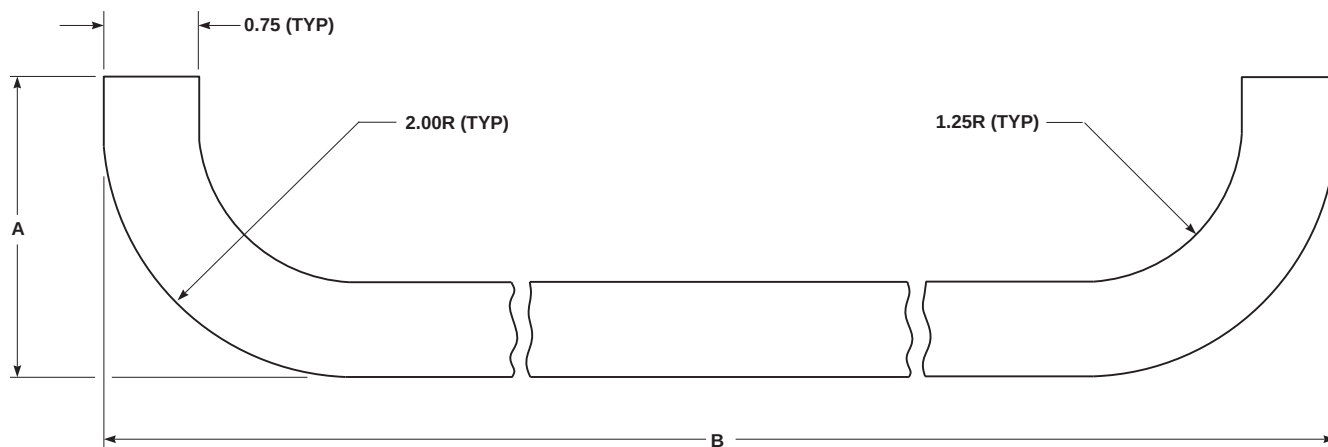

| SIKORSKY PART NUMBER | DIMENSION A | DIMENSION B |
|----------------------|-------------|-------------|
| 70500-02059-155      | 2.50        | 28.00       |
| 70500-02059-160      | 2.37        | 28.00       |

## NOTES


1. MAKE FROM 0.125-INCH-THICK FOAM RUBBER SHEET, SCE-11L, MIL-STD-670, NSN 9320-01-154-2225.
2. USE TWO PIECES TO MAKE 0.125.
3. ALL DIMENSIONS ARE IN INCHES.
4. CUT GASKET TOPS TO SIZE PER CHART.
5. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GREEN INK, TT-I-1795. USE 1/16-1/8-INCH HIGH SANS SERIF CHARACTERS.

EXAMPLE: P / N 70216-02401-107 3Q 86  
 PART NUMBER THIRD QUARTER 1986

PART NUMBER: 70500-02059-155, -160

AK1747  
SA

FIGURE H-116. GASKET TOP

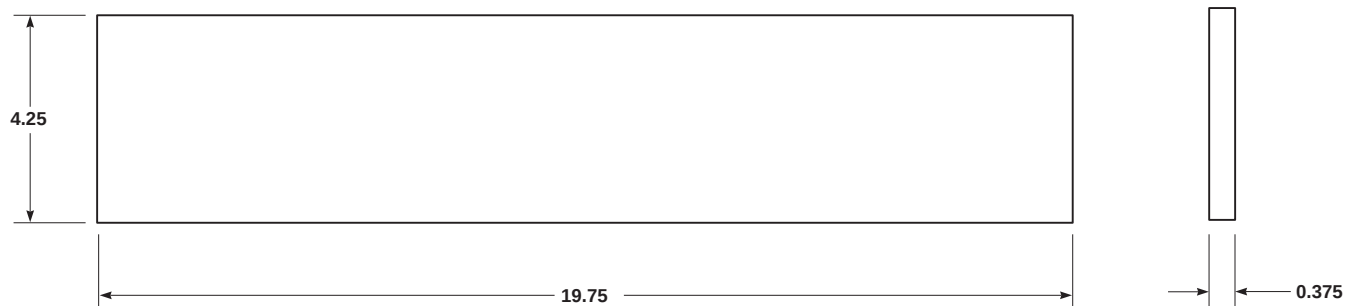

#### NOTES

1. MAKE FROM 0.375-INCH-THICK RUBBER, TYPE 2, GRADE A MEDIUM, MIL-R-6130, NSN 5330-00-232-2420.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GREEN INK, TT-I-1795. USE 1/16 - 1/8-INCH HIGH SANS SERIF CHARACTERS.


EXAMPLE: P / N 70216-02401-107 3Q 86  
 PART NUMBER THIRD QUARTER 1986

PART NUMBER: 70700-20426-118

AK1748  
SA

**FIGURE H-117. TAIL ROTOR ADAPTER PAD**



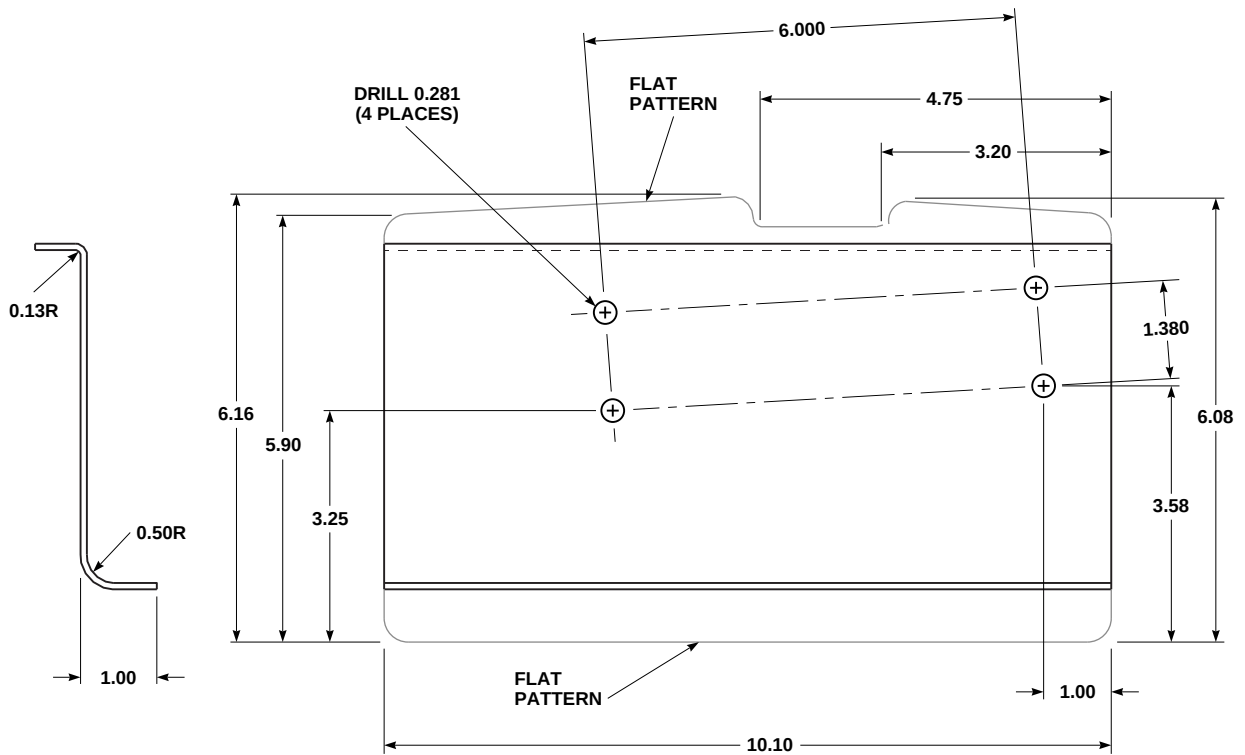


#### NOTES

1. MAKE FROM 0.040-INCH-THICK ALUMINUM SHEET, 7075-0, QQ-A-250 / 13, NSN 9535-00-084-4581.
2. ROUND ALL EXTERNAL CORNERS TO 0.280-INCH RADIUS, AND ALL INTERNAL CORNERS TO 0.16-INCH RADIUS.
3. ALL DIMENSIONS ARE IN INCHES.
4. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70500-02053-116

AK1751  
SA

FIGURE H-118. CONTROLS ENCLOSURE SUPPORT

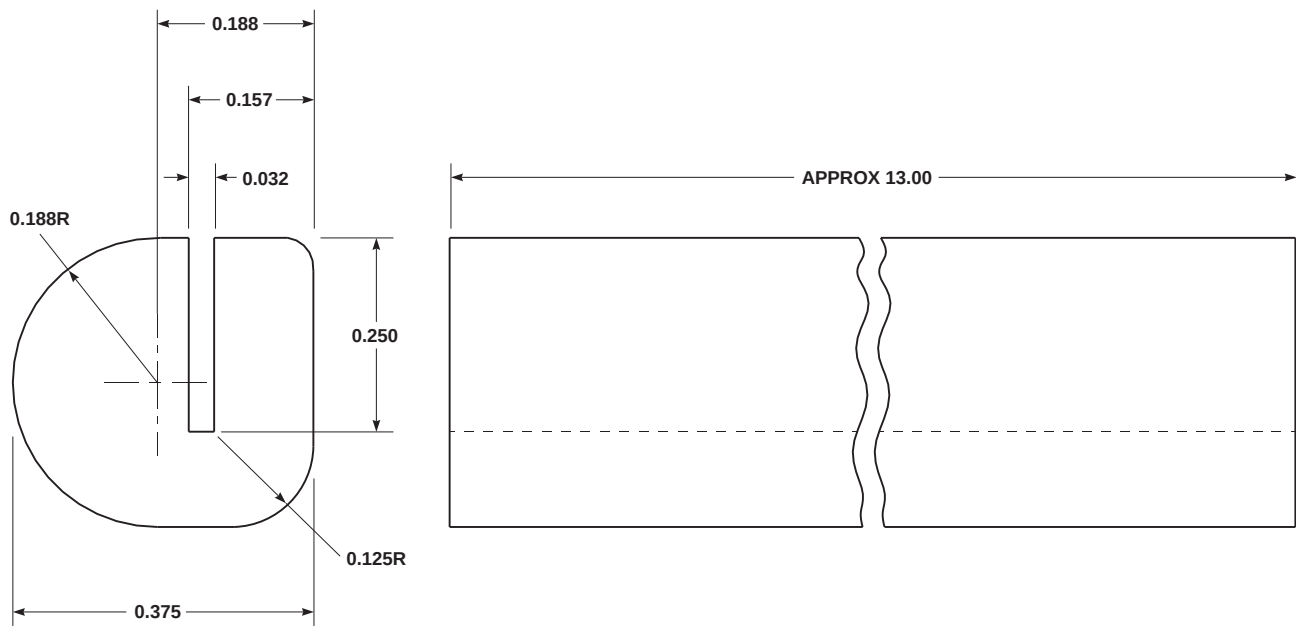

#### NOTES


1. MAKE FROM SS2929-120 MOLDED SYNTHETIC CELLULAR SPONGE EDGING, MIL-R-6130, FSCM 78286.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GRAY INK, TT-I-1795. USE 1/16 - 1/8-INCH HIGH SANS SERIF CHARACTERS.
4. TRIM TO FIT ON INSTALLATION.

EXAMPLE: P / N 70216-02401-107 3Q 86  
 PART NUMBER THIRD QUARTER 1986

PART NUMBER: 70500-02058-167

AK1752  
 SA

FIGURE H-119. SIDEWALL DUCT SEAL

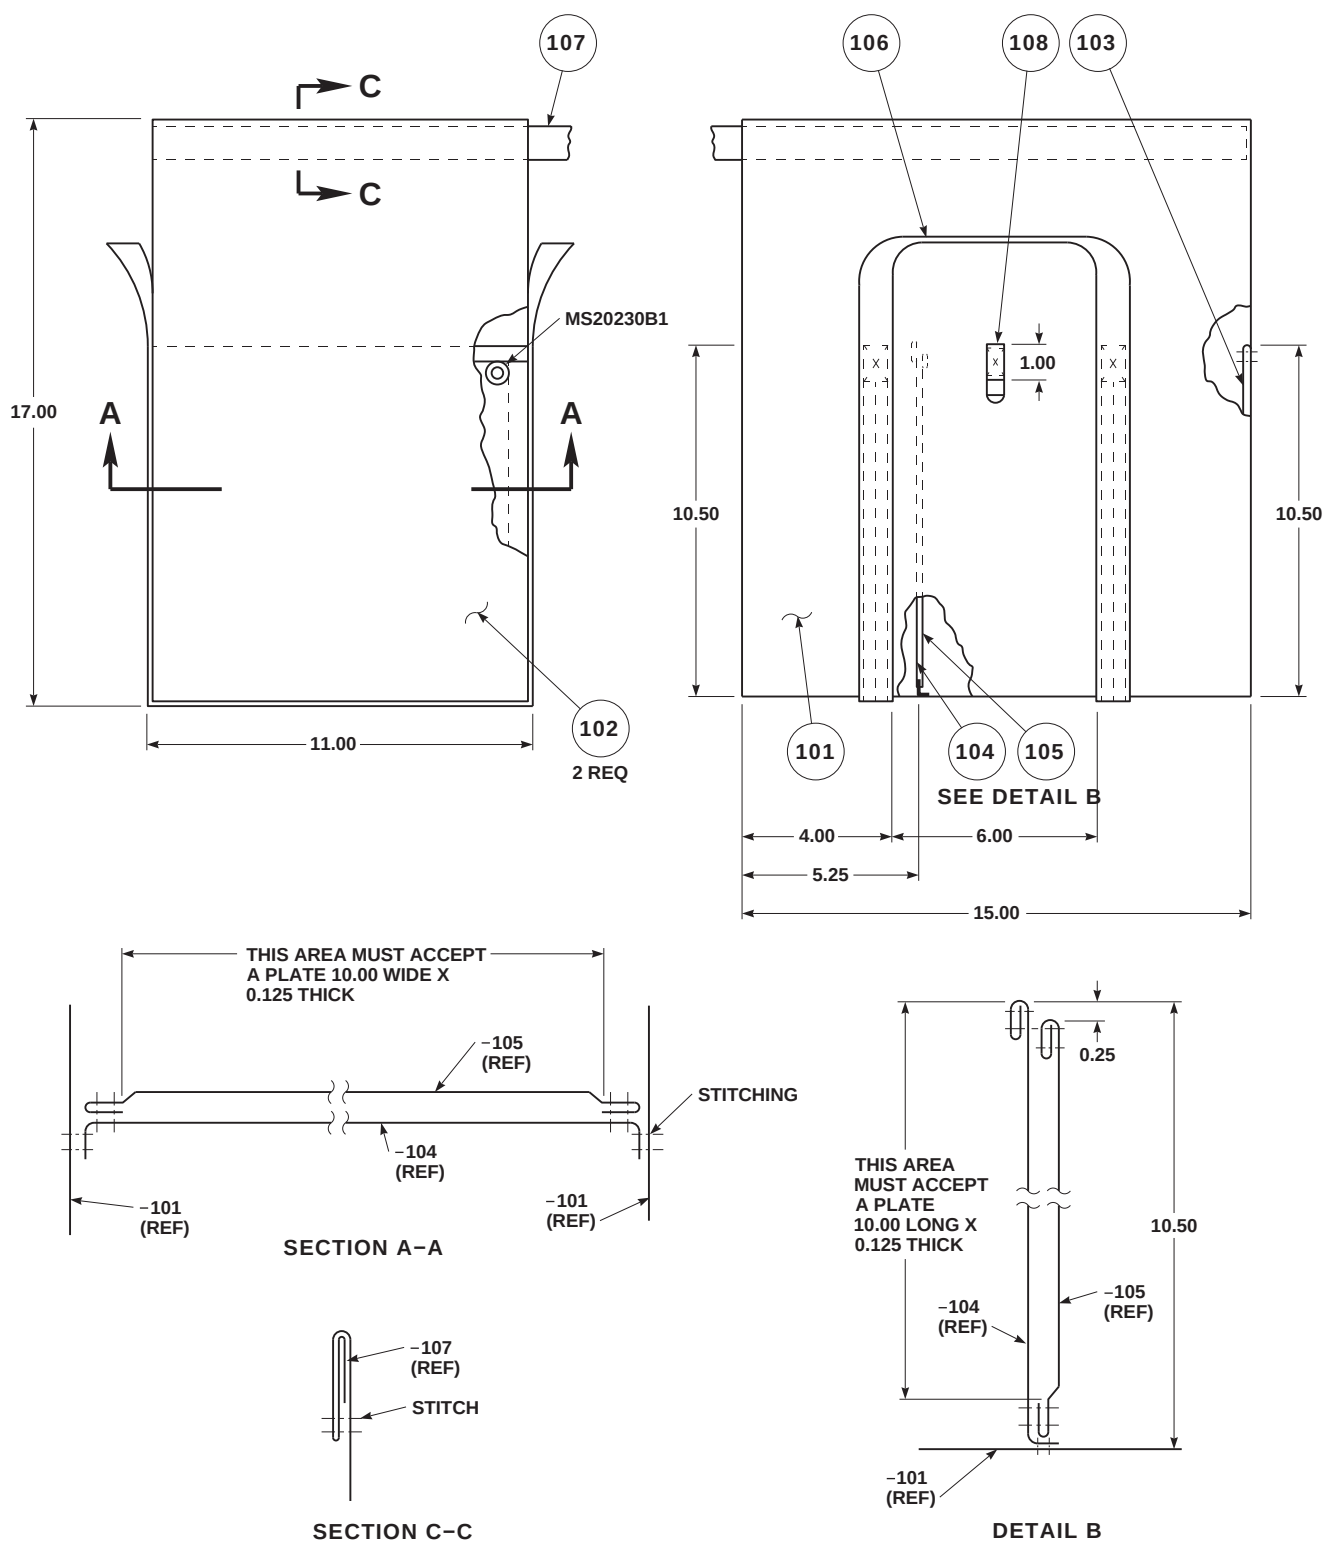

AK1753\_1  
SA

FIGURE H-120. STORAGE BAG (SHEET 1 OF 2)


| NOMENCLATURE  | PART NUMBER     | QTY | MATERIAL AND SPECIFICATION |
|---------------|-----------------|-----|----------------------------|
| PANEL         | 70700-20325-101 | 1   | SEE NOTES 1, 6, 8          |
| END PANEL     | 70700-20325-102 | 2   | SEE NOTES 1, 6, 8          |
| REINFORCEMENT | 70700-20325-103 | 1   | SEE NOTES 1, 6             |
| PANEL         | 70700-20325-104 | 1   | SEE NOTES 1, 6             |
| POCKET        | 70700-20325-105 | 1   | SEE NOTES 1, 6             |
| STRAP         | 70700-20325-106 | 1   | SEE NOTES 2, 6             |
| TIE           | 70700-20325-107 | 1   | SEE NOTES 3, 6             |
| TAPE          | 70700-20325-108 | 1   | SEE NOTES 4, 6             |
| GROMMET       | MS20230B1       | 1   | SEE NOTE 7                 |
| THREAD        | V-T-276         | FT  | SEE NOTES 6, 8             |

### NOTES

1. MAKE 70700-20325-101, -102, -103, -104, -105 FROM 10-OUNCE COTTON DUCK, COLOR OLIVE DRAB. NSN 8305-00-170-3449.
2. MAKE 70700-20325-106, FROM 1.00 INCH WIDE X 94.00 INCH LONG COTTON WEBBING, TYPE I, MIL-W-5665, COLOR OLIVE DRAB. NSN 8305-00-281-3315.
3. MAKE 70700-20325-107, FROM 1.00 INCH WIDE X 60.00 INCH LONG COTTON WEBBING, TYPE I, MIL-W-5665, COLOR OLIVE DRAB. NSN 8305-00-281-3315.
4. MAKE 70700-20325-108, FROM 0.562 INCH WIDE X 0.04-0.05 INCH THICK COTTON WEBBING, TYPE I, COLOR OLIVE DRAB. NSN 8305-00-753-6341.
5. ALL FOLDS BEFORE SEWING TO BE AT LEAST 0.50 INCH.
6. ALL SEWING TO BE PER FED. STD 751 USING THREAD, V-T-276, TICKET NO. 16, 4 PLY COTTON. COLOR, OLIVE DRAB. NSN 8310-00-262-2551.
7. INSTALL GROMMET, NSN 5325-00-291-0275, ON REINFORCEMENT AS SHOWN IN FIGURE PER MIL-S-8512.
8. SEW PANEL AND END PANELS ON WRONG SIDE AND REVERSE FOR END PRODUCT.

AK1753\_2  
SA

### FIGURE H-120. STORAGE BAG (SHEET 2 OF 2)

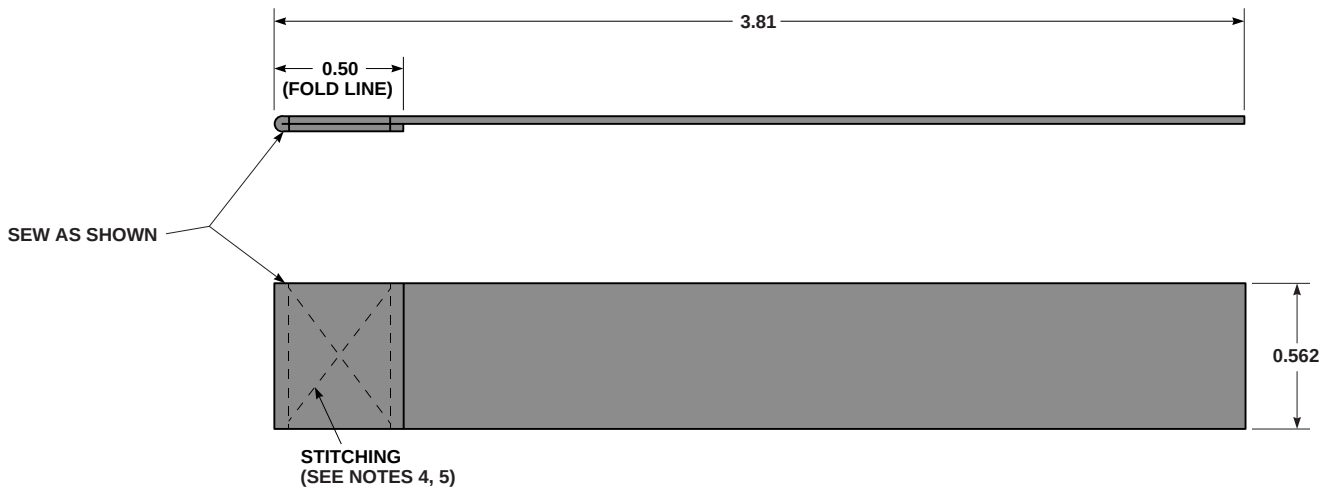


### NOTES

1. MAKE FROM 0.562 INCH WIDE GRAY NYLON WEBBING, MIL-W-4088, TYPE 1A (CAGE 81349).
2. CUT LENGTH TO 4.312.
3. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
4. FOLD AND SEW TAB AS SHOWN IN FIGURE.
5. ALL SEAMS AND STITCHING PER FED-STD-571. USE GRAY NYLON THREAD, V-T-295, NSN 9320-00-202-1935.
6. IDENTIFY PARTS PER MIL-STD-130.


PART NUMBER: 70500-03050-130

FB3444  
SA


**FIGURE H-121. BLANKET ASSEMBLY TAB**

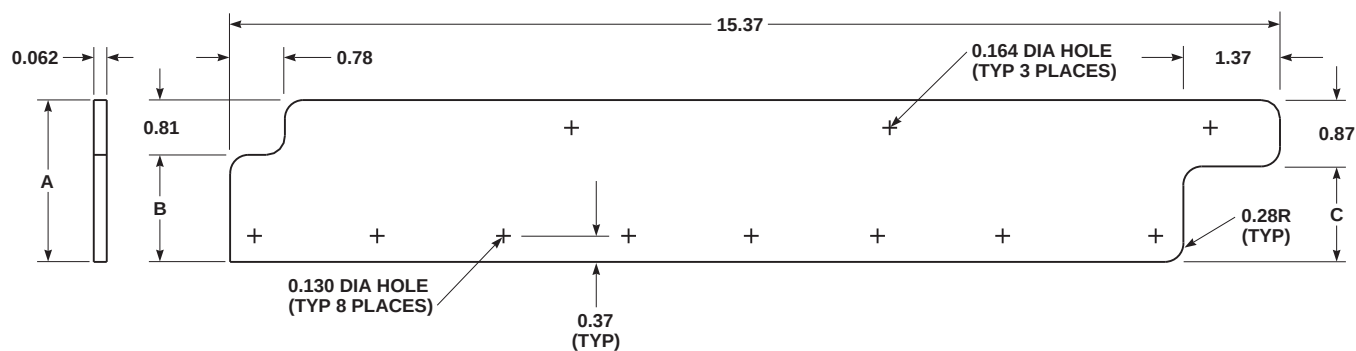


192 207

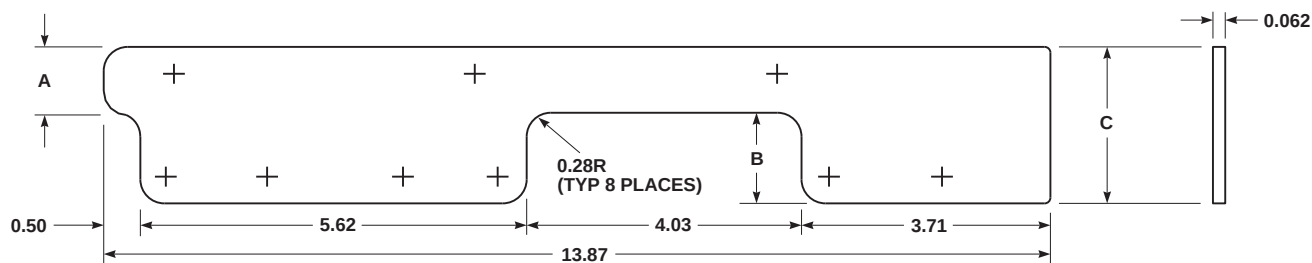

193 208

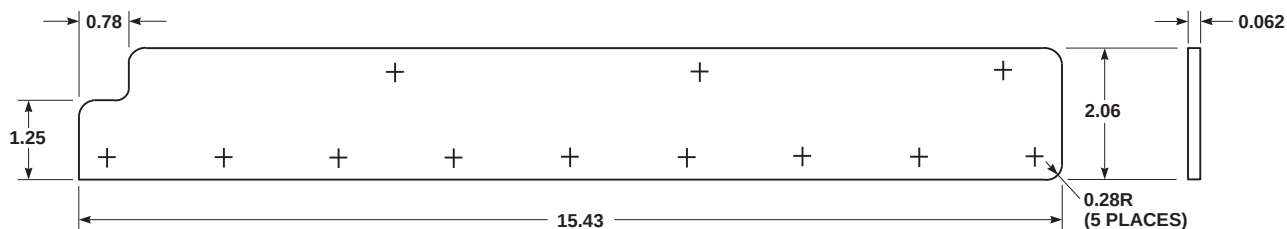

143

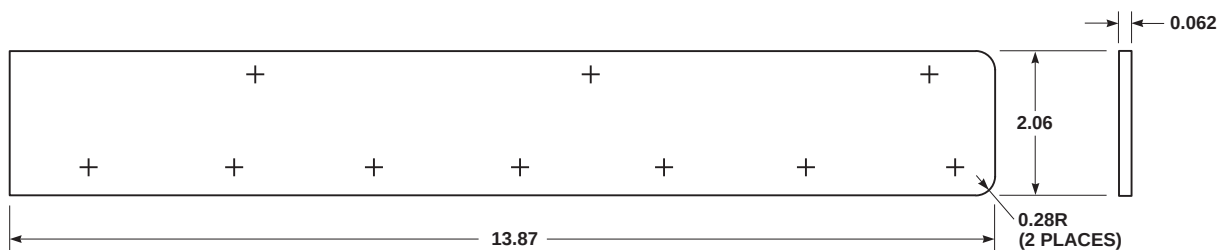

145

AK1755\_1  
SA

FIGURE H-122. DRIP PAN SEAL (SHEET 1 OF 2)

| SIKORSKY<br>PART NUMBER | DIMENSION A | DIMENSION B | DIMENSION C |
|-------------------------|-------------|-------------|-------------|
| 70500-02060-192         | 2.05        | 1.24        | 1.18        |
| 70500-02060-193         | 2.23        | 1.42        | 1.36        |
| 70500-02060-207         | 0.88        | 1.17        | 2.05        |
| 70500-02060-208         | 0.88        | 1.35        | 2.23        |

## NOTES


1. MAKE -192, -193, -207, -208, -143, -145, FROM 0.062 INCH THICK NITRILE RUBBER SHEET, CLASS 1, GRADE 60, MIL-R-6855, NSN 9320-00-241-9742.
2. ALL DIMENSIONS ARE IN INCHES.
3. MAKE SEALS PER FIGURE AND DIMENSIONS IN CHART.
4. FASTENER HOLES ARE PICKED UP ON ASSEMBLY.
5. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE YELLOW INK, TT-I-1795. USE 1/16 - 1/8 INCH HIGH SANS SERIF CHARACTERS.

EXAMPLE:  $\frac{P / N 70216-02401-107}{\text{PART NUMBER}}$        $\frac{3Q 86}{\text{THIRD QUARTER 1986}}$

PART NUMBER: 70500-02060-192, -193, -207, -208, -143, -145

AK1755\_2  
SA

## FIGURE H-122. DRIP PAN SEAL (SHEET 2 OF 2)

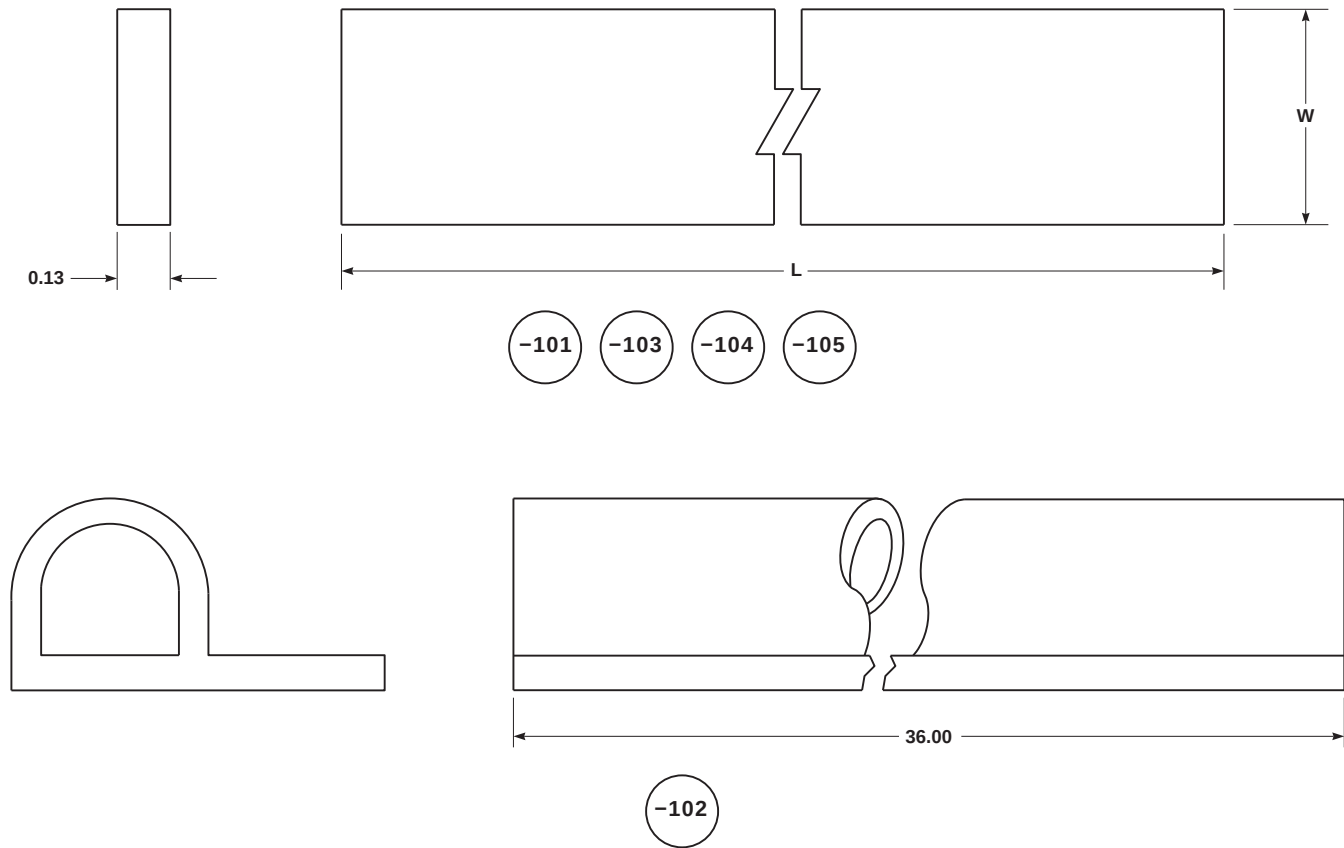

| NOMENCLATURE            | W WIDTH | L LENGTH | SIKORSKY<br>PART NUMBER |
|-------------------------|---------|----------|-------------------------|
| COCKPIT DOOR JAMB SEALS | 0.50    |          | 70000-00550-101         |
|                         | 0.062   | 36.0     | 70000-00550-102         |
|                         | 0.062   | 78.0     | 70000-00550-103         |
|                         | 0.062   | 10.0     | 70000-00550-104         |
|                         |         |          | 70000-00550-105         |

## NOTES

1. MAKE -101, -103, -104, -105 FROM 0.13 INCH THICK RUBBER, SCE-7, MIL-STD-670, 5330-01-208-3761.
2. MAKE -102 FROM NO. ZX-10047 RUBBER EXTRUSION, CAGE 76385, CUT TO LENGTH.
3. ALL DIMENSIONS ARE IN INCHES.
4. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GREEN INK, TT-I-1795. USE 1/16 - 1/8 INCH HIGH SANS SERIF CHARACTERS.


**EXAMPLE:** P / N 70216-02401-107                      3Q 86  
PART NUMBER                      THIRD QUARTER 1986

**PART NUMBER: 70000-00550-101, THROUGH -105**

AK1757B  
SA

**FIGURE H-123. COCKPIT DOOR JAMB SEALS**



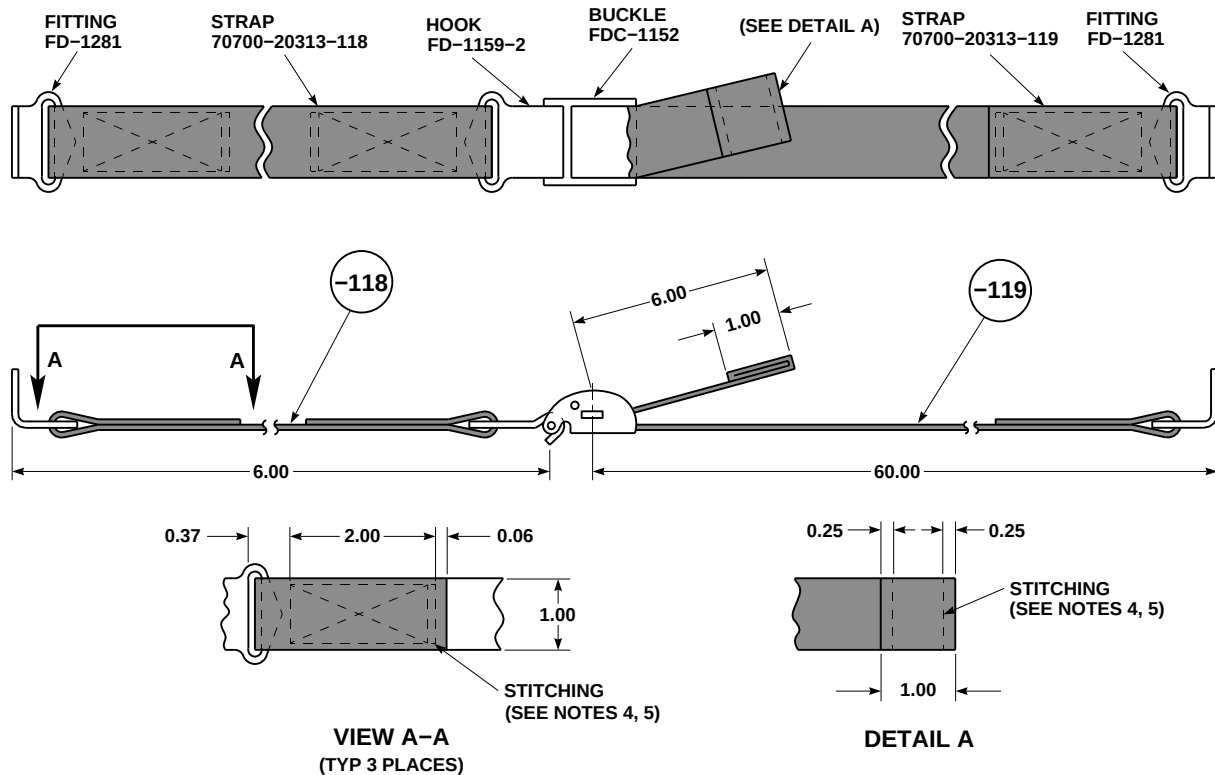

| PART NUMBER                      | DESCRIPTION          | QUANTITY | NSN              |
|----------------------------------|----------------------|----------|------------------|
| FD-1281                          | FITTING              | 2        | 6760-01-088-0003 |
| 70700-20313-118                  | STRAP                | 9.75 IN. | 8315-00-263-3604 |
| FD-1159-2                        | HOOK                 | 1        | 5340-00-802-6886 |
| FDC-1152                         | BUCKLE               | 1        | 5340-01-079-6667 |
| 70700-20313-119                  | STRAP                | 69.5 IN. | 8315-00-263-3604 |
| V-T-276, TYPE 1B3, TICKET NO. 16 | THREAD, 4-PLY COTTON | AR       | 8310-00-530-1182 |


### NOTES

1. MAKE -118 STRAP PER FIGURE AND MATERIAL LISTED IN CHART. ASSEMBLE STRAP WITH LISTED FITTING AND HOOK TO MAKE -050 STRAP.
2. MAKE -119 STRAP PER FIGURE AND MATERIAL LISTED IN CHART. ASSEMBLE STRAP WITH LISTED FITTING AND BUCKLE TO MAKE -046 BUCKLE.
3. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
4. SEW STRAPS AS SHOWN IN FIGURE, VIEW A-A AND DETAIL A.
5. ALL SEAMS AND STITCHING PER FED-STD-571. USE THREAD, 4-PLY COTTON, V-T-276.
6. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70700-20313-118, -119

FB3445  
SA

FIGURE H-124. STORAGE FRAME STRAP

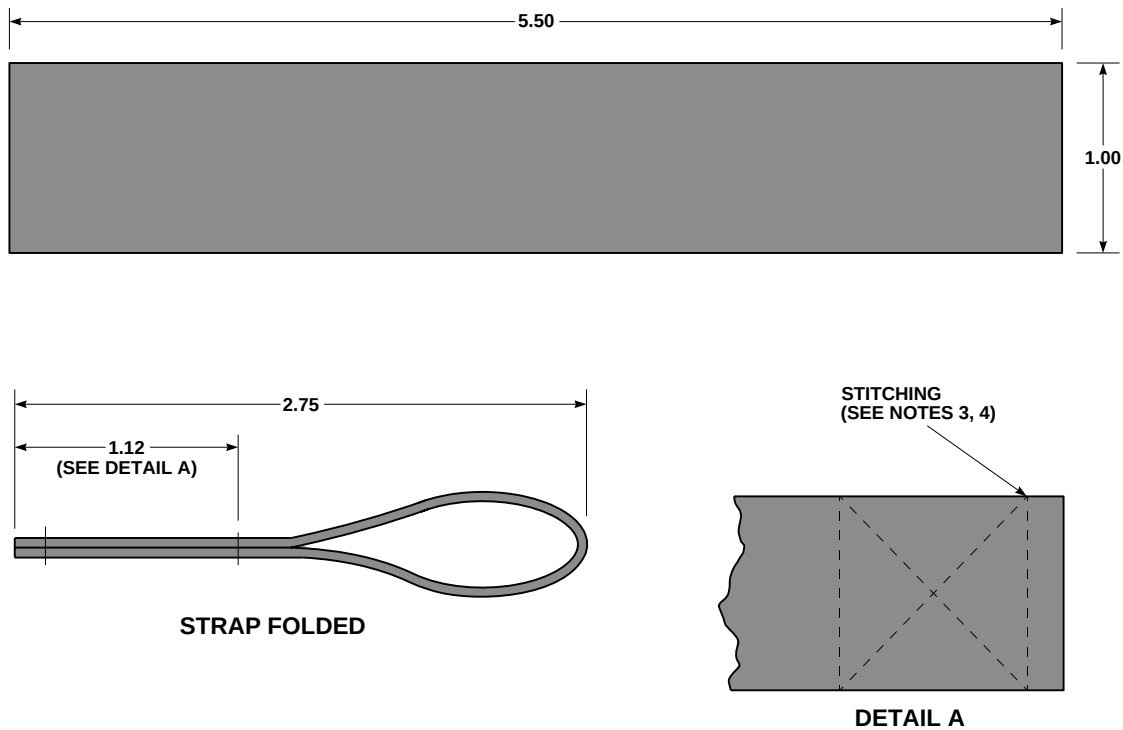


#### NOTES

1. MAKE FROM BLACK NYLON TAPE, MIL-W-4088, TYPE II, NSN 8305-00-811-1617.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. FOLD AND SEW TAB TO CURTAIN AS SHOWN IN FIGURE.
4. ALL SEAMS AND STITCHING PER FED-STD-571. USE NYLON THREAD, V-T-295, TYPE I, CLASS A, STYLE E, NSN 8310-00-515-3367.
5. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70700-20014-110

FB3446  
SA

FIGURE H-125. CURTAIN TAB

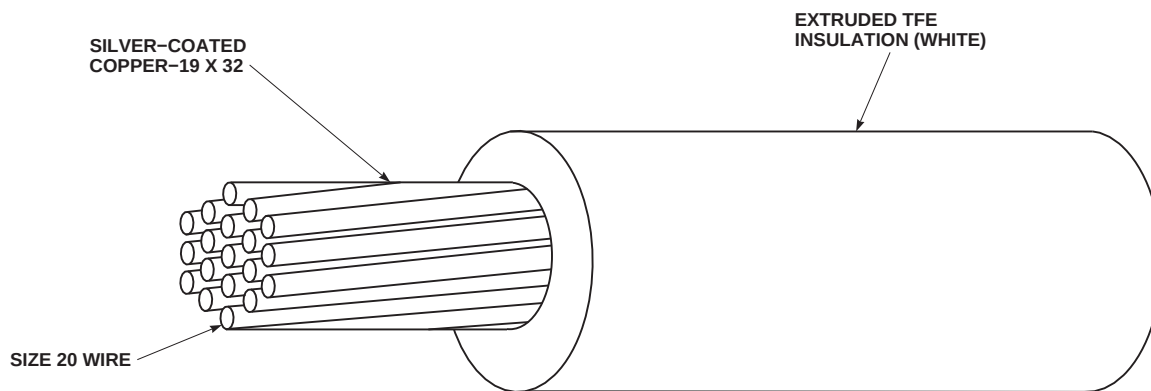

| SIKORSKY PART NUMBER | SIZE | MAKE FROM PART NUMBER | MAKE FROM NSN    |
|----------------------|------|-----------------------|------------------|
| SS7313-20A1          | 20   | M22759 / 11-20-9      | 6145-00-939-4964 |




**NOTES**

1. MAKE FROM SILVER-COATED COPPER WIRE PER CHART.
2. CUT WIRE TO REQUIRED LENGTH.
3. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: SS7313-20A1

AK1761  
SA

**FIGURE H-126. HIGH-TEMPERATURE ELECTRICAL WIRE**

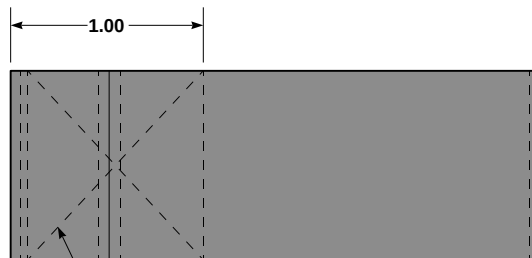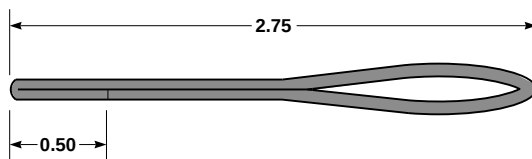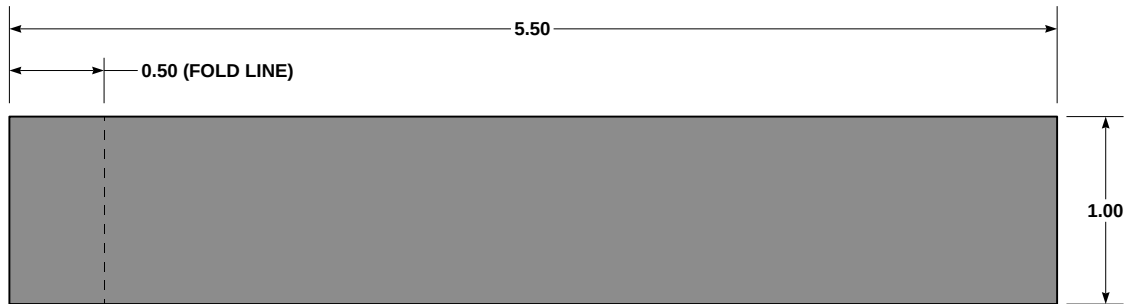

STITCHING (SEE NOTES 3, 4)


### NOTES

1. MAKE FROM 1.00 INCH WIDE BLACK NYLON TAPE, MIL-W-4088, TYPE II, NSN 8305-00-811-1617.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. FOLD AND SEW TAB AS SHOWN IN FIGURE.
4. ALL SEAMS AND STITCHING PER FED-STD-571. USE THREAD, V-T-295C, NSN 8310-00-515-3367.
5. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70070-20013-106


FB3447  
SA

FIGURE H-127. CURTAIN TAB

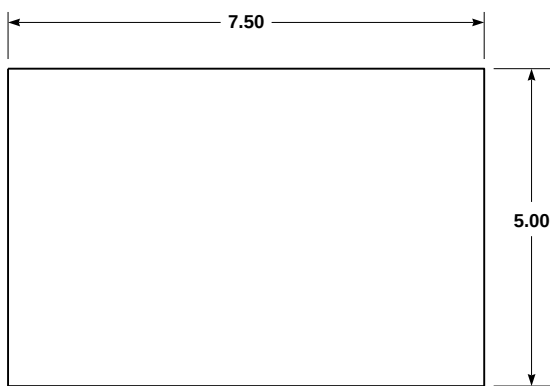


FLAT PATTERN

152

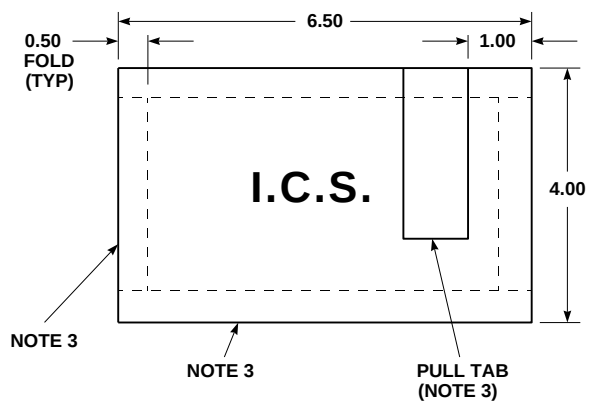


COVER FOLDED FOR SEWING

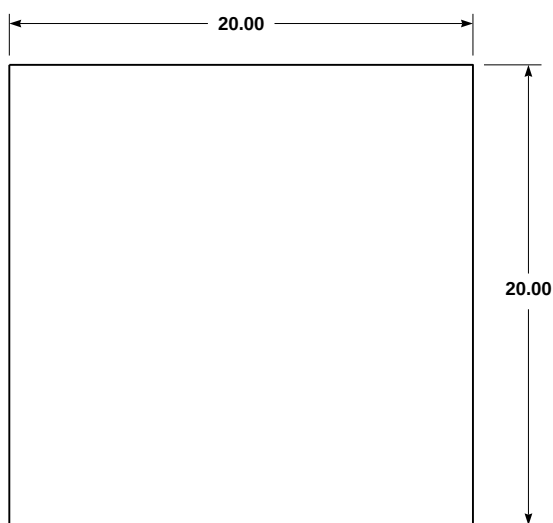


FLAT PATTERN

153

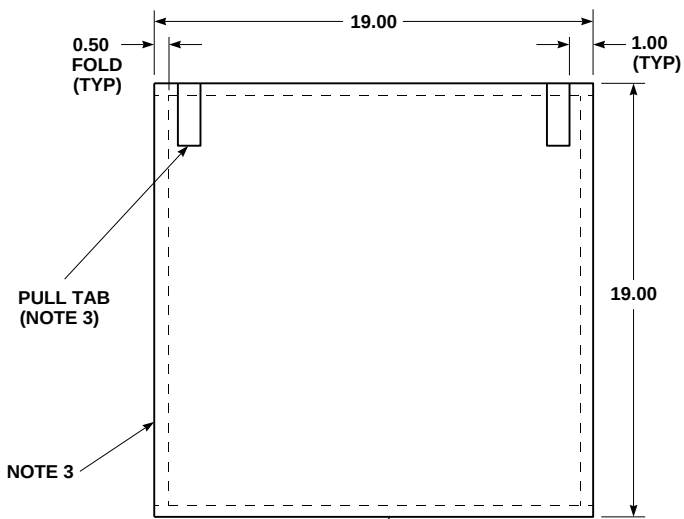


COVER FOLDED FOR SEWING

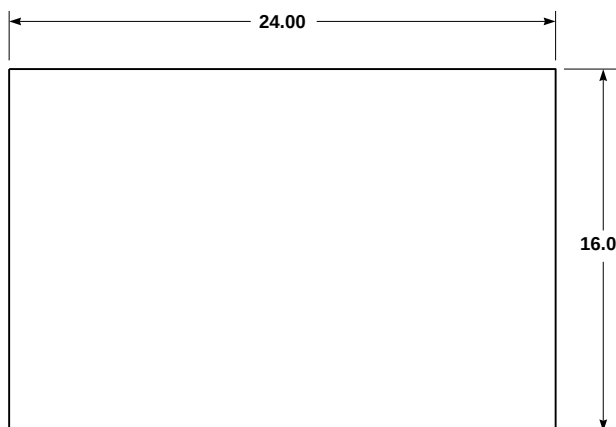

FLAT PATTERN


154

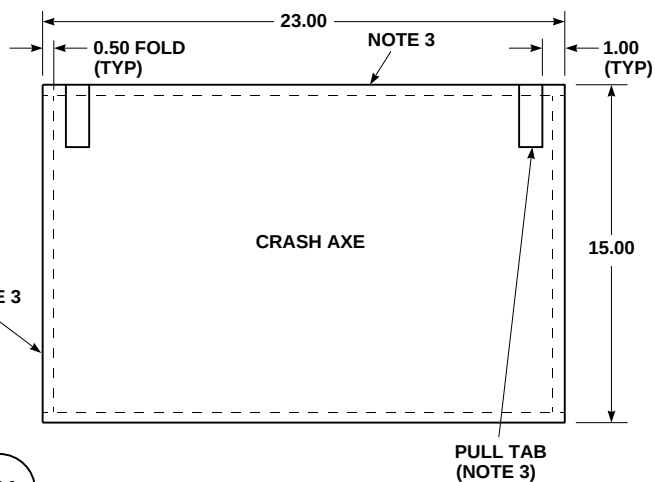


COVER FOLDED FOR SEWING

AK1763\_1  
SA

FIGURE H-128. BLACKOUT CURTAIN COVER (SHEET 1 OF 4)

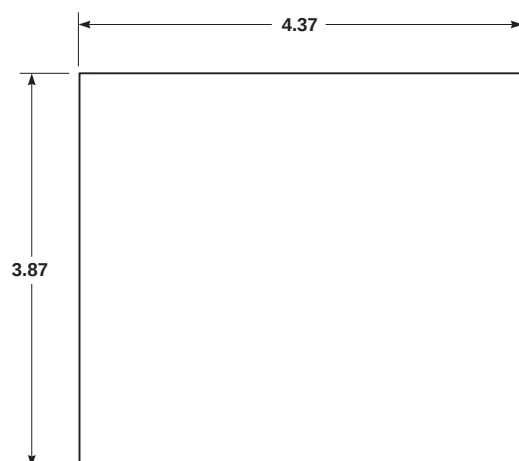


## FLAT PATTERN

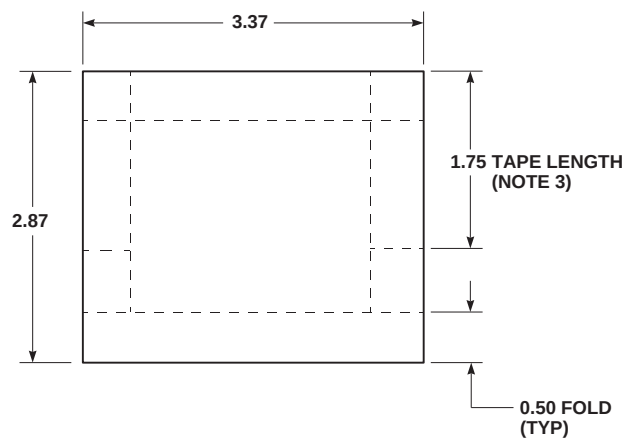


**COVER FOLDED FOR SEWING**

155

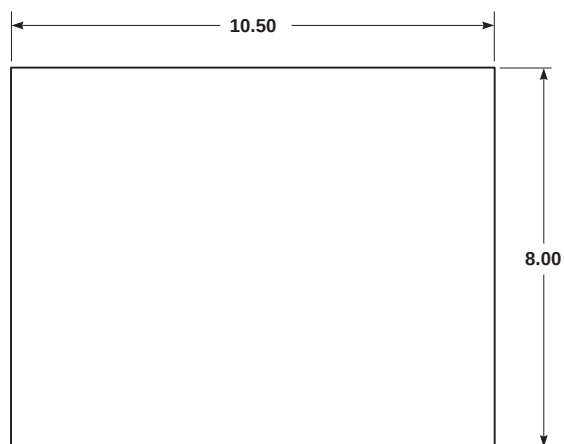

## FLAT PATTERN

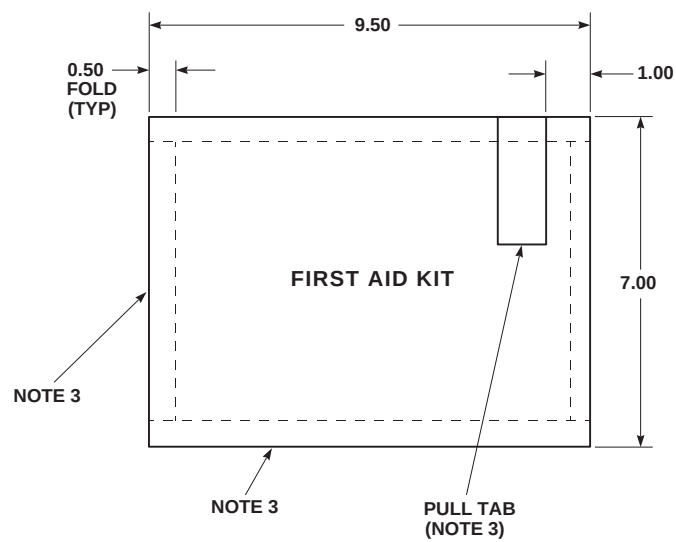

**COVER FOLDED FOR SEWING**

156


AK1763\_2  
SA

**FIGURE H-128. BLACKOUT CURTAIN COVER (SHEET 2 OF 4)**

**H-198**

## Change 9

This Document contains technical data subject to ITAR. See WARNING and classifications on first page.

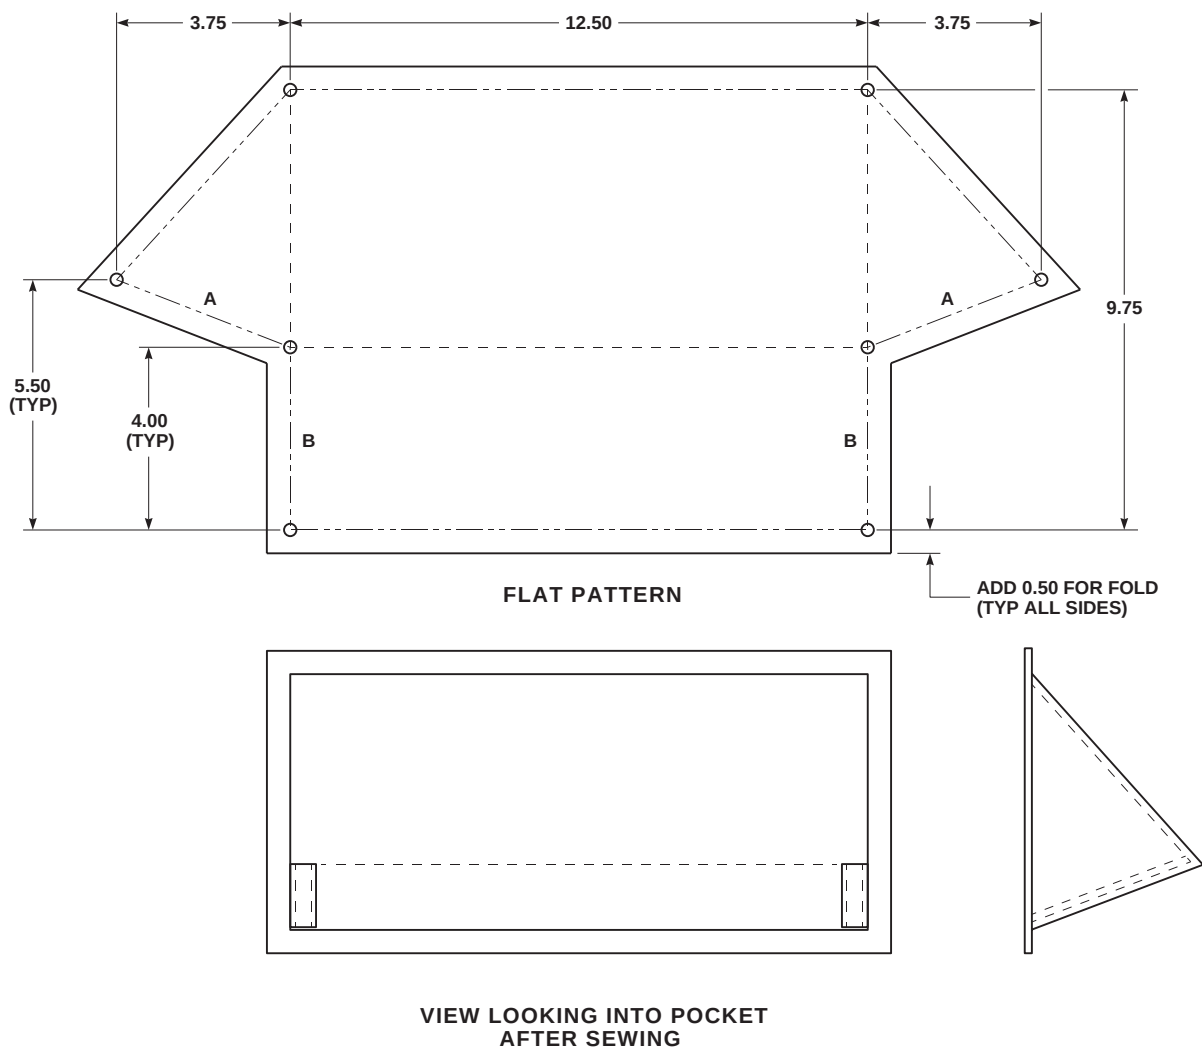

158

AK1763\_3  
SA

FIGURE H-128. BLACKOUT CURTAIN COVER (SHEET 3 OF 4)

| SIKORSKY<br>PART NUMBER        | DESCRIPTION | QUANTITY | MAKE FROM            |
|--------------------------------|-------------|----------|----------------------|
| 70070-20013-152                | COVER       | 1        | NOTE 1               |
| 70070-20013-106                | PULL TAB    | 1        | FIGURE H-127         |
| 70070-20013-116                | TAPE HOOK   | 2        | FIGURE H-133         |
| 70070-20013-118                | TAPE HOOK   | 2        | FIGURE H-133         |
| V-T-295, SIZE E, TYPE I, BLACK | THREAD      | AR       | NSN 8310-00-515-3367 |
| 70070-20013-153                | COVER       | 1        | NOTE 1               |
| 70070-20013-106                | PULL TAB    | 1        | FIGURE H-127         |
| 70070-20013-112                | TAPE HOOK   | 2        | FIGURE H-133         |
| 70070-20013-114                | TAPE HOOK   | 2        | FIGURE H-133         |
| V-T-295, SIZE E, TYPE I, BLACK | THREAD      | AR       | NSN 8310-00-515-3367 |
| 70070-20013-154                | COVER       | 1        | NOTE 1               |
| 70070-20013-106                | PULL TAB    | 2        | FIGURE H-127         |
| 70070-20013-108                | TAPE HOOK   | 2        | FIGURE H-133         |
| 70070-20013-110                | TAPE HOOK   | 1        | FIGURE H-133         |
| V-T-295, SIZE E, TYPE 1, BLACK | THREAD      | AR       | NSN 8310-00-515-3367 |
| 70070-20013-155                | COVER       | 1        | NOTE 1               |
| 70070-20013-134                | TAPE HOOK   | 2        | FIGURE H-133         |
| V-T-295, SIZE E, TYPE 1, BLACK | THREAD      | AR       | NSN 8310-00-515-3367 |
| 70070-20013-156                | COVER       | 1        | NOTE 1               |
| 70070-20013-106                | PULL TAB    | 1        | FIGURE H-127         |
| 70070-20013-120                | TAPE HOOK   | 2        | FIGURE H-133         |
| 70070-20013-122                | TAPE HOOK   | 2        | FIGURE H-133         |
| V-T-295, SIZE E, TYPE 1, BLACK | THREAD      | AR       | NSN 8310-00-515-3367 |

## NOTES


1. MAKE FROM DARK GREEN NYLON CLOTH, TYPE I, CLASS III, MIL-C-20696, NSN 8305-00-965-1654, AND ATTACHING PARTS LISTED IN CHART.
2. CUT CLOTH TO FLAT PATTERN DIMENSIONS.
3. FOLD CLOTH 1/2 INCH UNDER ON ALL SIDES. POSITION 70070-20013-116, 70070-20013-118 TAPE HOOKS, 70070-20013-106 PULL TAB ON FOLDED COVER AND SEW WITH DOUBLE ROW STITCH.
4. STITCHING TO BE PER FED. STD 751, USING V-T-295 BLACK NYLON THREAD.
5. ON AFT SIDE OF PART, BLACK INK STENCIL IN 1/2 INCH LETTERS - I.C.S.
6. IDENTIFY PARTS PER MIL-STD-130. APPLY IDENTIFICATION ON FORWARD SIDE.

PART NUMBER: 70070-20013-152, -153, -154, -155, -156, -158

AK1763\_4  
SA

## FIGURE H-128. BLACKOUT CURTAIN COVER (SHEET 4 OF 4)



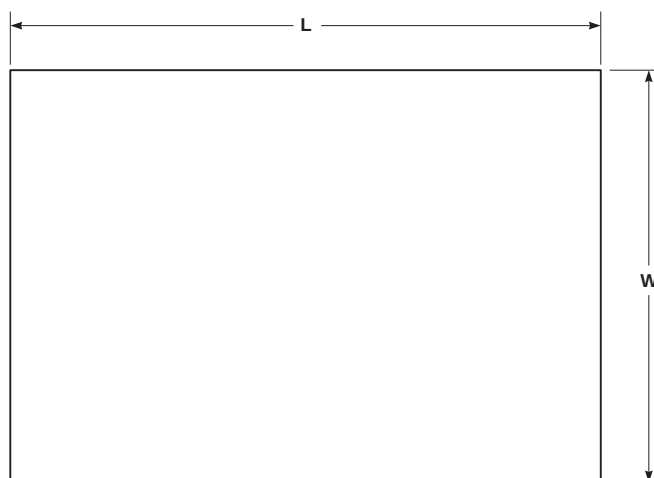

| SIKORSKY PART NUMBER | L LENGTH | W WIDTH |
|----------------------|----------|---------|
| 70500-02066-124      | 5.30     | 2.00    |
| 70500-02066-137      | 37.20    | 9.80    |
| 70500-02066-138      | 37.20    | 9.80    |
| 70500-02066-141      | 5.40     | 4.00    |
| 70500-02066-143      | 5.20     | 1.92    |
| 70500-02066-145      | 5.20     | 3.00    |
| 70500-02066-147      | 5.52     | 4.72    |
| 70500-02066-148      | 4.72     | 3.92    |
| 70500-02066-149      | 4.72     | 1.28    |
| 70500-02066-155      | 3.80     | 3.36    |
| 70500-02066-156      | 10.72    | 3.36    |
| 70500-02066-165      | 5.00     | 2.48    |
| 70500-02066-166      | 5.00     | 2.88    |
| 70500-02066-167      | 6.00     | 4.20    |
| 70500-02066-168      | 5.28     | 4.20    |
| 70500-02066-169      | 5.28     | 5.04    |
| 70500-02066-170      | 5.28     | 2.96    |
| 70500-02066-177      | 16.20    | 3.20    |
| 70500-02066-178      | 16.20    | 3.76    |
| 70500-02066-179      | 16.20    | 3.12    |
| 70500-02066-180      | 16.20    | 3.92    |
| 70500-02066-181      | 12.60    | 4.00    |
| 70500-02066-182      | 7.40     | 1.92    |
| 70500-02066-214      | 6.75     | 6.30    |
| 70500-02066-218      | 15.52    | 2.82    |
| 70500-02066-219      | 15.52    | 2.82    |
| 70500-02066-220      | 7.40     | 2.82    |
| 70500-02066-221      | 7.40     | 2.82    |
| 70500-02066-223      | 6.00     | 2.84    |

FA1836\_1  
SA

**FIGURE H-129. FOIL PANEL SQUARE OR RECTANGULAR CONFIGURATION  
(SHEET 1 OF 3)**

| SIKORSKY PART NUMBER | L LENGTH | W WIDTH |
|----------------------|----------|---------|
| 70500-02066-225      | 6.00     | 2.84    |
| 70500-02066-226      | 9.95     | 2.84    |
| 70500-02066-227      | 5.94     | 2.84    |
| 70500-02066-228      | 15.14    | 5.94    |
| 70500-02066-229      | 15.14    | 5.99    |
| 70500-02066-230      | 13.80    | 5.18    |
| 70500-02066-233      | 14.42    | 5.09    |
| 70500-02066-234      | 13.85    | 5.15    |
| 70500-02066-235      | 14.77    | 5.00    |
| 70500-02066-238      | 6.72     | 5.12    |
| 70500-02066-239      | 6.72     | 4.20    |
| 70500-02066-243      | 4.28     | 4.20    |
| 70500-02066-244      | 16.12    | 5.12    |
| 70500-02066-245      | 16.12    | 3.52    |
| 70500-02066-246      | 6.28     | 5.38    |
| 70500-02066-247      | 7.14     | 6.40    |
| 70500-02066-248      | 6.35     | 1.08    |
| 70500-02066-258      | 6.30     | 2.48    |
| 70500-02066-263      | 6.34     | 6.30    |
| 70500-02066-265      | 8.50     | 6.65    |
| 70500-02066-266      | 5.15     | 1.72    |
| 70500-02066-267      | 3.14     | 2.38    |
| 70500-02066-272      | 8.32     | 5.12    |
| 70500-02066-274      | 5.60     | 4.16    |
| 70500-02066-275      | 4.16     | 1.12    |
| 70500-02066-276      | 4.80     | 3.68    |
| 70500-02066-277      | 3.68     | 3.52    |
| 70500-02066-296      | 3.52     | 3.20    |
| 70500-02066-297      | 4.80     | 4.32    |
| 70500-02066-298      | 4.32     | 2.80    |
| 70500-02066-305      | 6.29     | 5.51    |
| 70500-02066-306      | 6.64     | 6.41    |
| 70500-02066-311      | 3.78     | 1.61    |
| 70500-02066-312      | 4.35     | 1.92    |
| 70500-02066-313      | 5.96     | 2.81    |
| 70500-02066-314      | 7.56     | 1.76    |
| 70500-02066-315      | 7.36     | 2.84    |
| 70500-02066-316      | 7.34     | 2.81    |

FA1836\_2  
SA


**FIGURE H-129. FOIL PANEL SQUARE OR RECTANGULAR CONFIGURATION  
(SHEET 2 OF 3)**

**NOTES**

1. MAKE FROM DAMPING FOIL, SJ2017X, FSCM 76381, NSN 1560-01-184-1735.
2. ALL DIMENSIONS ARE IN INCHES.
3. CUT DAMPING FOIL TO RECTANGULAR DIMENSIONS.
4. MEASURE AND MARK FINAL DIMENSIONS ON FOIL.
5. TRIM TO REQUIRED SIZE. ROUND OFF CORNERS TO PREVENT DELAMINATION.  
MINIMUM RADIUS IS 0.28-INCH.
6. IDENTIFY PARTS PER MIL-STD-130.

FA1836\_3  
SA

**FIGURE H-129. FOIL PANEL SQUARE OR RECTANGULAR CONFIGURATION  
(SHEET 3 OF 3)**





#### NOTES

1. MAKE FROM 301 STAINLESS STEEL, 0.0250 - 1 INCH MIL-S-5059, USING BACKING STRIP AS TEMPLATE.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. DRILL PILOT HOLES PER FIGURE.
4. IDENTIFY PARTS PER MIL-STD-130.

FO0302A  
SA

**FIGURE H-130. BACKING STRIP**

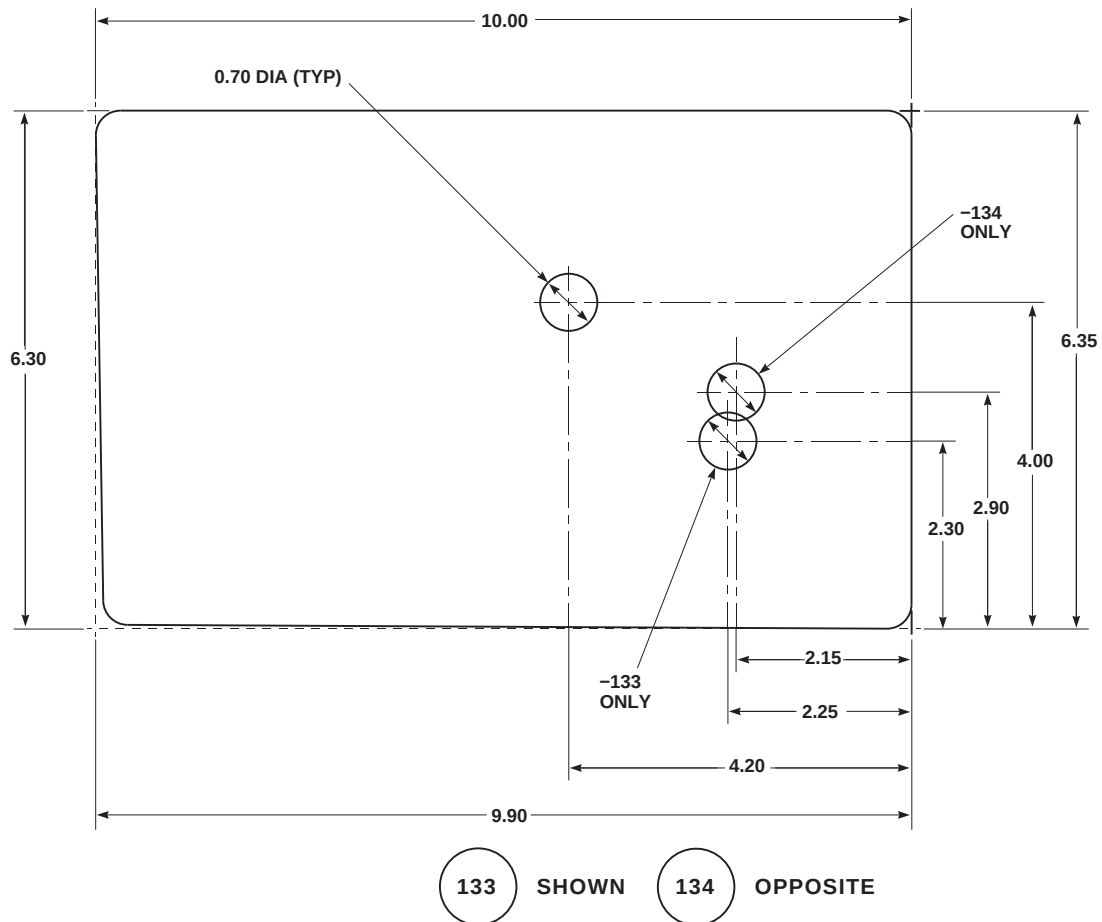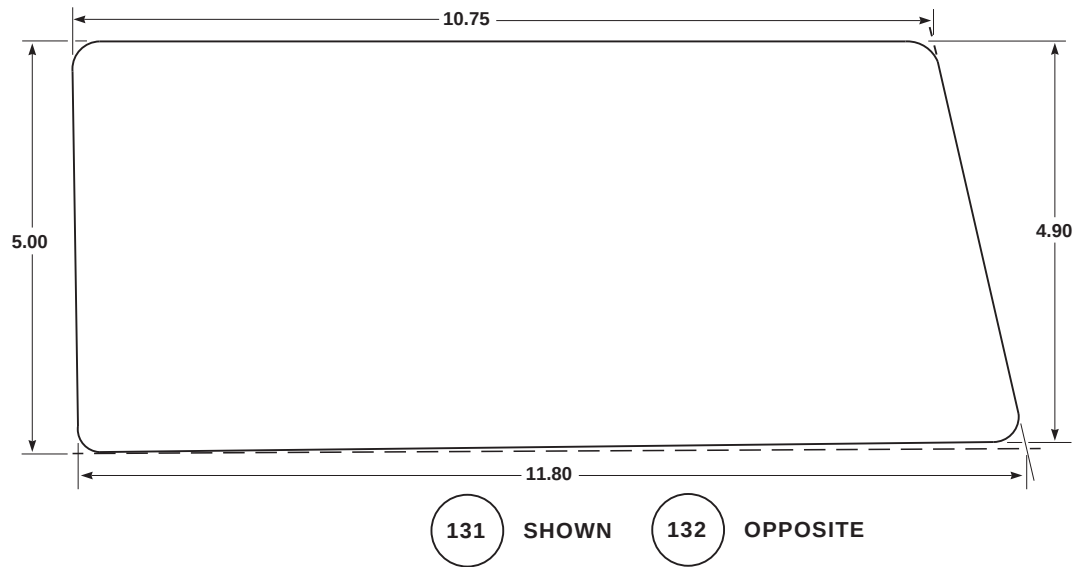

AK1770\_1  
SA

FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 1 OF 43)



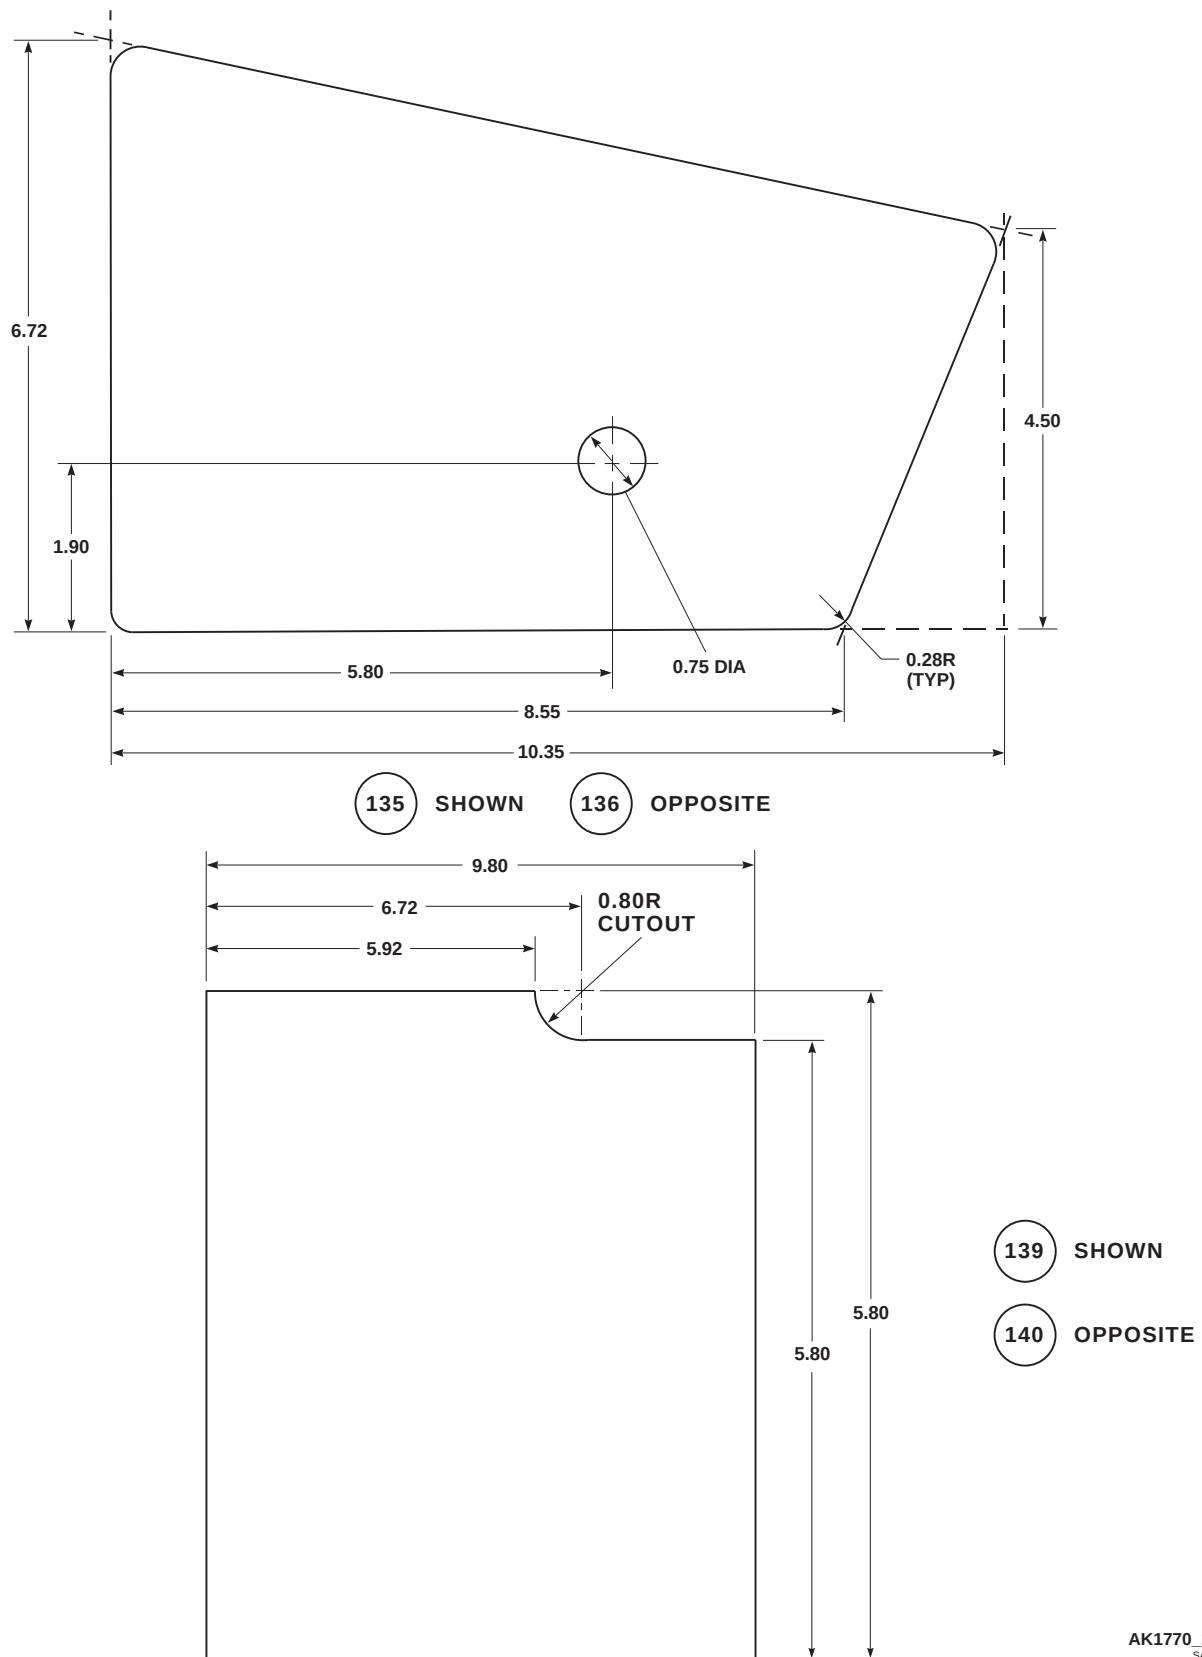


FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 2 OF 43)

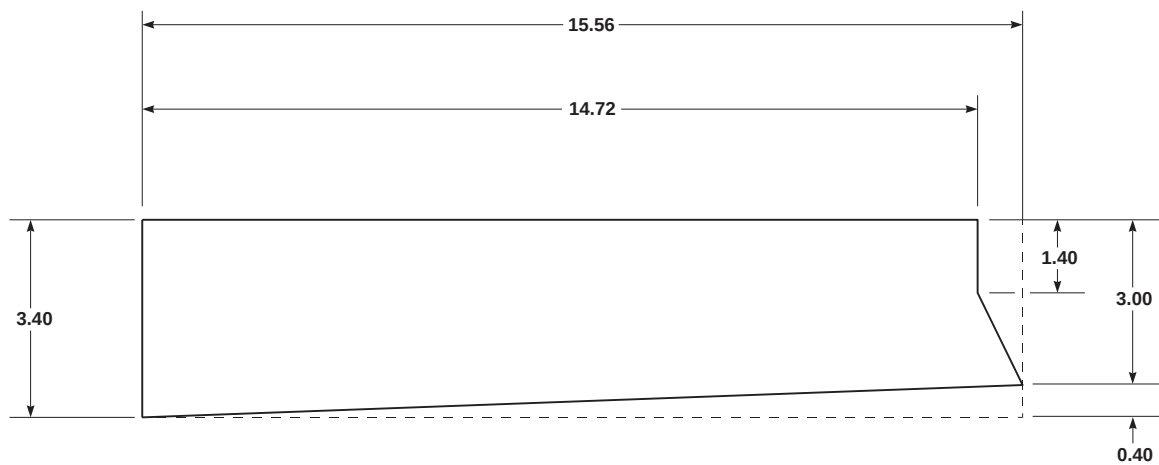


142

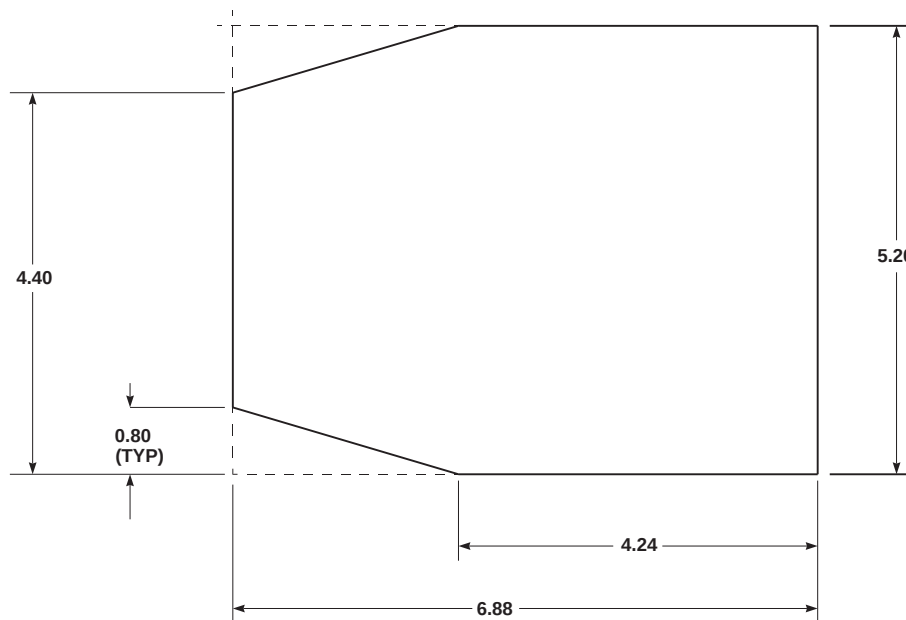

144

AK1770\_3  
SA



FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 3 OF 43)

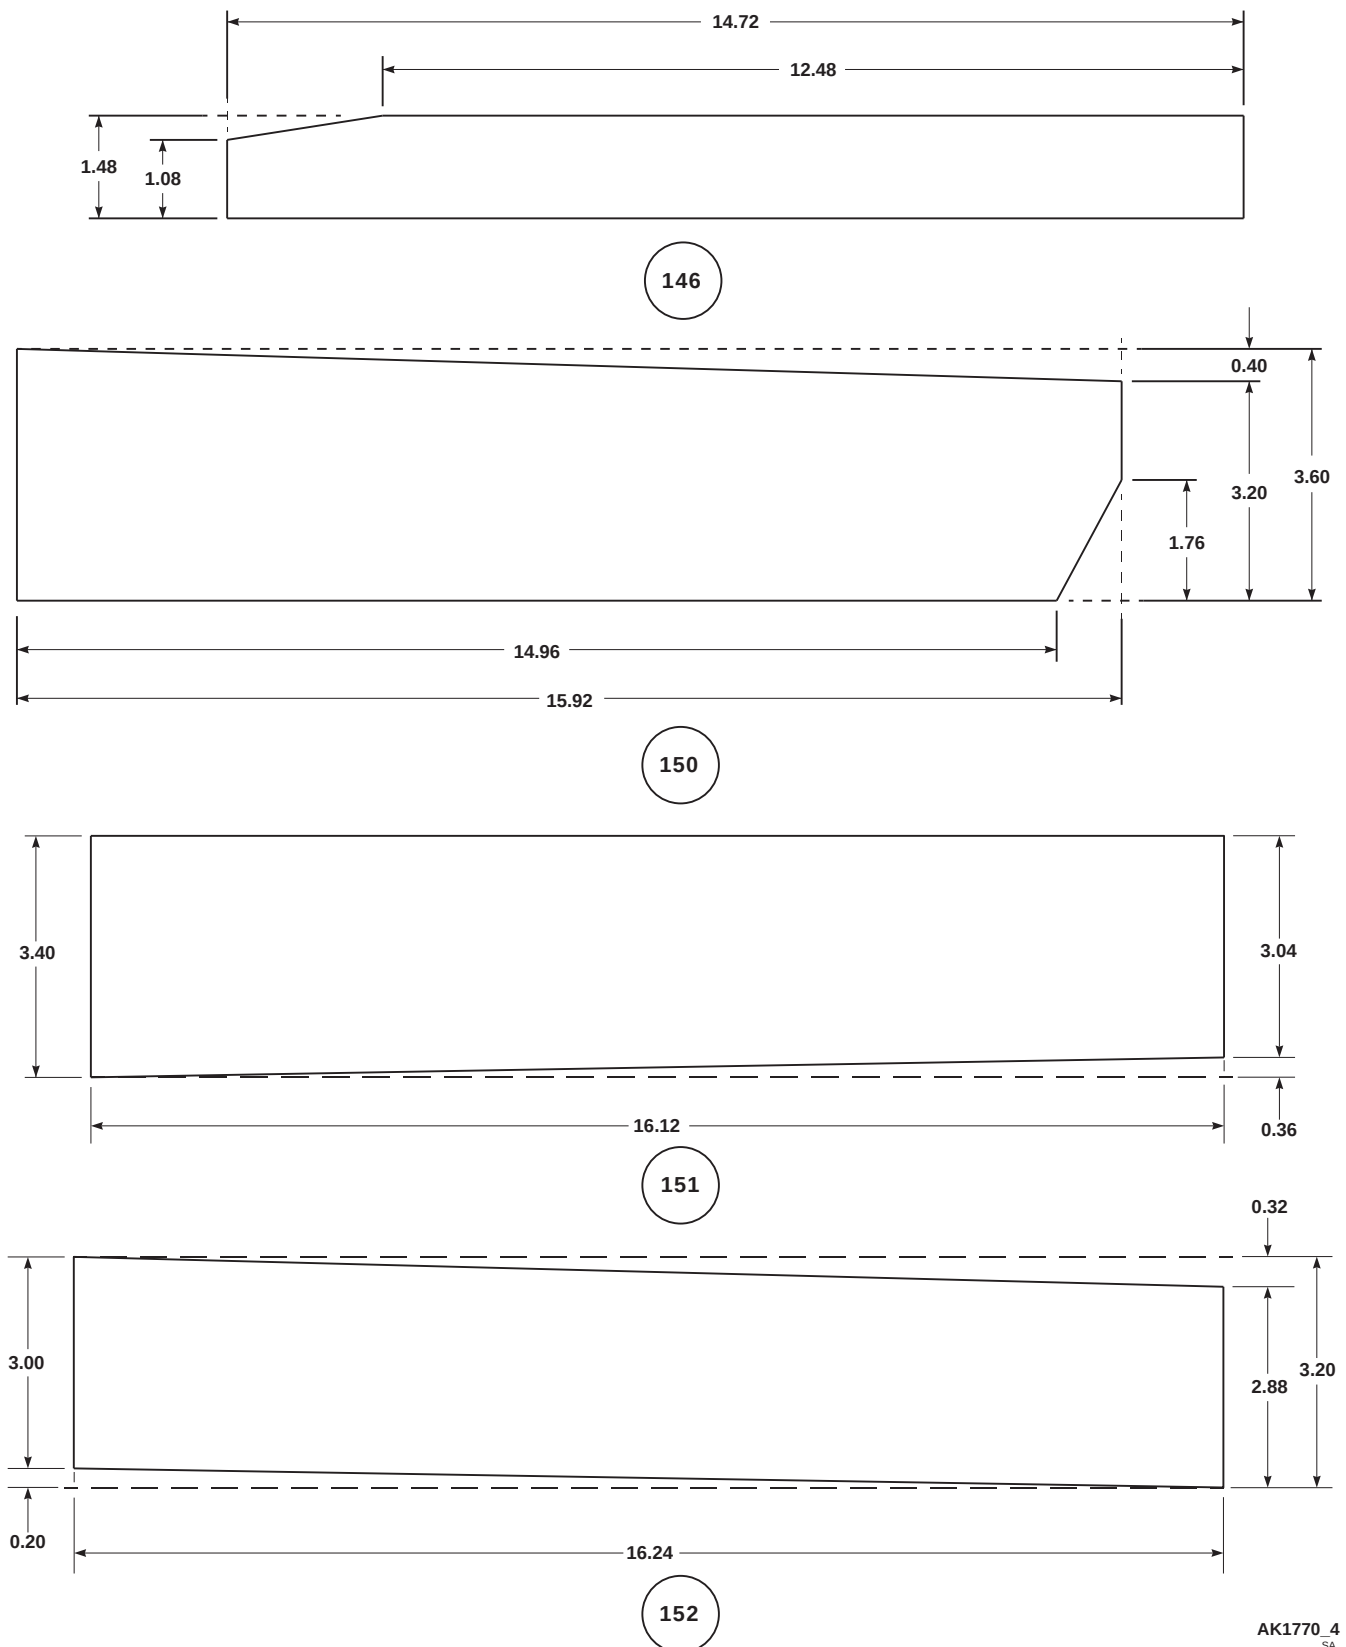

AK1770\_4  
SA


FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 4 OF 43)



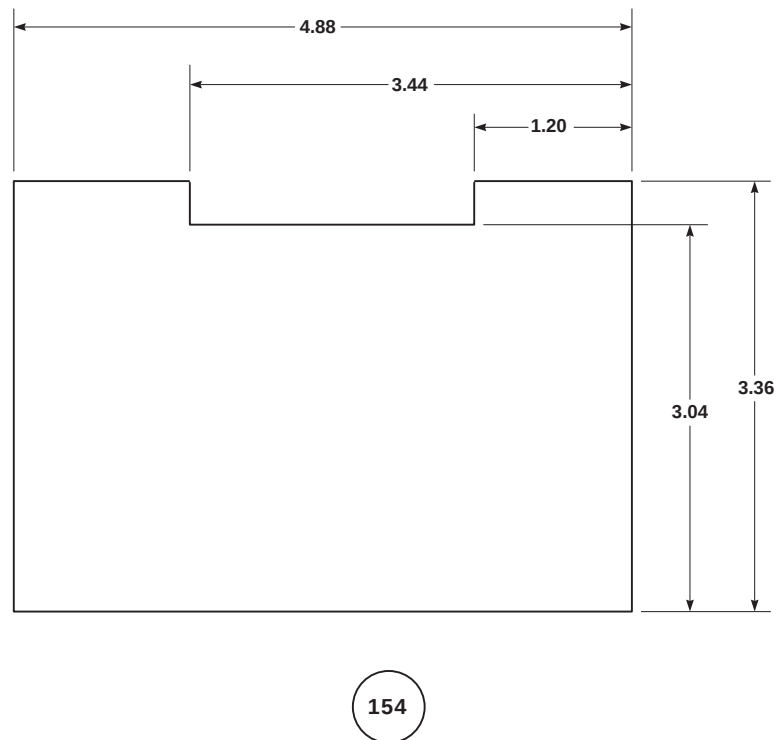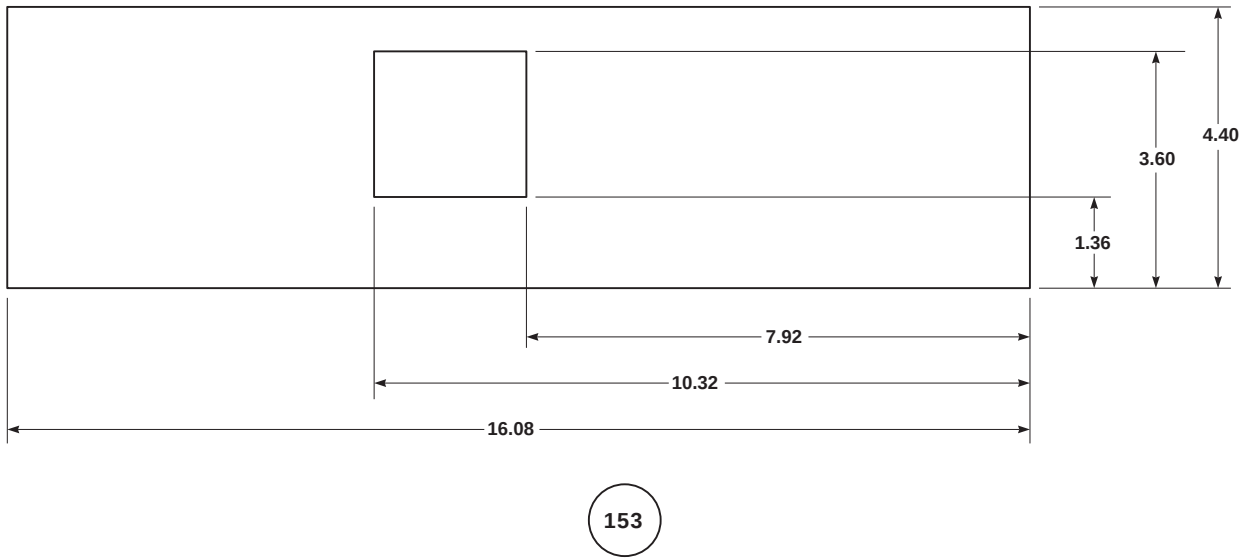


AK1770\_5  
SA

FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 5 OF 43)

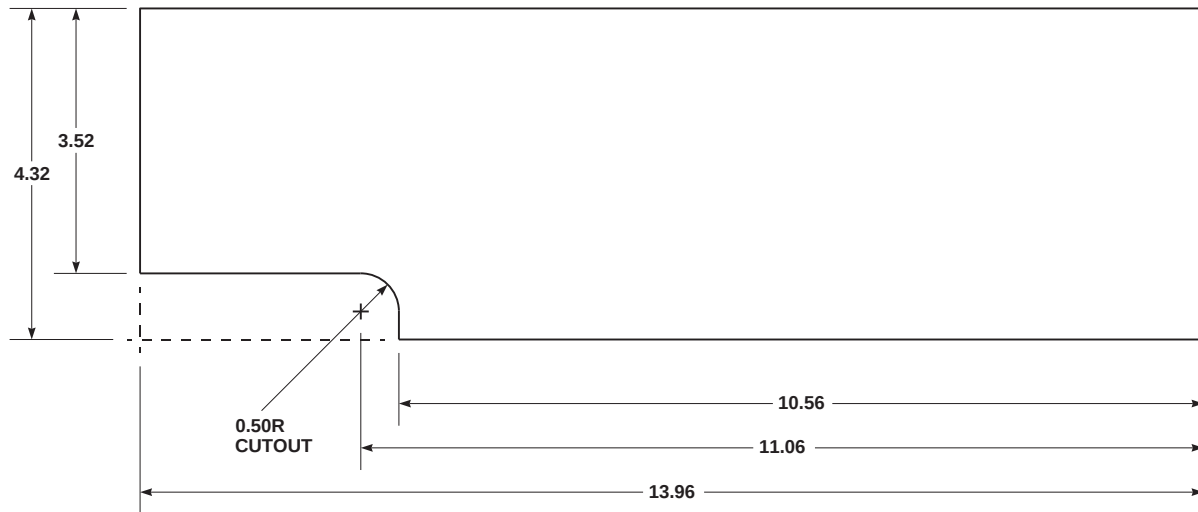

157 SHOWN


158 OPPOSITE

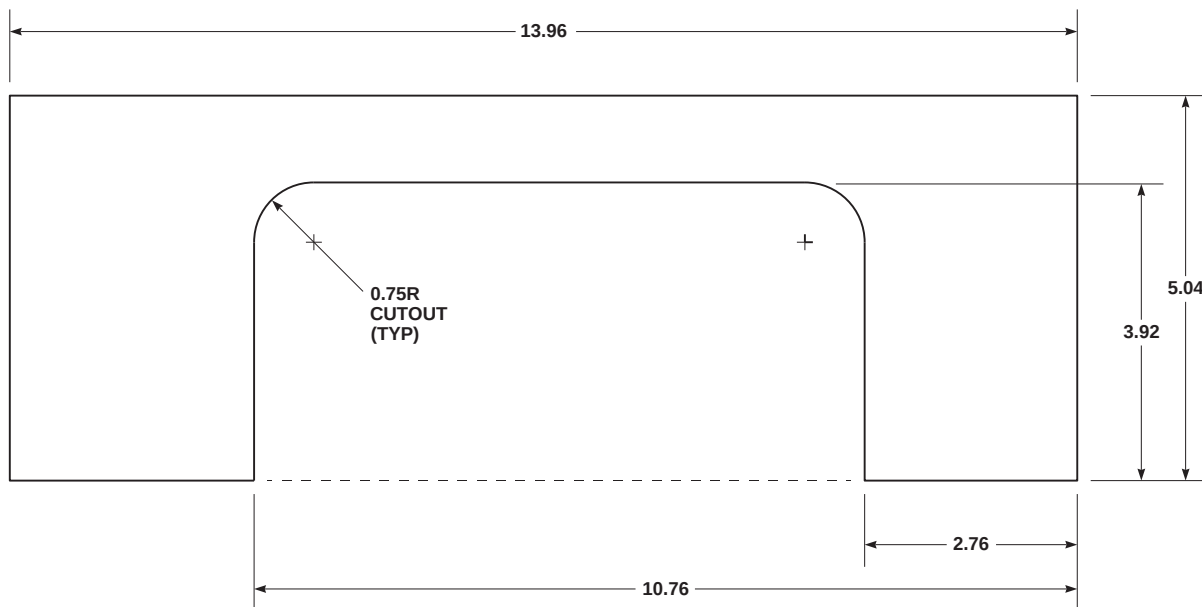

159


AK1770\_6  
SA

FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 6 OF 43)

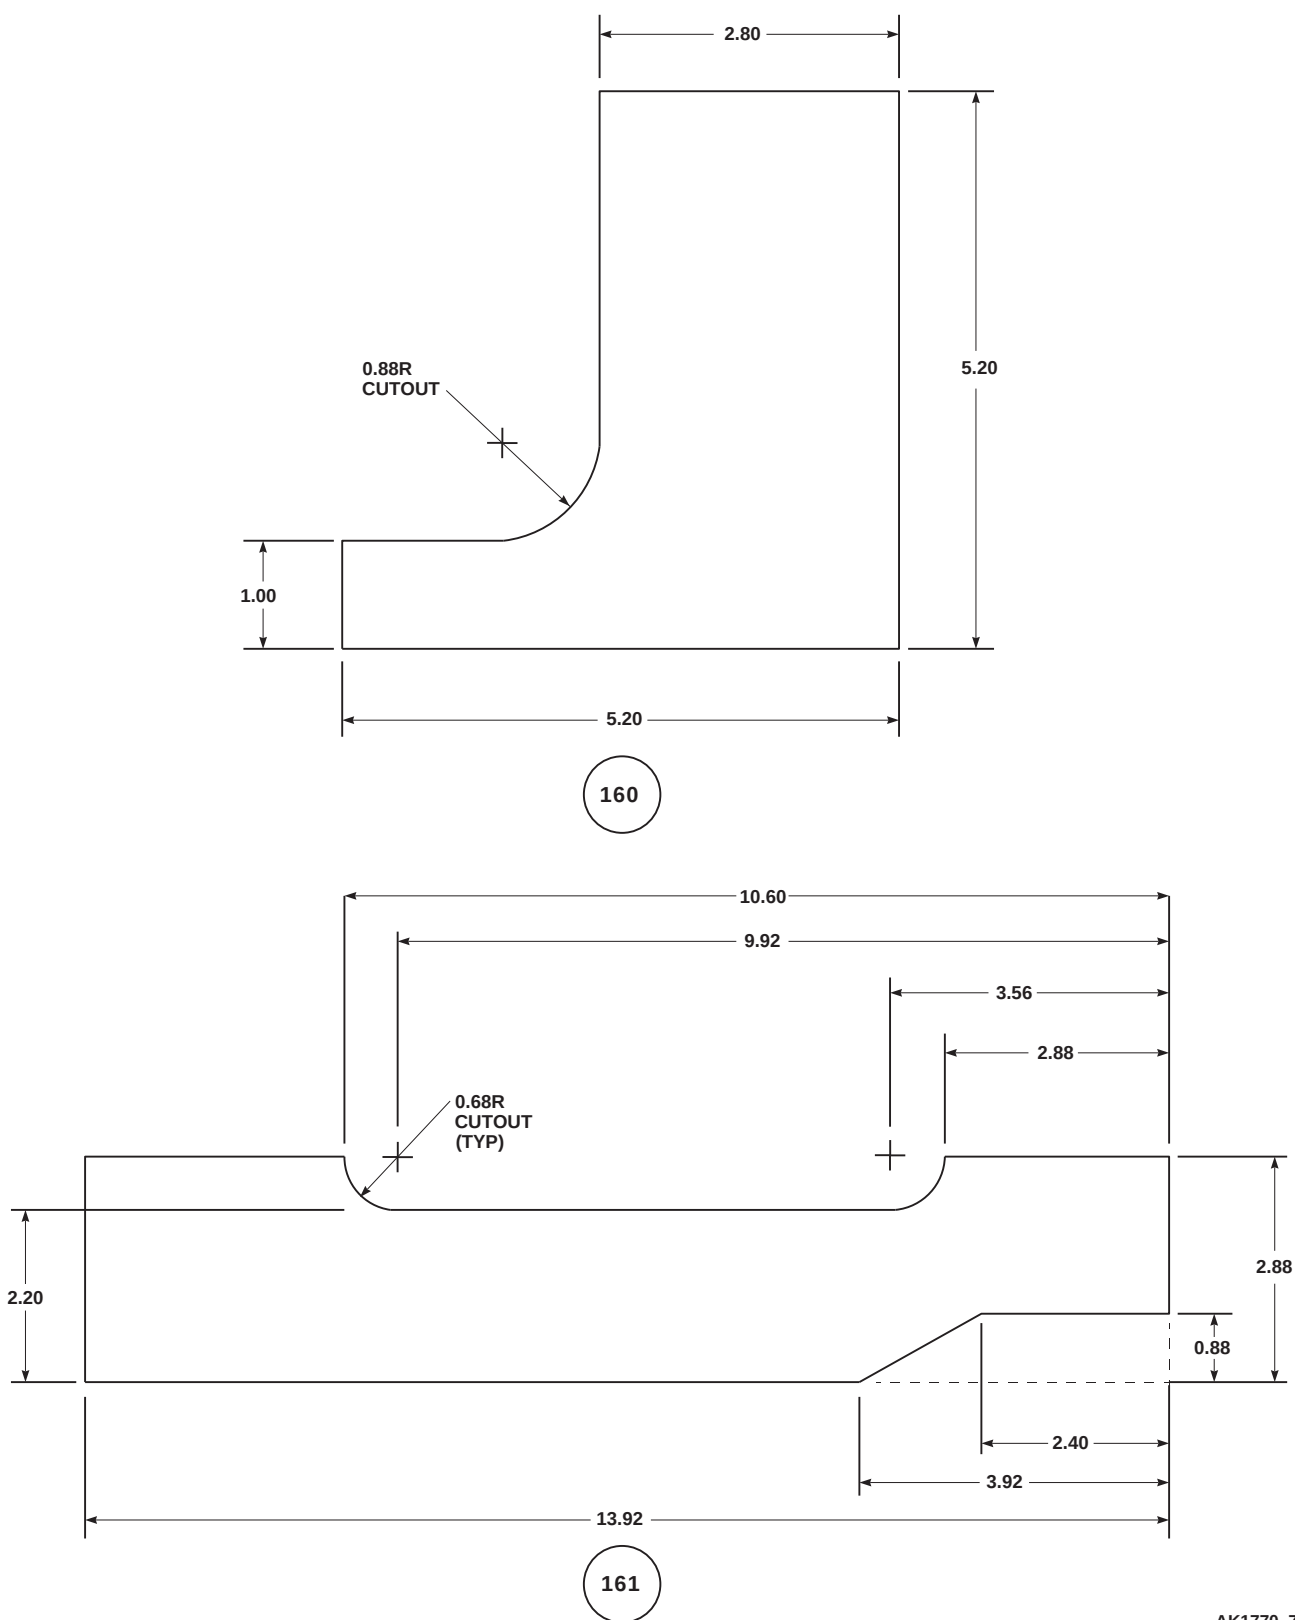


AK1770\_7  
SA

FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 7 OF 43)

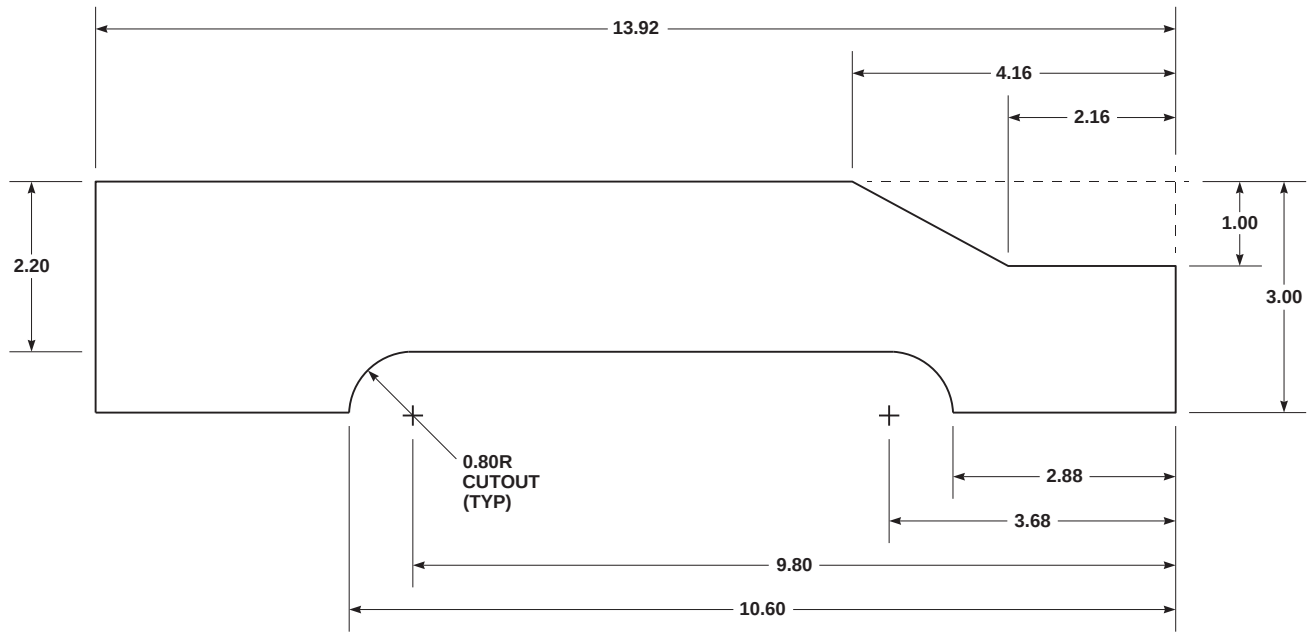

162

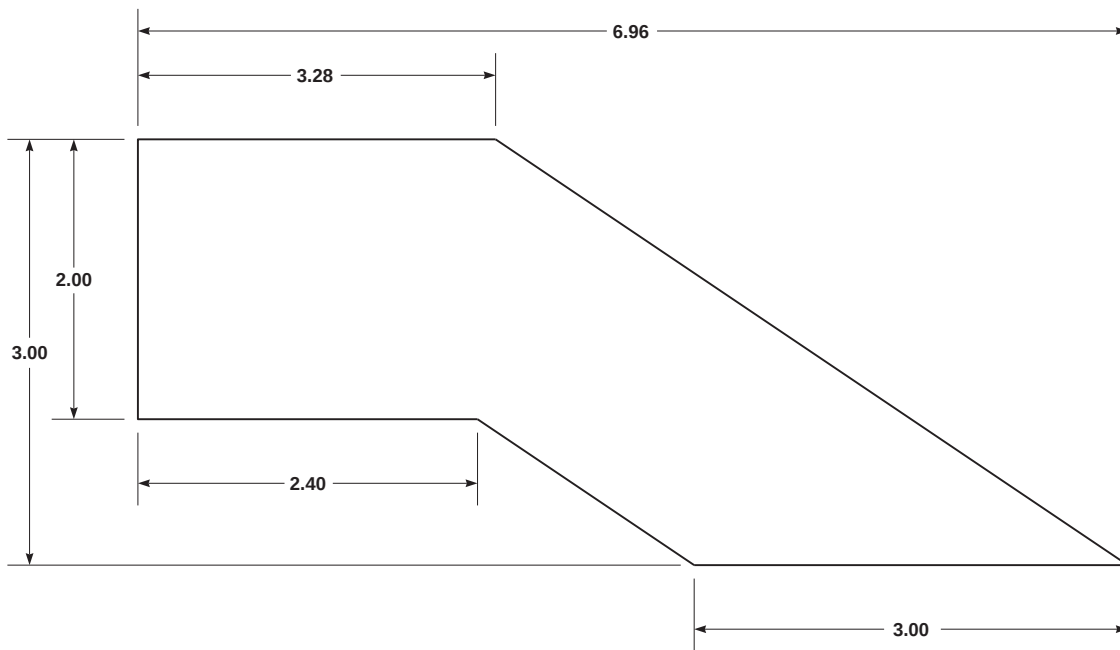

163 SHOWN

164 OPPOSITE

AK1770\_8  
SA

FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 8 OF 43)



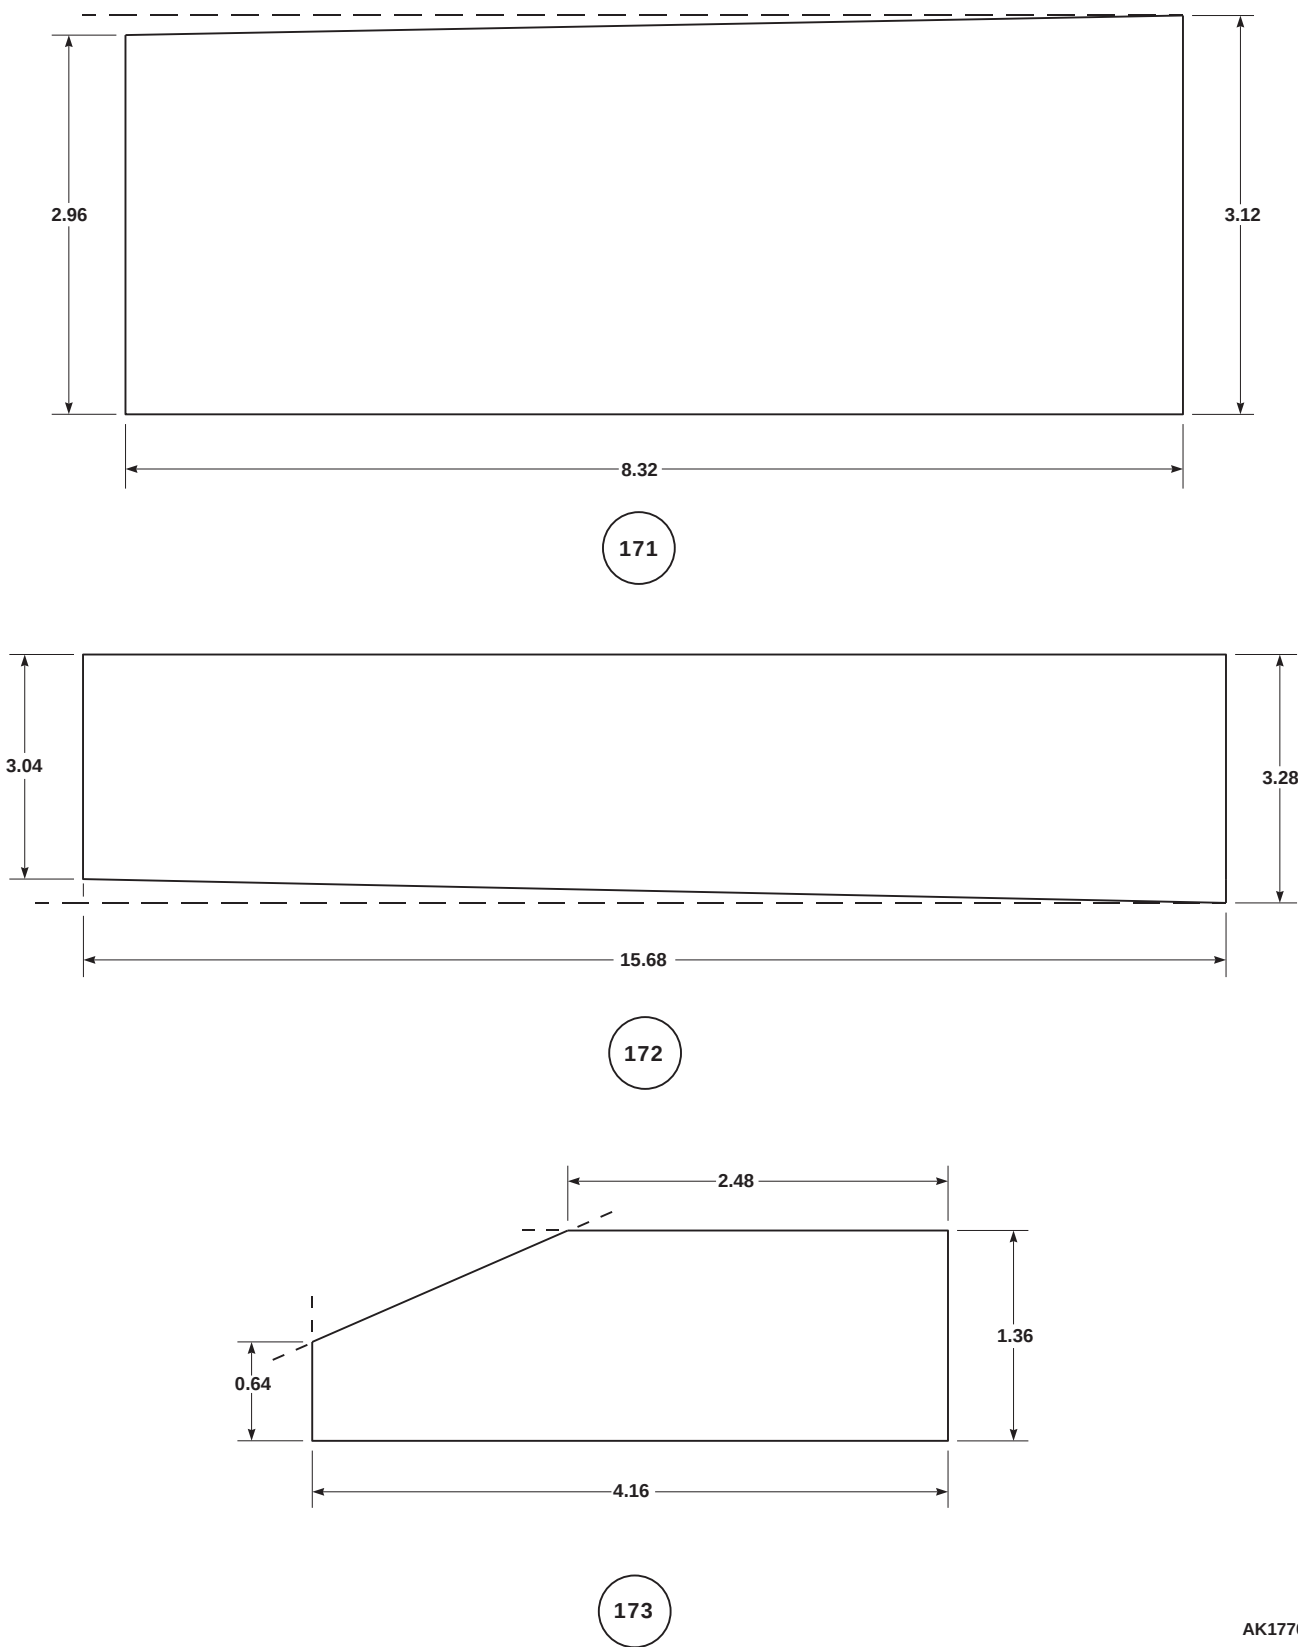


FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 9 OF 43)

AK1770\_9  
SA

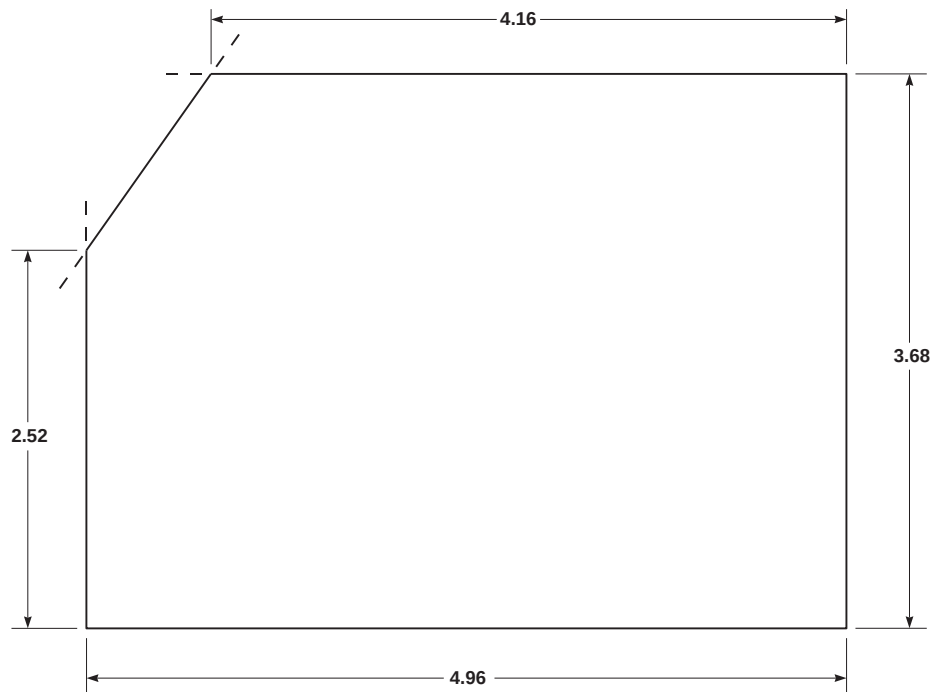

174


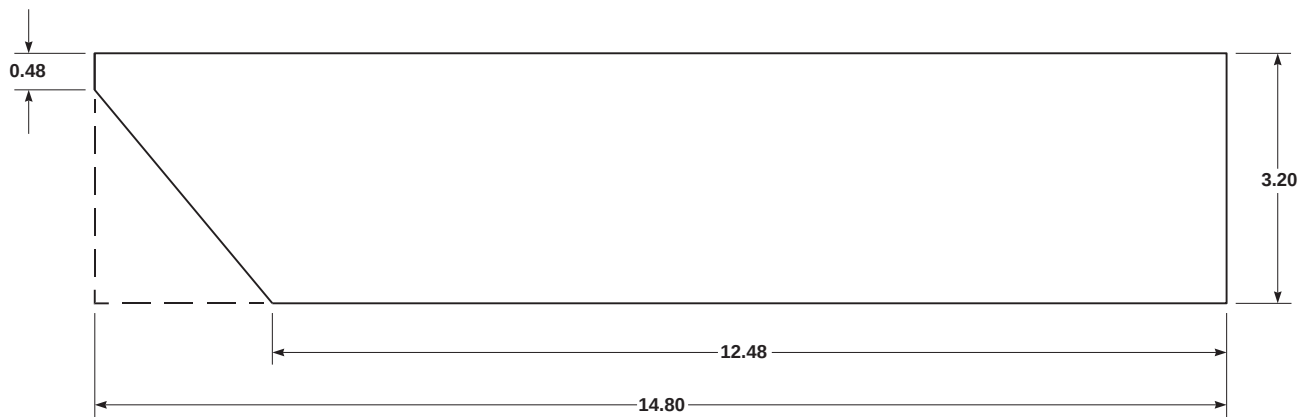


175 SHOWN

176 OPPOSITE

AK1770\_10  
SA

FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 10 OF 43)

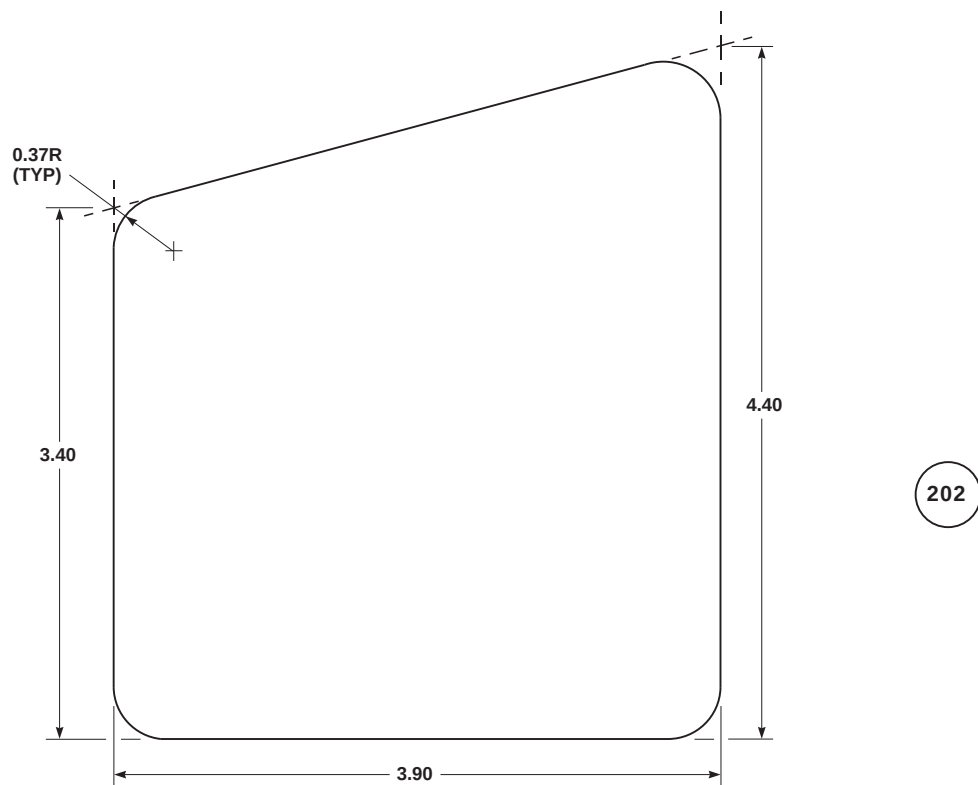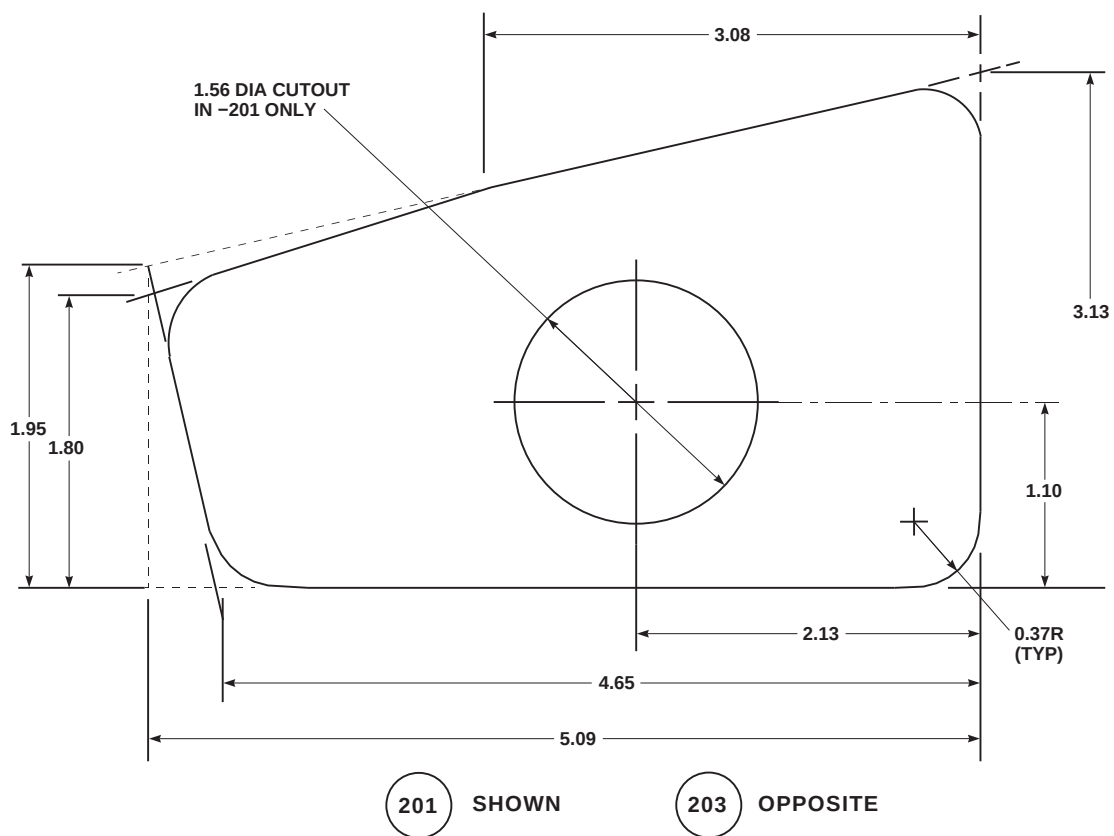

AK1770\_11  
SA

FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 11 OF 43)

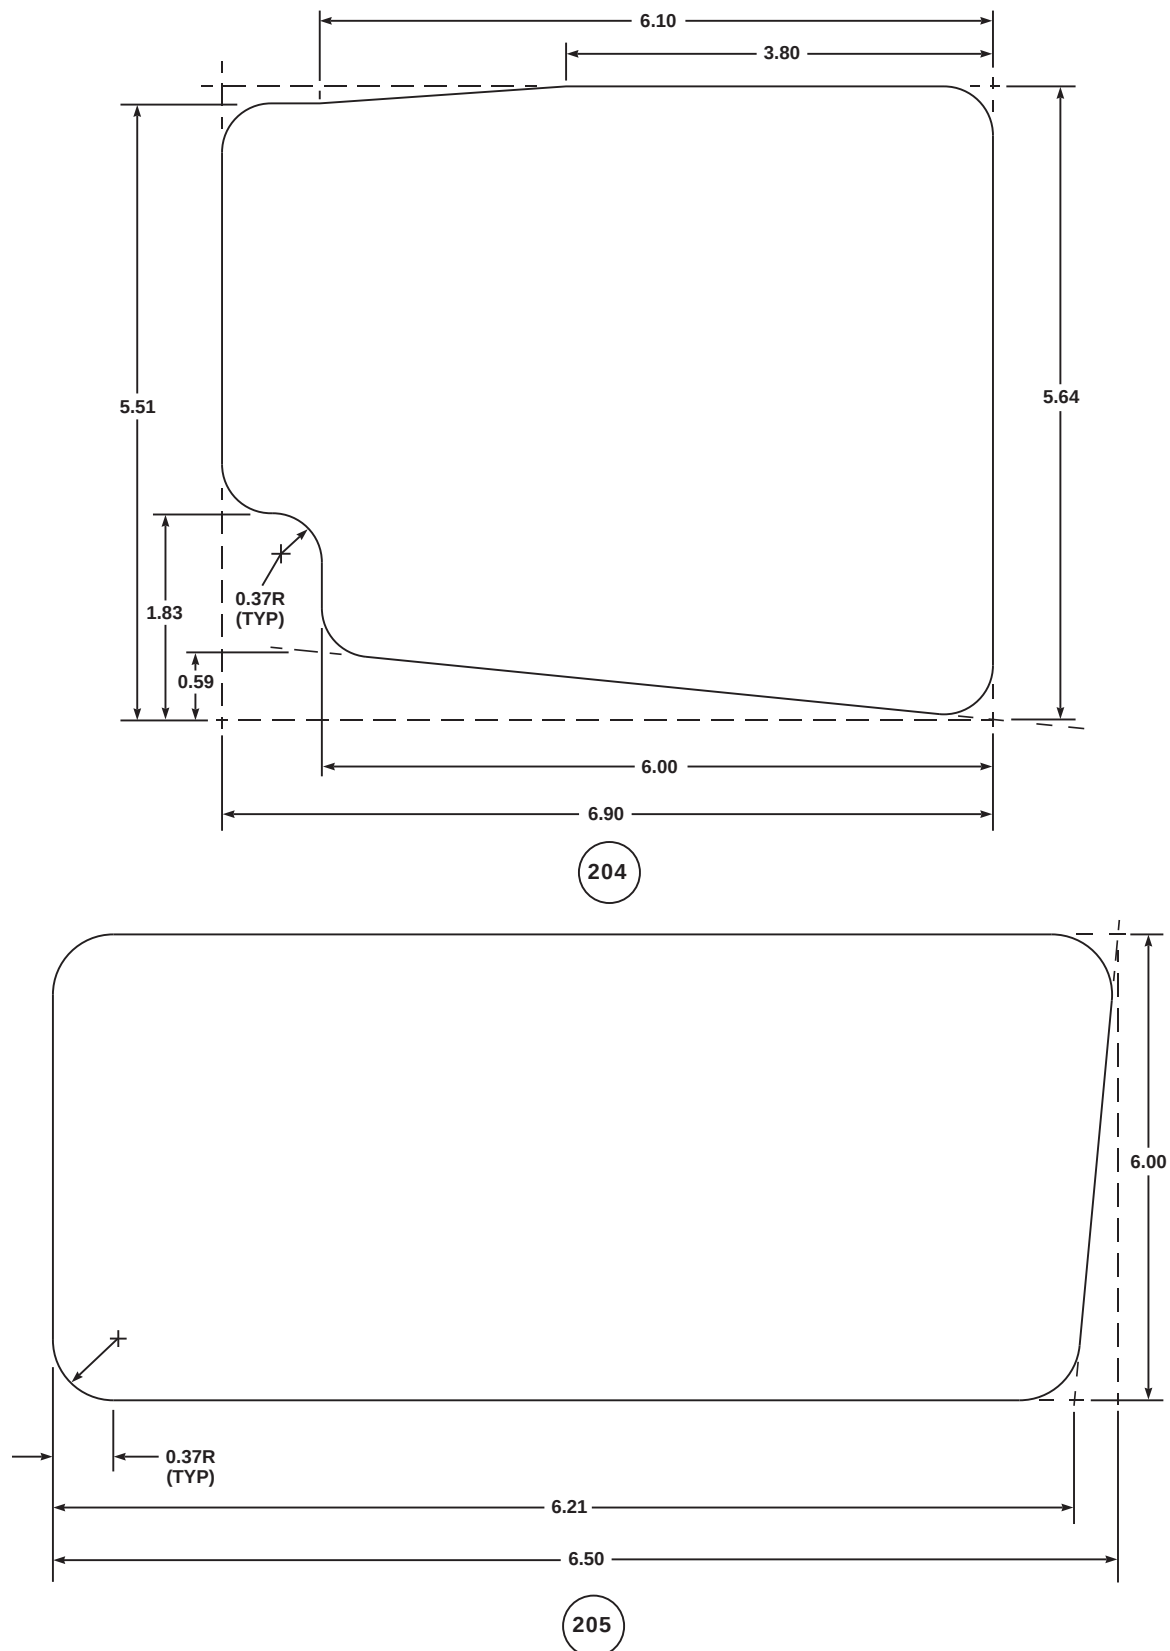


FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 12 OF 43)






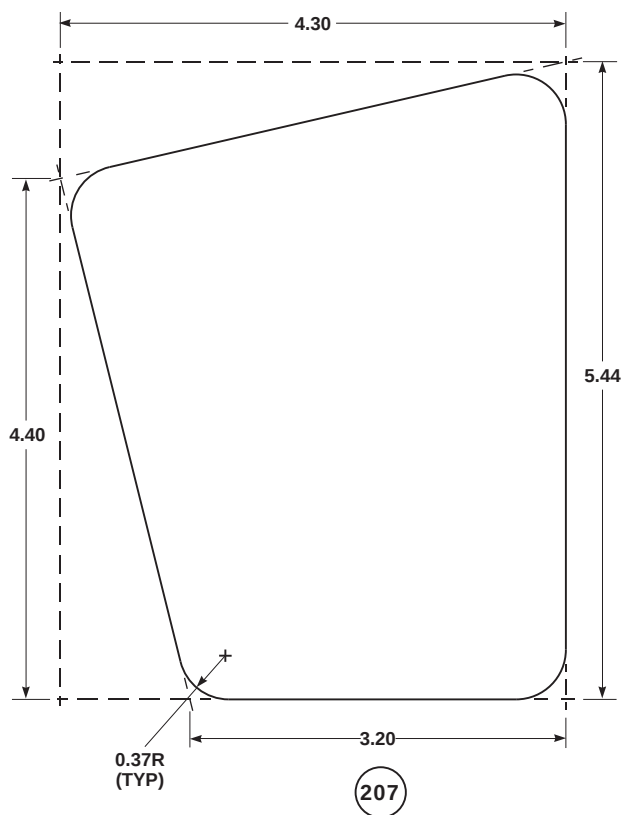


FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 13 OF 43)

AK1770\_13  
SA

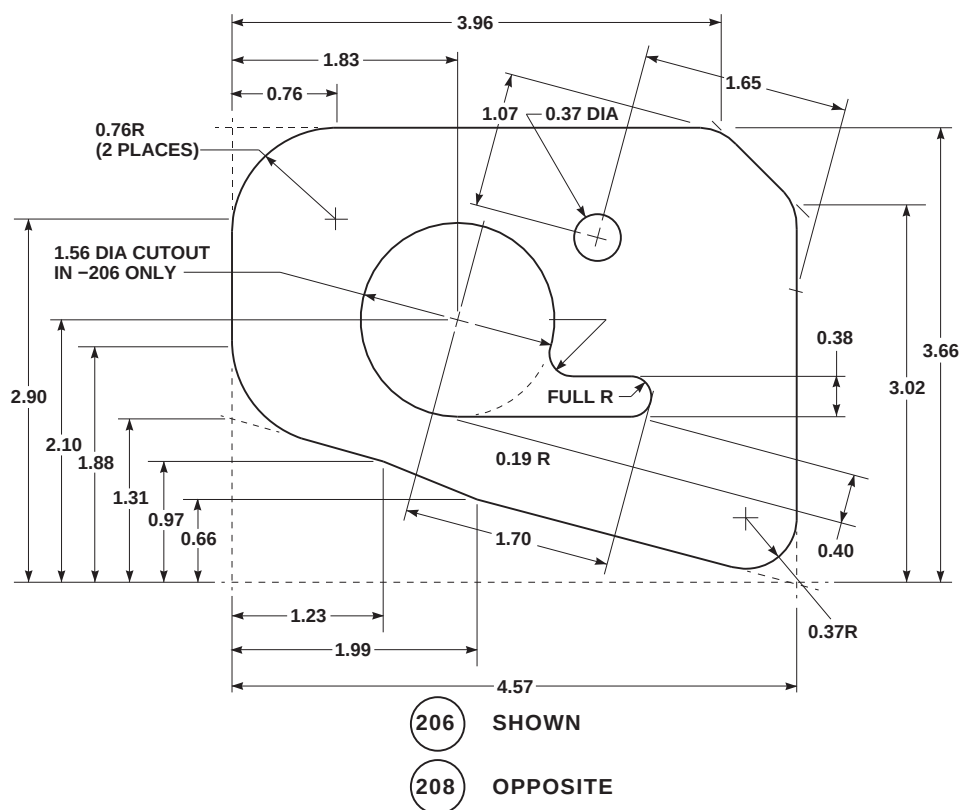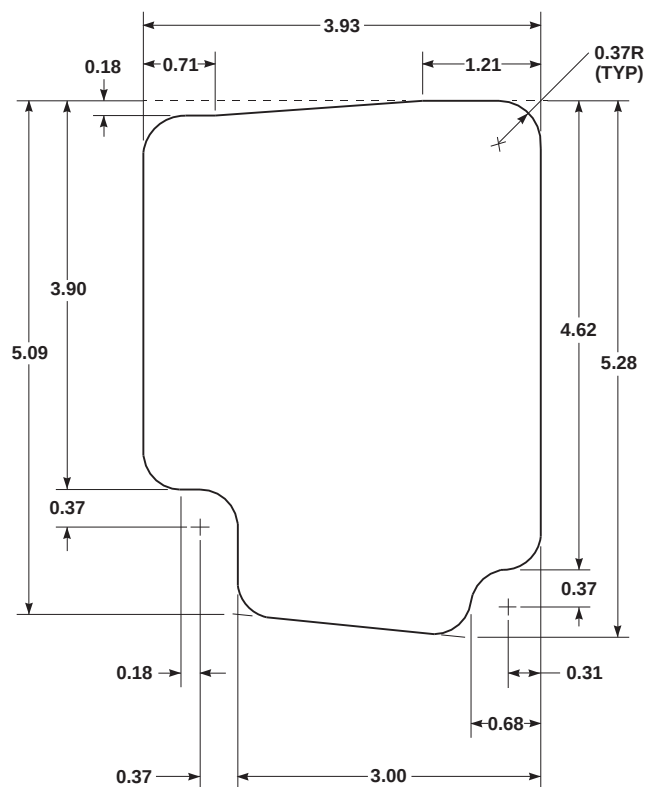



209

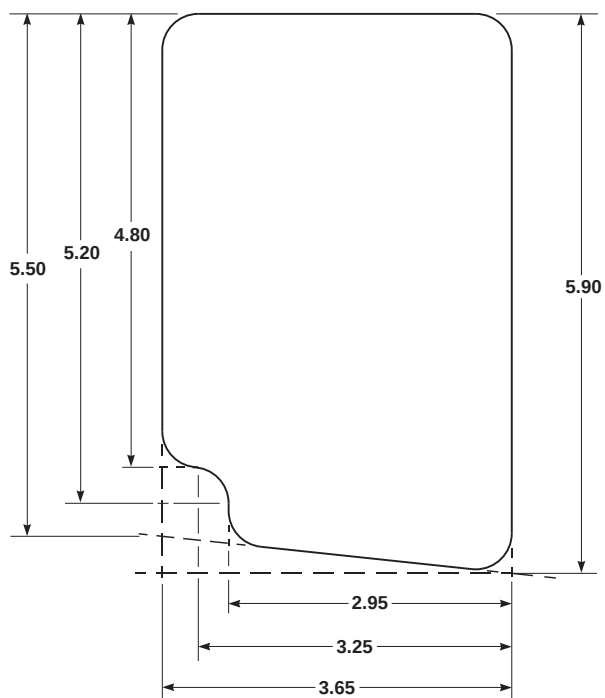

210



AK1770\_14  
SA

FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 14 OF 43)

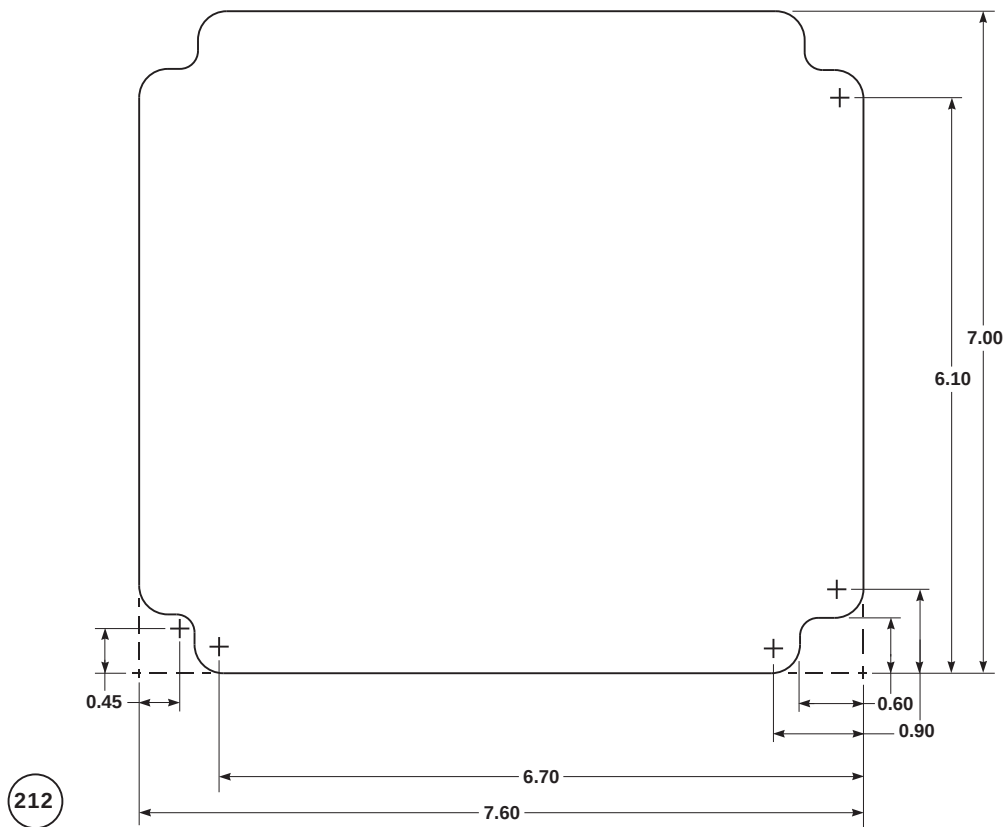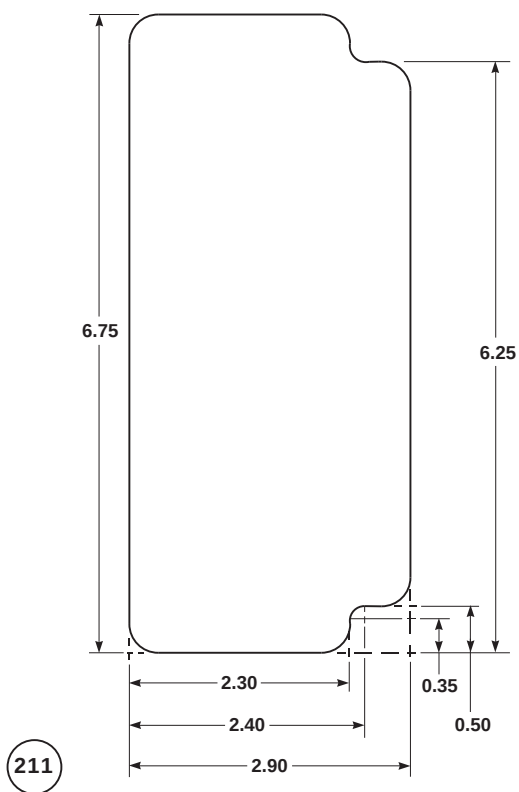


AK1770\_15  
SA

FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 15 OF 43)

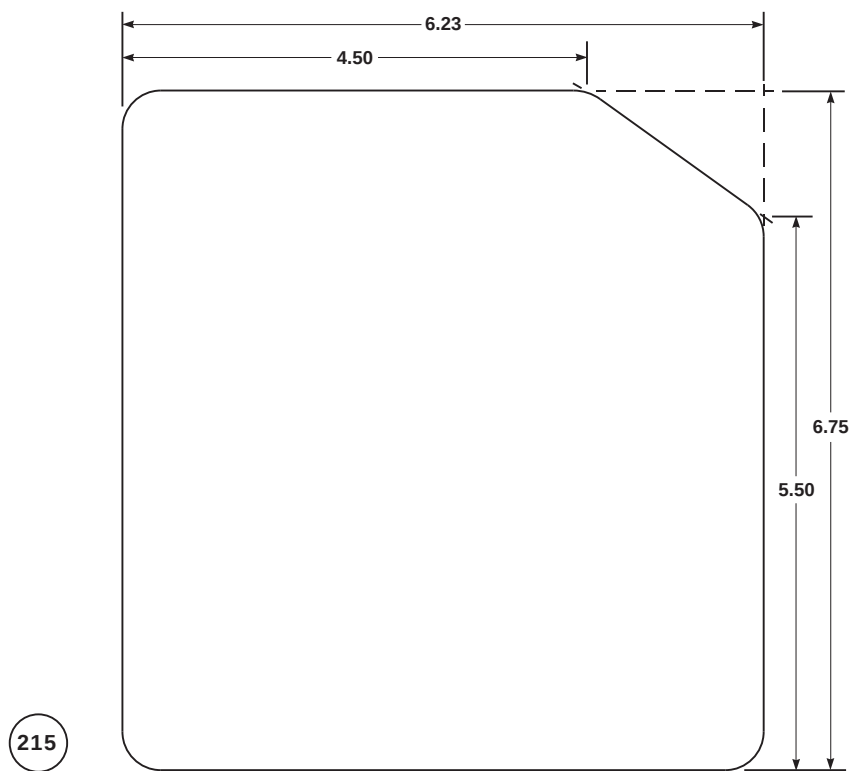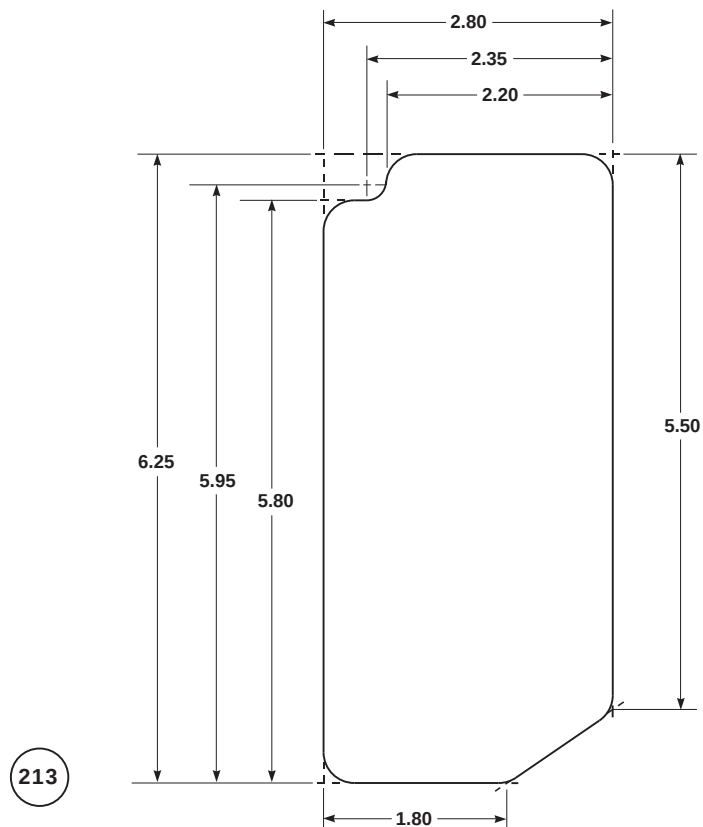


AK1770\_16  
SA

FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 16 OF 43)

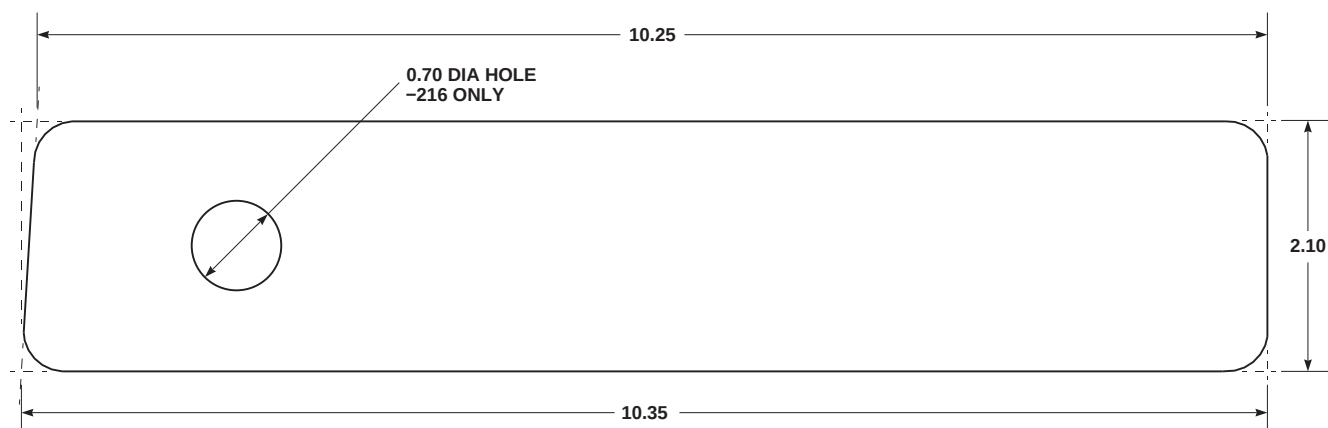

216 SHOWN

217 OPPOSITE

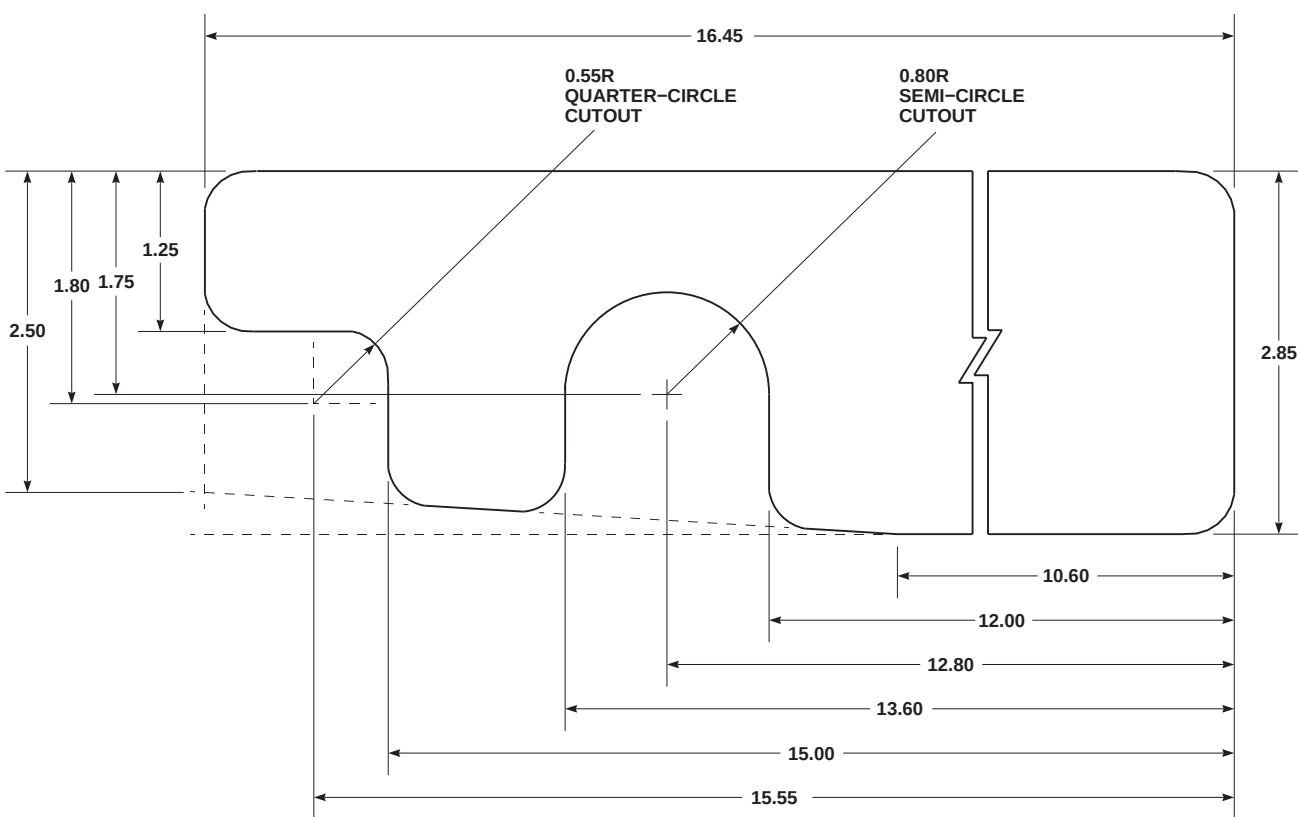


222 SHOWN


268 OPPOSITE

AK1770\_17  
SA

FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 17 OF 43)

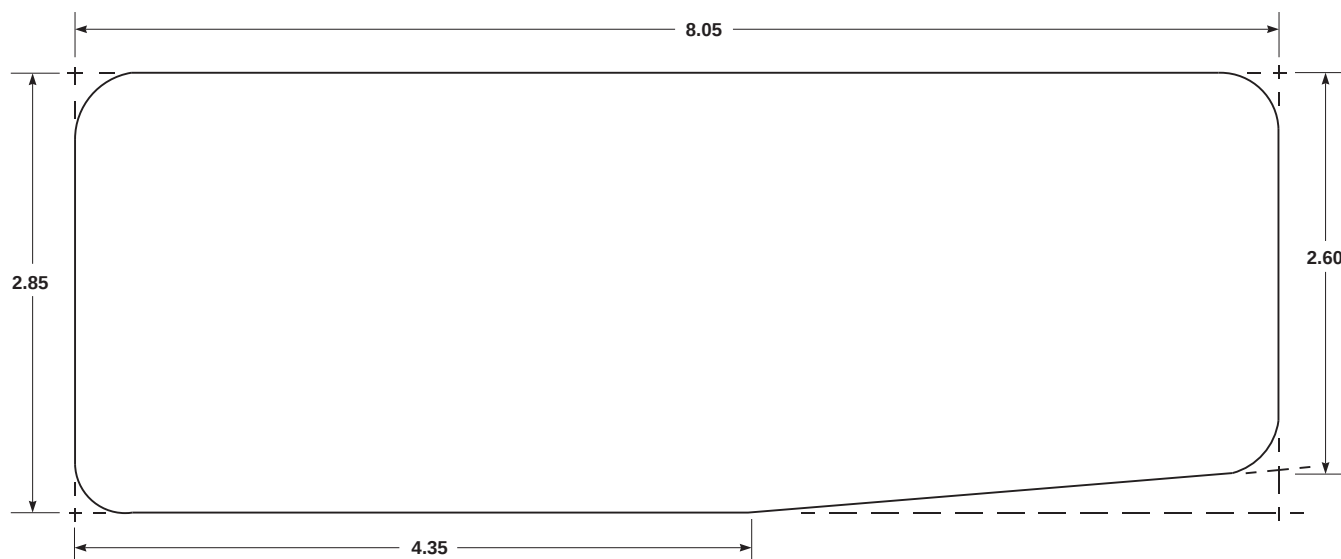

224


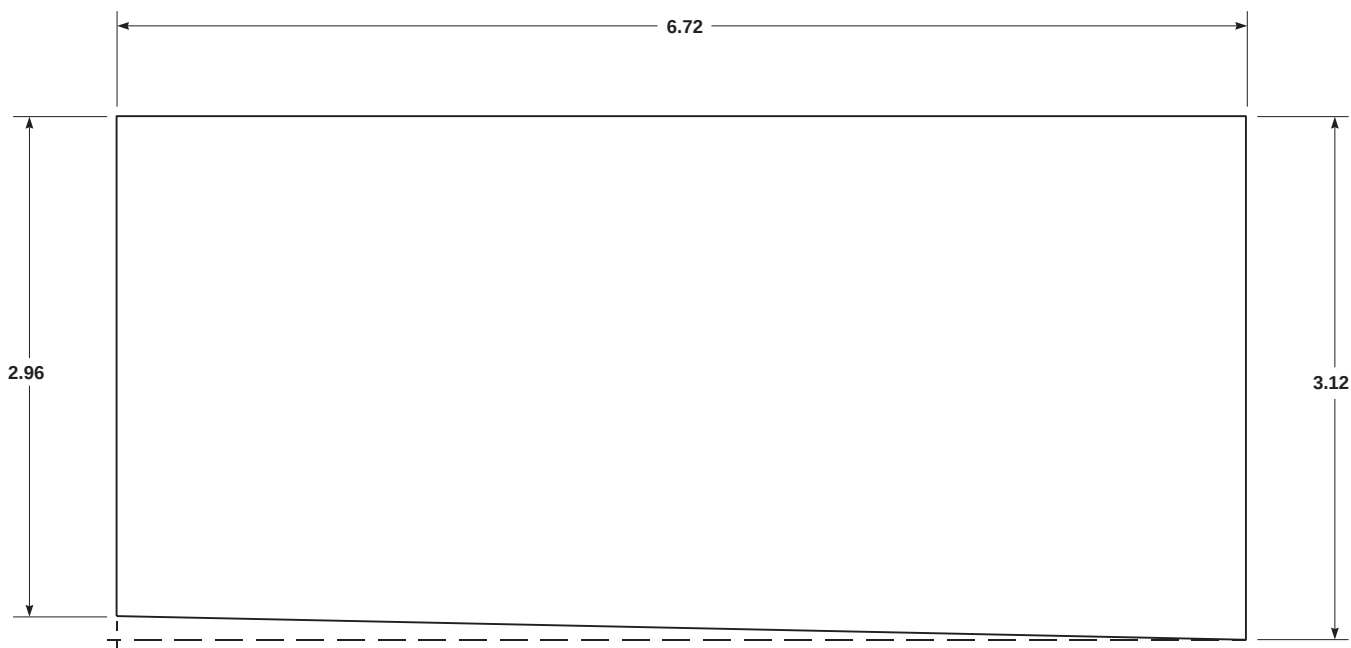


231 SHOWN

232 OPPOSITE



AK1770\_18  
SA

FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 18 OF 43)

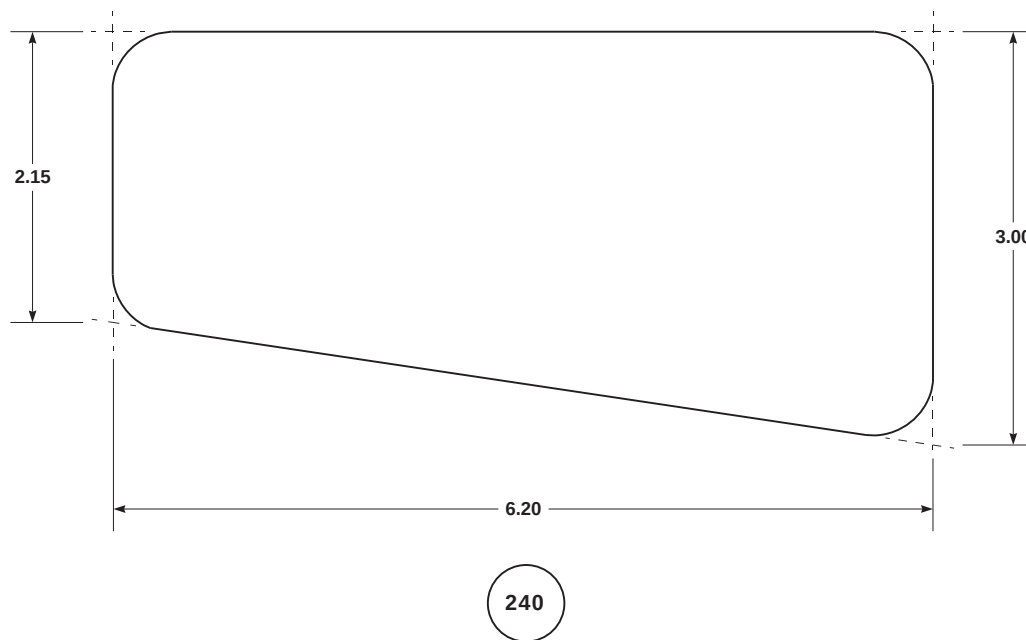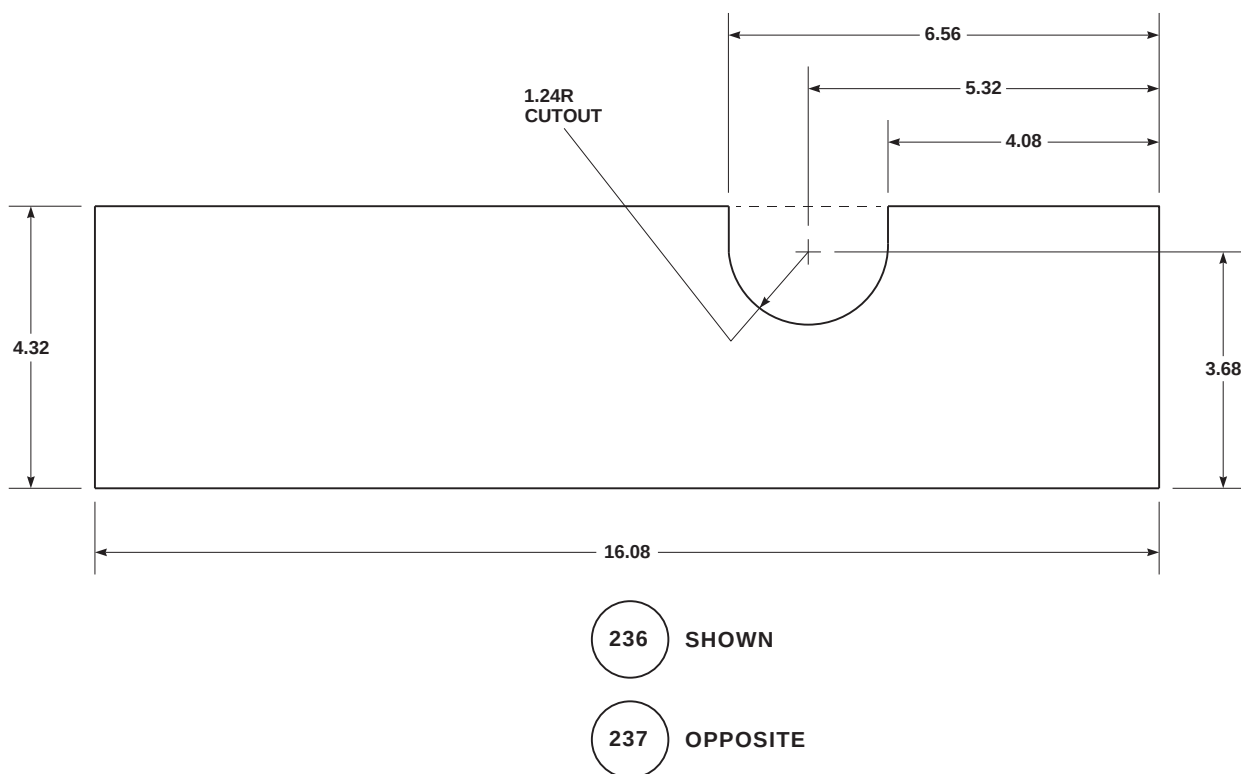

AK1770\_19  
SA


FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 19 OF 43)

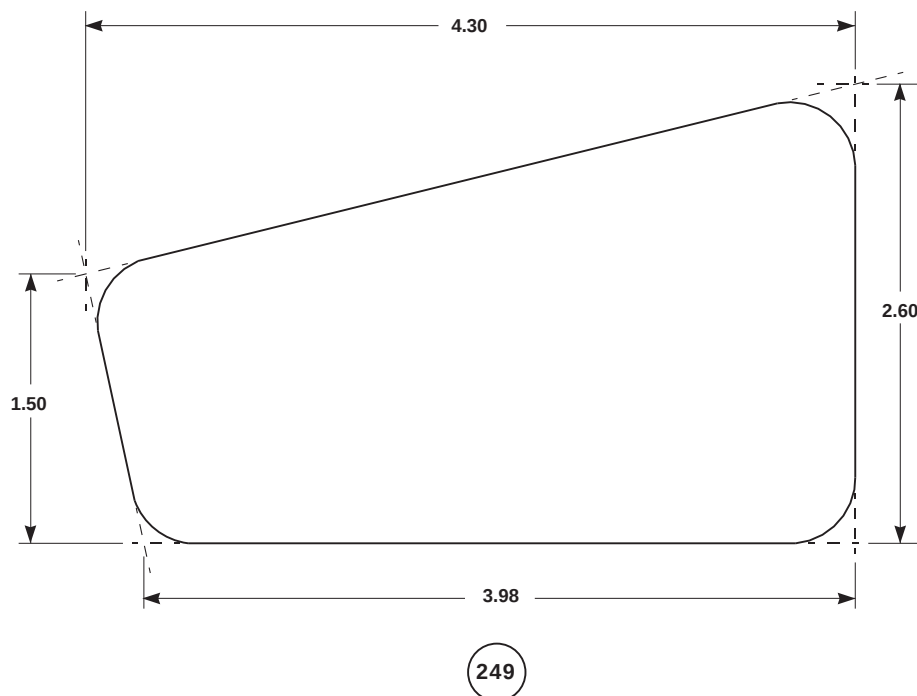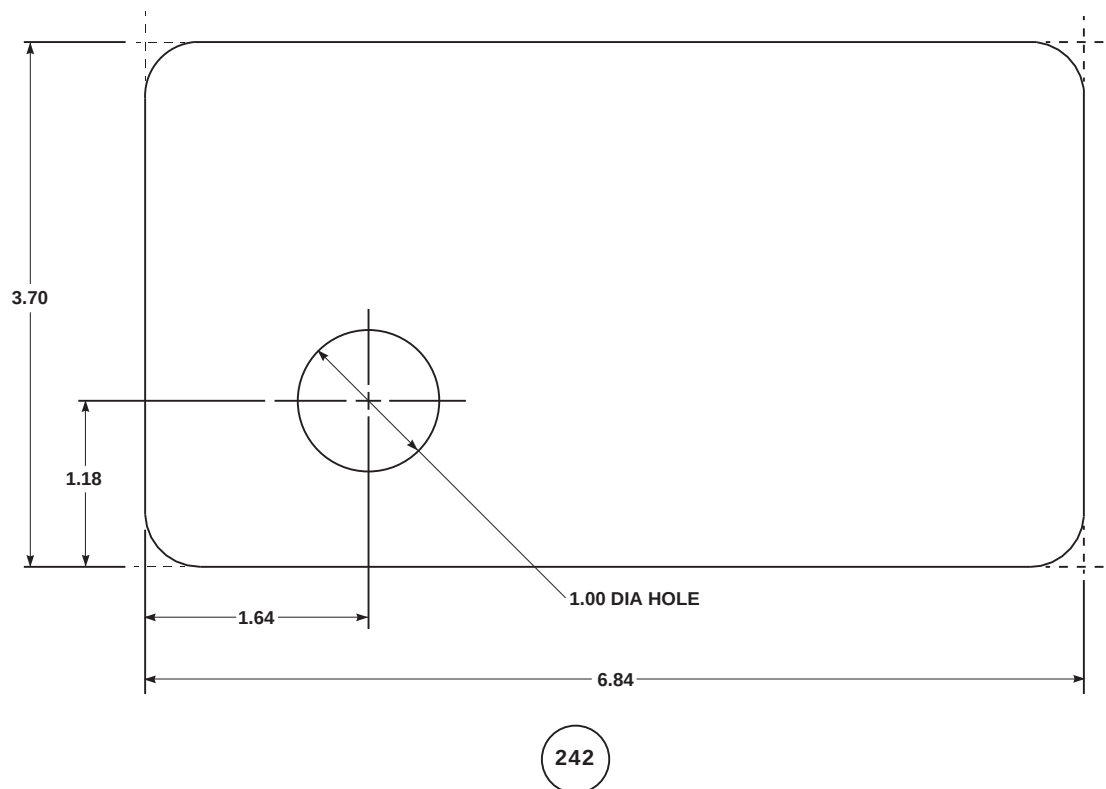

AK1770\_20  
SA


FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 20 OF 43)



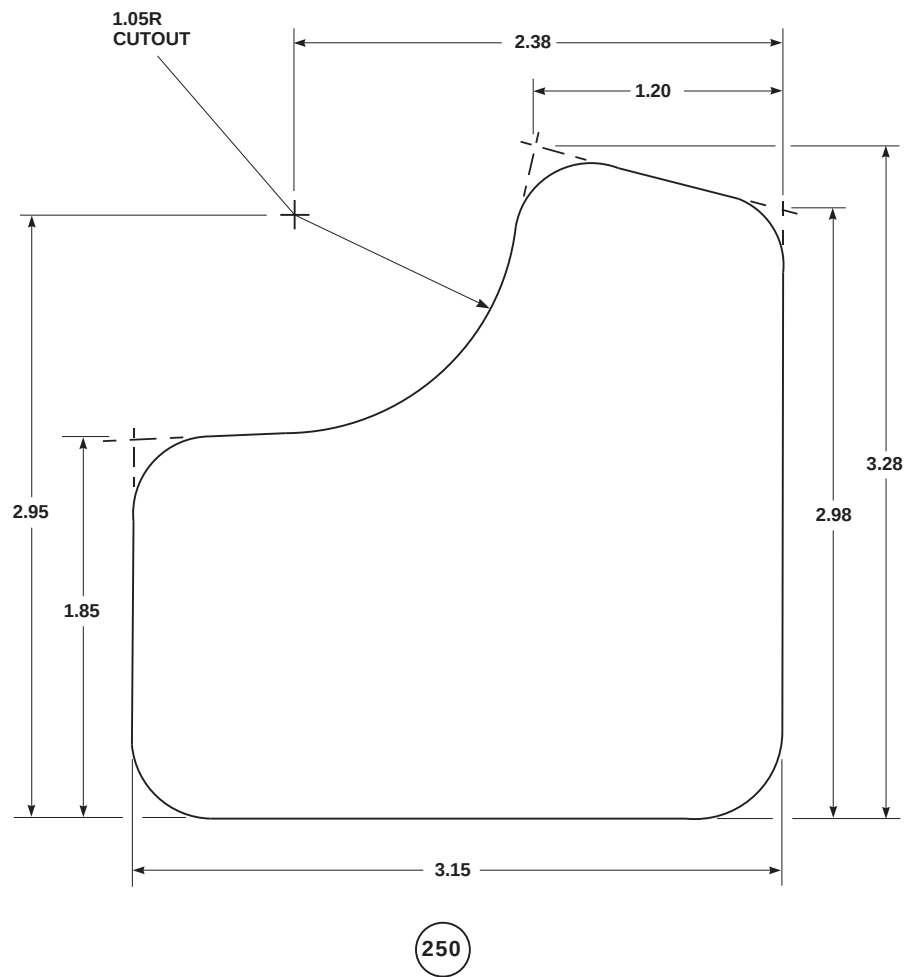



AK1770\_21  
SA

FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 21 OF 43)

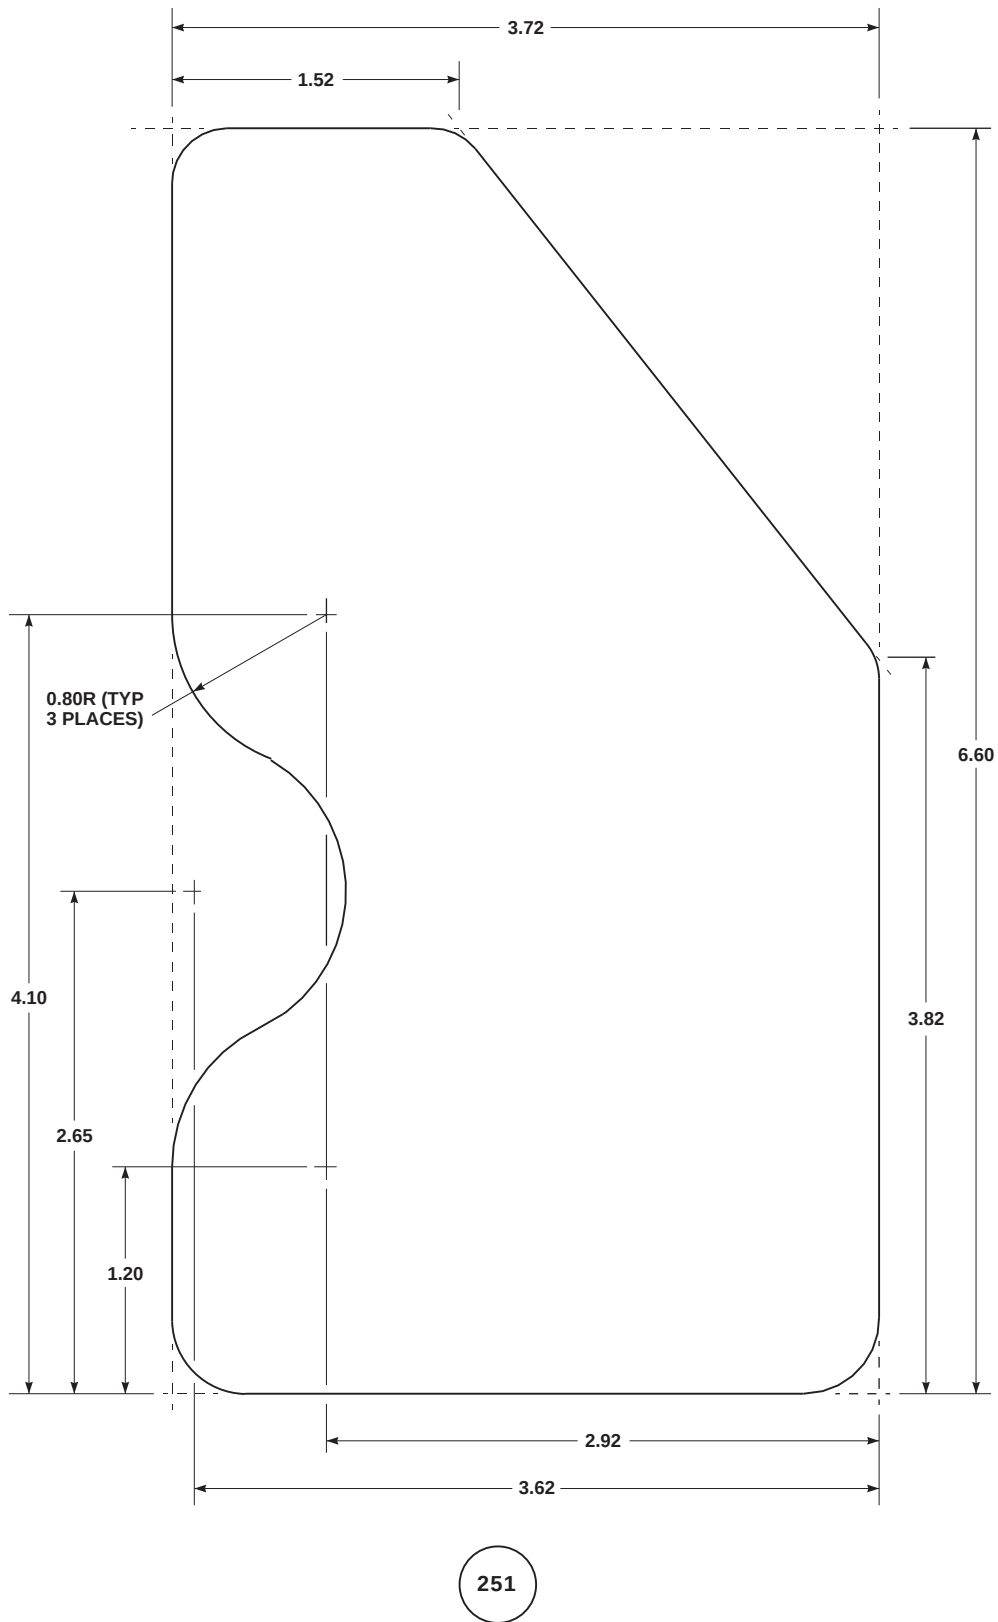


AK1770\_22  
SA

FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 22 OF 43)

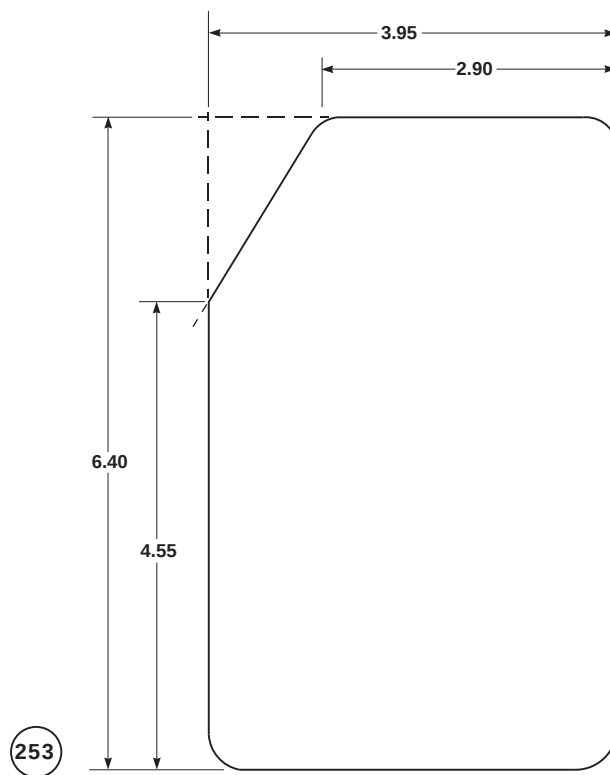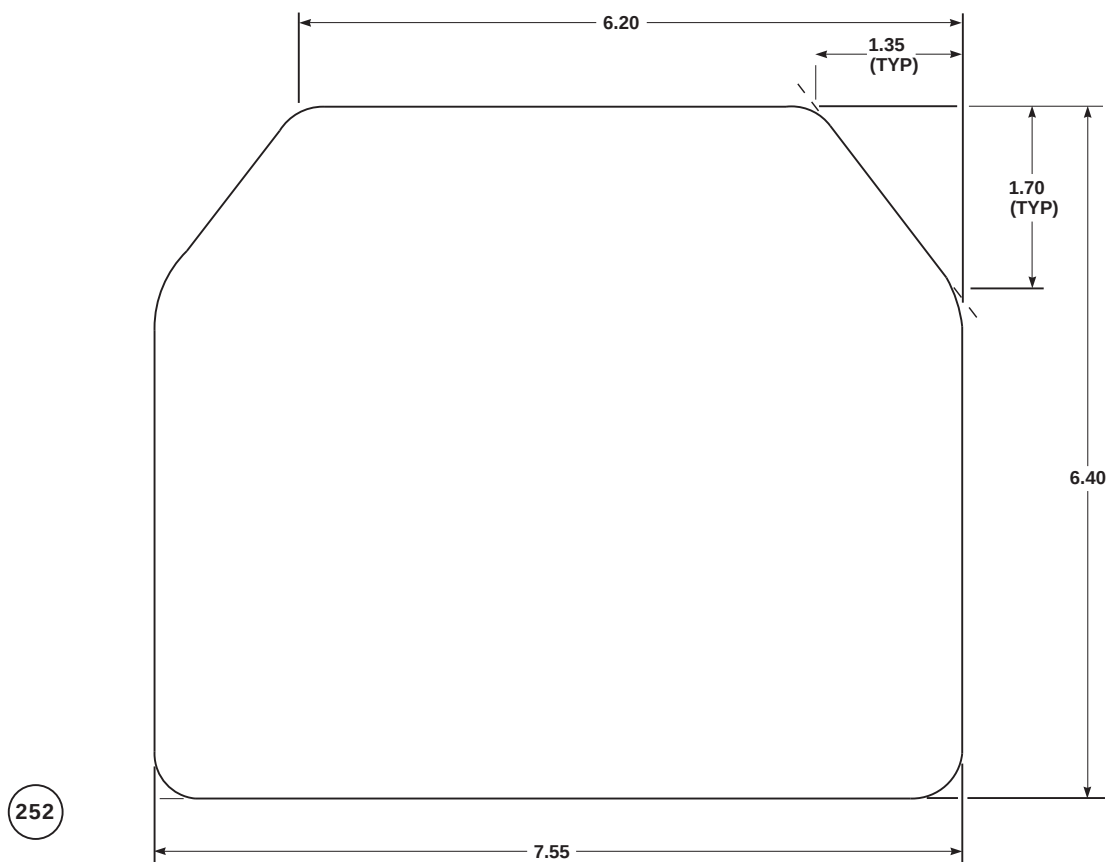


AK1770\_23  
SA

FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 23 OF 43)

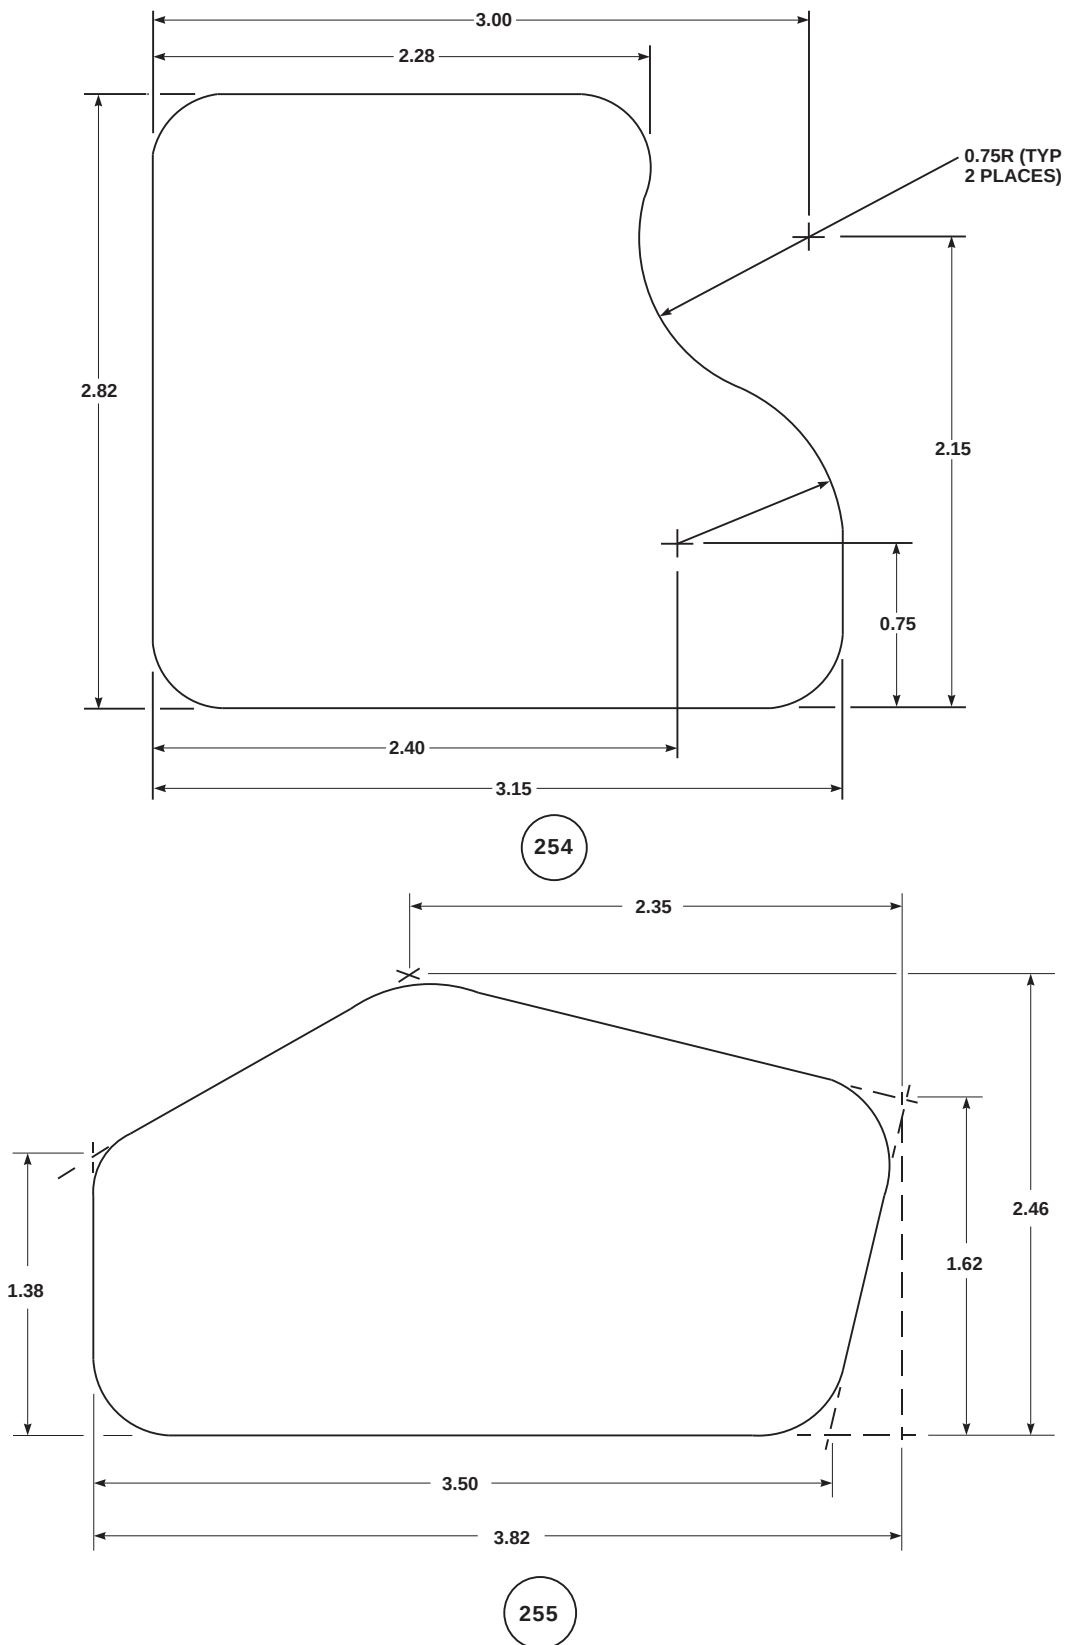


AK1770\_24  
SA

FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 24 OF 43)

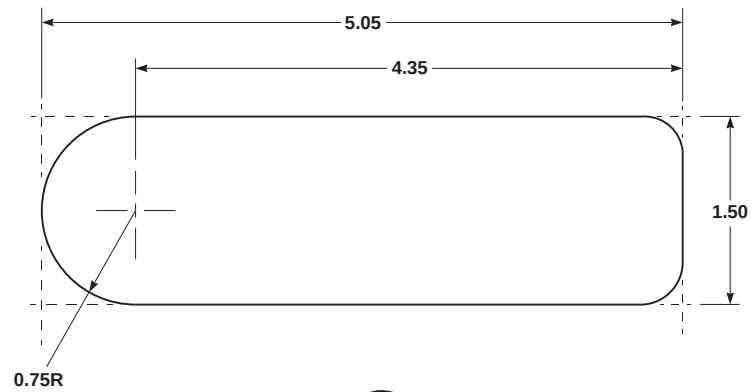

256

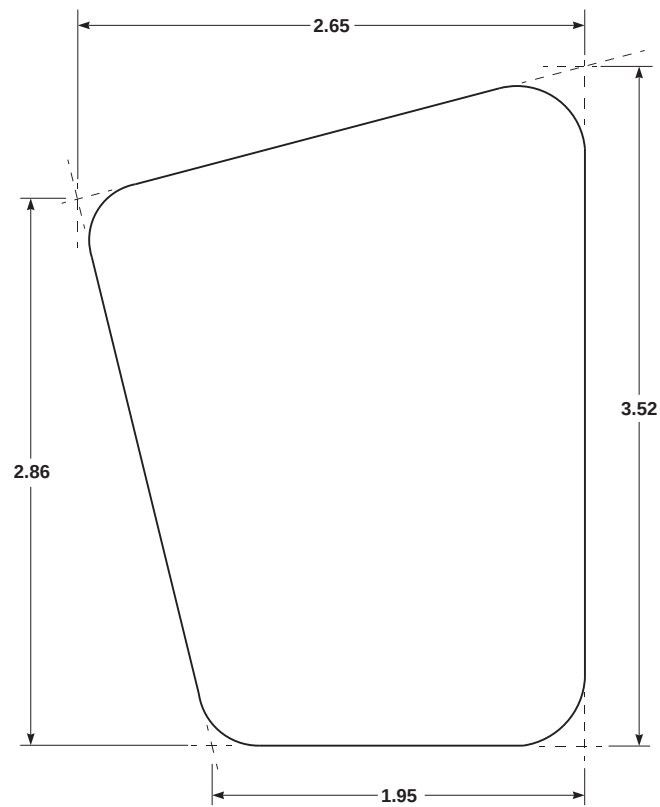

257



SHOWN

264

OPPOSITE


AK1770\_25  
SA

FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 25 OF 43)

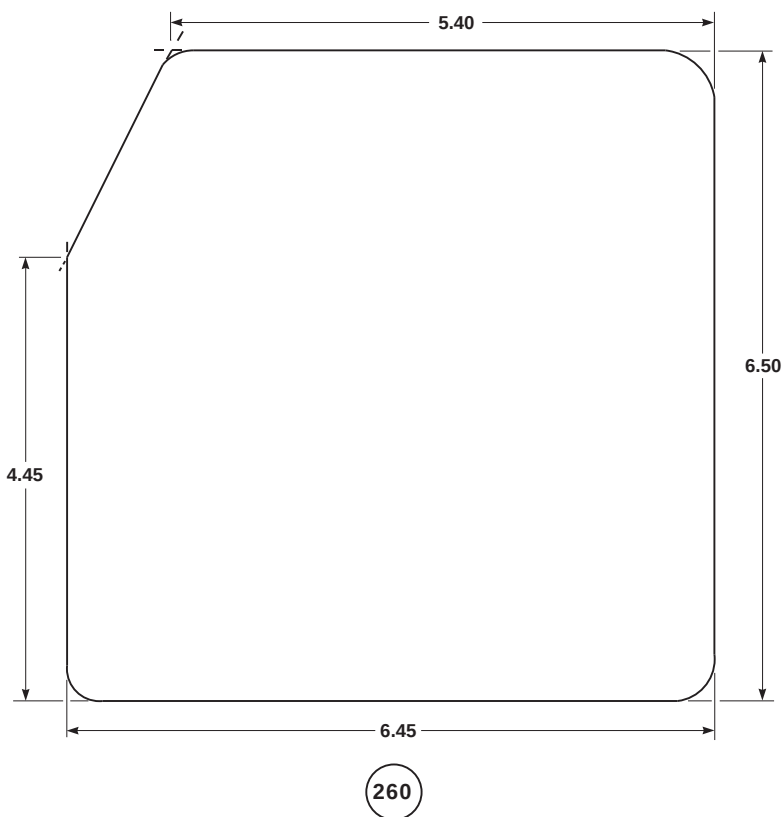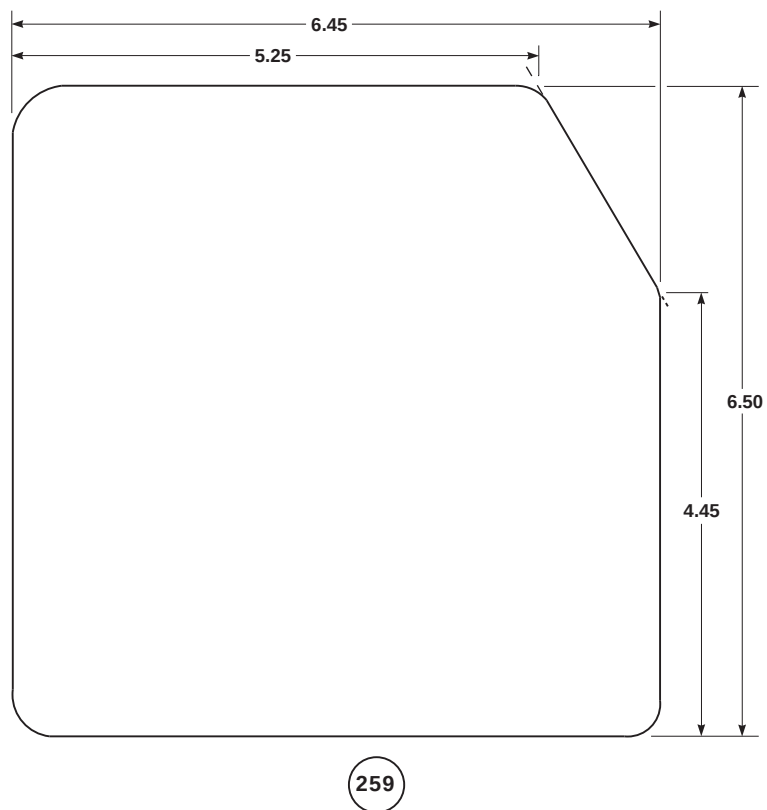

AK1770\_26  
SA

FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 26 OF 43)


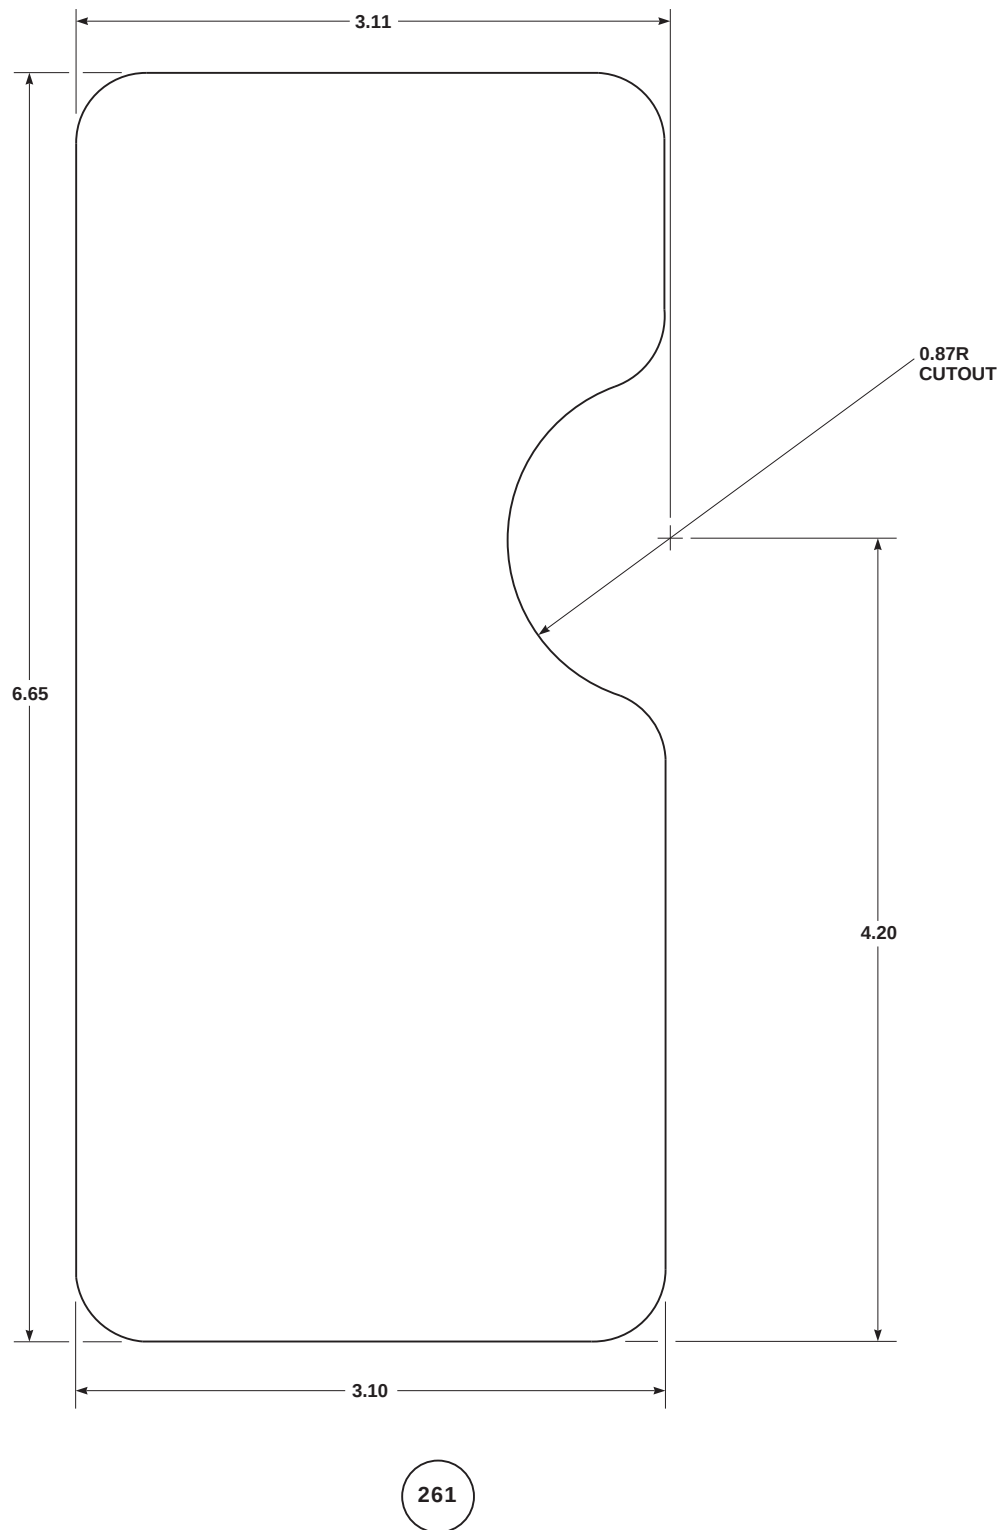


AK1770\_27  
SA

FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 27 OF 43)

Change 9

H-231

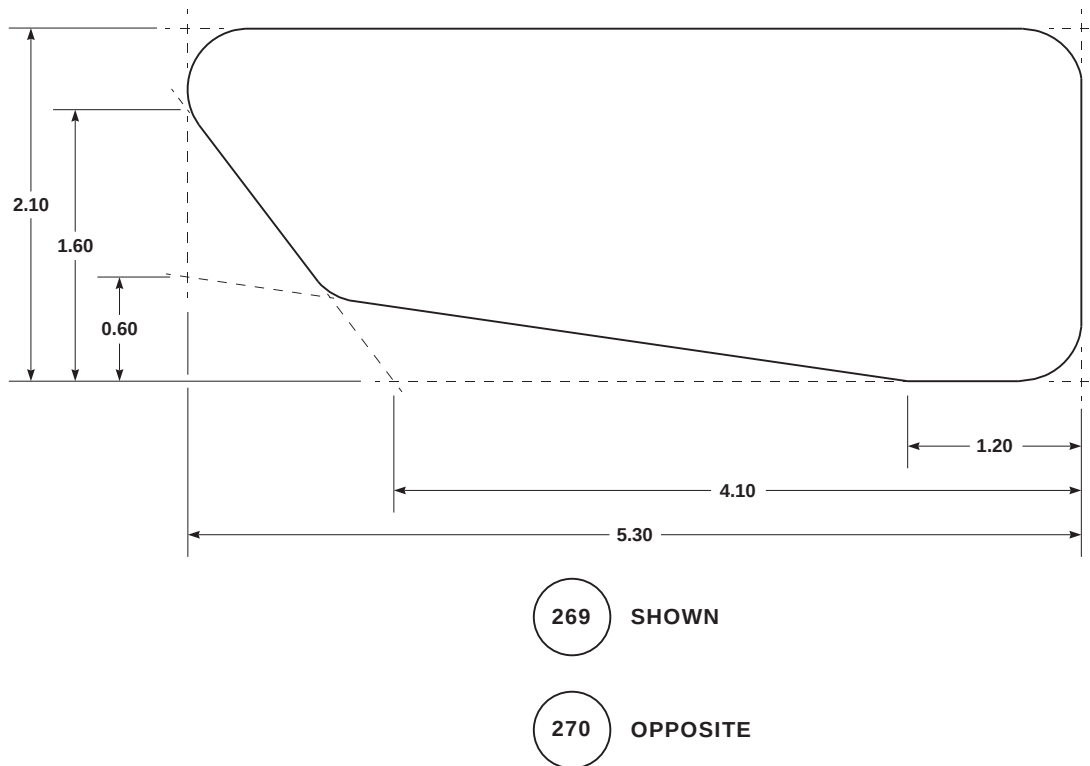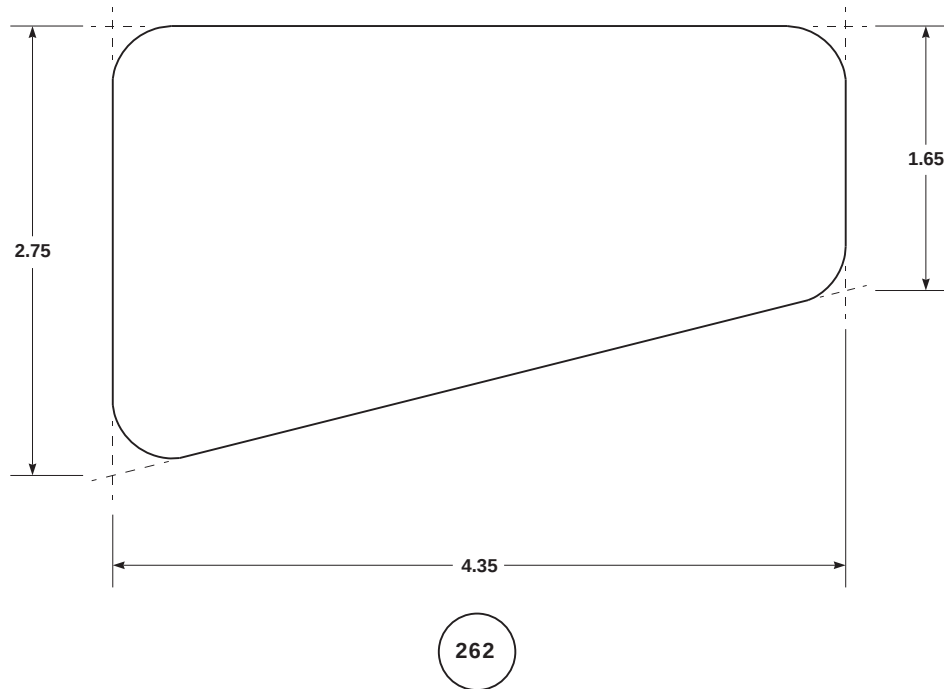

AK1770\_28  
SA

FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 28 OF 43)



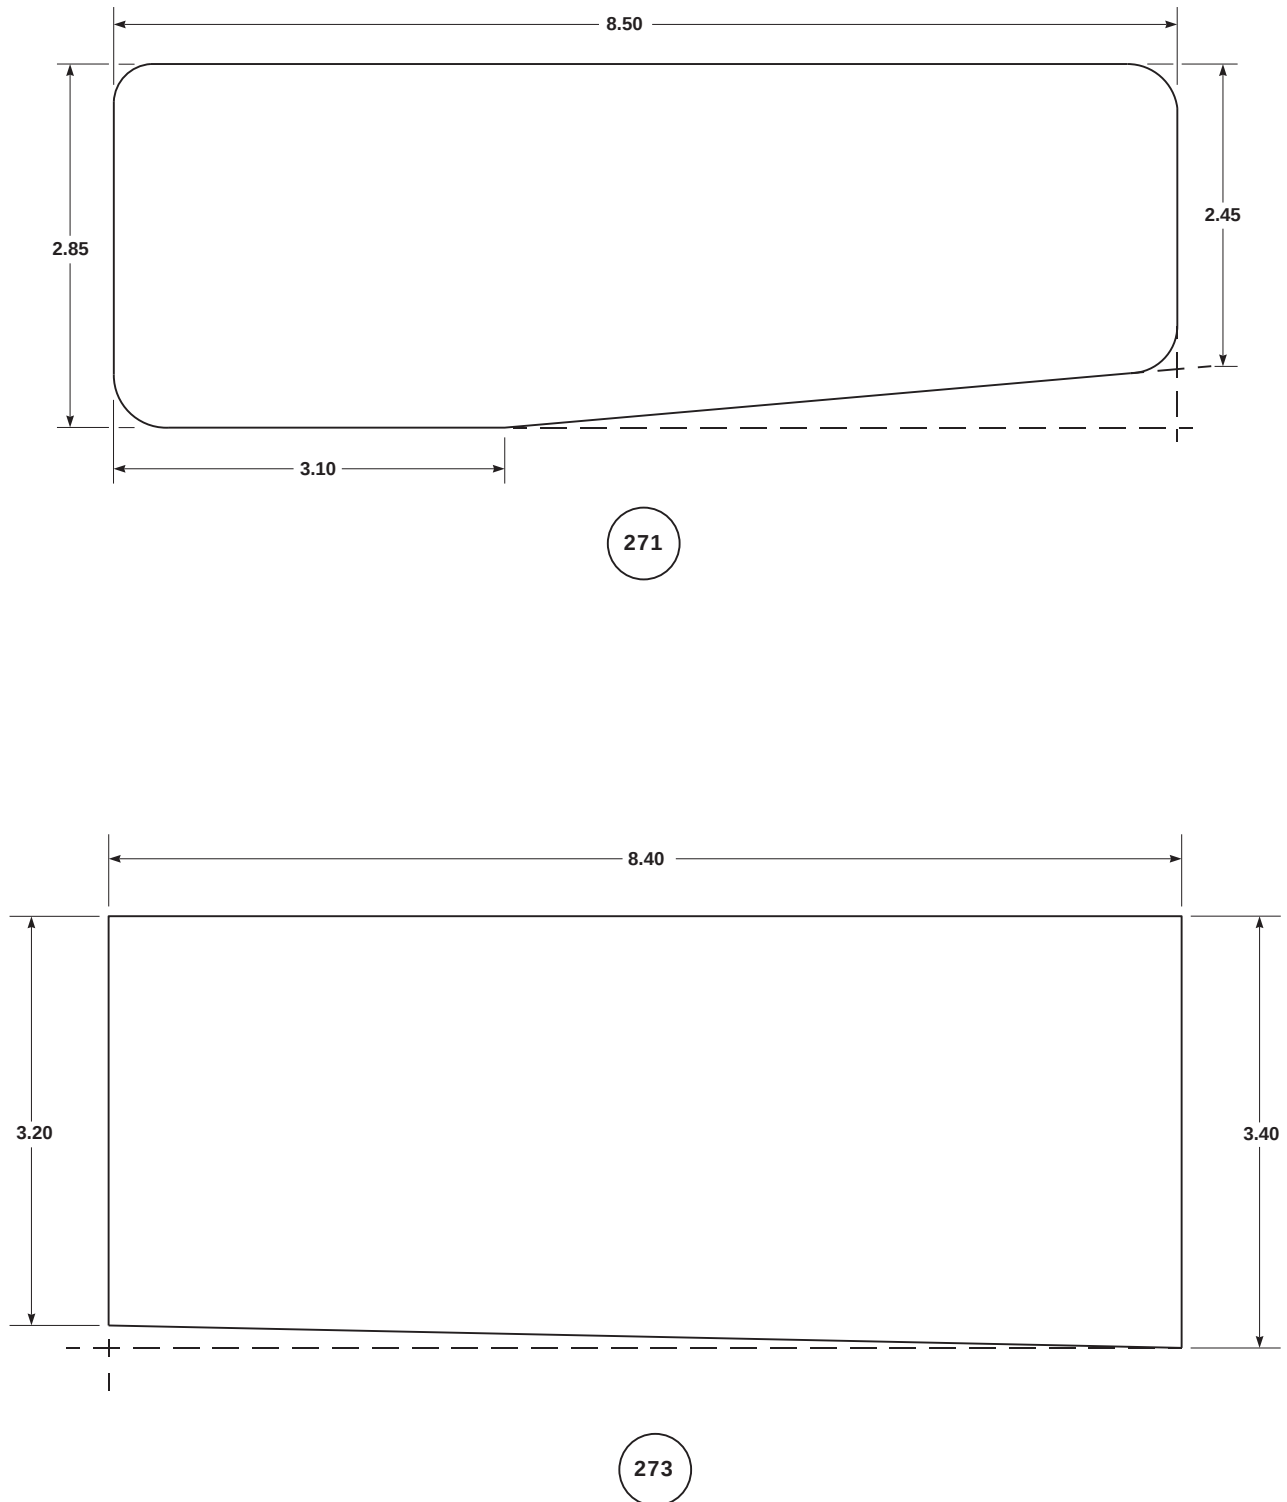


FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 29 OF 43)

AK1770\_29  
SA





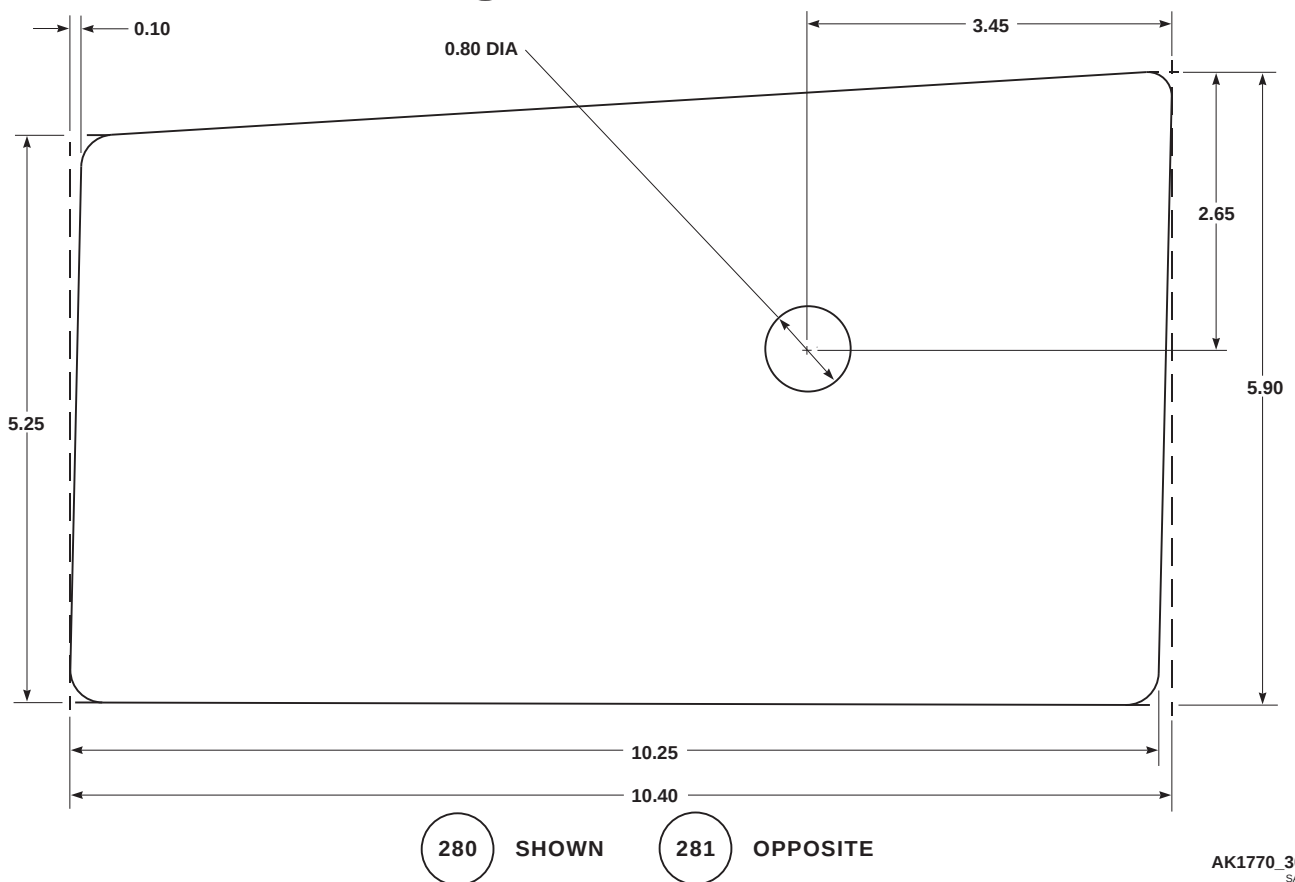


FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 30 OF 43)

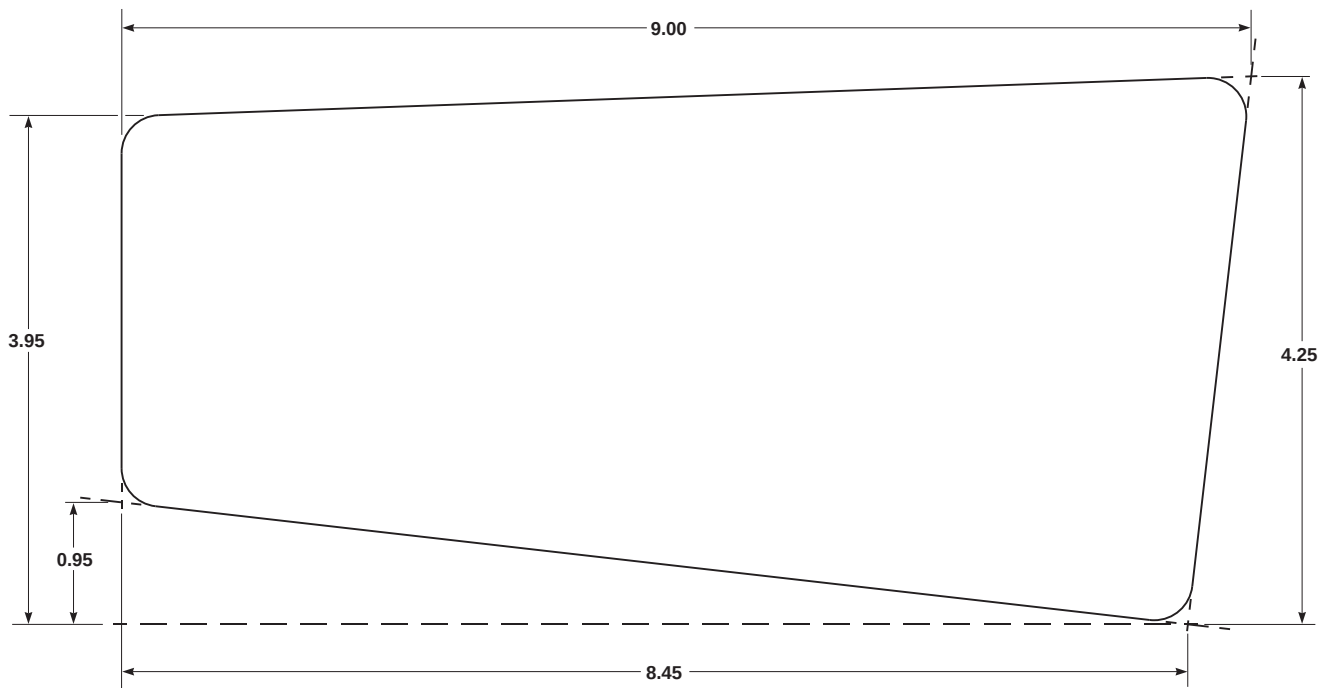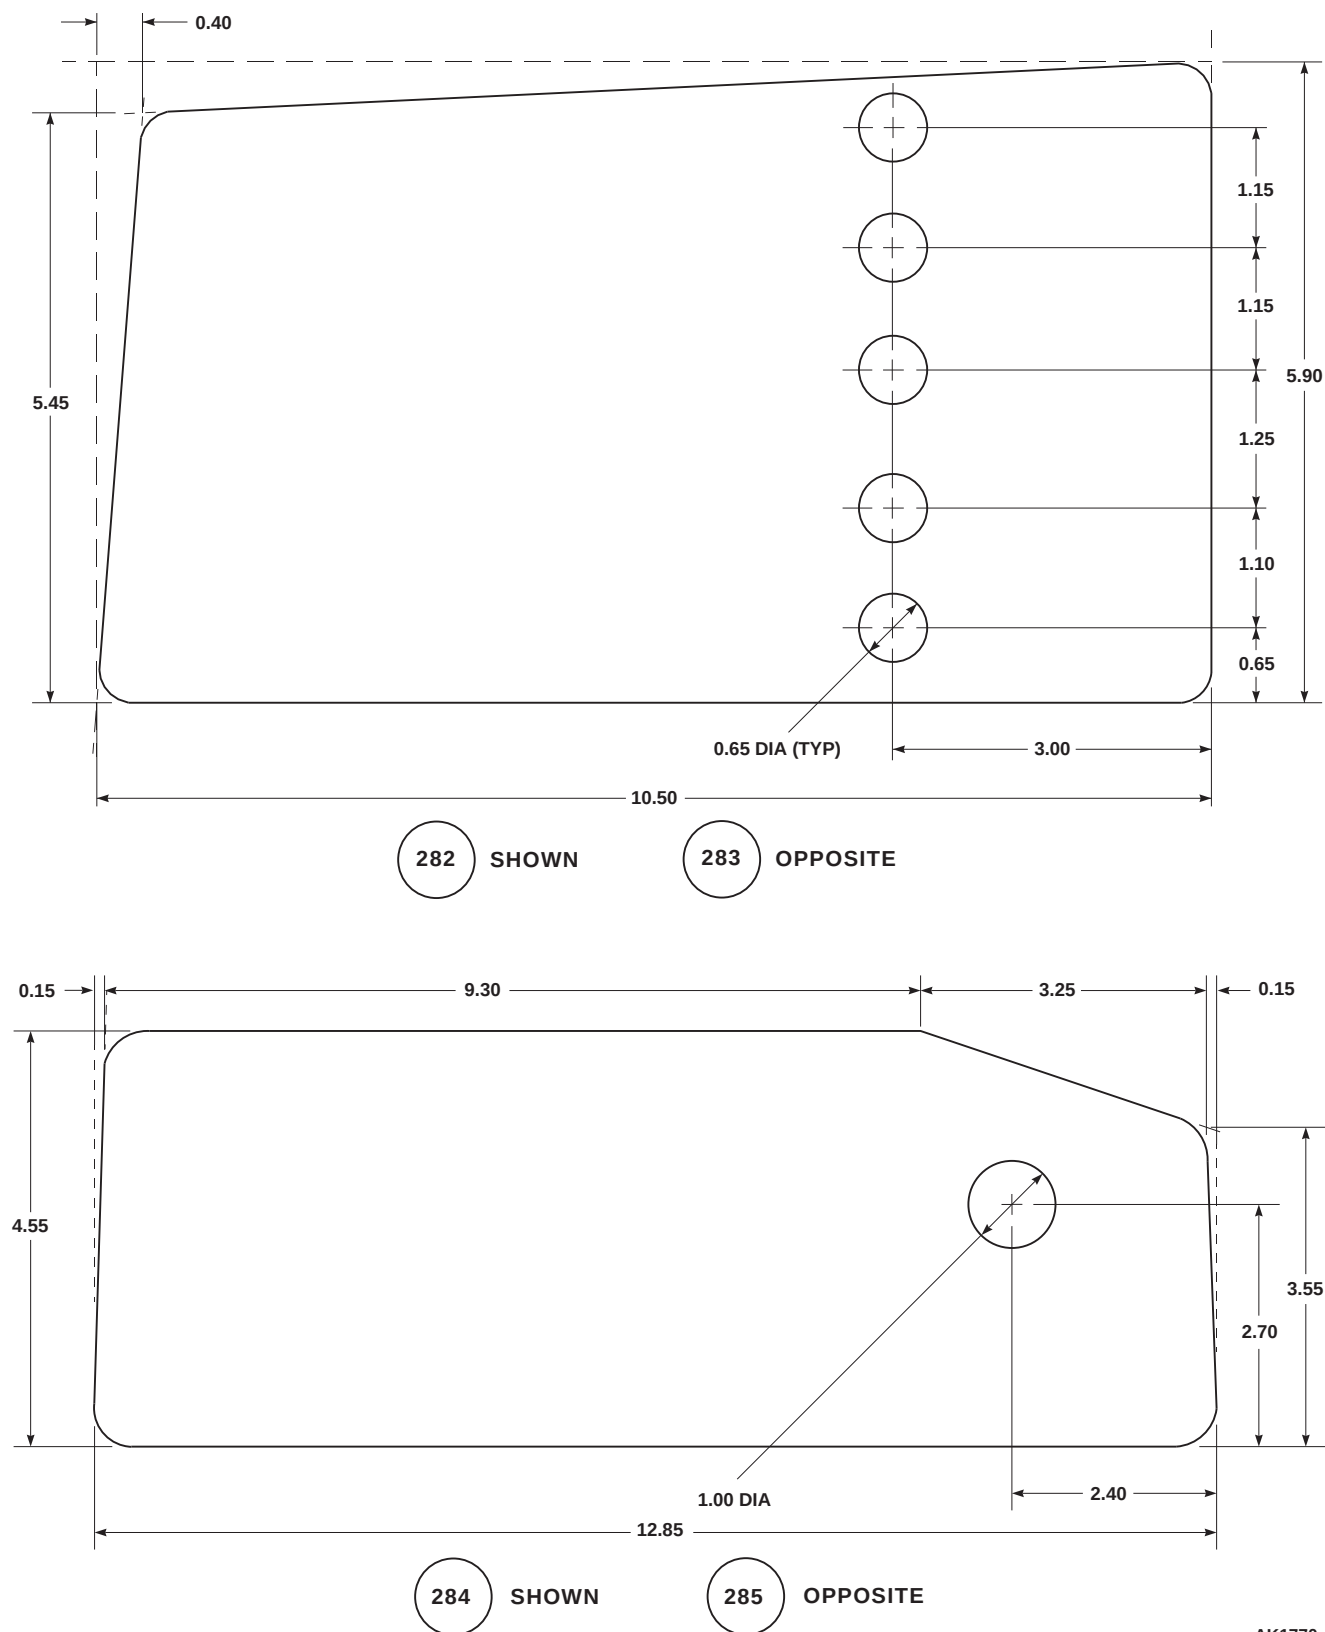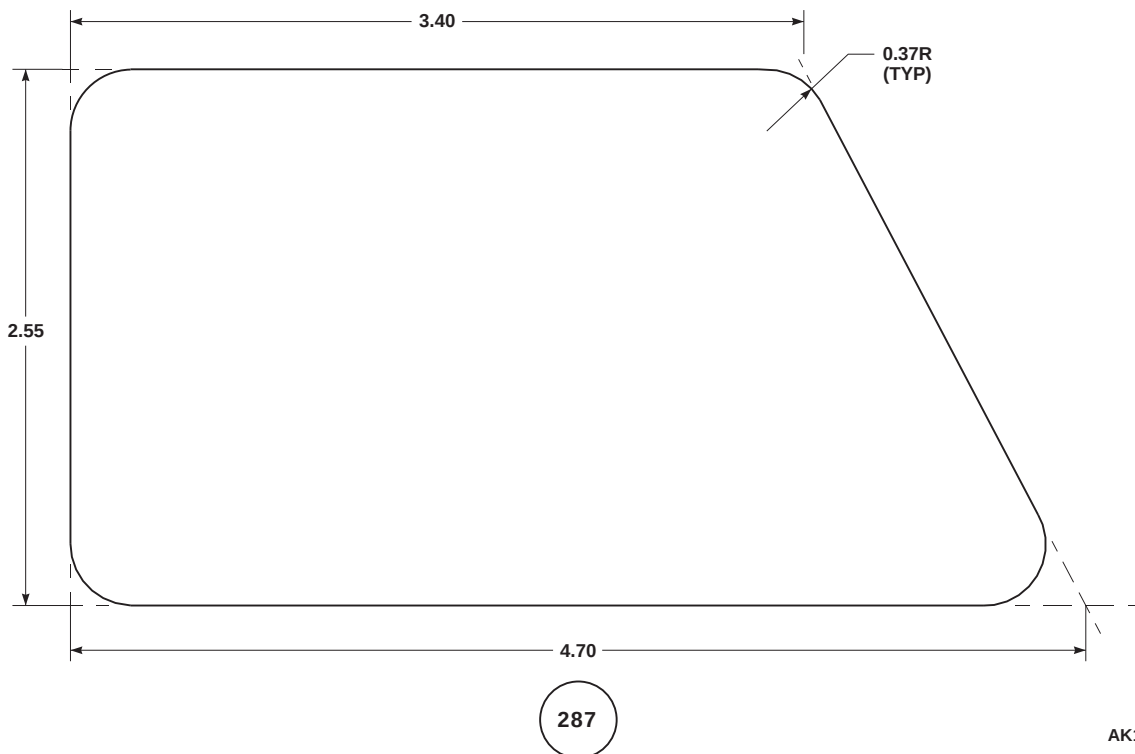


AK1770\_31  
SA

FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 31 OF 43)

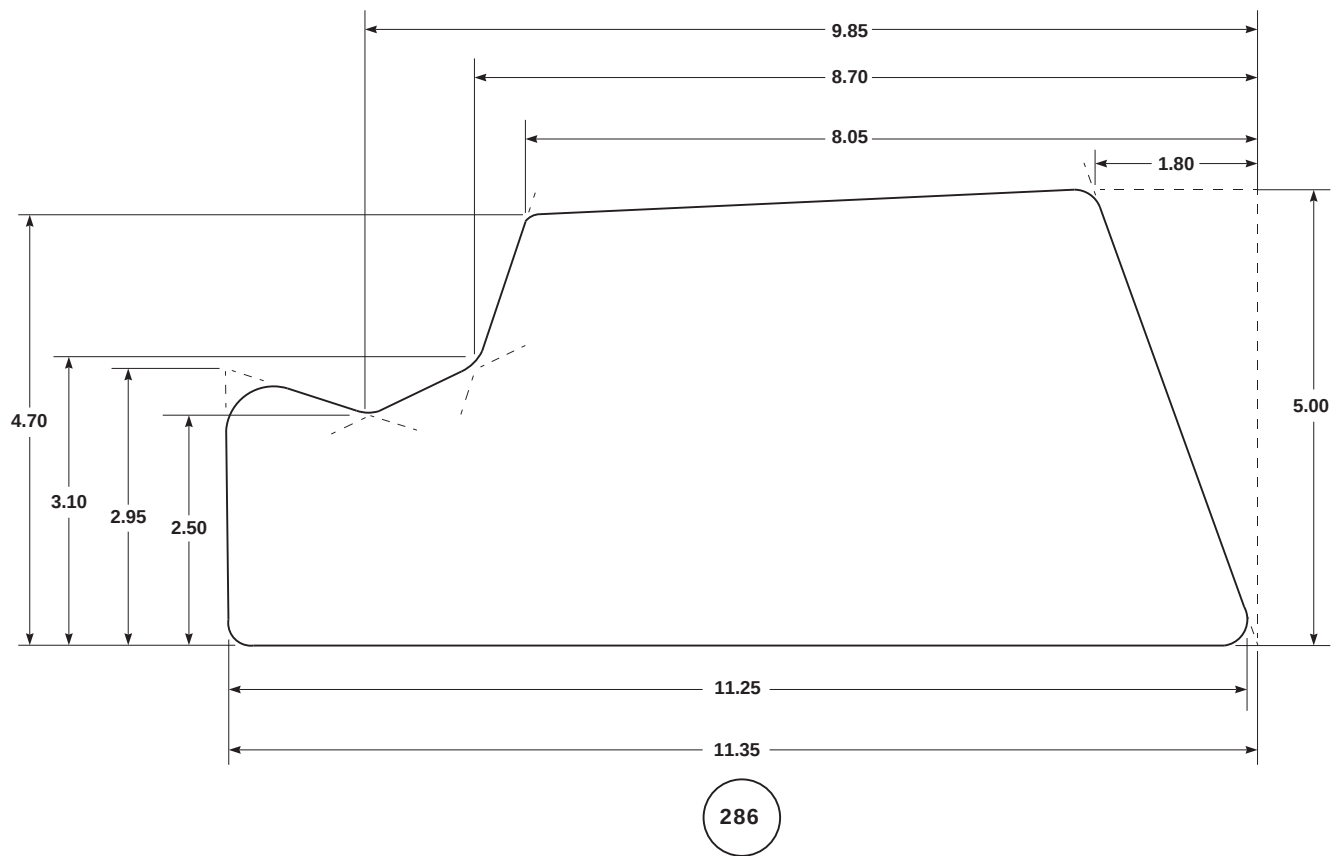


AK1770\_32  
SA

FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 32 OF 43)

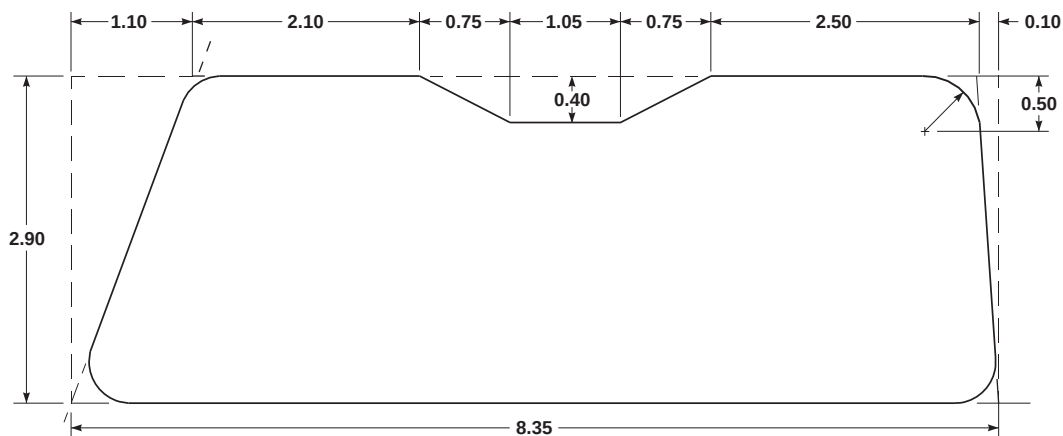


288

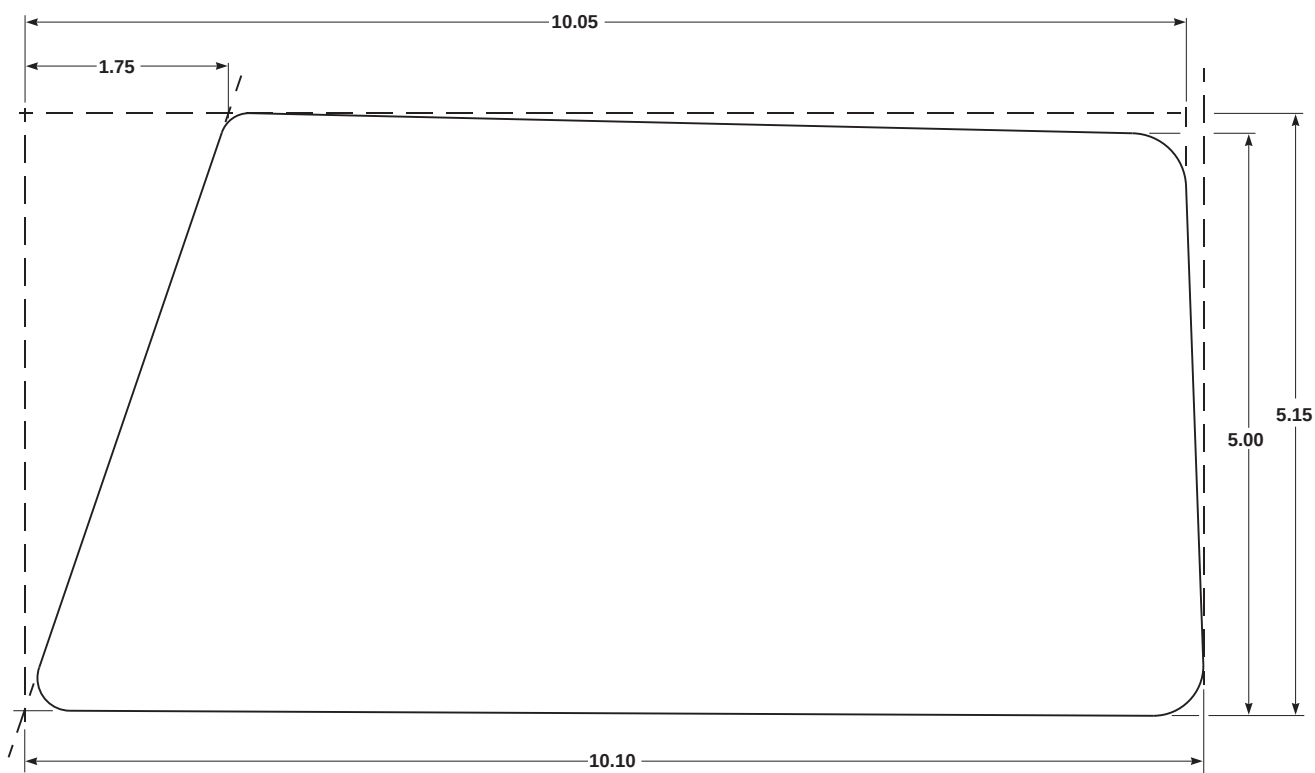

289



AK1770\_33  
SA

FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 33 OF 43)

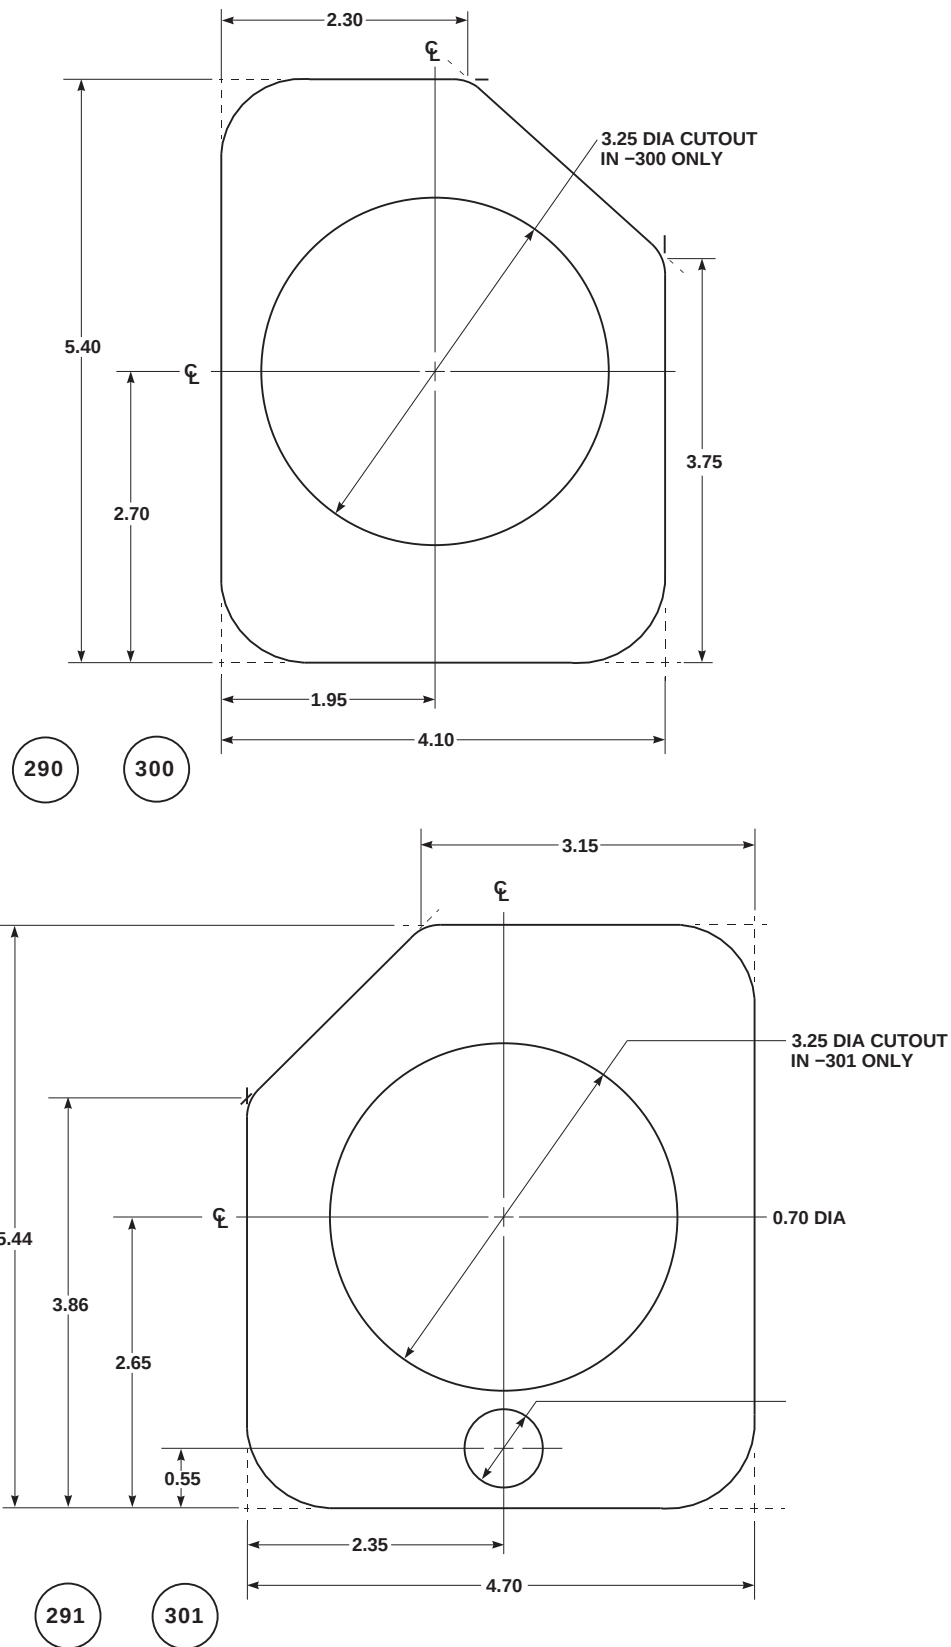


AK1770\_34  
SA

FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 34 OF 43)

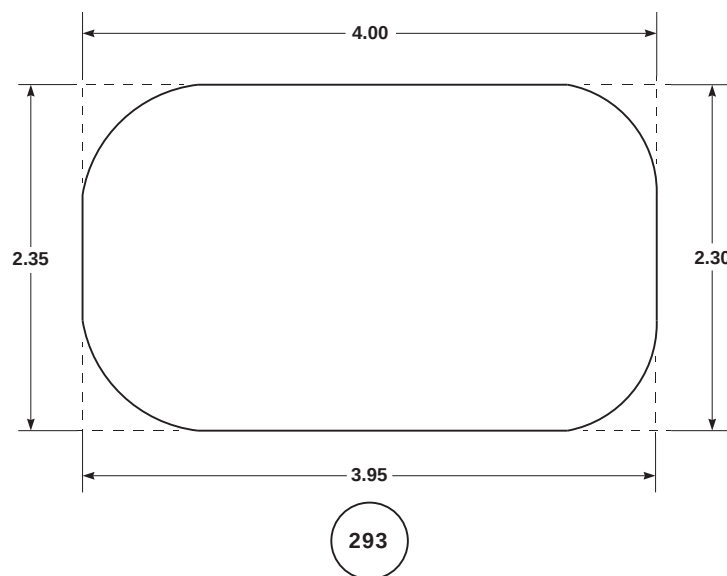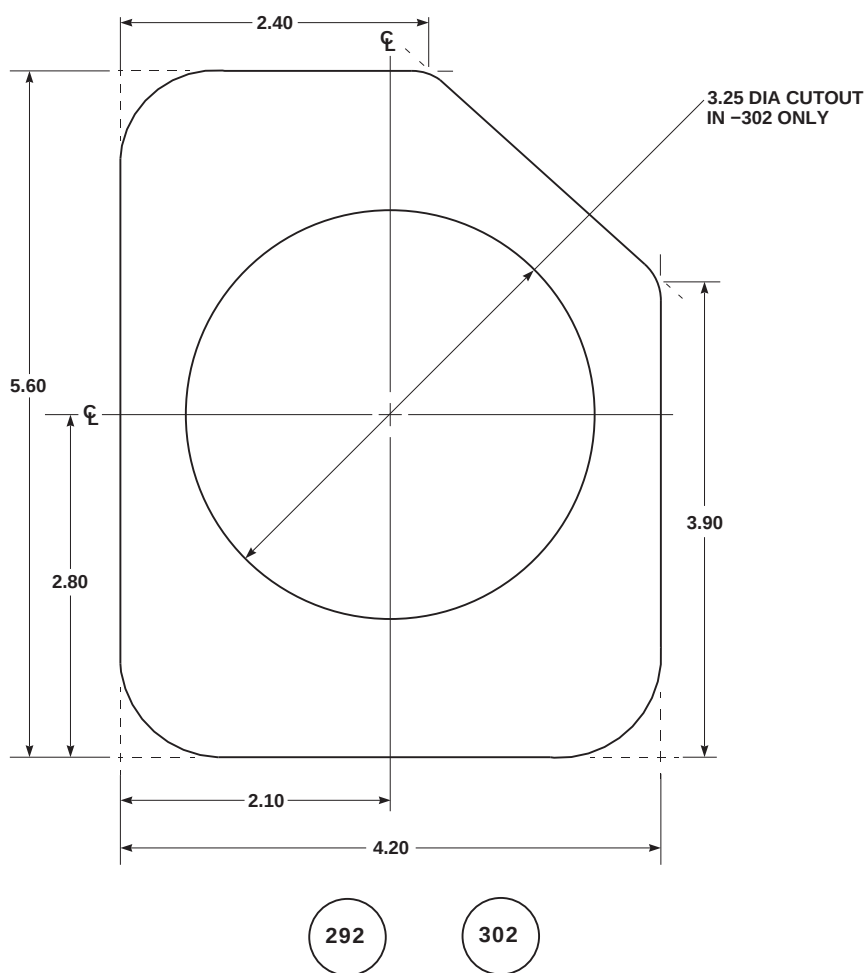

AK1770\_35  
SA



FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 35 OF 43)

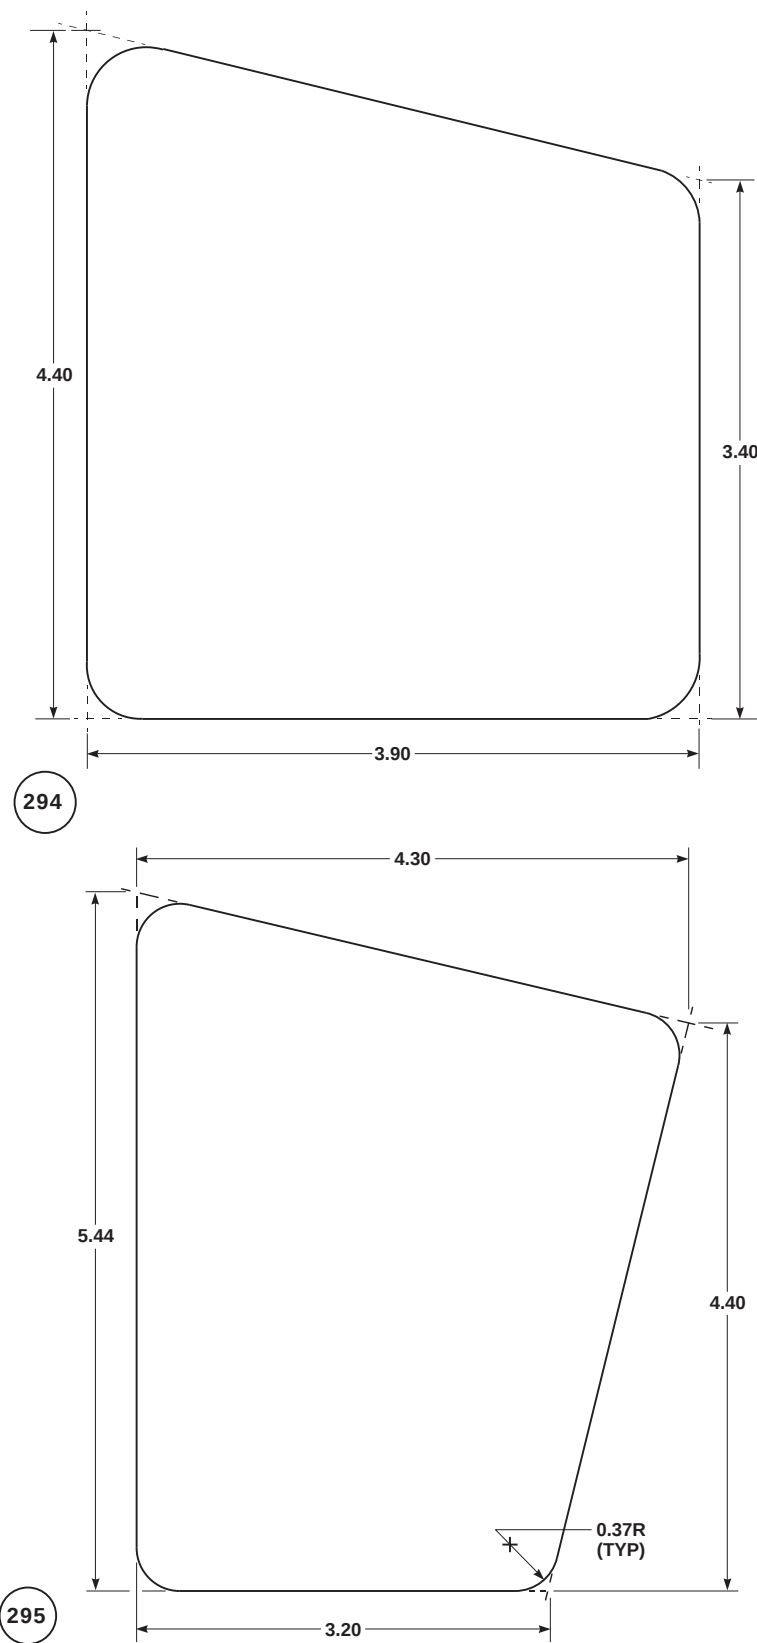

AK1770\_36  
SA


FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 36 OF 43)



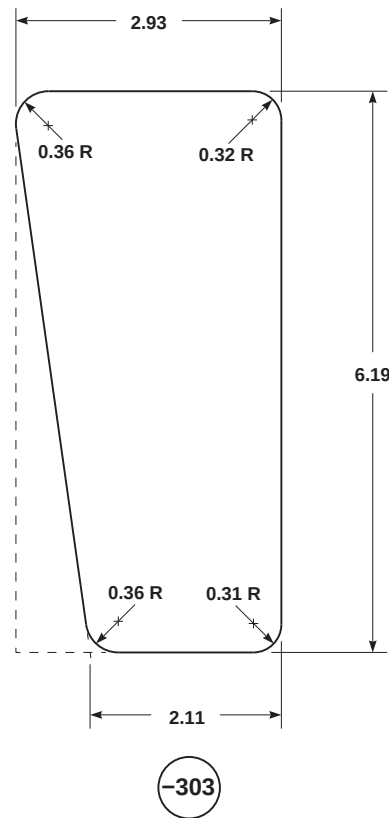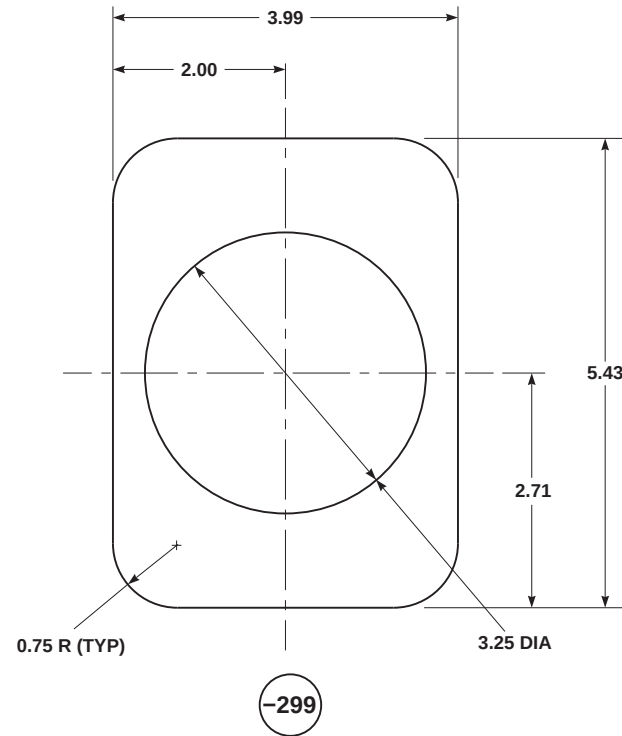


FA1837\_37  
SA

FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 37 OF 43)

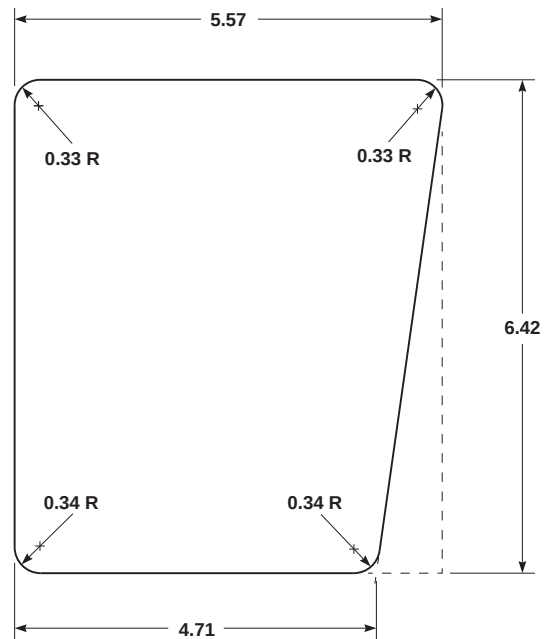


(-304)

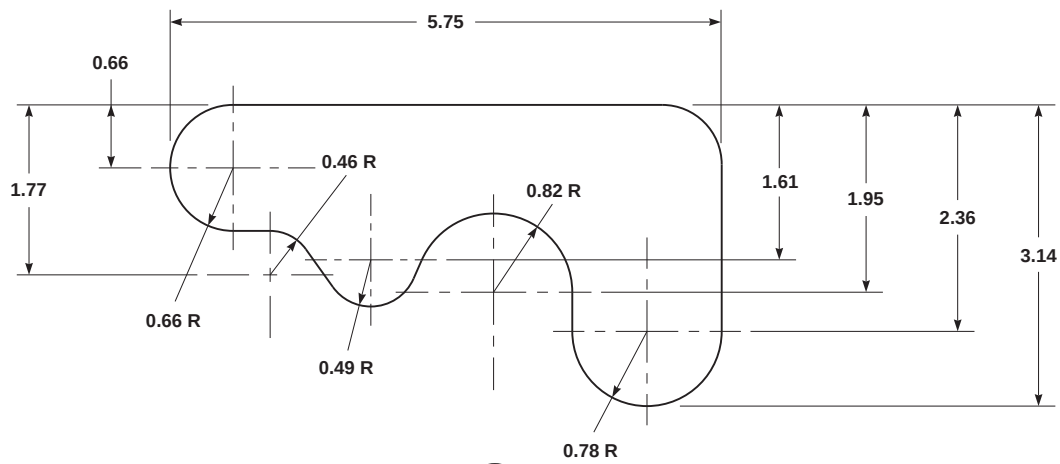

(-307) SHOWN


(-308) OPPOSITE

FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 38 OF 43)

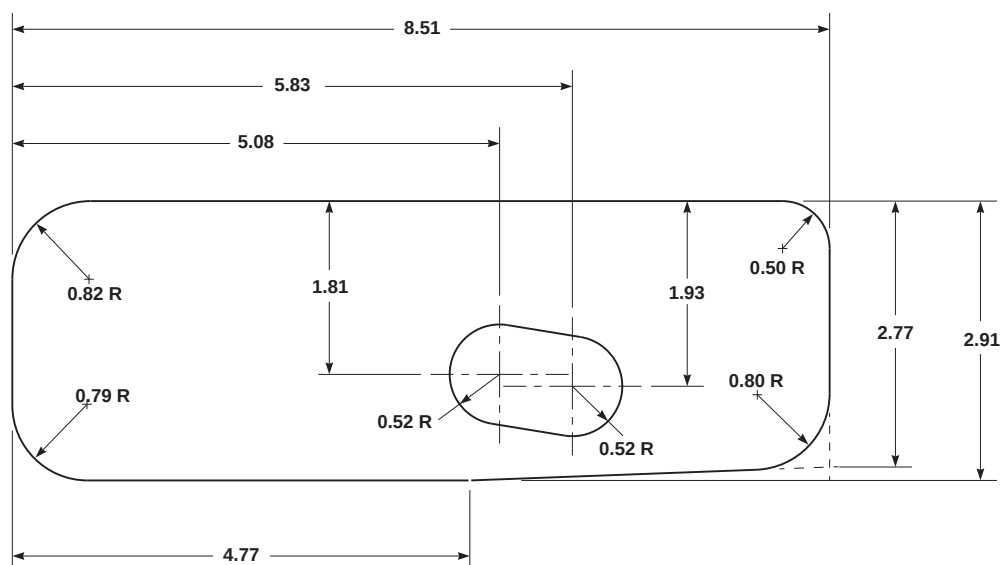

—309 SHOWN


–310 OPPOSITE

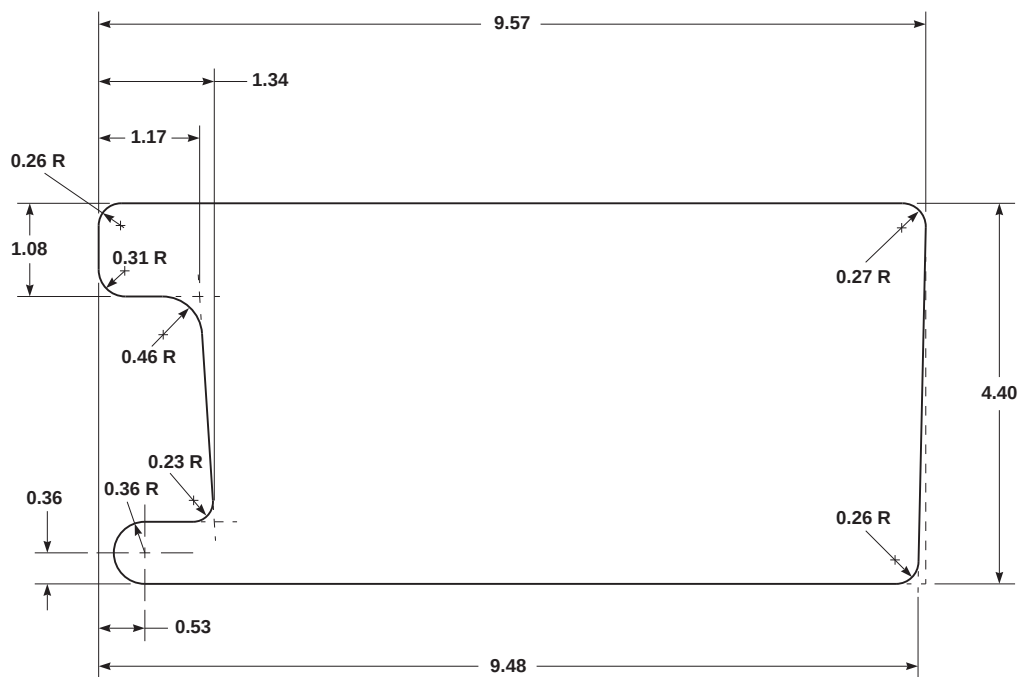


—319

FA1837\_39  
SA

**FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 39 OF 43)**

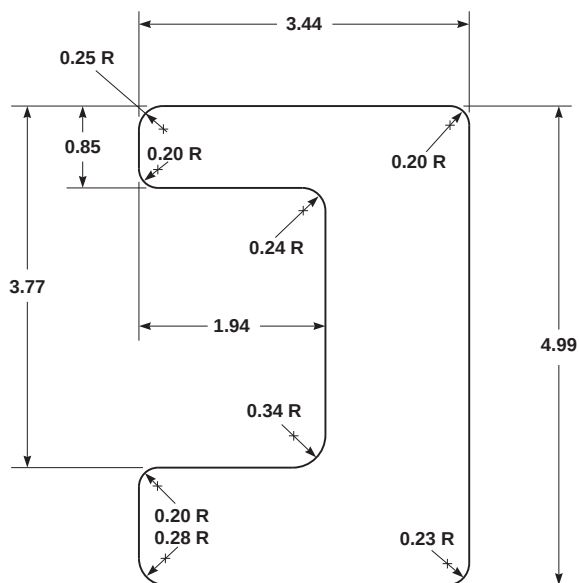



-320

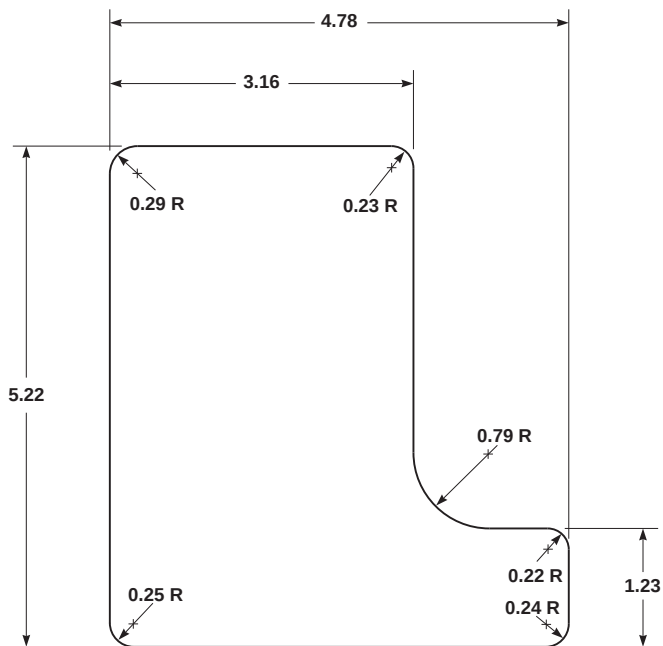

-321


FA1837\_40  
SA

FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 40 OF 43)

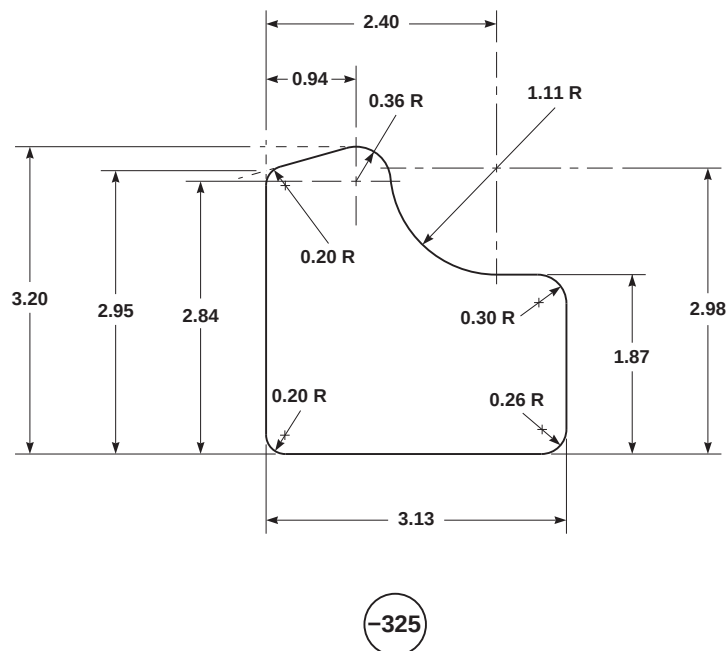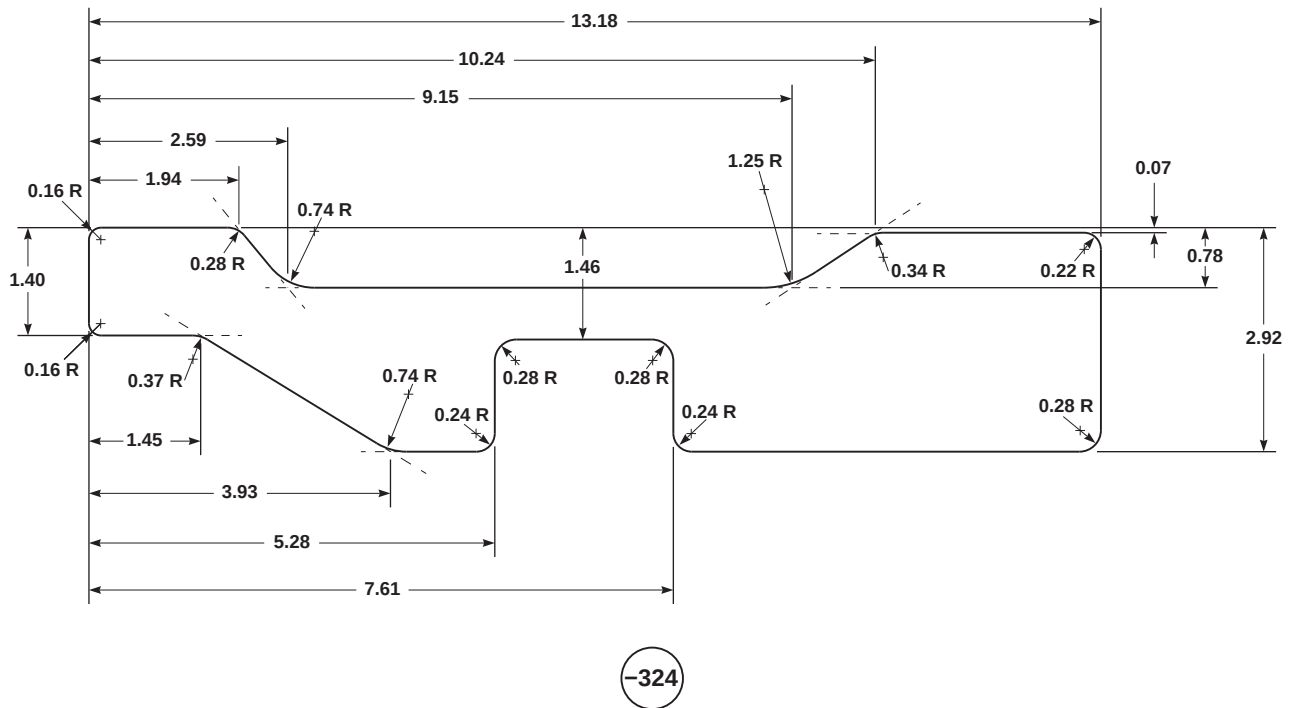


FA1837\_41  
SA

FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 41 OF 43)

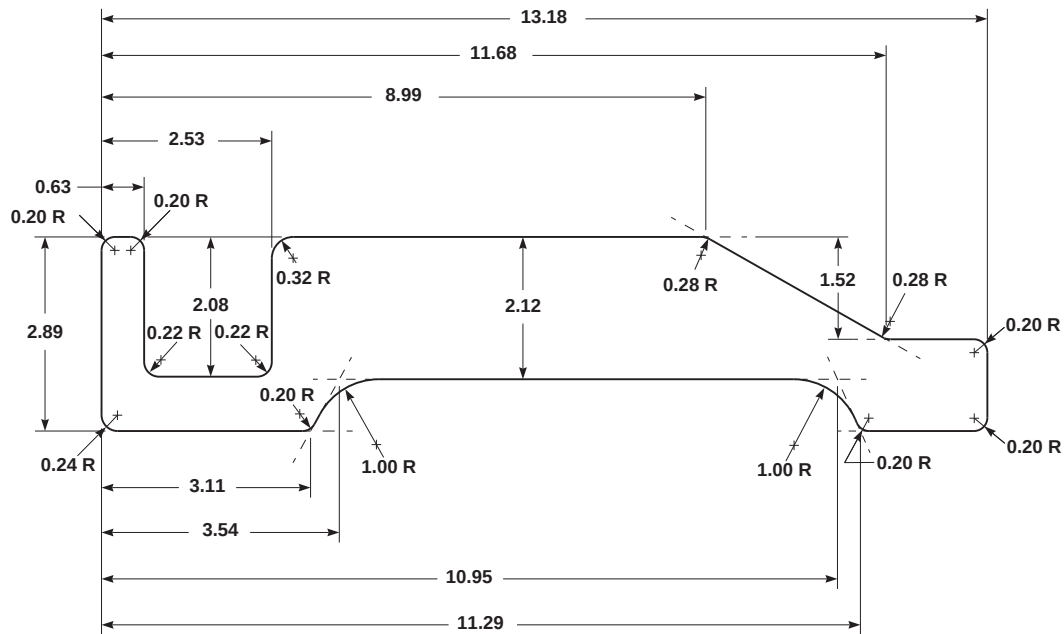

-326

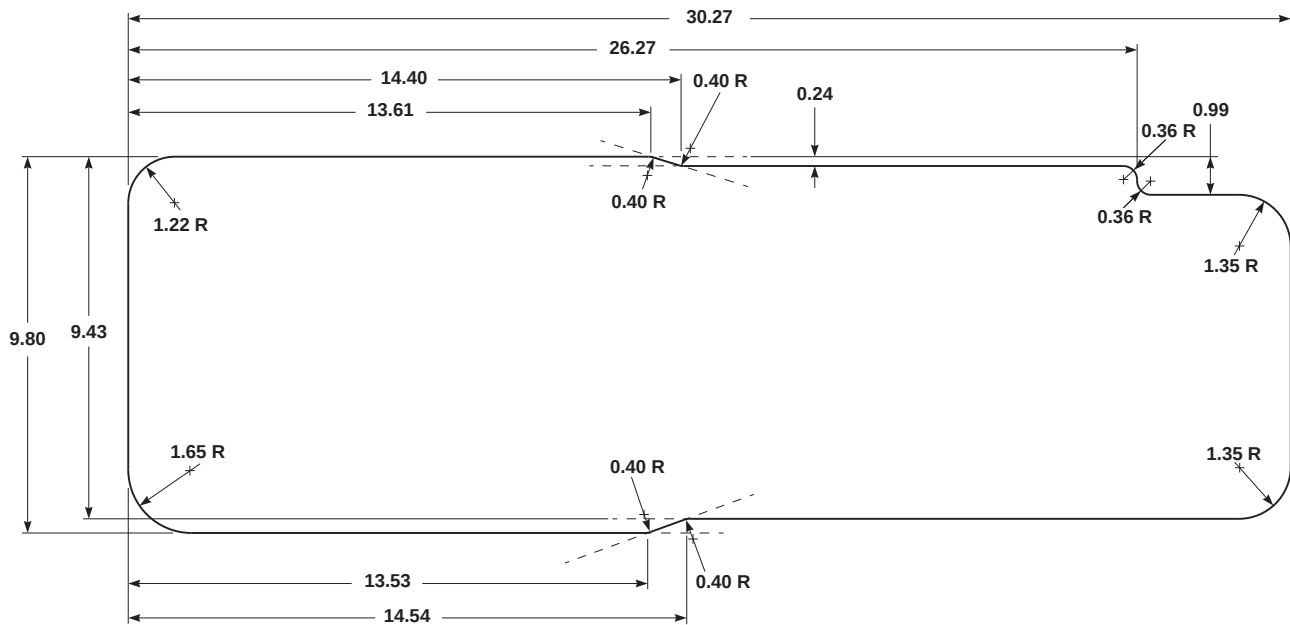

-333 SHOWN

-332 OPPOSITE


FA1837\_42  
SA

FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 42 OF 43)

**NOTES**

1. MAKE FROM DAMPING FOIL, SJ2017X, NSN 1560-01-184-1735.
2. ALL DIMENSIONS ARE IN INCHES.
3. CUT DAMPING FOIL TO RECTANGULAR DIMENSIONS.
4. MEASURE AND MARK FINAL DIMENSIONS ON FOIL.
5. TRIM TO REQUIRED SIZE. ROUND OFF CORNERS TO PREVENT DELAMINATION. MINIMUM RADIUS IS 0.28 INCH.
6. IDENTIFY PARTS PER MIL-STD-130.
7. DASH NUMBERS SHOWN ARE TAKEN FROM SIKORSKY DRAWING, NUMBER 70500-02066, DAMPING INSTL-SOUND-ABSORBING.

FA1837\_43  
SA**FIGURE H-131. FOIL PANEL UNUSUAL CONFIGURATION (SHEET 43 OF 43)**

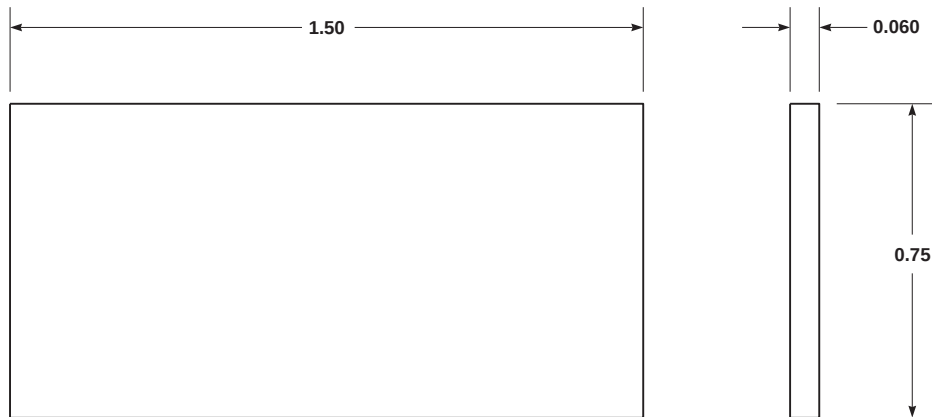

**NOTES**

1. MAKE FROM 0.060-INCH-THICK, CLASS 2, GRADE 60 RUBBER, MIL-R-6855, NSN 9320-01-157-9070.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GREEN INK, TT-I-1795. USE 1/16 - 1/8-INCH HIGH SANS SERIF CHARACTERS.


EXAMPLE: P / N 70216-02401-107 3Q 86  
 PART NUMBER THIRD QUARTER 1986

PART NUMBER: 70212-02139-106

AK1771  
SA

**FIGURE H-132. UPPER FUSELAGE GASKET**

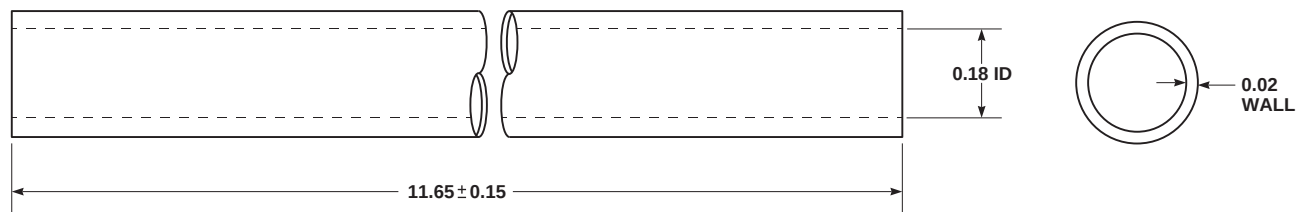


**NOTES**

1. CUT TUBING TO LENGTH PER FIGURE, USING MS23053 / 5-105-C, NSN 5970-01-132-9963 MATERIAL.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 2652559-1

AK1772  
SA**FIGURE H-133. CHAIN ASSEMBLY TUBING**

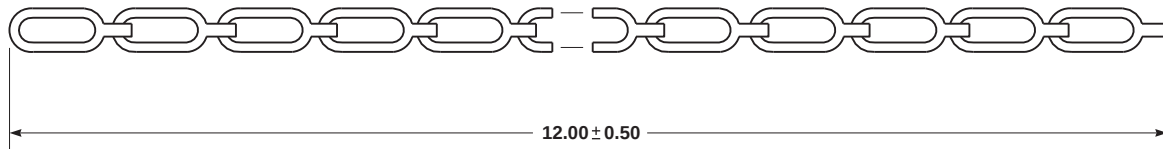


**NOTES**

1. MAKE FROM NO. 00 STEEL WELDLESS SAFETY CHAIN, RR-C-271, TYPE II, CLASS 2, FSCM 81348.
2. ALL DIMENSIONS ARE IN INCHES.
3. CUT CHAIN TO REQUIRED LENGTH PER FIGURE.
4. IDENTIFY PARTS PER MIL-STD-130.


PART NUMBER: 1427-566558

AK1773  
SA

**FIGURE H-134. SAFETY CHAIN**

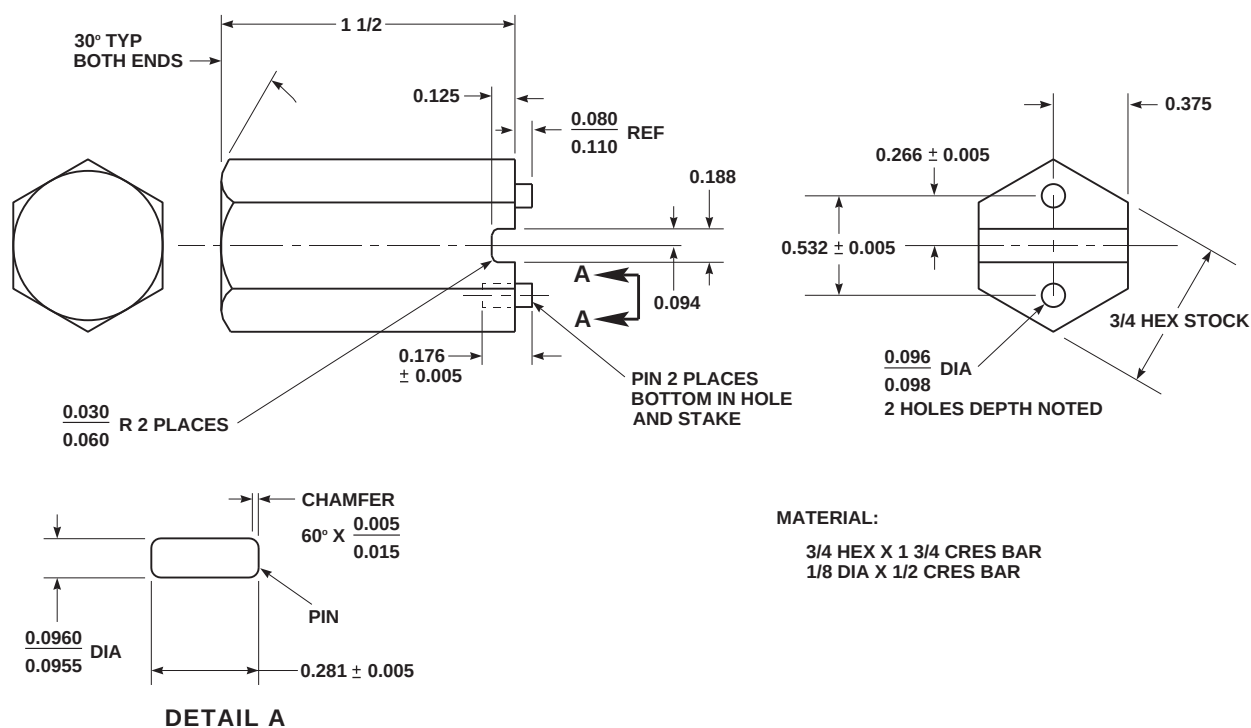


## BREECH CAP PLUG ASSEMBLY WRENCH

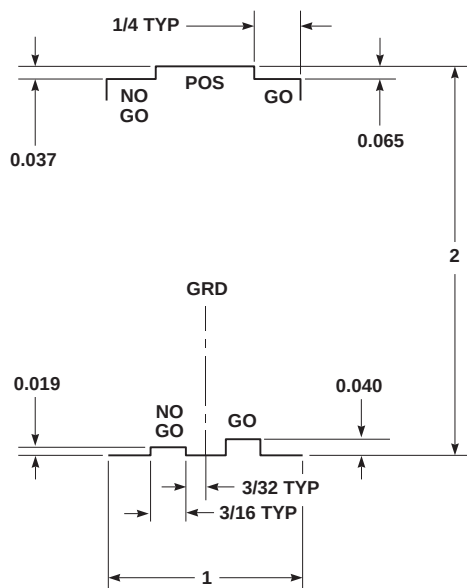

## GO / NO-GO BREECH CAP GAGE


FN1907  
SA

FIGURE H-135. BREECH CAP PLUG ASSEMBLY WRENCH AND GO/NO-GO BREECH CAP GAGE

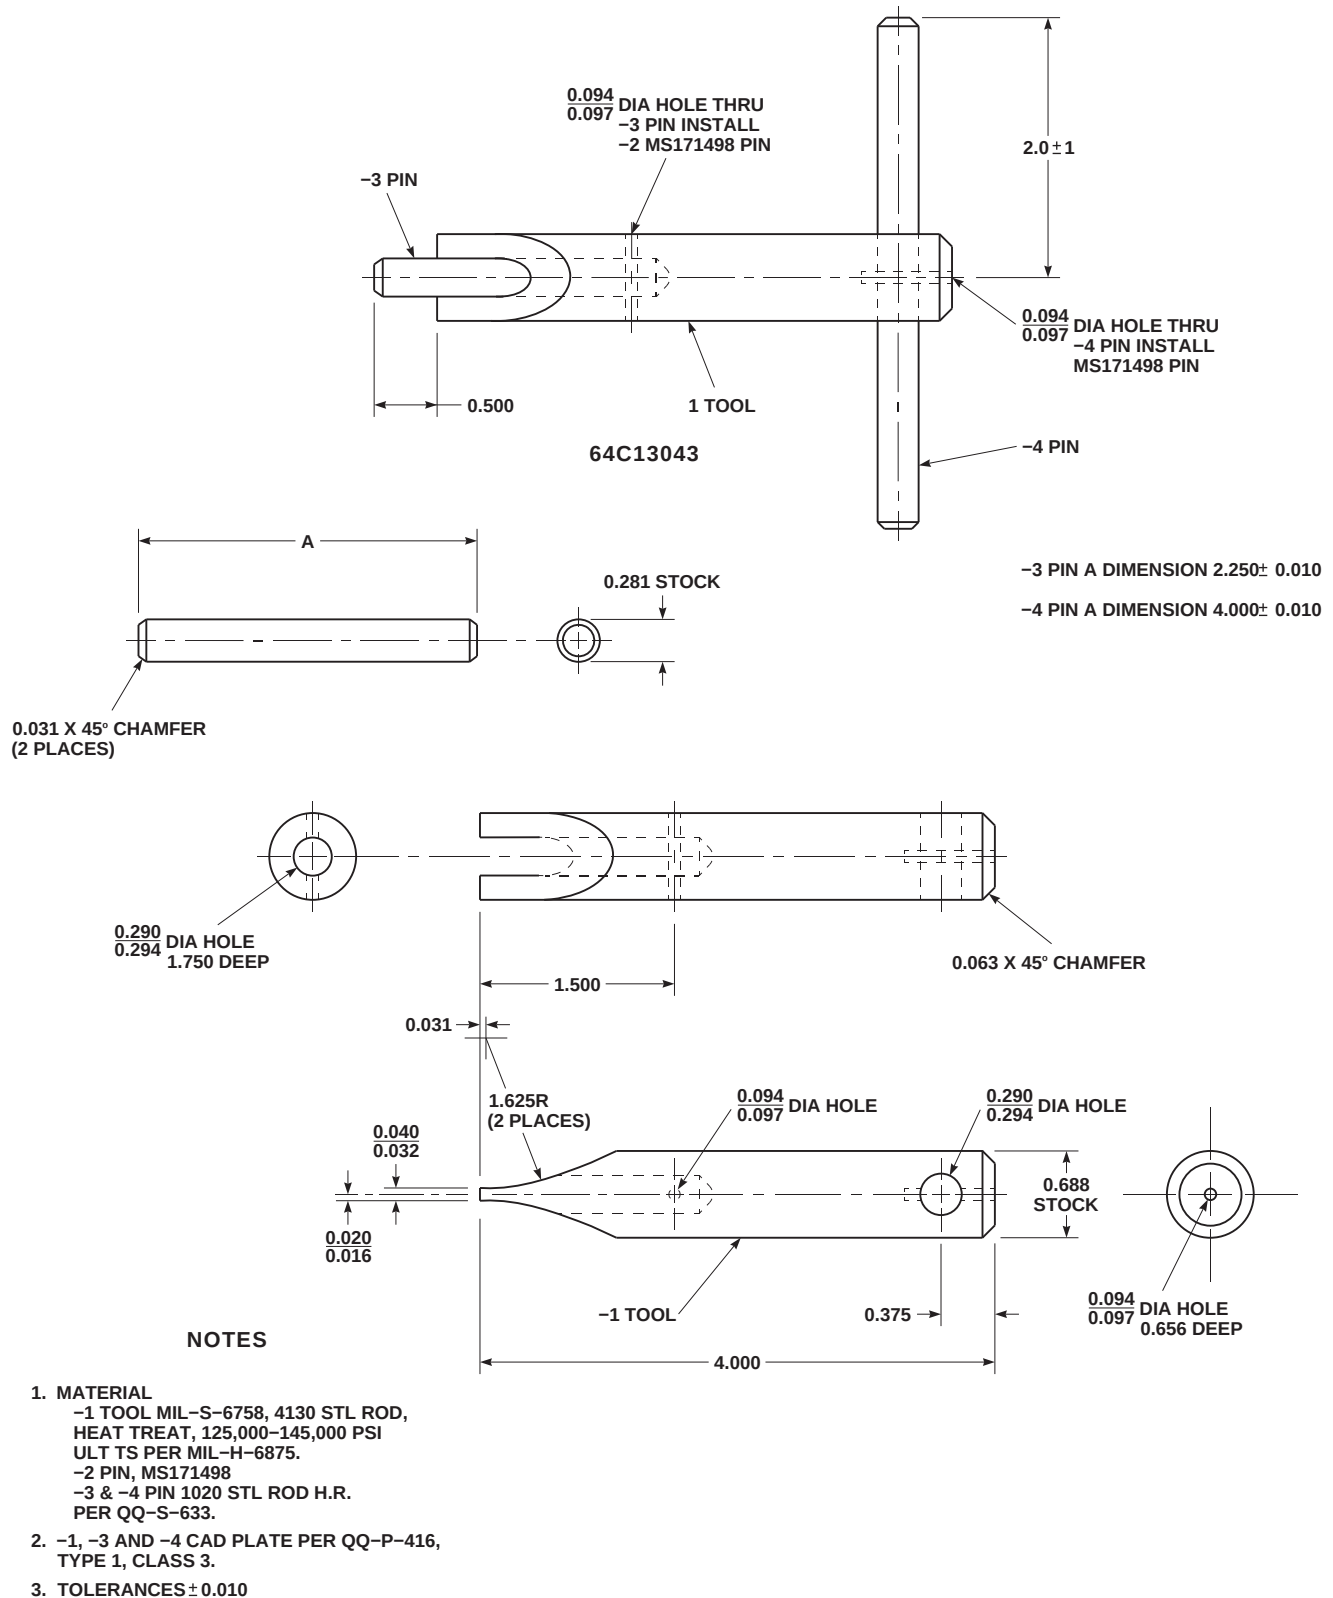

FK0328  
SA

FIGURE H-136. PISTON GUIDE REMOVAL TOOL

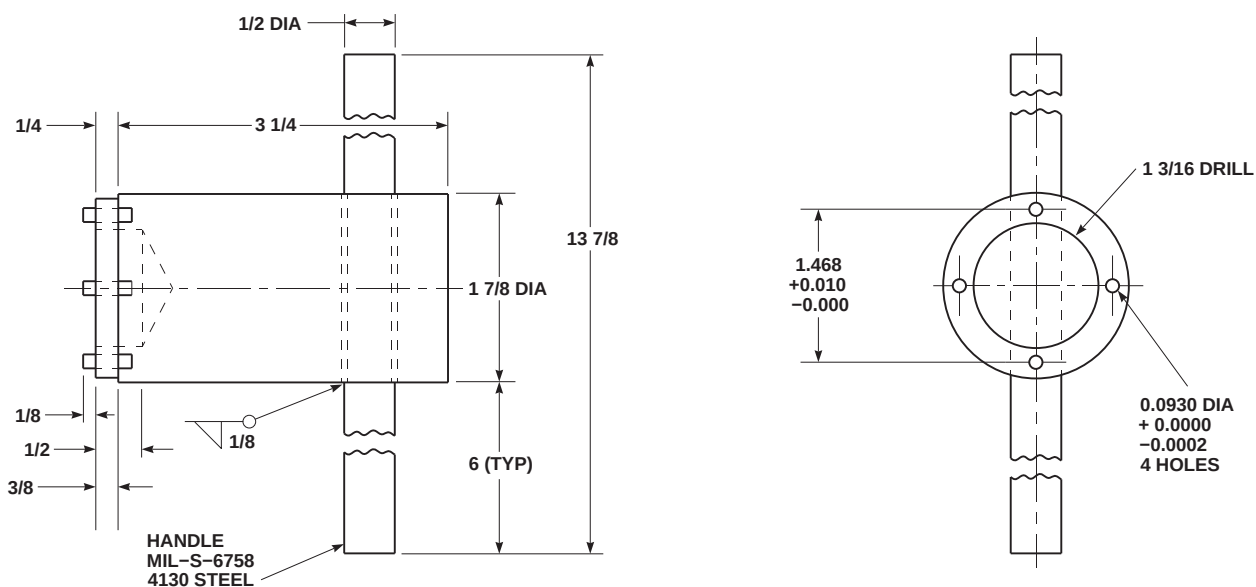

#### NOTES

1. TOLERANCES  
FRACTIONS  $\pm 1/64$   
DECIMALS  $.XX \pm 0.03$   
125  $.XXX \pm 0.010$   
✓ ALL MACHINED SURFACES  
REMOVE BURRS & BREAK SHARP  
EDGES 0.005 - 0.015
2. TREATMENT: HEAT TREAT BARREL  
AND HANDLE TO C-35 CONDITION  
PER MIL-H-6875.
3. FINISH: MIL-S-5002, CAD PLATE  
QQ-P-416 TYPE 1, CLASS C.




FK0331  
SA

FIGURE H-137. PISTON PLUG REMOVAL TOOL



FA2141  
SA

**FIGURE H-138. ESSS WRENCH**

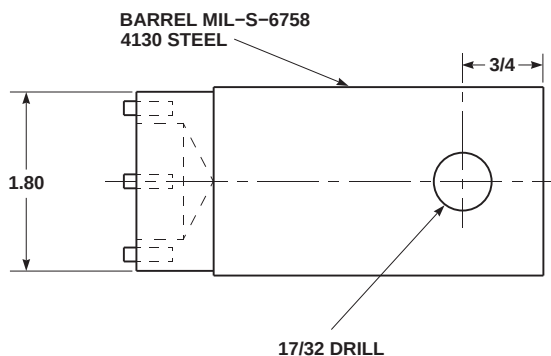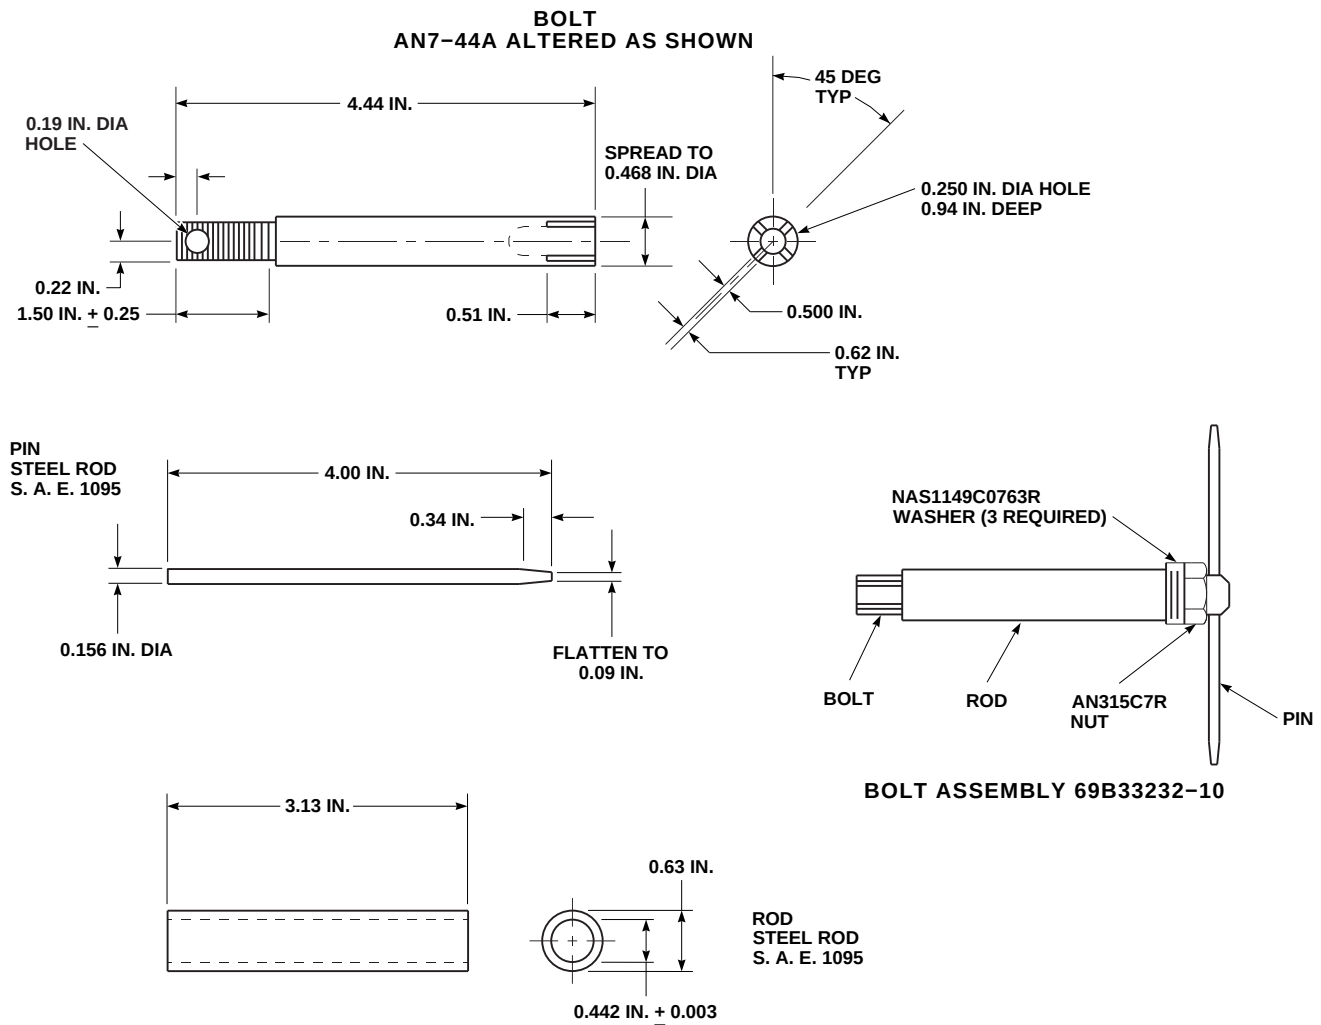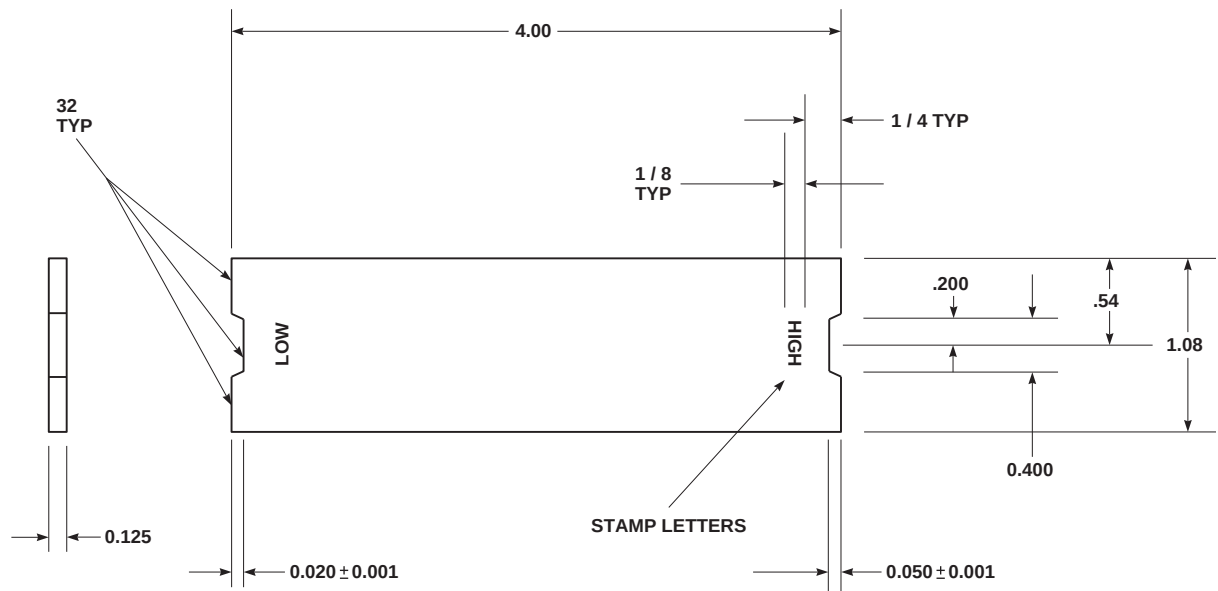


## NOTES

1. MATERIAL CRES 17-4PH COND "A".
2. HEAT TREAT TO COND 11925 PER MIL-H-6875.
3. CLEAN AND PASSIVATE PER QQ-P-35.
4. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.

FO0303A  
SA

FIGURE H-139. HIGH-LOW GAGE

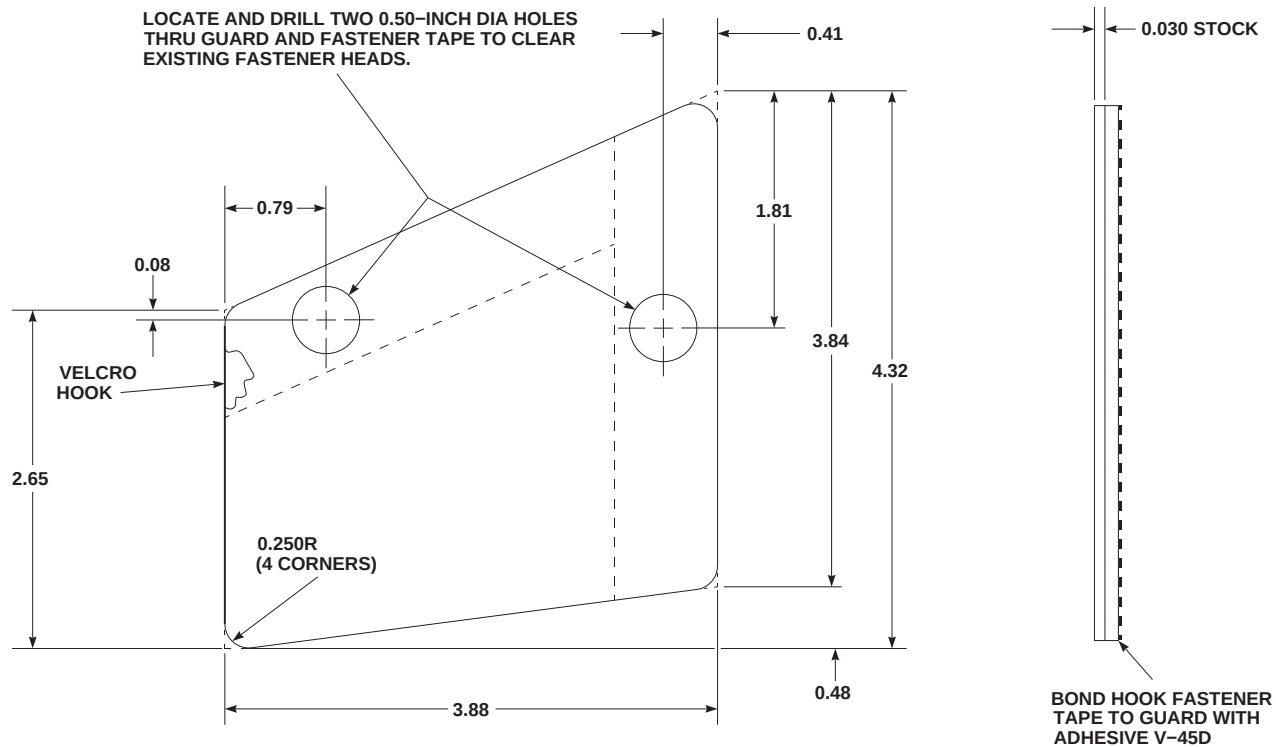

#### NOTES



1. MAKE FROM CLEAR ACRYLIC PLASTIC SHEET, MIL-P-46144, TYPE I, CLASS 2, 0.030-INCH-THICK, NSN 9330-01-208-1024.
2. BOND HOOK FASTENER TAPE TO GUARD WITH ADHESIVE, V-45D, NSN 8040-01-203-8976.
3. ALL DIMENSIONS ARE IN INCHES.
4. IDENTIFY PARTS PER MIL-STD-130.
5. REMOVE BURRS AND SHARP EDGES.
6. USE 0.50-INCH WIDE HOOK FASTENER TAPE, NSN 8315-01-213-9560.

PART NUMBER: 70217-02708-051

FN2330  
SA

FIGURE H-140. JETTISON HANDLE GUARD



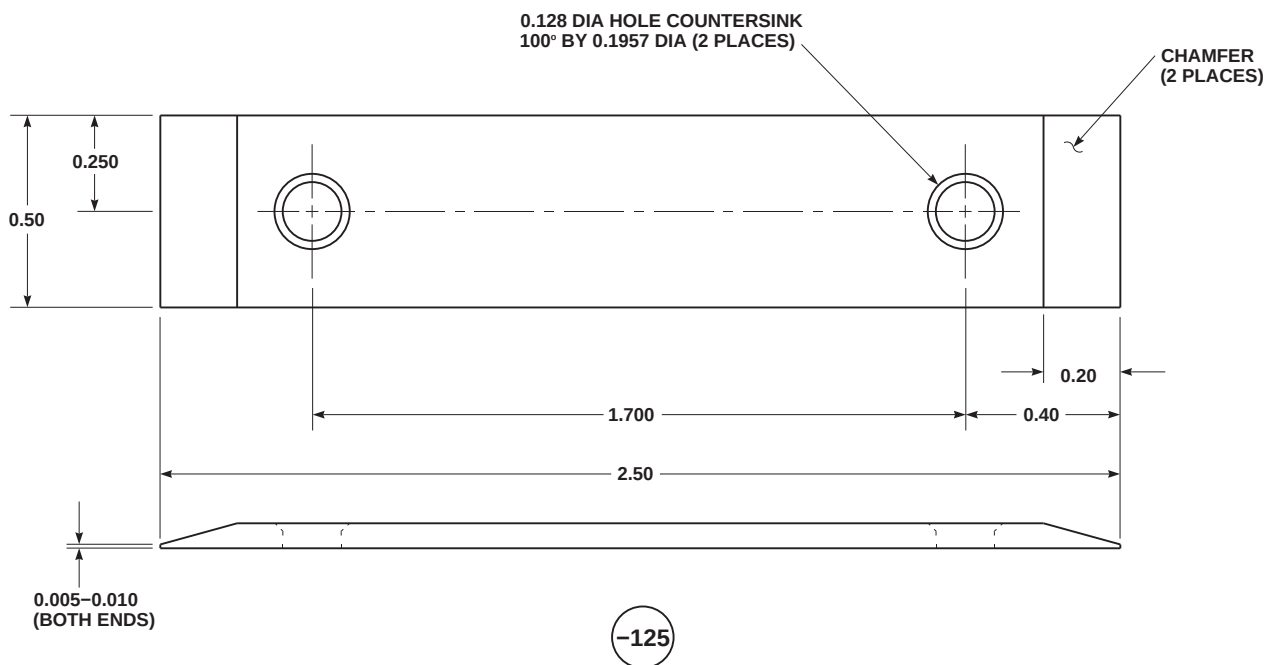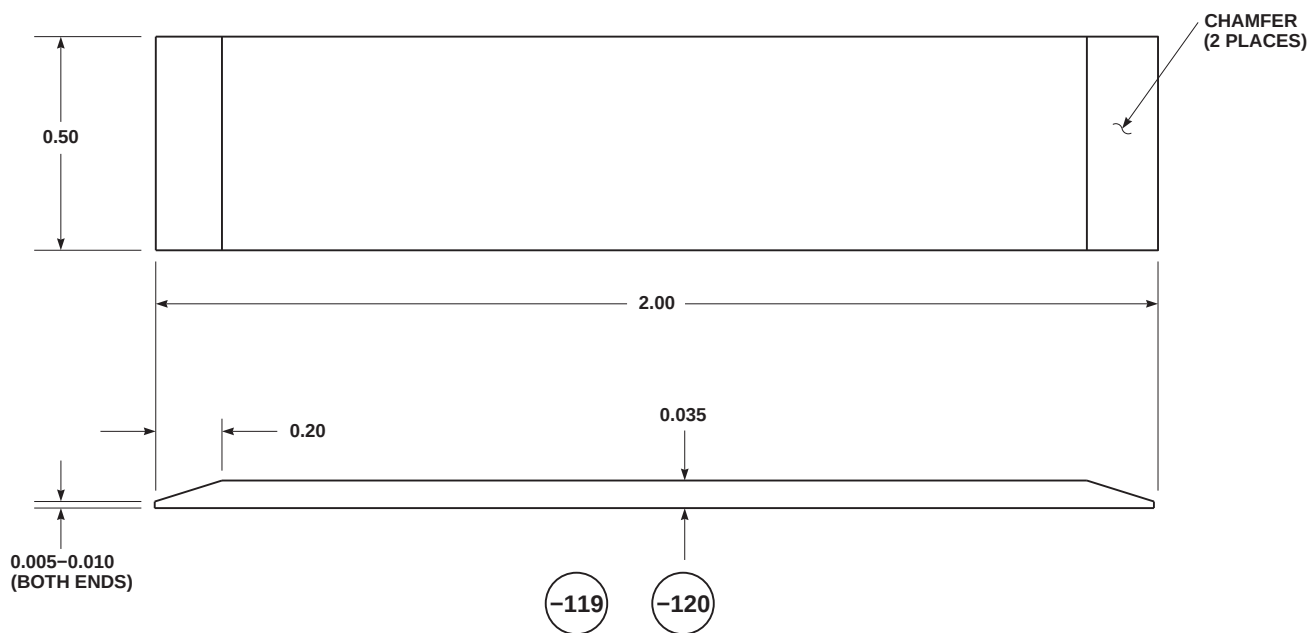


## NOTES

1. MAKE FROM 301 STAINLESS STEEL, 1/2 HARD, 0.036 INCH THICK, MIL-S-5059, NSN 9515-00-235-7610.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. INSULATE DISSIMILAR METALS ON INSTALLATION.
4. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70207-02727-119, -120, -125

FO0304A  
SA

FIGURE H-141. WEAR STRIP

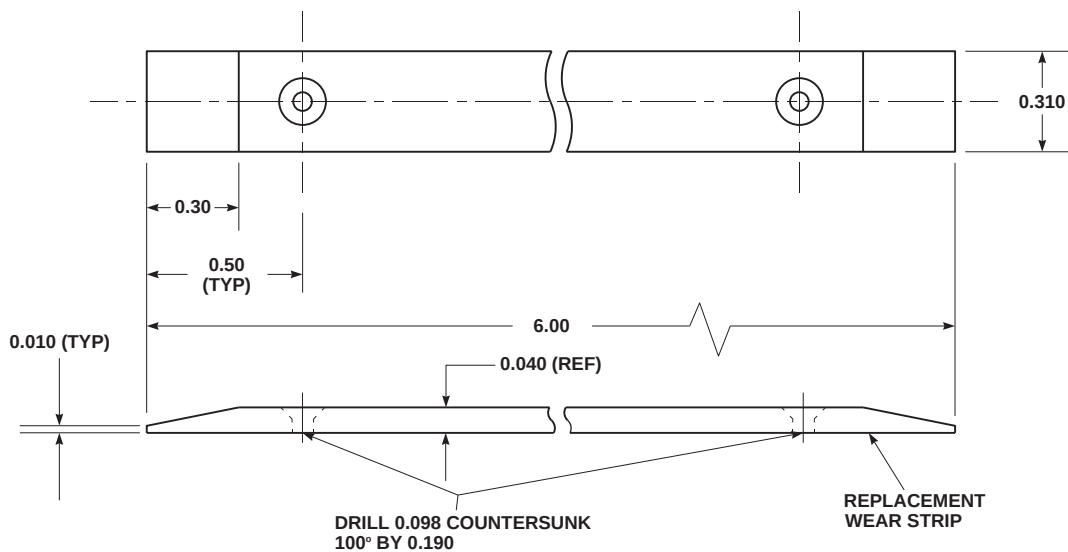


#### NOTES

1. MAKE FROM 301 STAINLESS STEEL, 1/2 HARD, 0.040 INCH THICK, MIL-S-5059, NSN 9515-00-235-7610.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. INSULATION DISSIMILAR METALS ON INSTALLATION.
4. IDENTIFY PARTS PER MIL-STD-130.

FO0305\_1B  
SA

FIGURE H-142. WEAR STRIP - CABIN DOOR UPPER TRACK

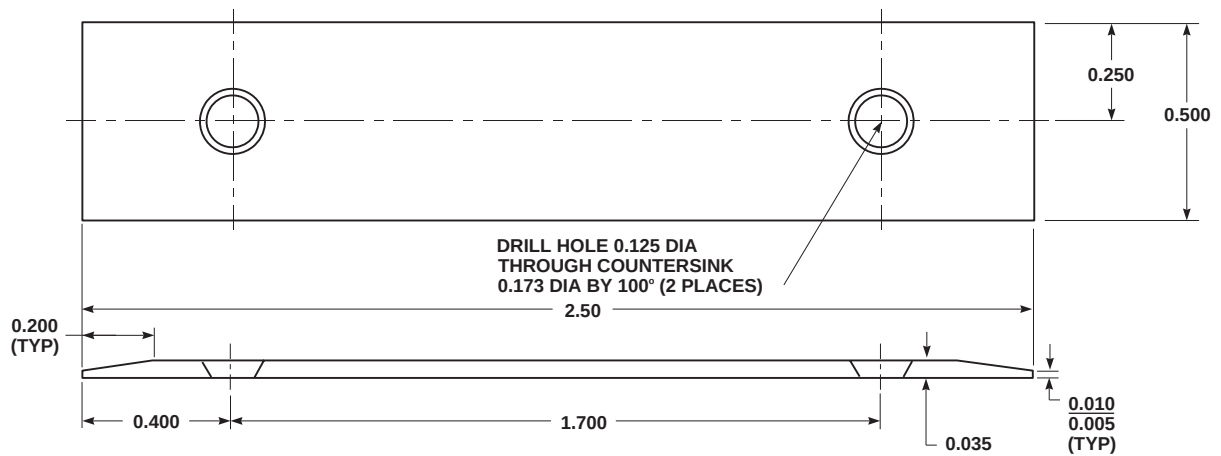


### NOTES


1. MAKE FROM 301 STAINLESS STEEL, 1/2 HARD, 0.035 INCH THICK, MIL-S-5059, NSN 9515-00-235-7610.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. INSULATE DISSIMILAR METALS ON INSTALLATION.
4. IDENTIFY PARTS PER MIL-STD-130.

FO0306B  
SA

**FIGURE H-143. WEAR STRIP - CABIN DOOR LOWER TRACK**

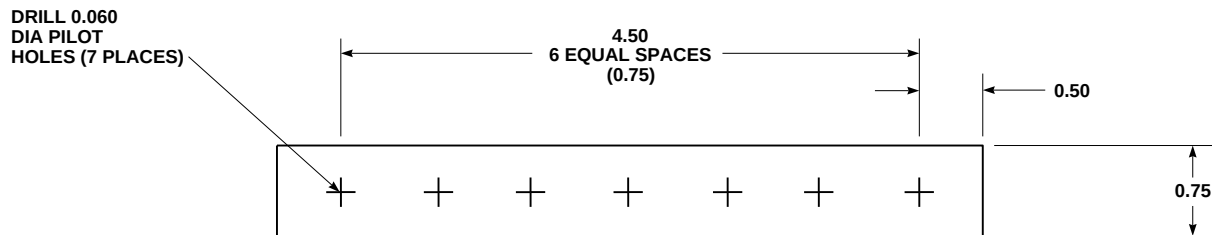

115 STRAP

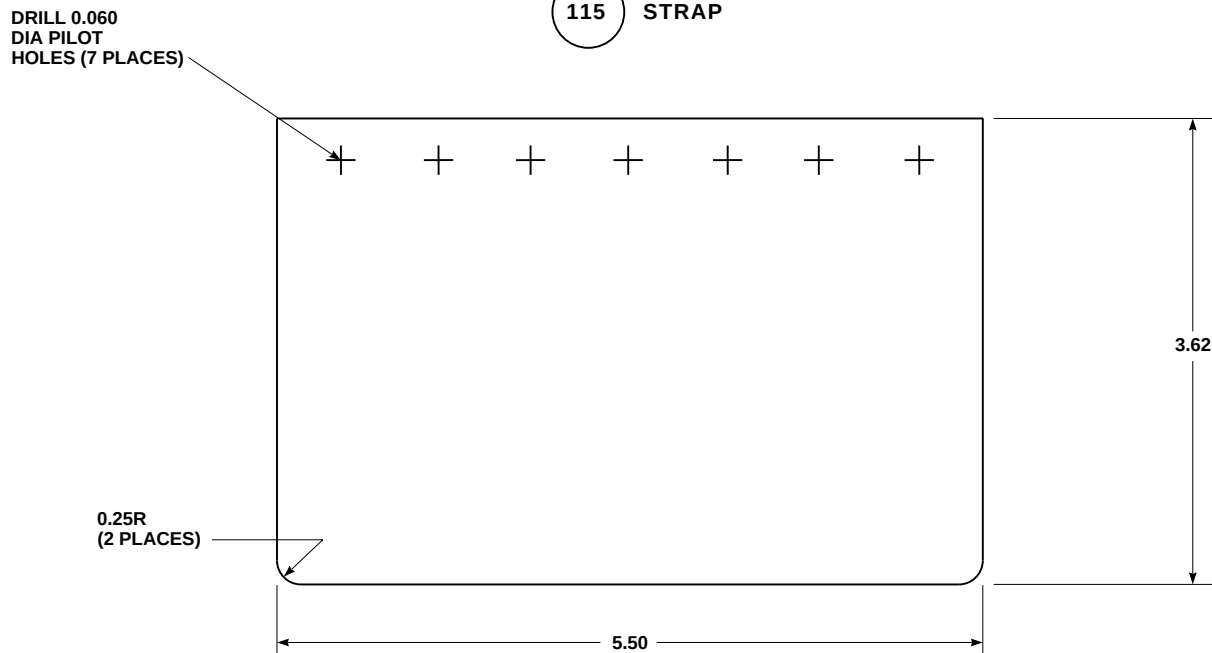

114 FLAP


#### NOTES

1. MAKE 70205-06052-114 FROM 0.040 THICK ALUMINUM SHEET, MIL-P-4060, 05-227-009.
2. MAKE 70205-06052-115 FROM 0.040 THICK ALUMINUM SHEET, QQ-A-250-13, 7075-T6.
3. ALL DIMENSIONS ARE IN INCHES.

PART NUMBER: 70205-06052-114, -115

AK1782  
SA

FIGURE H-144. HAND HOLD FLAP AND STRAP

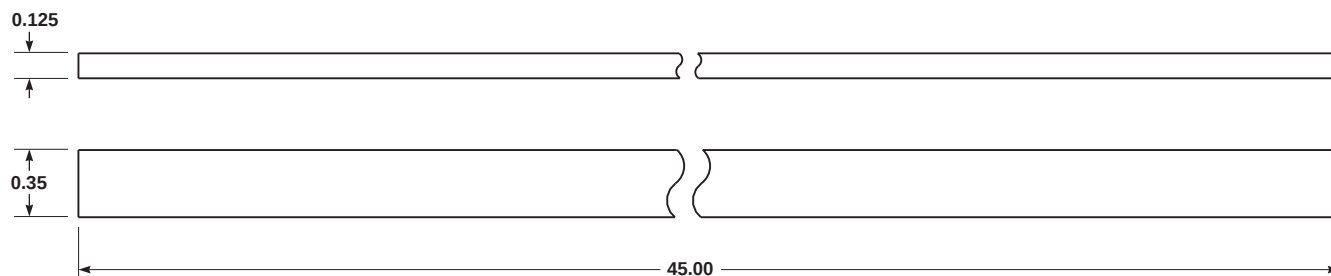
**NOTES**

1. MAKE FROM MIL-R-6855, CLASS 1, GRADE 40.
2. NSN 9320-00-059-6504, 9320-00-241-9745, 5330-00-385-4446.
3. ALL DIMENSIONS ARE IN INCHES.

PART NUMBER: 70215-05002-130, -131.

AA9351  
SA

**FIGURE H-145. STRIP, TAIL ROTOR DRIVE SHAFT COVER**

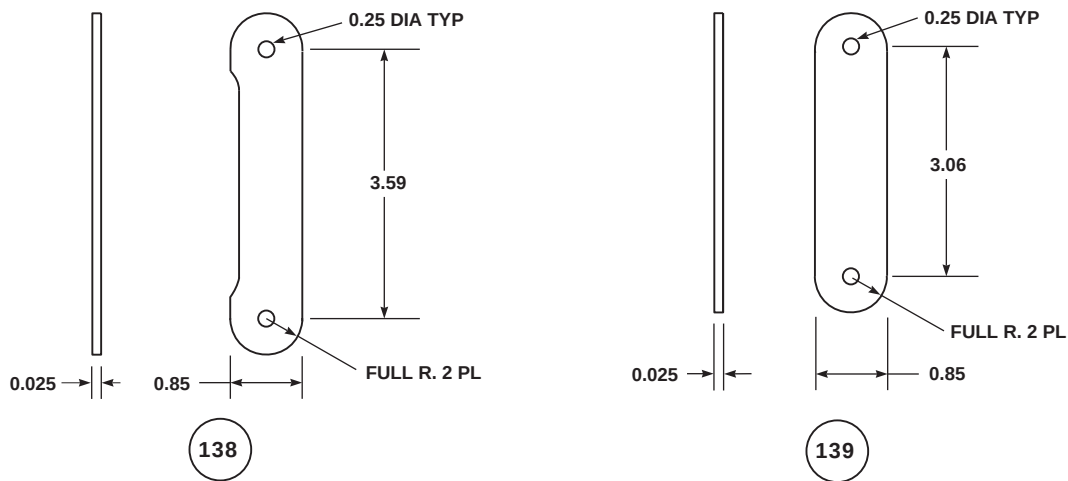


NOTES

1. MAKE FROM 7075-T6 ALUMINUM ALLOY, QQ-A-250-13.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70211-02104-138, -139

AK1784  
SA

FIGURE H-146. FRAME SHIM

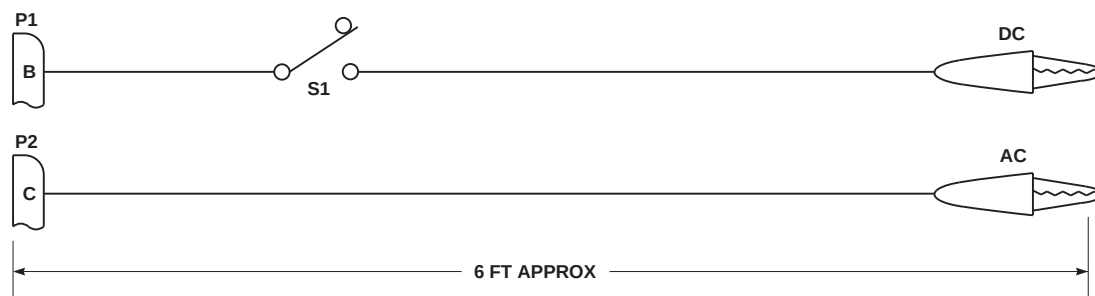


| NOMENCLATURE       | PART NUMBER      | QUANTITY       |
|--------------------|------------------|----------------|
| BOOT               | 5975-00-503-1440 | 2              |
| CONNECTOR, P1      | MS3456L16-11P    | 1              |
| CONNECTOR, P2      | MS3456L20-4P     | 1              |
| SWITCH             | MS25089-4GR      | 1              |
| TAPE ELECTRICAL    | 5790-419-4290    | AS REQUIRED    |
| WIRE               | 18-GAGE          | 12 FT (APPROX) |
| TUBING, INSULATION | MIL-I-631        | 12 FT (APPROX) |

## NOTE

IDENTIFY CONNECTORS AND ALLIGATOR CLIPS AS SHOWN.


AK1786  
SA

FIGURE H-147. BLADE DEICE TEST HARNESS

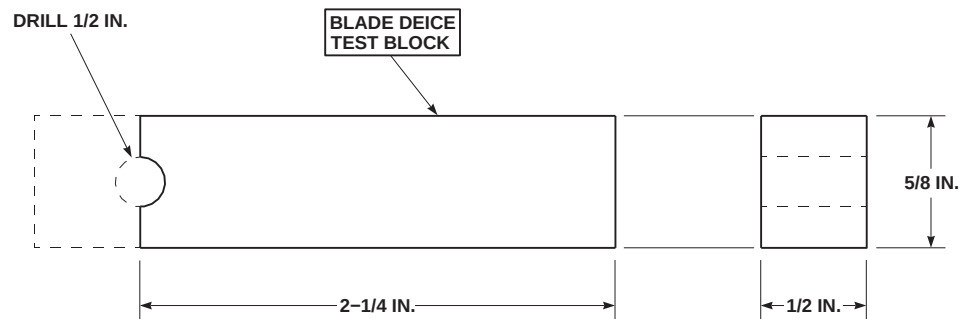

| NOMENCLATURE   | PART NUMBER    | QTY |
|----------------|----------------|-----|
| PHENOLIC BLOCK | 1/2 INCH THICK | 1   |


NOTES

1. DRILL 1/2-INCH HOLE: THEN CUT END OF BLOCK OFF.
2.  INDICATES SUGGESTED MARKING.

AK1787  
SA

FIGURE H-148. BLADE DEICE TEST BLOCK




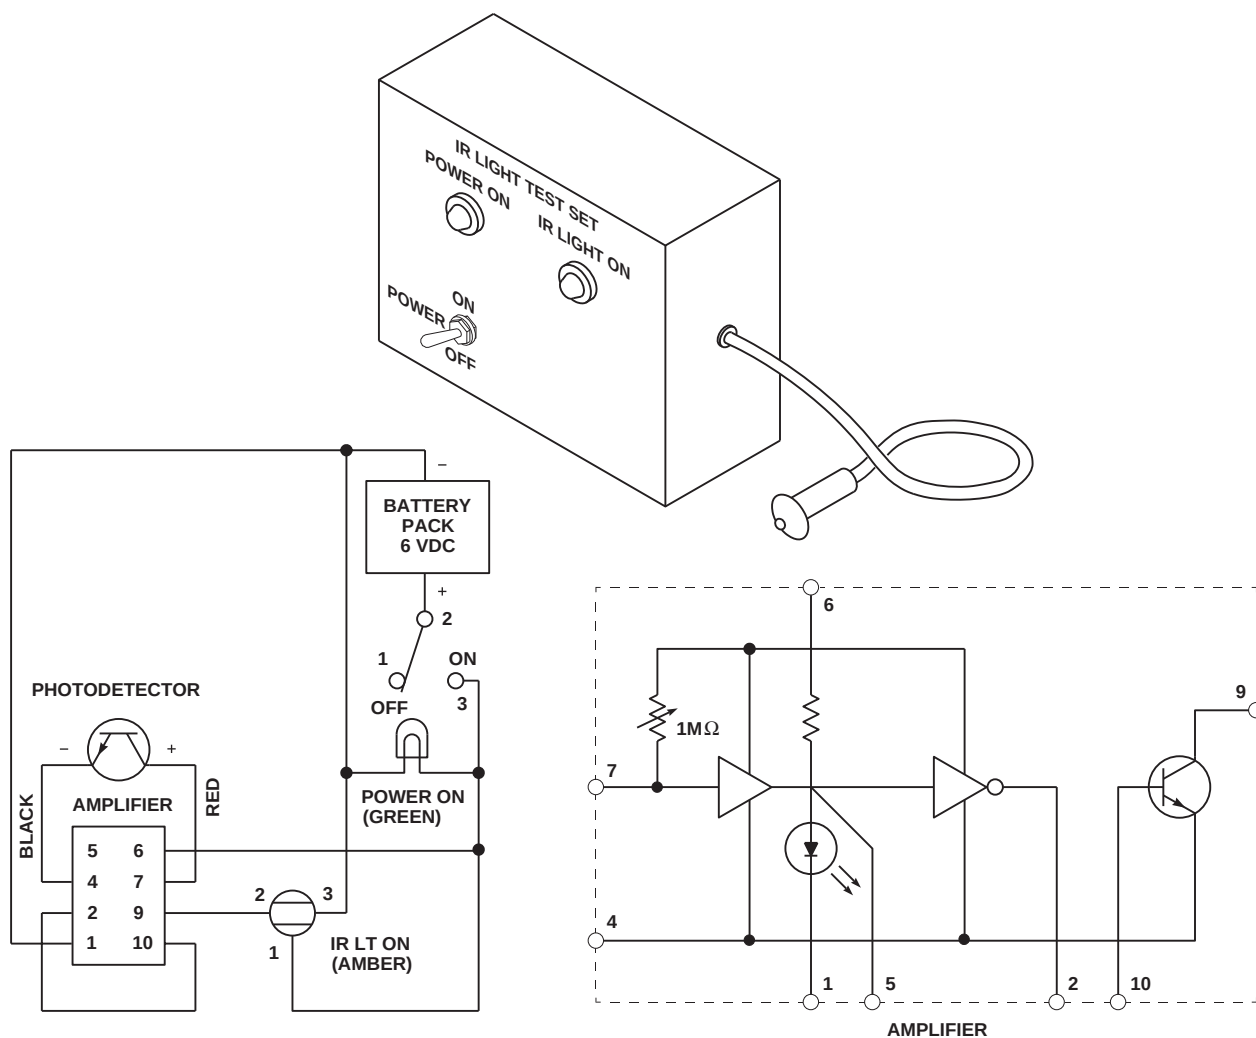

| NOMENCLATURE                 | PART NUMBER      | FSCM  | QTY | VENDER NAME             |
|------------------------------|------------------|-------|-----|-------------------------|
| AMPLIFIER                    | T21104           | 51522 | 1   | SKAN-A-MATIC. CORP.     |
| PHOTODETECTOR                | P11201           | 51522 | 1   |                         |
| SOCKET                       | B01001           | 51522 | 1   |                         |
| SWITCH. LOCK                 | MS24658-22D      |       | 1   |                         |
| LIGHT. IND                   | MS25041-8        |       | 1   |                         |
| LIGHT. IND                   | MS25256-4        |       | 1   |                         |
| LAMP 6 VDC                   | MS25237-328      |       | 2   |                         |
| HOLDER. BTRY                 | 148              | 91833 | 1   | KEYSTONE ELECTRONICS    |
| BATTERY (AA)                 | 49F1169          | 62332 | 4   | EVEREADY/UNION CAR      |
| BOX. UTILITY                 | 1411L            | 73831 | 1   | HAMMOND MFG. (5"x4"x3") |
| GROMMET                      | 2170             | N/A   | 1   | KUKLA. SMITH. INC.      |
| TUBING                       | M23053 / 5-104-0 |       |     |                         |
| WIRE                         | M22759 / 34-22   |       |     |                         |
| EQUIVALENT PARTS MAY BE USED |                  |       |     |                         |

AK1788  
SA


FIGURE H-149. INFRARED LIGHT TEST SET

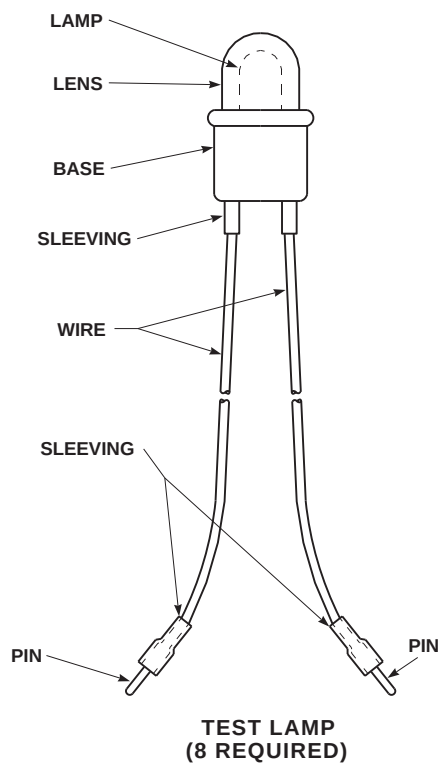

| TEST LAMP PARTS LIST<br>(PER ASSEMBLY) |                     |          |
|----------------------------------------|---------------------|----------|
| ITEM                                   |                     | QUANTITY |
| BASE                                   | NSN6210-00-813-8265 | 1        |
| LAMP                                   | NSN6240-00-763-7744 | 1        |
| LENS                                   | NSN6210-00-023-7030 | 1        |
| PIN                                    | NSN5990-00-901-3237 | 2        |
| SLEEVING                               | NSN5970-00-787-2310 | 3 INCHES |
| WIRE                                   | NSN6145-01-057-3273 | 2 FEET   |

FIGURE H-150. STORES JETTISON SYSTEM TEST ADAPTER

AA6452  
SA

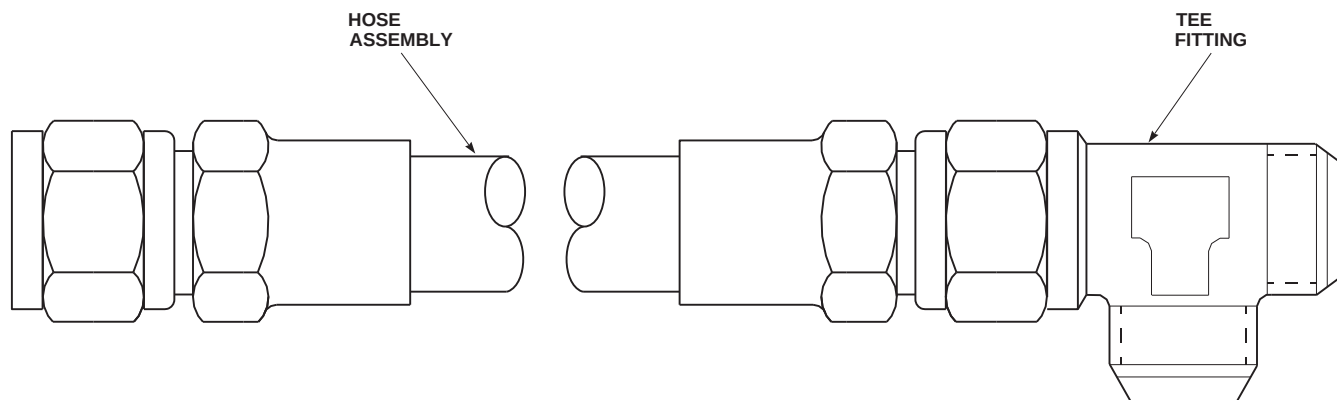



| PARTS LIST      |               |          |
|-----------------|---------------|----------|
| ITEM            | PART NUMBER   | QUANTITY |
| CAP (SEE NOTE)  | M5501 / 3-4   | 2        |
| HOSE ASSEMBLY   | AN6270-4D-096 | 1        |
| PLUG (SEE NOTE) | M5501 / 1-4   | 1        |
| TEE FITTING     | AN824-4D      | 1        |

**NOTE**

WHEN ADAPTER IS NOT USED, PROTECT ADAPTER FITTINGS WITH CAPS AND PLUG.

FK0332  
SA

**FIGURE H-151. PNEUMATIC ADAPTER (ESSS)**

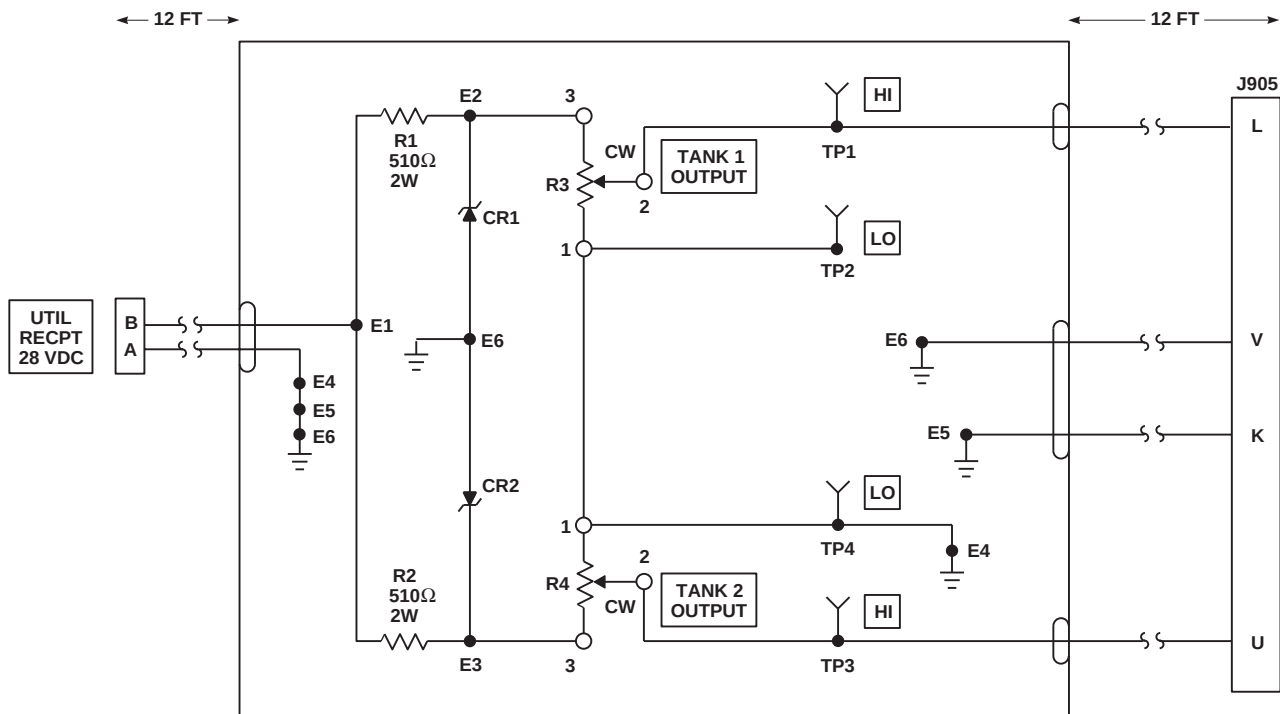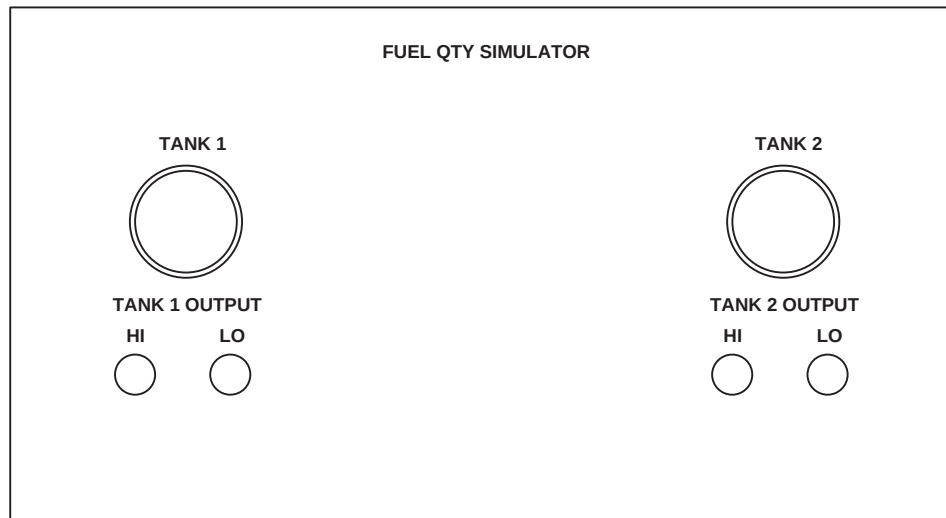

AK1791\_1  
SA

FIGURE H-152. FUEL QUANTITY SIMULATOR TEST SET (SHEET 1 OF 2)


| NOMENCLATURE                           | PART NUMBER           | QUANTITY    |
|----------------------------------------|-----------------------|-------------|
| ALUMINUM CHASSIS 8 IN. X 4 IN. X 2 IN. | AC-410 (SEE NOTE 1)   | 1           |
| CONNECTOR, J905                        | MS3472W14-19P         | 1           |
| CONNECTOR TO 28 VDC                    | MS3456W16-11P         | 1           |
| RESISTOR, R1 AND R2                    | RW67V511              | 2           |
| RESISTORS, VARIABLE R3, R4             | 3610S2-103            | 2           |
| ZENER DIODE, CR1 AND CR2               | 1N4739A               | 2           |
| POSTS, ELECTRICAL                      | S05-8 (SEE NOTE 2)    | 4           |
| TERMINALS, STUD                        | B2010B-1 (SEE NOTE 3) | 14          |
| TEST POINT, YELLOW                     | M39024 / 10-08        | 2           |
| TEST POINT, WHITE                      | M39024 / 10-01        | 2           |
| ELECTRICAL TAPE                        | 5790-419-4290         | AS REQUIRED |
| WIRE                                   | M22759 / 11-22-9      | BULK        |
| INSULATION TUBING                      | MIL-I-631             | BULK        |

#### NOTES

1. ITEM CAN BE OBTAINED FROM: BUD INDUSTRIES INC.,  
4605 E. 355TH ST., WILLOUGHBY, OHIO 44094
2. ITEM CAN BE OBTAINED FROM: DESIGNATRONICS INC., STERLING INSTRUMENT DIV.  
55 S. DENTON AVE., NEW HYDE PARK, NY 11040
3. ITEM CAN BE OBTAINED FROM: WINCHESTER ELECTRONICS, LITTON SYSTEMS, USECO DIV.,  
13536 SATICOY ST., VAN NUYS, CA 91409

FA5262\_2  
SA

FIGURE H-152. FUEL QUANTITY SIMULATOR TEST SET (SHEET 2 OF 2)

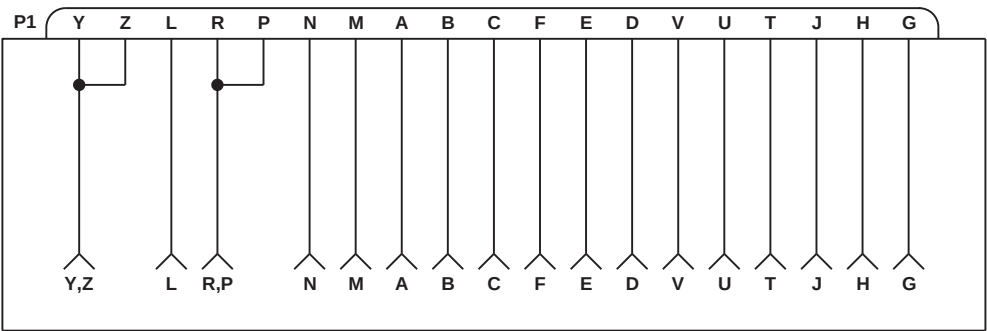

| NOMENCLATURE       | PART NUMBER            | QUANTITY    |
|--------------------|------------------------|-------------|
| BOX                | SEE NOTE 3             | 1           |
| CONNECTOR, P1      | MS3476L16-26S          | 1           |
| TEST JACK          | M39024 / 10-02 (RED)   | 14          |
| TEST JACK          | M39024 / 10-03 (BLACK) | 3           |
| TUBING, INSULATION | MIL-I-631              | AS REQUIRED |
| WIRE               | 22-GAGE                | AS REQUIRED |

NOTES

- 1. IDENTIFY CONNECTOR AND TEST JACKS AS SHOWN.
- 2. COVER WIRES WITH INSULATION TUBING.
- 3. ITEM CAN BE OBTAINED FROM:  
ZERO MFG CO.  
14501 49TH STREET  
NORTH CLEARWATER, FL. 33520  
OR LOCALLY-MADE
- 4. THESE TEST POINTS ARE BLACK: M, N, AND Y, Z. ALL OTHER POINTS ARE RED.

AK1792  
SA

FIGURE H-153. BOOST PUMP CONTROL PANEL TEST HARNESS

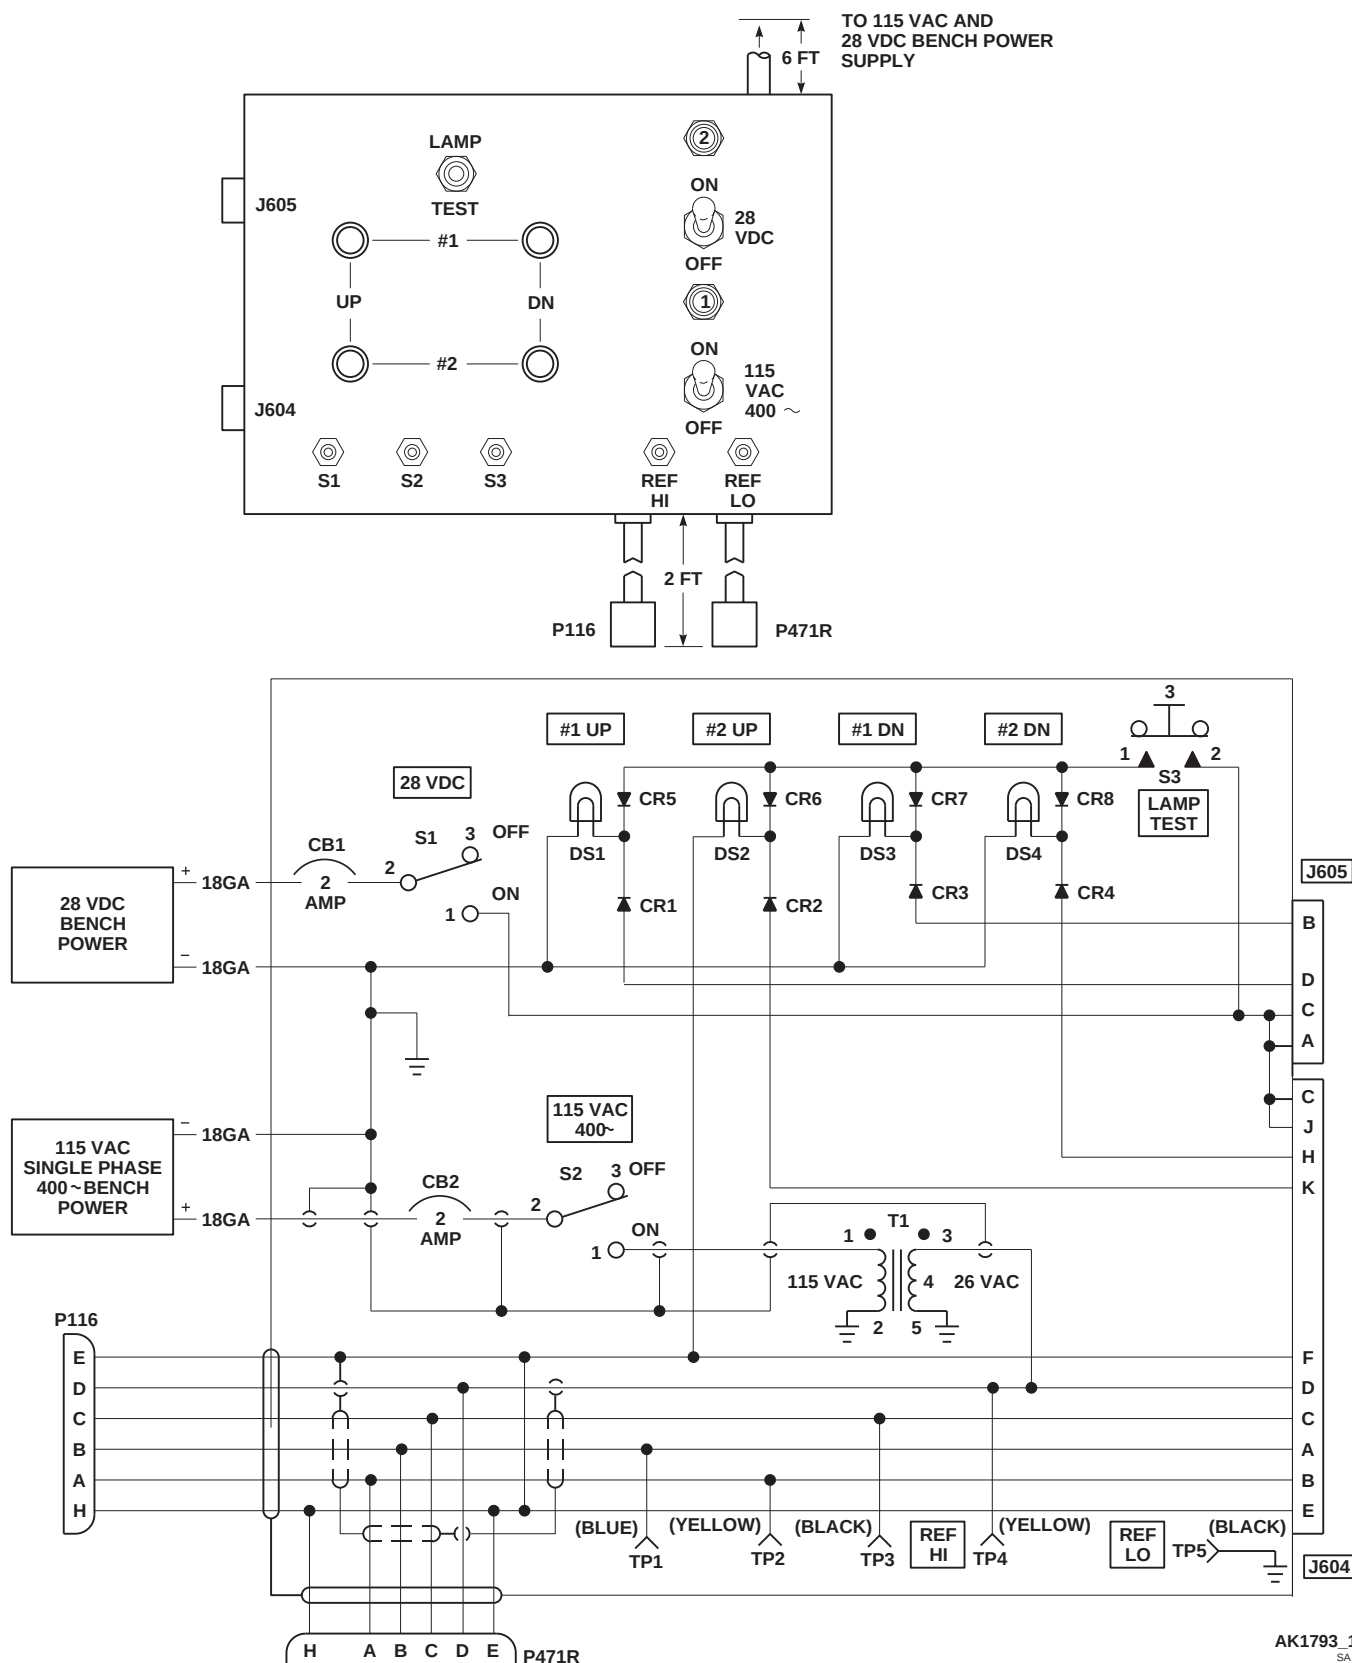


FIGURE H-154. STABILATOR POSITION SENSOR/LIMIT SWITCH TEST UNIT  
(SHEET 1 OF 3)

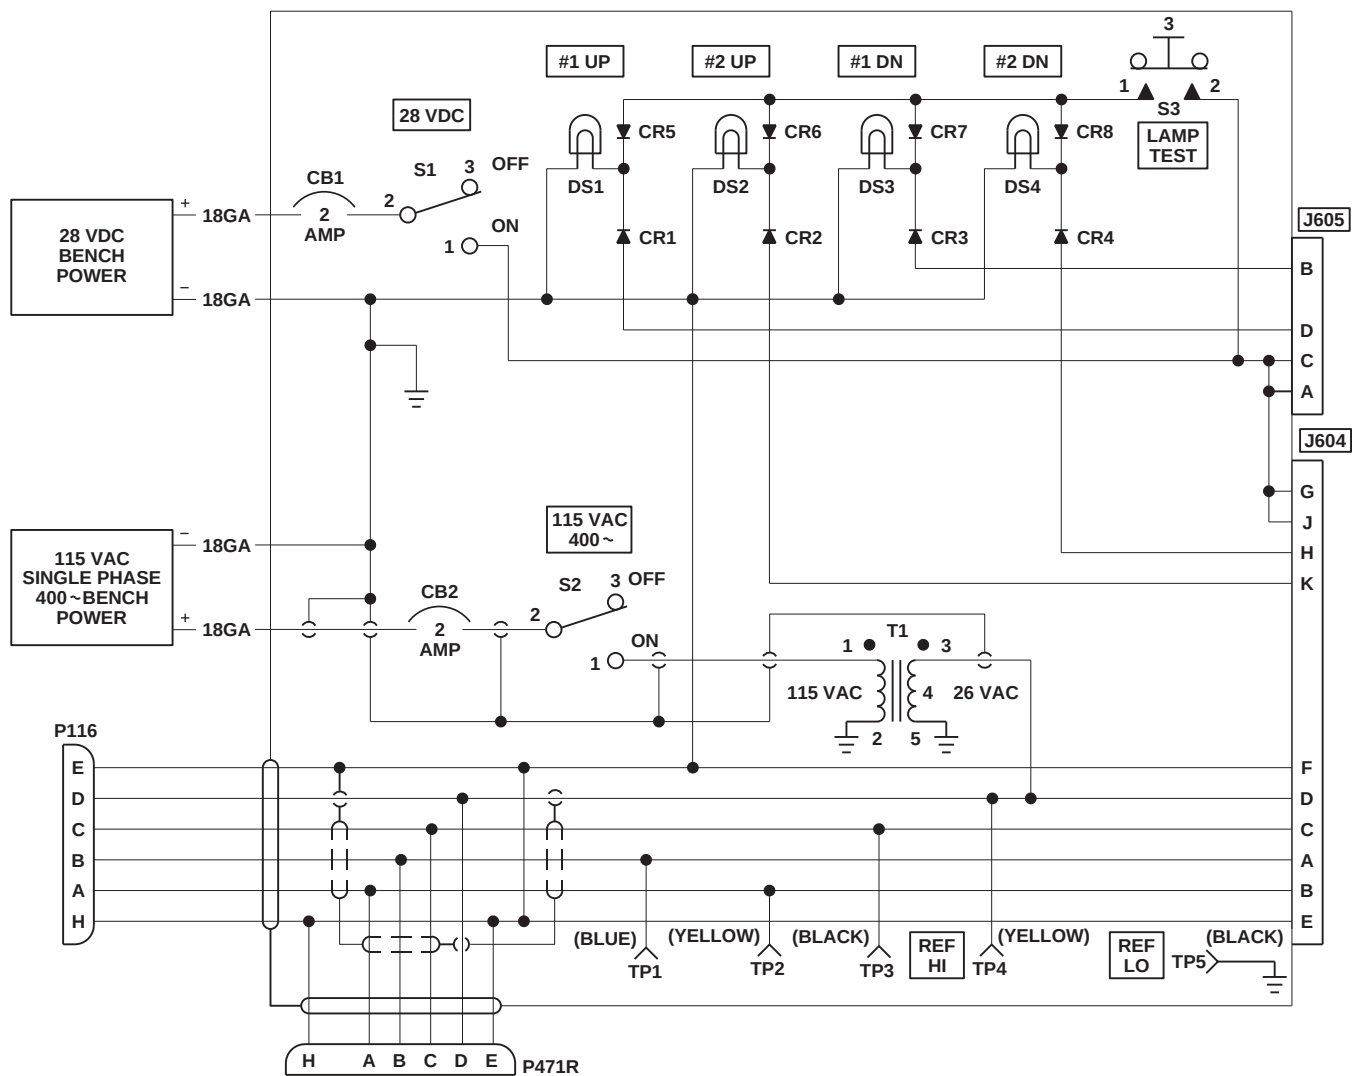


FIGURE H-154. STABILATOR POSITION SENSOR/LIMIT SWITCH TEST UNIT  
(SHEET 2 OF 3)





| TEST SET PARTS LIST                     |                        |          |
|-----------------------------------------|------------------------|----------|
| NOMENCLATURE                            | PART NO.               | QUANTITY |
| ALUMINUM BOX<br>(5 IN. x 7 IN. x 3 IN.) | AC-429<br>SEE NOTE 3   | 1        |
| CIRCUIT BREAKER, CB1                    | MS3320-2               | 1        |
| CIRCUIT BREAKER, CB2                    | MS3320-1               | 1        |
| LAMP, DS1, DS2, DS3, DS4                | MS25256-4              | 4        |
| SWITCH, S1, S2                          | MS24523-22             | 2        |
| SWITCH, S3                              | MS25089-4G             | 1        |
| TRANSFORMER, T1                         | TW-63271<br>SEE NOTE 4 | 1        |
| DIODE, CR1 THROUGH CR8                  | IN645                  | 8        |
| CONNECTOR, J604                         | MS3472L12-10S          | 1        |
| CONNECTOR, J604                         | MS3472L10-6S           | 1        |
| CONNECTOR, P116, P471R                  | MS3476L12-10S          | 2        |
| TEST JACK, BLUE                         | M39024/10-07           | 1        |
| TEST JACK, YELLOW                       | M39024/10-08           | 2        |
| TEST JACK, BLACK                        | M39024/10-03           | 2        |
| WIRE                                    | 18-GAGE                | BULK     |
| WIRE                                    | 22-GAGE                | BULK     |
| INSULATION TUBING                       | MIL-I-631              | BULK     |

#### NOTES

1. USE 22 - GAGE WIRE FOR ALL CONNECTIONS EXCEPT WHERE OTHERWISE INDICATED.
2. AFTER COMPLETING HARNESS WIRING COVER WIRES WITH INSULATION TUBING.
3. ITEM CAN BE OBTAINED FROM: BUD INDUSTRIES INC.  
4605 E. 355TH ST.  
WILLOUGHBY, OHIO 44094
4. ITEM CAN BE OBTAINED FROM: TORWICO ELECTRONICS INC.  
ROUTE 70  
LAKEWOOD, N.J. 08701


AK1793\_3  
SA

**FIGURE H-154. STABILATOR POSITION SENSOR/LIMIT SWITCH TEST UNIT  
(SHEET 3 OF 3)**

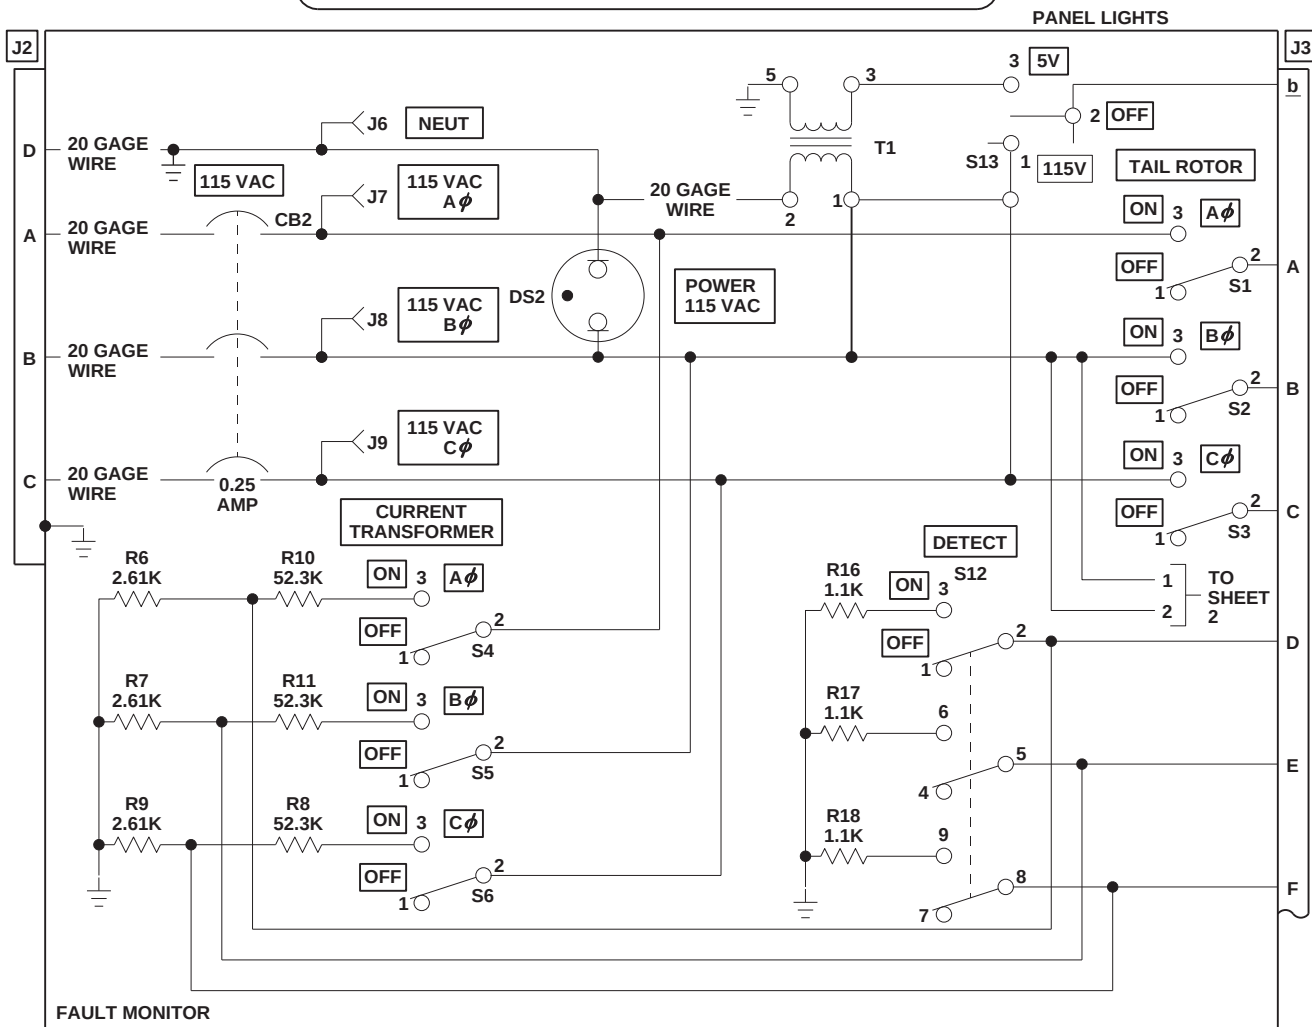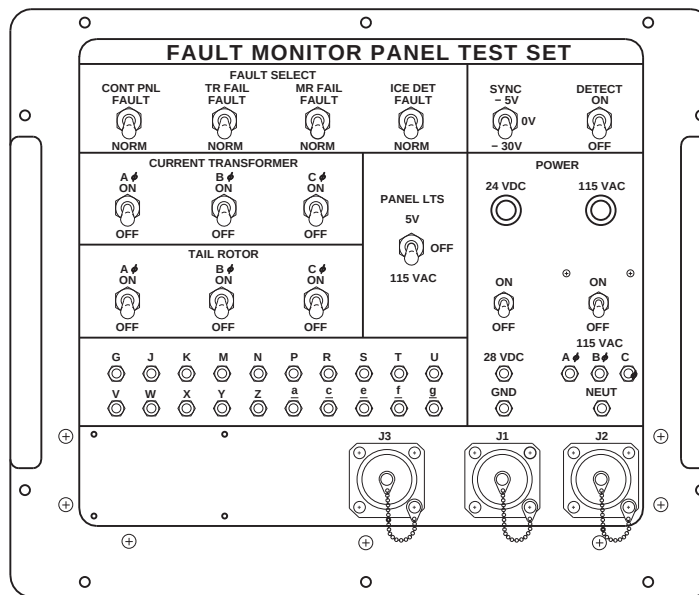

AA8990\_1B  
SA

FIGURE H-155. BLADE DEICE TEST SET (SHEET 1 OF 4)

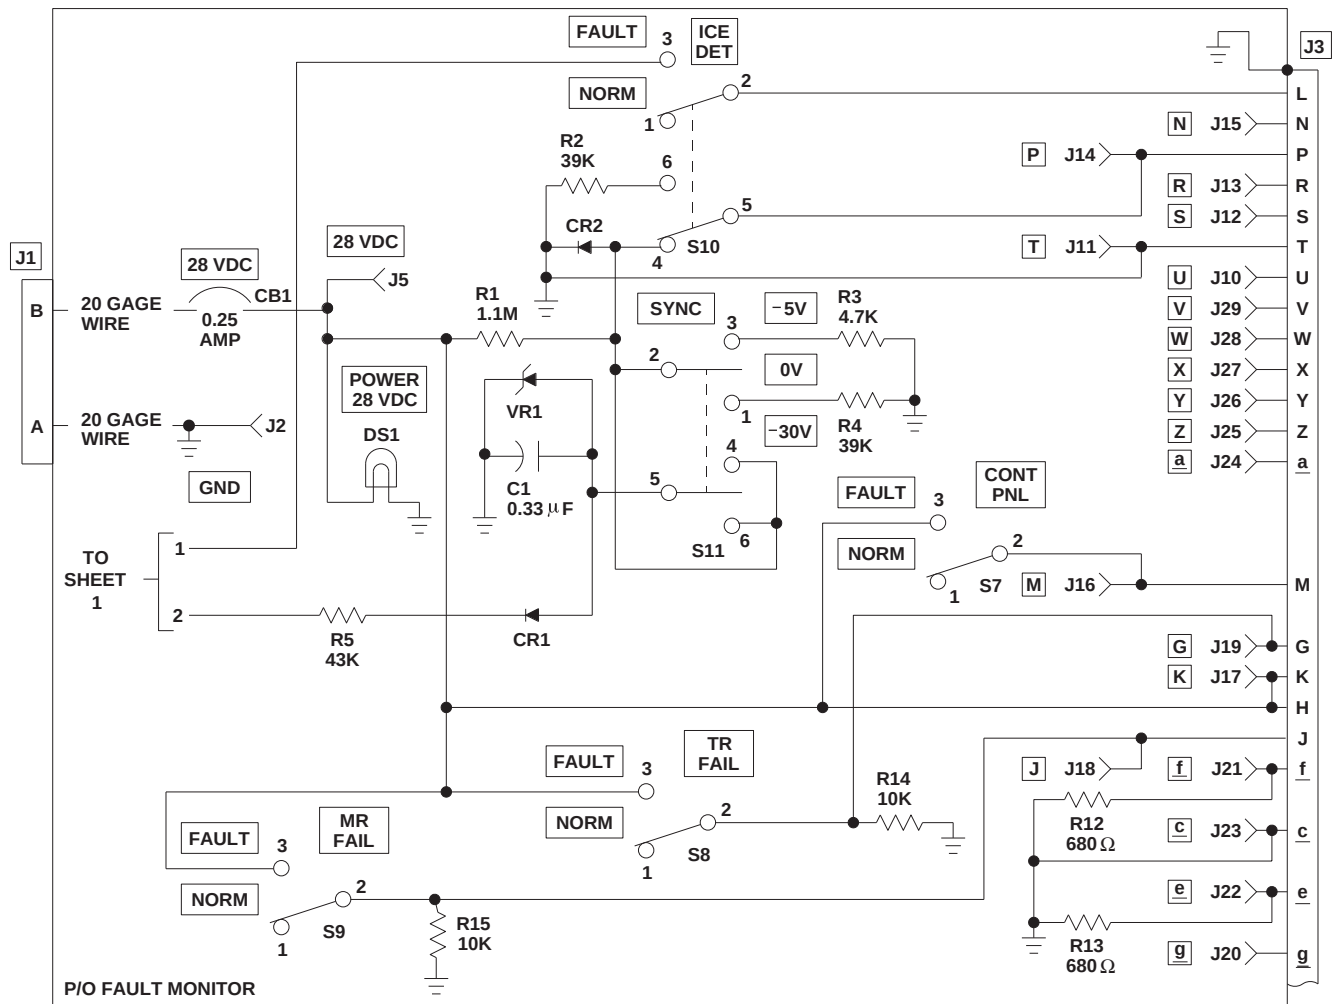


| TEST SET PARTS LIST  |                  |          |
|----------------------|------------------|----------|
| NOMENCLATURE         | PART NO          | QUANTITY |
| ALUMINUM CHASSIS     | AC-424           | 1        |
| 16 x 13.5 x 12.5     | SEE NOTE 3       |          |
| CAPACITOR            | M39003 / 01-5272 | 1        |
| CIRCUIT BREAKER, CB1 | M39019 / 01-206  | 1        |
| CIRCUIT BREAKER, CB2 | M39019 / 05-206  | 1        |
| CONNECTOR, J1        | MS3102R16-11P    | 1        |
| CONNECTOR, J2        | MS3102R20-4P     | 1        |
| CONNECTOR, J3        | MS3472W18-325    | 1        |
| DIODE, CR1           | JANTX1N5618      | 1        |
| DIODE, CR2           | JANTX1N645A      | 1        |
| DIODE, VR1           | JANTX1N4481      | 1        |
| INSULATION, TUBING   | MIL-I-22129      | BULK     |
| LAMP, DS1            | MS25237-327      | 1        |
| LAMP, DS2            | M15098 / 11-002  | 1        |
| LAMP HOLDER FOR DS1  | LH73 / 1         | 1        |
| LAMP HOLDER FOR DS2  | LH74 / 1         | 1        |
| LENS FOR DS1         | LC12GN2          | 1        |
| LENS FOR DS2         | LC13RN2          | 1        |
| RESISTOR, R1         | RCR20G115JR      | 1        |
| RESISTOR, R2 AND R4  | RCR20G393JM      | 2        |

| TEST SET PARTS LIST         |                |          |
|-----------------------------|----------------|----------|
| NOMENCLATURE                | PART NO        | QUANTITY |
| RESISTOR, R3                | RCR20G472JM    | 1        |
| RESISTOR, R5                | RCR20G433JR    | 1        |
| RESISTOR, R6, R7, AND R9    | RNR65C2611FM   | 3        |
| RESISTOR, R8, R10, AND R11  | RNR65C5232FM   | 3        |
| RESISTOR, R12 AND R13       | RCR42G681JR    | 2        |
| RESISTOR, R14 AND R15       | RCR20G103JR    | 2        |
| RESISTOR, R16, R17, AND R18 | RNC65H1101FS   | 3        |
| SWITCH, S1 THROUGH S9       | MS24523-23     | 9        |
| SWITCH, S10                 | MS24524-23     | 1        |
| SWITCH, S11                 | MS24524-21     | 1        |
| SWITCH, S12                 | MS24525-23     | 1        |
| TERMINAL LUG FOR J2         | MS77068-1      | 1        |
| TERMINAL LUG FOR J3         | MS77068-2      | 1        |
| TEST POINT, BLACK           | M39024 / 10-03 | 5        |
| TEST POINT, GREEN           | M39024 / 10-05 | 15       |
| TEST POINT, RED             | M39024 / 10-02 | 3        |
| TEST POINT, WHITE           | M39024 / 10-01 | 3        |
| TRANSFORMER, T1             | GE5CT          | 1        |
| WIRE                        | 20-GAGE        | BULK     |


AA9352 2B  
SA

FIGURE H-155. BLADE DEICE TEST SET (SHEET 2 OF 4)

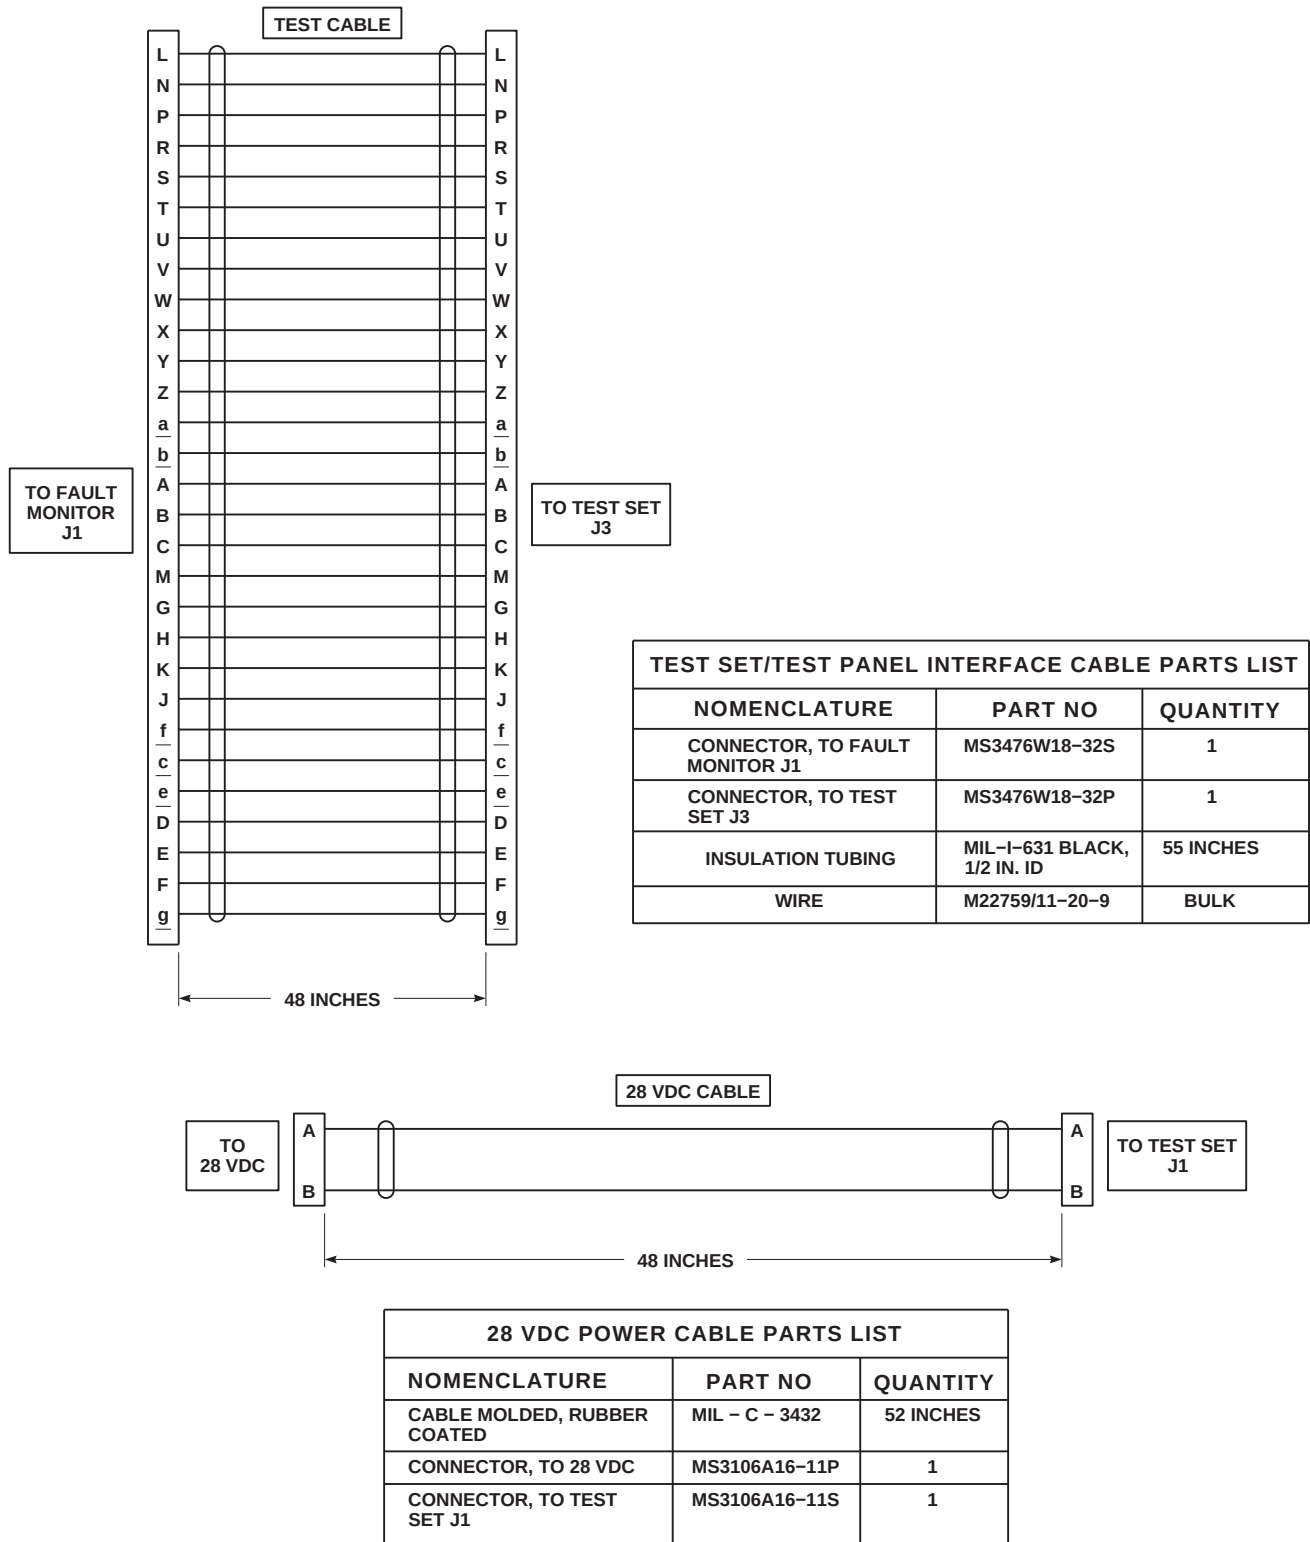

AK1794\_3  
SA

FIGURE H-155. BLADE DEICE TEST SET (SHEET 3 OF 4)

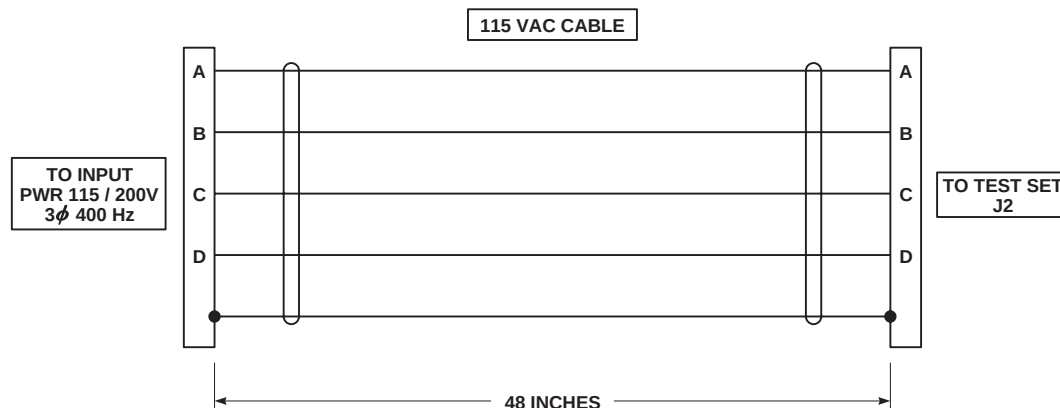

| 115 VAC POWER CABLE PARTS LIST              |                             |           |
|---------------------------------------------|-----------------------------|-----------|
| NOMENCLATURE                                | PART NO                     | QUANTITY  |
| CONNECTOR, TO TEST SET J2                   | MS3106F20-4S                | 1         |
| CONNECTOR TO INPUT PWR 115 / 200V 3φ 400 Hz | MS3106F20-4P                | 1         |
| INSULATION TUBING                           | MIL-I-631 BLACK 5/16 IN. ID | 55 INCHES |
| WIRE                                        | M22759 / 11-16-9            | BULK      |

#### NOTES



1.  INDICATES EQUIPMENT MARKINGS.
2. USE 20 - GAGE WIRE FOR ALL CONNECTIONS EXCEPT WHERE OTHERWISE INDICATED.
3. AFTER COMPLETING HARNESS WIRING, COVER WITH INSULATION TUBING.
4. DELETED.
5. ITEM CAN BE OBTAINED FROM:  
ABBOTT TRANSISTOR LABORATORIES, INC  
TRANSFORMER DIV  
639 S. GLENWOOD PLACE  
BURBANK, CA, 91506
6. THESE TEST POINTS ARE IN GREEN:  

|     |     |     |
|-----|-----|-----|
| J5  | J15 | J21 |
| J10 | J16 | J25 |
| J12 | J17 | J26 |
| J13 | J18 | J27 |
| J14 | J19 | J28 |

TEST POINTS J4, J6, J11, J22, AND J23 ARE BLACK.  
TEST POINTS J7, J8, AND J9 ARE RED, AND  
TEST POINTS J20, J24, AND J29 ARE WHITE.

AA9352\_4  
SA

FIGURE H-155. BLADE DEICE TEST SET (SHEET 4 OF 4)

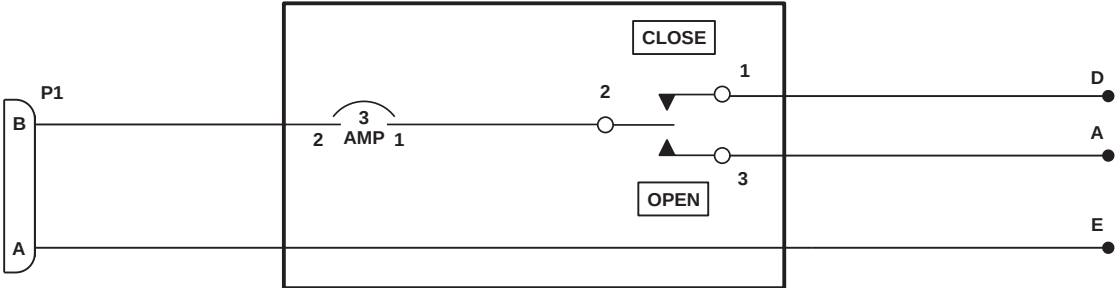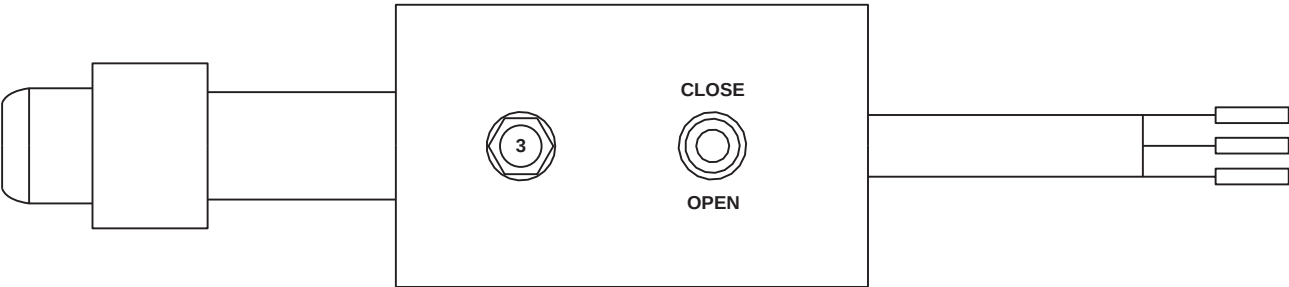


WIRING SCHEMATIC

| PARTS LIST       |                                                                        |          |
|------------------|------------------------------------------------------------------------|----------|
| PART NUMBER      | ITEM NAME                                                              | QUANTITY |
| MS3320-3         | CIRCUIT BREAKER                                                        | 1        |
| MS24655-271      | SWITCH, TOGGLE                                                         | 1        |
| MS3456W16-11P    | CONNECTOR                                                              | 1        |
|                  | PANEL, SHEET METAL<br>(1-1/2 IN. X 2-1/2 IN. X 1/32 IN.)               | 1        |
| M22759 / 11-22-9 | WIRE, 12 FT<br>(P1-B TO CIRCUIT BREAKER TERMINAL 2)                    | 1        |
| M22759 / 11-22-9 | WIRE, 13 FT 3 IN. (P1-A TO TERMINAL E)                                 | 1        |
| M22759 / 11-22-9 | WIRE, 15 IN. (SWITCH TERMINALS<br>1 AND 3 TO TERMINALS A AND D)        | 1        |
| M22759 / 11-22-9 | WIRE, AS REQUIRED (CIRCUIT BREAKER<br>TERMINAL 1 TO SWITCH TERMINAL 2) | 1        |
| M39029 / 31-228  | TERMINAL (A, D, E)                                                     | 3        |
|                  | SPIRAL WRAP                                                            | A / R    |

AA2203  
SA

FIGURE H-156. ESSS GATE VALVE TEST HARNESS

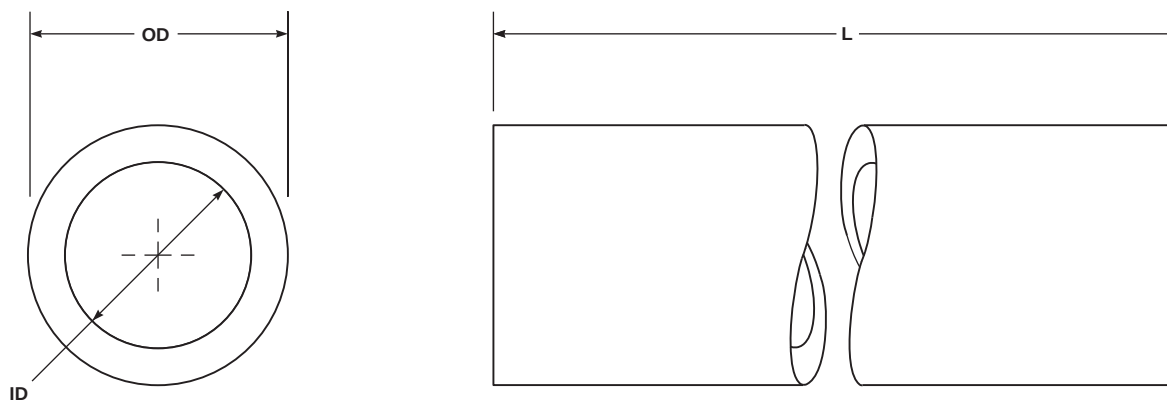


| NOMENCLATURE                     | L LENGTH | OD OUTSIDE DIAMETER | ID INSIDE DIAMETER |
|----------------------------------|----------|---------------------|--------------------|
| INPUT MODULE INPUT SEAL          | 4.00     | 3.50                | 3.00               |
| MAIN GEARBOX OUTPUT SEAL         | 4.00     | 3.25                | 2.75               |
| INTERMEDIATE GEARBOX INPUT SEAL  | 4.00     | 3.00                | 2.50               |
| INTERMEDIATE GEARBOX OUTPUT SEAL | 4.00     | 3.00                | 2.50               |
| TAIL GEARBOX INPUT SEAL          | 4.00     | 3.00                | 2.50               |
| TAIL GEARBOX OUTPUT SEAL         | 4.00     | 5.00                | 4.50               |

## NOTES

1. MAKE FROM ALUMINUM TUBING.
2. ALL DIMENSIONS ARE IN INCHES.
3. DO NOT PAINT.

AK1796  
SA

FIGURE H-157. SEAL INSTALLATION TOOL

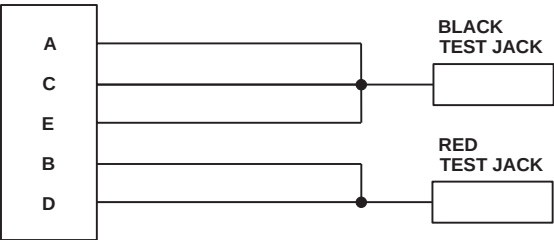

| PART NUMBER      | DESCRIPTION       | QUANTITY | NSN              |
|------------------|-------------------|----------|------------------|
| MS3106A20-22S    | CONNECTOR         | 1        | 5935-00-259-0024 |
| M22759 / 43-08-9 | ELECTRICAL WIRE   | AS REQ'D | 6145-01-208-2495 |
| M39024 / 10-02   | TEST JACK - RED   | 1        | 5935-00-687-8090 |
| M39024 / 10-03   | TEST JACK - BLACK | 1        | 5935-00-169-9437 |
| MIL-S-8802       | SEALING COMPOUND  | kt       | 8030-00-174-2598 |
| SN60WRAP3 0.063  | SOLDER            | lb       | 3439-00-269-9610 |


NOTES

- 1. SOLDER ONE END OF WIRE TO TEST JACKS.
- 2. AFTER ASSEMBLING CONNECTOR FILL BACK SHELL WITH SEALING COMPOUND, SETTING TEST JACKS INTO SEALING COMPOUND.

FK0333  
SA

FIGURE H-158. AUXILIARY CABIN HEATER JUMPER PLUG



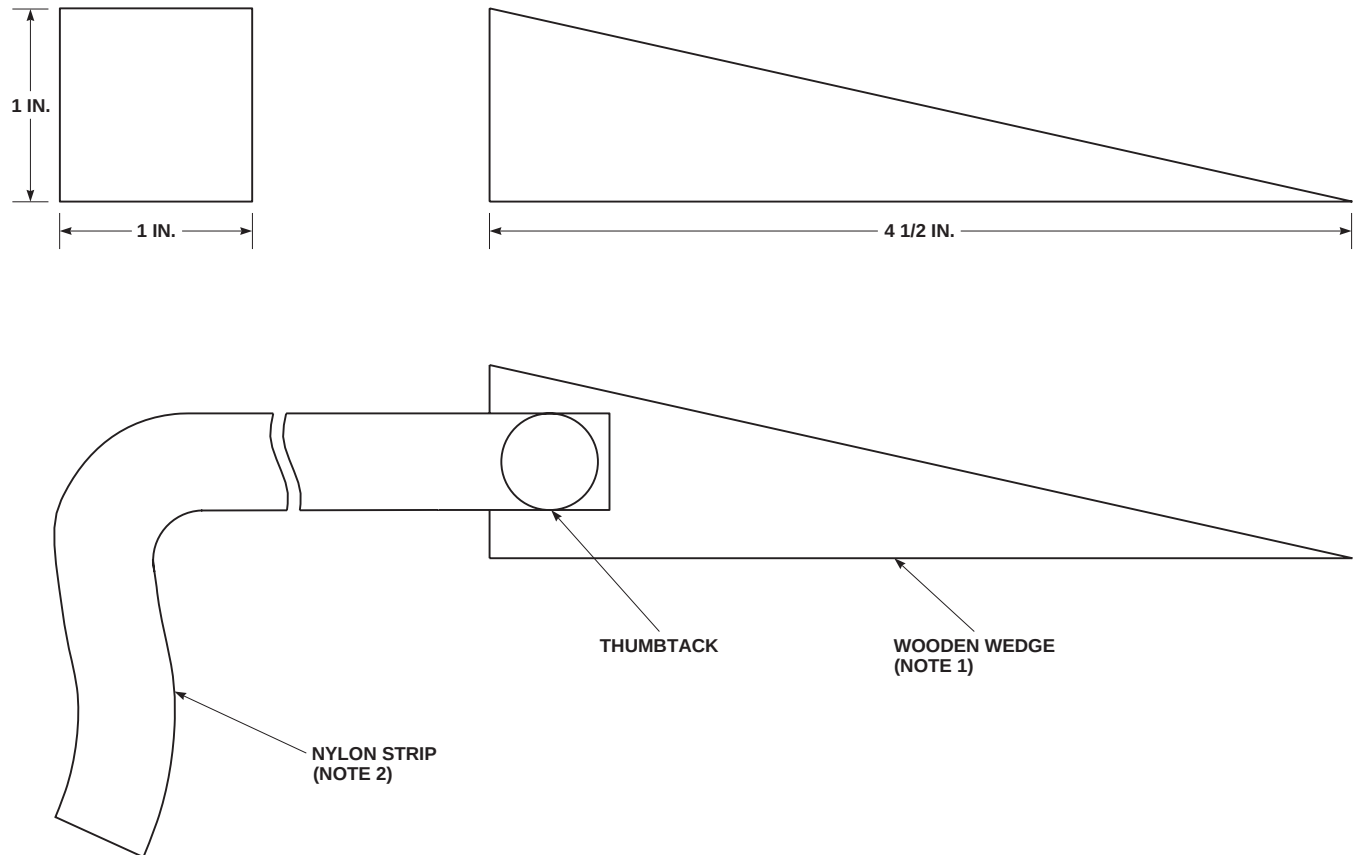


## NOTES

1. WOOD, MEDIUM TO HARD TYPE, OAK, MAPLE OR SIMILAR, 1 INCH THICK.
2. NYLON STRIP, WOVEN, PLASTIC COATED, FLUORESCENT RED, 14" X 1/2'.

AK1799  
SA

FIGURE H-159. WOODEN TUNING WEDGE

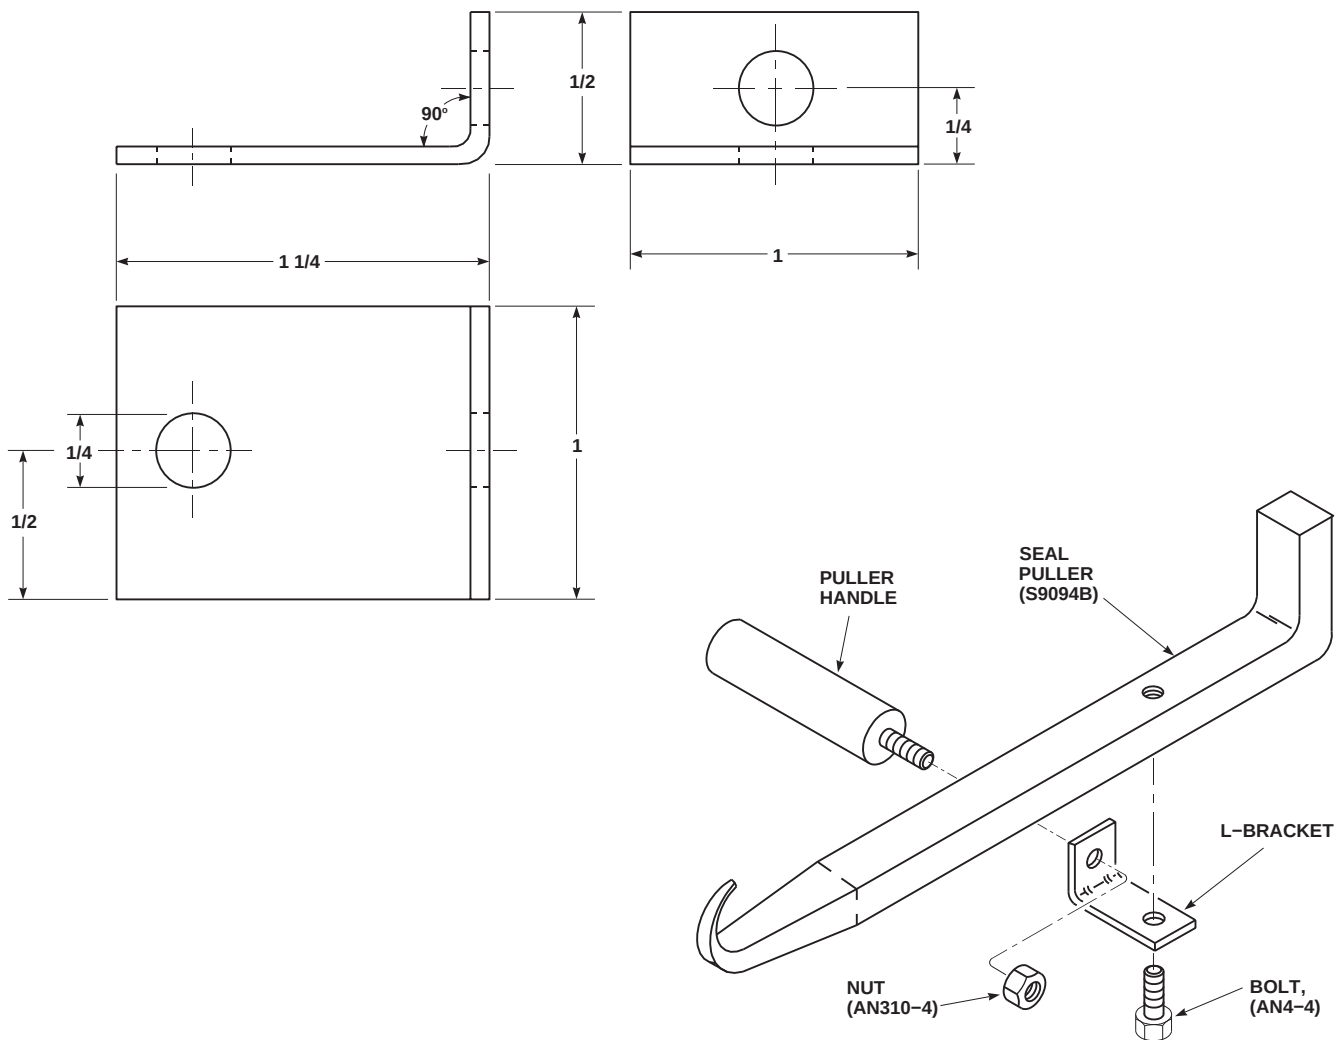


#### NOTES

1. MAKE BRACKET FROM 7075 ALUMINUM ALLOY, USE .064 THICKNESS.
2. ALL DIMENSIONS ARE IN INCHES.
3. REMOVE HANDLE FROM PULLER.
4. INSTALL L-BRACKET TO PULLER USING BOLT, AN4-4.
5. CONNECT PULLER HANDLE TO L-BRACKET USING NUT, AN310-4.
6. TAIL GEARBOX SEAL PULLER ASSEMBLY USED ON TAIL GEARBOX OUTPUT SEAL, INPUT SEAL AND FLANGE SEAL.

AA1199B  
SA

FIGURE H-160. SEAL PULLER

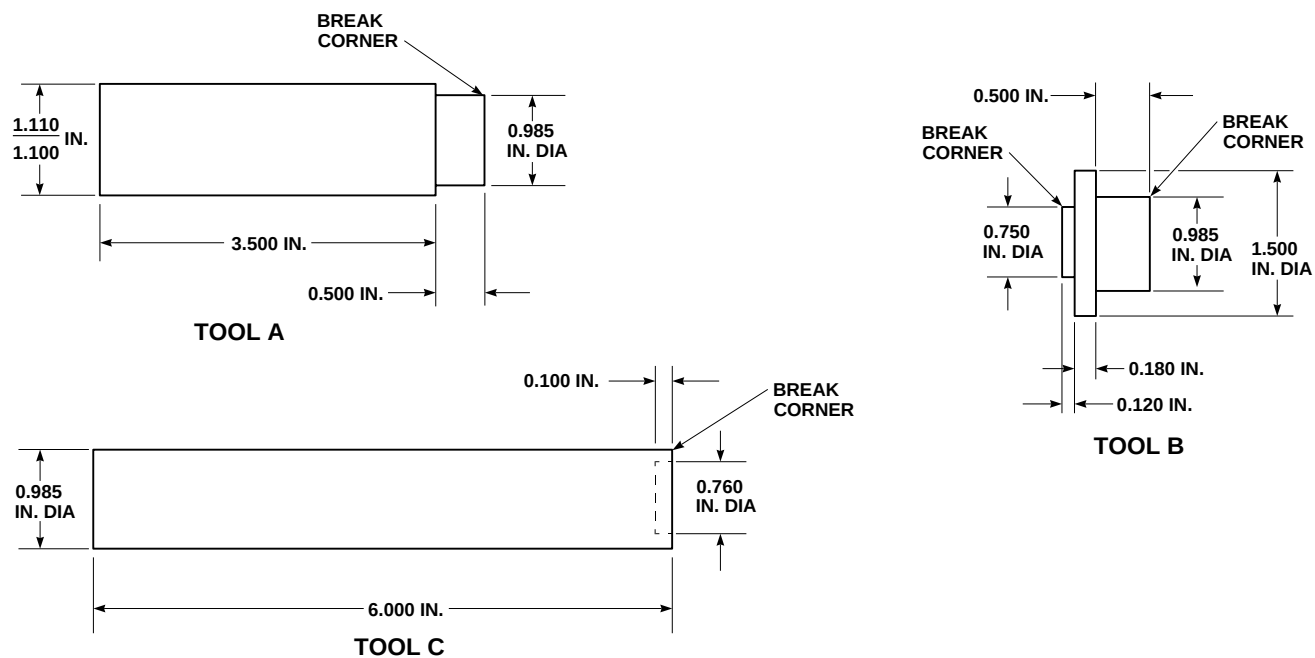


**NOTES**

1. MAKE FROM STEEL MIL-S-5000.
2. ALL DIMENSIONS ARE  $\pm 0.010$  INCH UNLESS OTHERWISE NOTED.

AK1801A  
SA

**FIGURE H-161. BLADE/SPINDLE CUFF BUSHING INSTALLATION TOOLS**

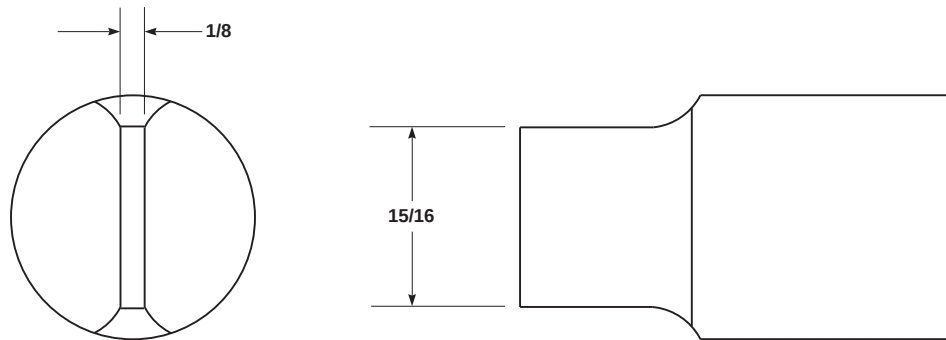


| PART NUMBER | DESCRIPTION                           | NSN              |
|-------------|---------------------------------------|------------------|
| GGG-B-1222  | FEMALE SOCKET, TYPE 1, 1/2-INCH DRIVE | 5120-00-277-3600 |

NOTES

1. REDUCE THICKNESS OF TIP TO APPROXIMATELY 1/8 INCH TO FIT RETAINING NUT RECESS ON AREA PILOT'S / COPILOT'S SEATS.
2. ALL DIMENSIONS ARE IN INCHES.

AK1802  
SA

FIGURE H-162. DRAG LINK ADJUSTING TOOL

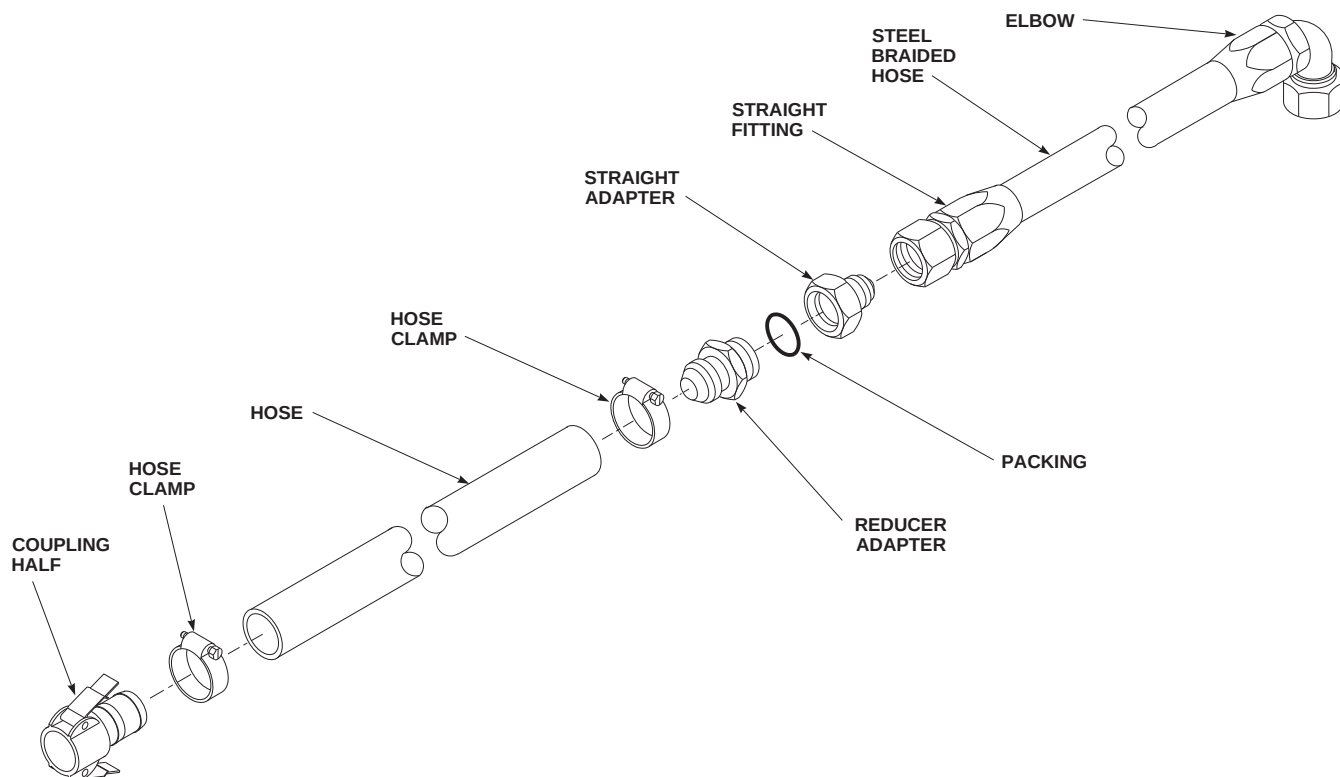


| CHART A      |                                                                    |          |                  |
|--------------|--------------------------------------------------------------------|----------|------------------|
| PART NUMBER  | DESCRIPTION                                                        | QUANTITY | NSN              |
| MS27025-5    | COUPLING HALF, QUICK DISCONNECT, CAM-LOCKING TYPE, FEMALE, TYPE VI | 1        | 4730-01-223-4931 |
| MS35842-12   | HOSE CLAMP                                                         | 2        | 4730-00-908-3193 |
| 601-20       | HOSE, 1-1/8 INCH ID                                                | 1 FT     | 4720-00-380-6944 |
| MS24393D12   | REDUCER ADAPTER                                                    | 1        | 4730-00-994-0883 |
| NAS1595-10   | PACKING                                                            | 1        | 5330-00-020-0067 |
| MS24398-12-8 | ADAPTER, STRAIGHT                                                  | 1        | 4730-00-883-8990 |
| M83798 / 1-8 | FITTING, STRAIGHT                                                  | 1        | 4730-00-632-2002 |
| 601 NO. 8    | STEEL BRAIDED HOSE                                                 | 1 FT     |                  |
| M83798 / 3-8 | ELBOW                                                              | 1        | 4730-00-795-0945 |

## NOTE


1. MAKE DEFUEL ADAPTER ASSEMBLY PER FIGURE, USING MATERIAL LISTED IN CHART A, OR APPROVED EQUIVALENT.

AA9532  
SA

FIGURE H-163. DEFUEL ADAPTER

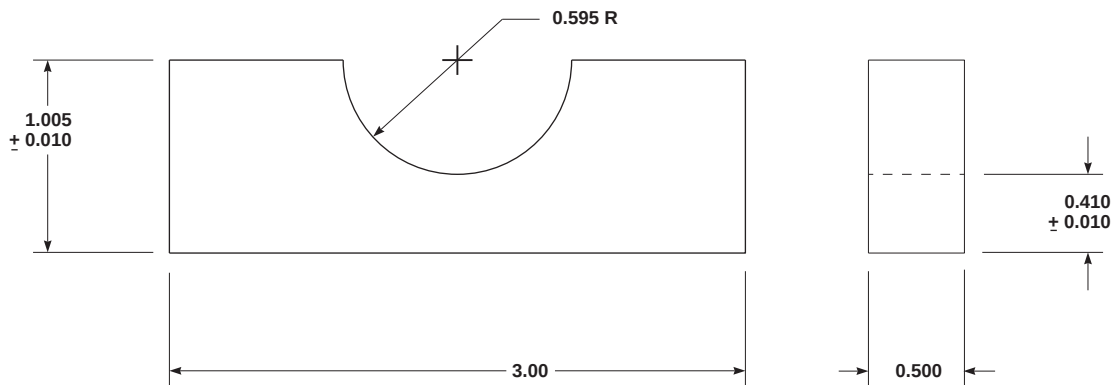

(SEE NOTES 1, 2, 3)

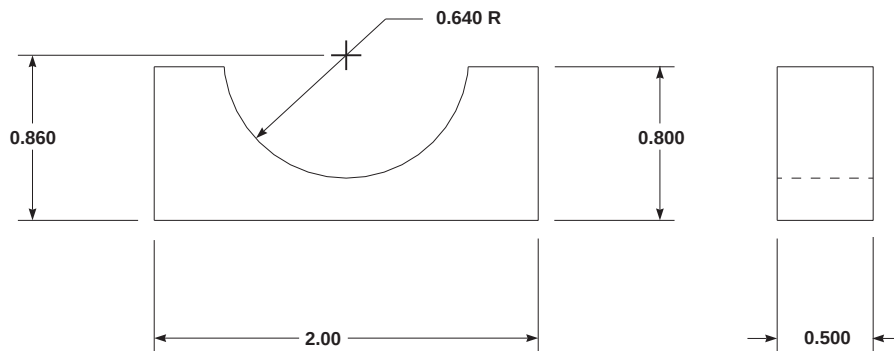


(SEE NOTES 1, 4, 5)

#### NOTES

1. ALL DIMENSIONS ARE IN INCHES.
2. MAKE FROM 7075-T6 ALUMINUM ALLOY.
3. DAMPER P/N 9018-1-2.
4. MAKE FROM 6061-T6 ALUMINUM ALLOY.
5. DAMPER P/N 9341101.

AA9721  
SA

FIGURE H-164. DAMPER INDICATOR CRADLE

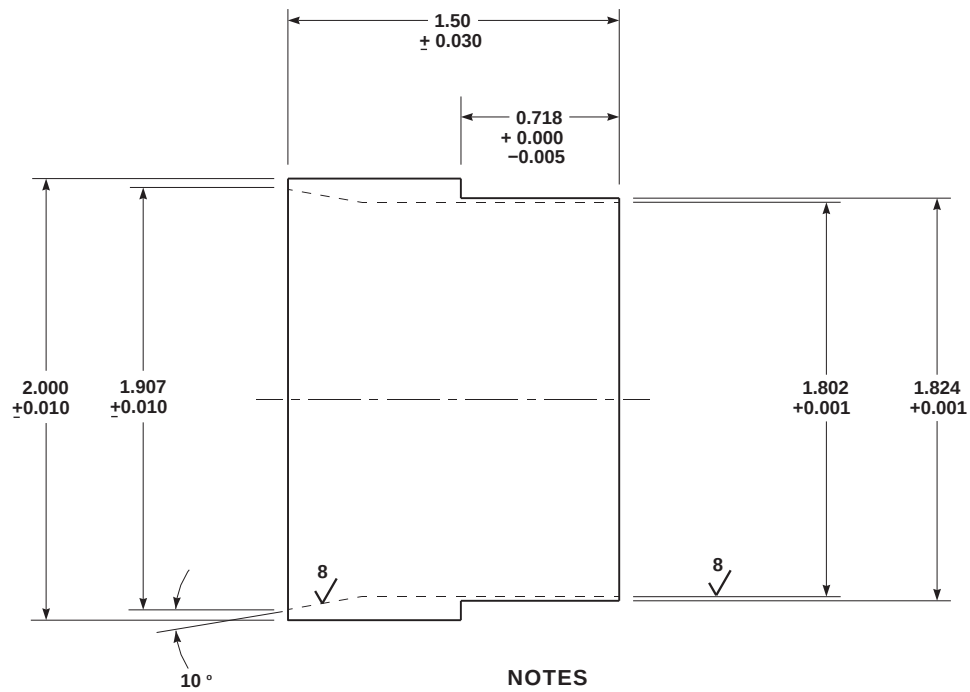


NOTES

1. MAKE FROM 303 STAINLESS STEEL.
2. BLEND ID SMOOTH.
3. ALL DIMENSIONS ARE IN INCHES.

AK1805  
SA

FIGURE H-165. DAMPER INDICATOR INSERTION TOOL

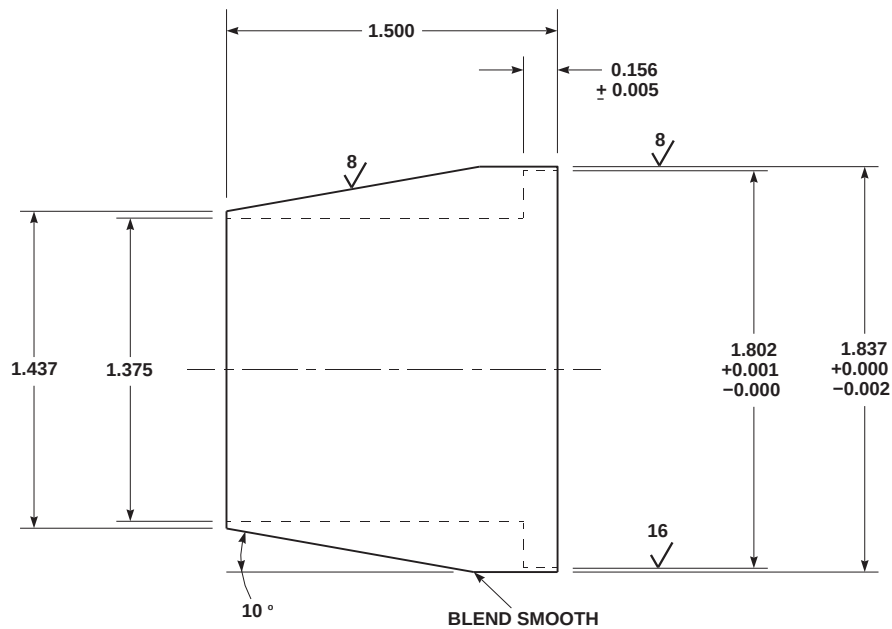


#### NOTES

1. MAKE FROM 303 STAINLESS STEEL.
2. BLEND OD SMOOTH.
3. ALL DIMENSIONS ARE IN INCHES.

AK1806  
SA

FIGURE H-166. DAMPER INDICATOR INSTALLATION TOOL



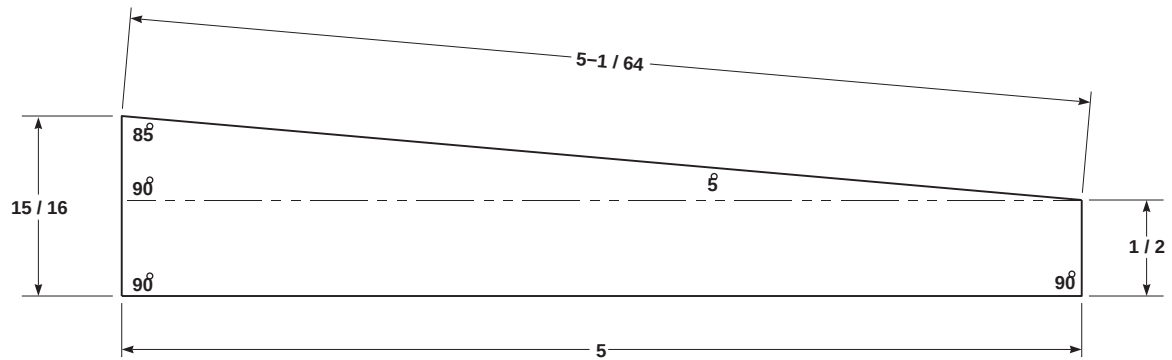


## NOTES

1. CUT FROM 2-INCH WOOD STOCK.
2. ENGRAVE DEGREE MARKS AS SHOWN.
3. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: A3012557

AK1807  
SA

FIGURE H-167. DRAG BEAM WEDGE

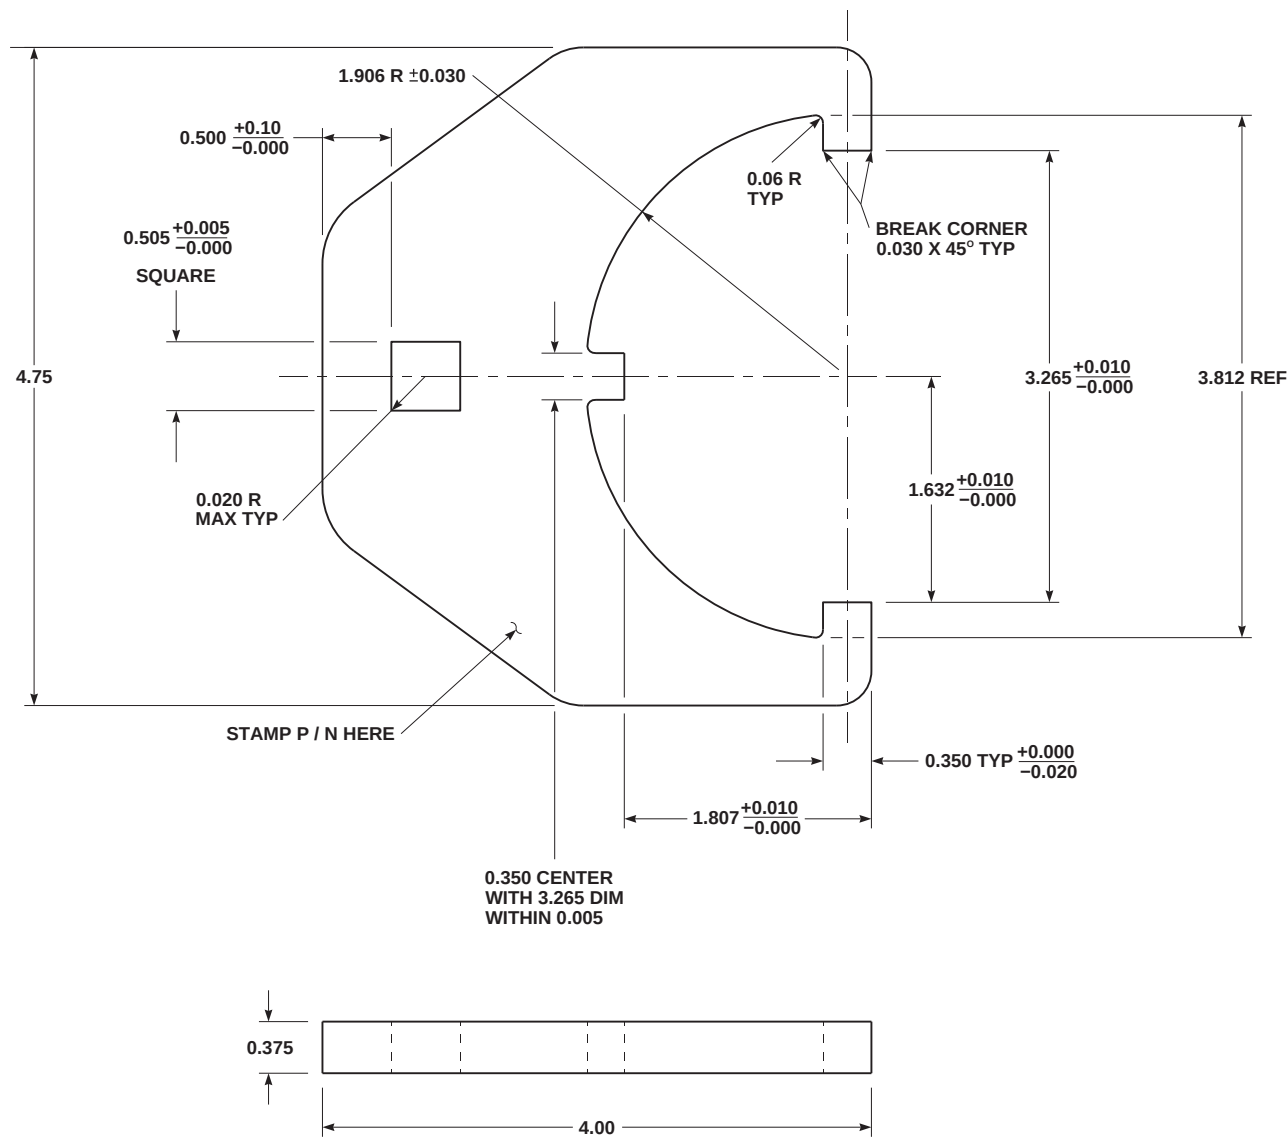

| NOMENCLATURE          | PART NUMBER   | MATERIAL   | THICKNESS | WIDTH | LENGTH |
|-----------------------|---------------|------------|-----------|-------|--------|
| DROOP STOP NUT WRENCH | 1520-BH53E001 | 4130 STEEL | 0.375     | 4.75  | 4.00   |


NOTES

- 1. MAKE DROOP STOP NUT WRENCH AS SHOWN IN FIGURE, USING MATERIAL LISTED IN CHART.
- 2. ALL DIMENSIONS ARE IN INCHES.
- 3. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 1520-BH53E001

AA4996  
SA

FIGURE H-168. DROOP STOP NUT WRENCH

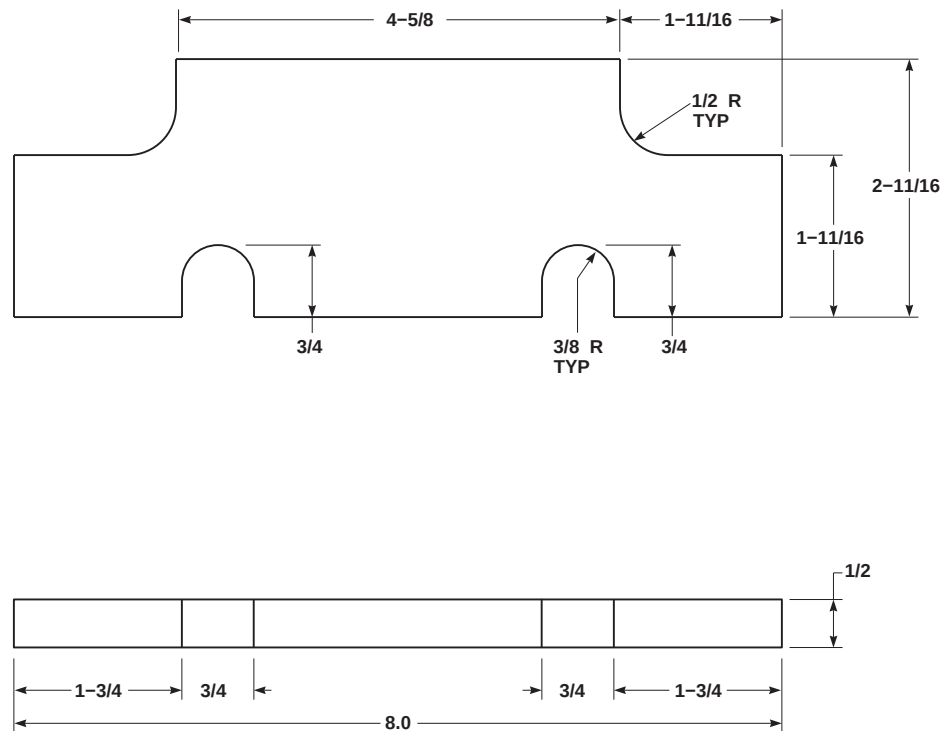


### NOTES

1. MAKE FROM 4130 STEEL PLATE, 0.50 INCH THICK.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. BREAK ALL SHARP EDGES.
4. IDENTIFY PART PER MIL-STD-130.

PART NUMBER: 4920BHS3E004

FO0548A  
SA

FIGURE H-169. STABILATOR BOLT REMOVAL TOOL

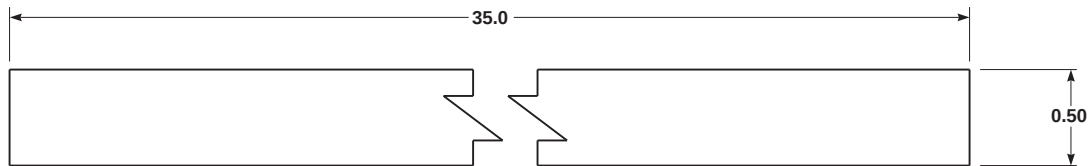


**NOTES**

1. MAKE FROM PRESSURE SENSITIVE FOIL TAPE, 2 MIL THICK.
2. MADE BY 3M CO., NO. 433, FSCM 26066.
3. ALL DIMENSIONS ARE IN INCHES.
4. CUT TAPE TO REQUIRED LENGTH.

PART NUMBER: 70216-01000-107.


AK1810  
SA

**FIGURE H-170. FOIL TAPE**

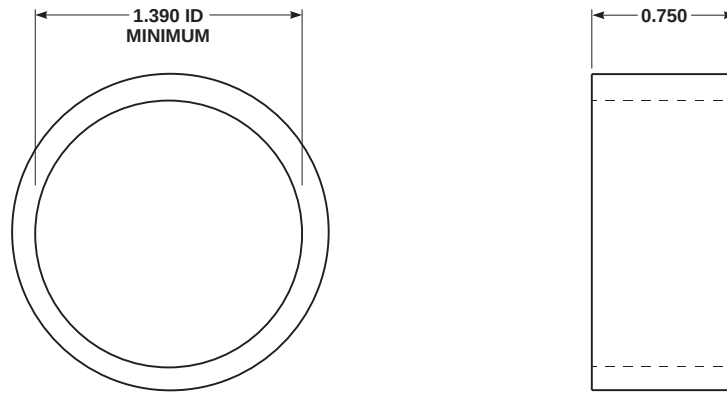**NOTES**

1. MAKE FROM SAE4130 STEEL TUBING, MIL-S-6731 OR EQUIVALENT.
2. ALL DIMENSIONS ARE IN INCHES.

AA4997  
SA**FIGURE H-171. STABILATOR FITTING SUPPORT**

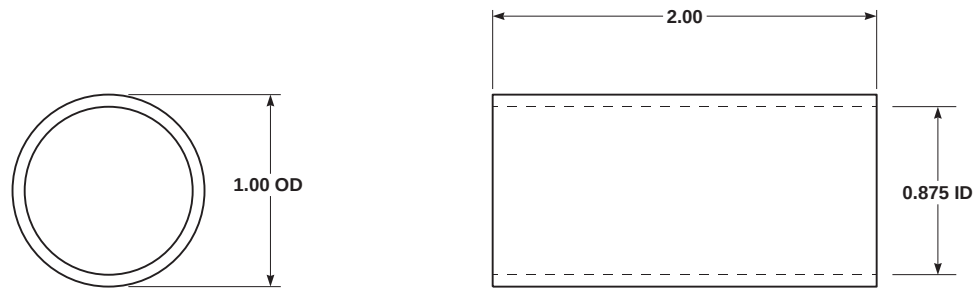


**NOTES**

1. MAKE FROM ALUMINUM TUBING.
2. ALL DIMENSIONS ARE IN INCHES.

AK1812  
SA

**FIGURE H-172. PUSHER TUBE**

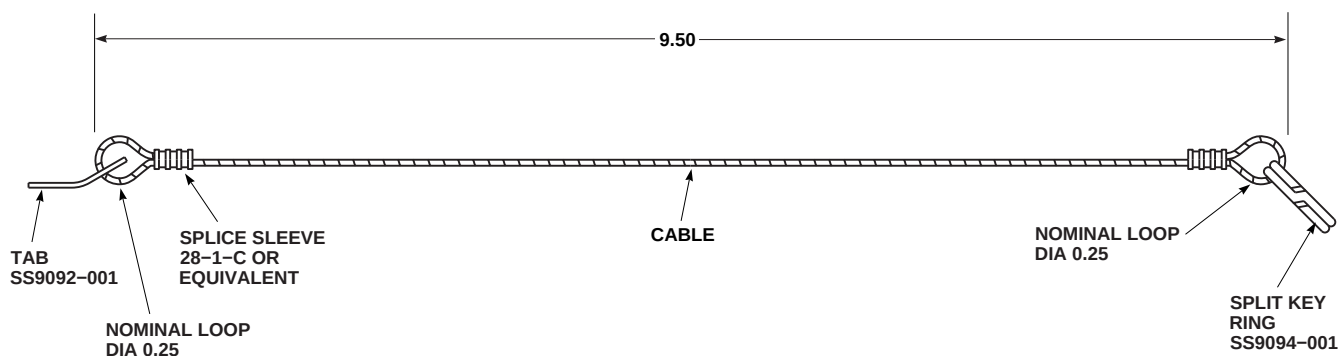


## NOTES

1. ALL DIMENSIONS ARE IN INCHES.
2. MAKE FROM:
  - A. CABLE 3/64 CRES WIRE CABLE, MIL-W-83420, TYPE II, COMP B, NSN 4010-00-082-5963.
  - B. SPLICE SLEEVE-28-1-6, NSN 4030-00-431-5536.
  - C. TAB-SS9092-001, FSCM 78286.
  - D. SPLIT KEY RING-SS9094-001, FSCM 78286.
3. CUT CABLE TO REQUIRED LENGTH. ASSEMBLE SPLICE SLEEVES, TAB, AND SPLIT KEY RING AS SHOWN.
4. REMOVE ALL BURRS AND SHARP EDGES.
5. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: SS9096A06GG0095

AK1813  
SA

FIGURE H-173. DRIP PAN CABLE ASSEMBLY

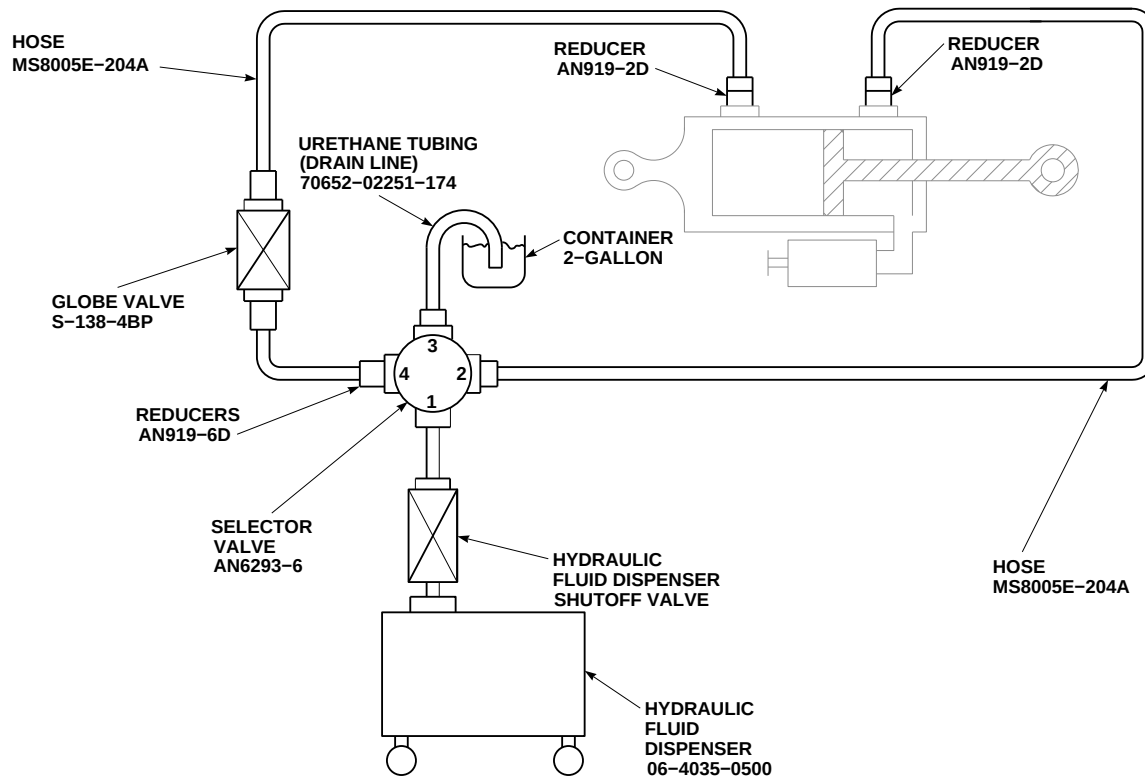

| PART NUMBER     | DESCRIPTION               | QUANTITY    |
|-----------------|---------------------------|-------------|
|                 | CONTAINER, 2-GALLON       | 1           |
| S-138-4BP       | GLOBE VALVE               | 1           |
| MS8005E-204A    | HOSE                      | AS REQUIRED |
| 06-4035-0500    | HYDRAULIC FLUID DISPENSER | 1           |
| AN919-6D        | REDUCER                   | 4           |
| AN919-2D        | REDUCER                   | 2           |
| AN6293-6        | SELECTOR VALVE            | 1           |
| 70652-02251-174 | TUBING, URETHANE          | 2 FEET      |

#### NOTES

1. MAKE DAMPER BLEED UNIT PER FIGURE, USING MATERIAL LISTED IN CHART OR EQUIVALENT.
2. IDENTIFY PARTS PER MIL-STD-130.

FO0307  
SA

FIGURE H-174. DAMPER BLEED UNIT



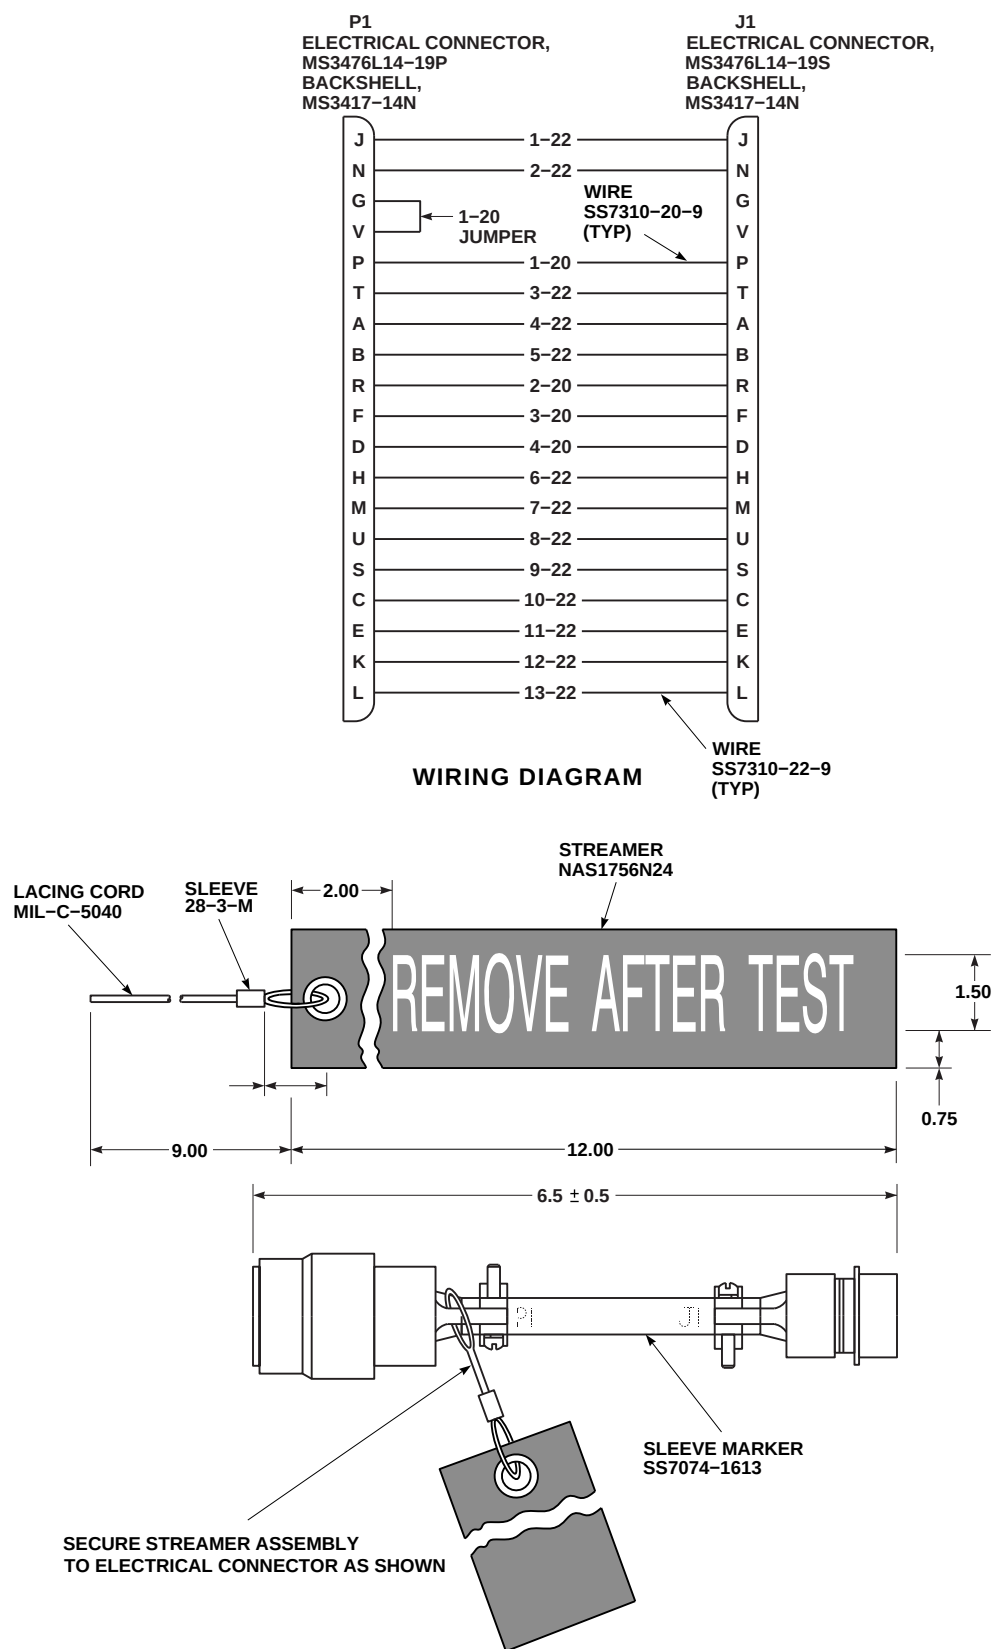


FIGURE H-175. DISPENSER TEST CABLE (SHEET 1 OF 2)

FO0549  
SA


| PART NUMBER   | DESCRIPTION          | QUANTITY    |
|---------------|----------------------|-------------|
| MIL-C-5040    | LACING CORD          | AS REQUIRED |
| MS3471L14-19S | ELECTRICAL CONNECTOR | 1           |
| MS3476L14-19P | ELECTRICAL CONNECTOR | 1           |
| MS3417-14N    | BACKSHELL            | 2           |
| SS7074-1613   | SLEEVE MARKER        | AS REQUIRED |
| SS7310-20-9   | WIRE                 | AS REQUIRED |
| SS7310-22-9   | WIRE                 | AS REQUIRED |
| 28-3-M        | SLEEVE               | 1           |
| NAS1756N24    | STREAMER             | 1           |

## NOTES

1. MAKE DISPENSER TEST CABLE AS SHOWN IN FIGURE, USING MATERIALS LISTED IN CHART.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY TEST CABLE AND CONNECTORS PER FIGURE AND MIL-STD-130.
4. STENCIL LETTERS USING WHITE, COLOR NO. 37875 PER FED-STD-595.
5. SECURE STREAMER TO CONNECTOR.

AA0128\_2  
SA

FIGURE H-175. DISPENSER TEST CABLE (SHEET 2 OF 2)

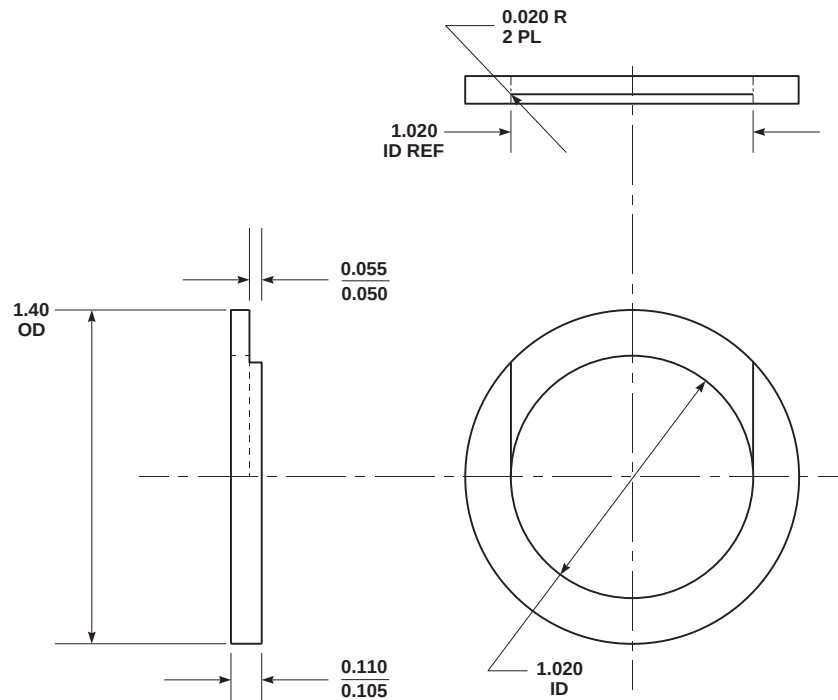


## NOTES

1. MAKE FROM 0.125 INCH THICK NYLON 6 / 6. L-P-410, NSN 9330-01-028-9334. MACHINE TO SPECIFIED THICKNESS.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-130.


PART NUMBER: 70250-13004-101

AK1818  
SA


FIGURE H-176. TAIL LANDING GEAR STRUT LIMITER

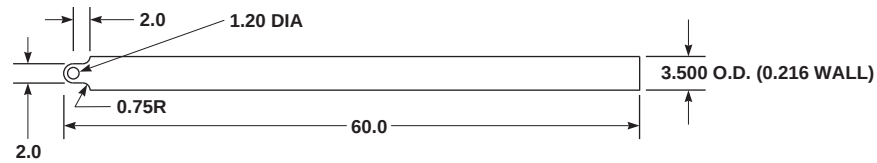

WT W/O APEX FITTING = 29 LBS  
WT COMPLETE = 38 LBS

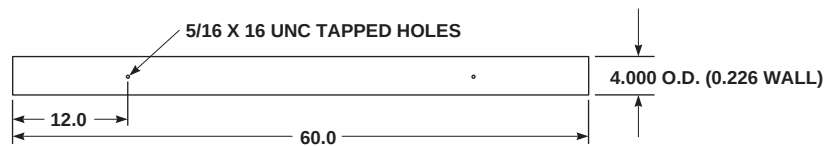

SCHEDULE 40 ALUMINUM PIPE  
6061T6

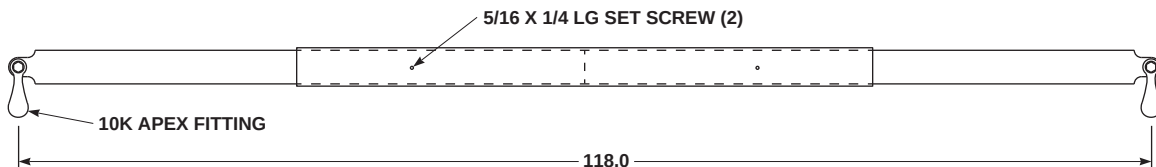


#### NOTES

1. MAKE EXTENDER FROM ALUMINUM TUBE, 6061-T6511, 5.5 INCH OD X 5 INCH ID X 43 INCHES LONG. IF 5.5 INCH OD X 0.25 INCH WALL TUBE IS NOT AVAILABLE. USE 5 INCH NOMINAL ALUMINUM TUBE, 6061-T6 TUBE (REFERENCE DIMENSIONS ARE 5.56 INCH OD X 5.047 INCH ID, 0.258 INCH WALLS THICKNESS).
2. MAKE INNER TUBE ASSEMBLY FROM TWO SPREADER BARS, 81996-1670EG050.
3. DRILL FOUR 1.281 INCH DIAMETER HOLES THROUGH EXTENDER AND INNER TUBE ASSEMBLIES.
4. ALL DIMENSIONS ARE IN INCHES.


AK1819A  
SA

FIGURE H-177. RECOVERY KIT SPREADER BAR

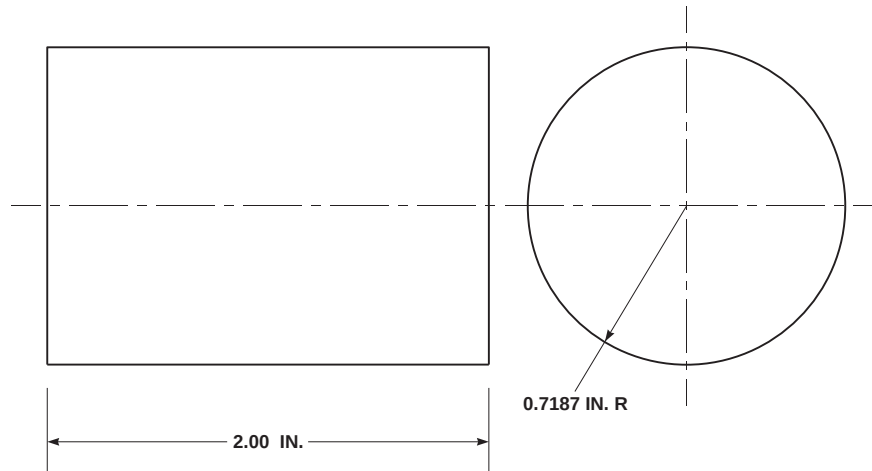**NOTES**

1. MAKE FROM BRASS.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.

FO0308A  
SA**FIGURE H-178. DRAG BEAM FUSELAGE SUPPORT FITTING BEARING DRIFT**

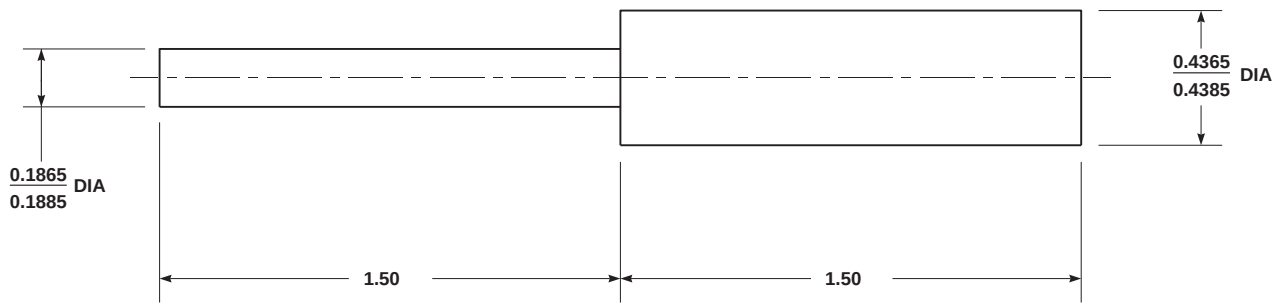


#### NOTES

1. MAKE FROM 17-4PH STEEL, AMS 5643.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: A3012558

FB3440  
SA

**FIGURE H-179. STABILATOR POSITION SENSOR/LIMIT SWITCH LOCKPIN**

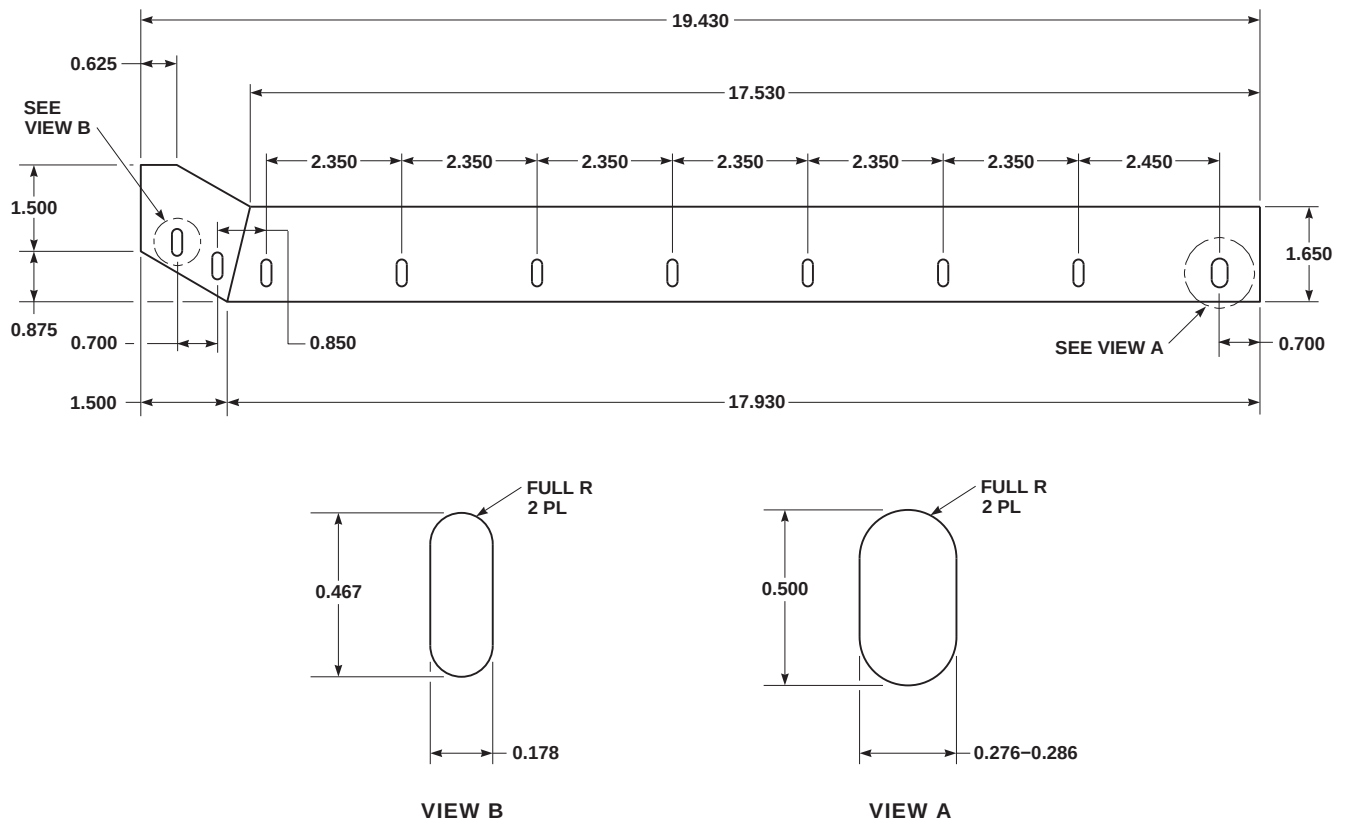

#### NOTES


1. MAKE FROM SEAL, NON METALLIC, NSN 5330-01-243-0782. PART NO. 8338-4, 0.625 DIA BULB, 1.625 TOTAL HEIGHT.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GREEN INK, TT-I-1795. USE 1/16-1/8-INCH SANS SERIF CHARACTERS.

EXAMPLE: P / N 70216-02401-107 3Q 86  
PART NUMBER THIRD QUARTER 1986

PART NUMBER: 70303-03201-106

AA1132  
SA

FIGURE H-180. SEAL, FIREWALL

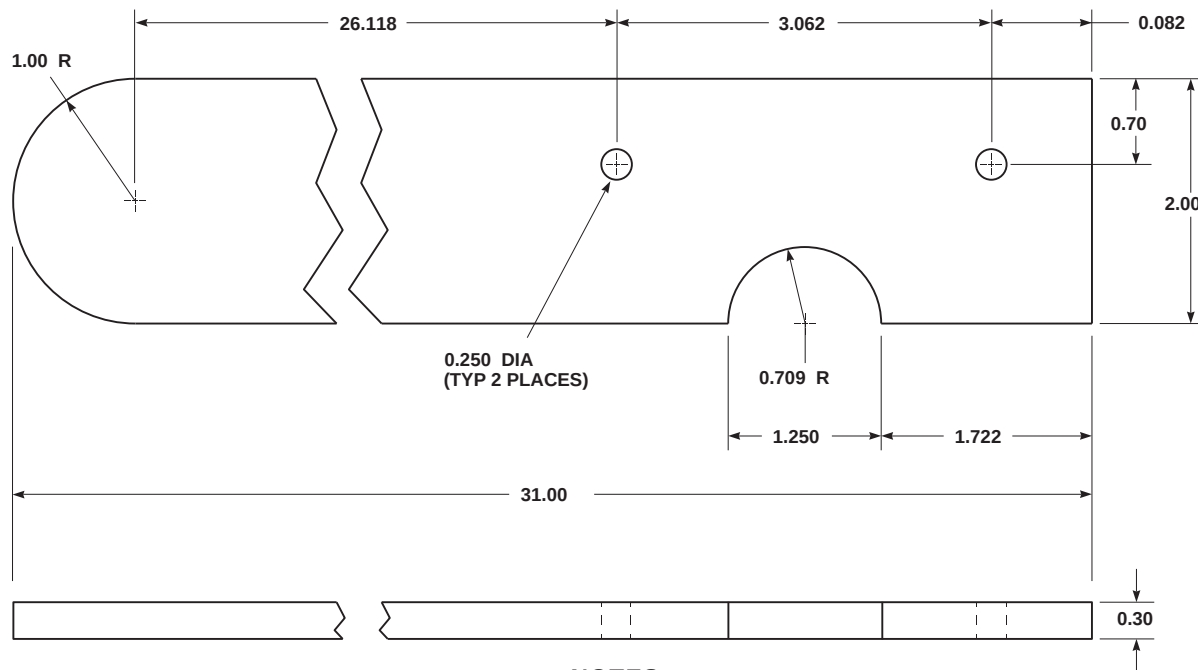

**NOTES**


1. MAKE FROM 7075-T6 ALUMINUM STOCK, 0.30 INCH THICK.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 410404-1

FO0309A  
SA

**FIGURE H-181. TORQUE REACTOR**



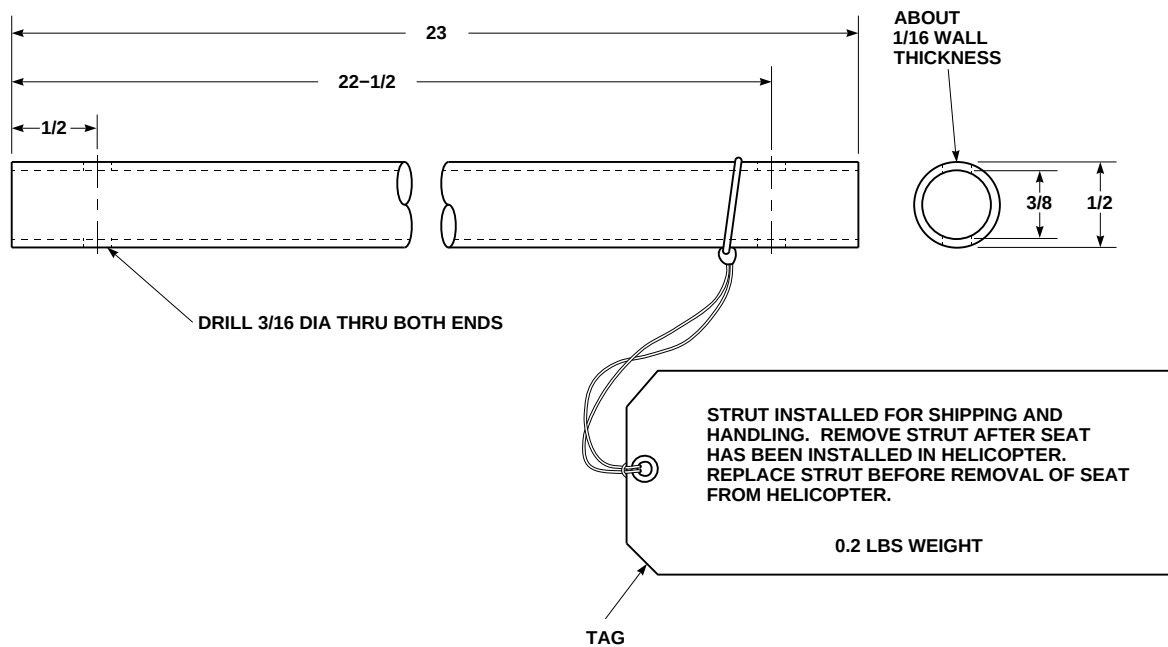


## NOTES

1. MAKE FROM ALUMINUM TUBING, 6061-T6, OR STAINLESS STEEL TUBING, MIL-S-6731.
2. FINISH PER MIL-P-23377 EPOXY PRIMER, NSN 8010-00-082-2477, 1 COAT, FED SPEC TT-L-20, AIRTIGHT RED LACQUER, NSN 8010-01-144-9873.
3. ALL DIMENSIONS ARE IN INCHES.
4. IDENTIFY PARTS PER MIL-STD-130.

AA0718A  
SA

FIGURE H-182. STABILIZER STRUT

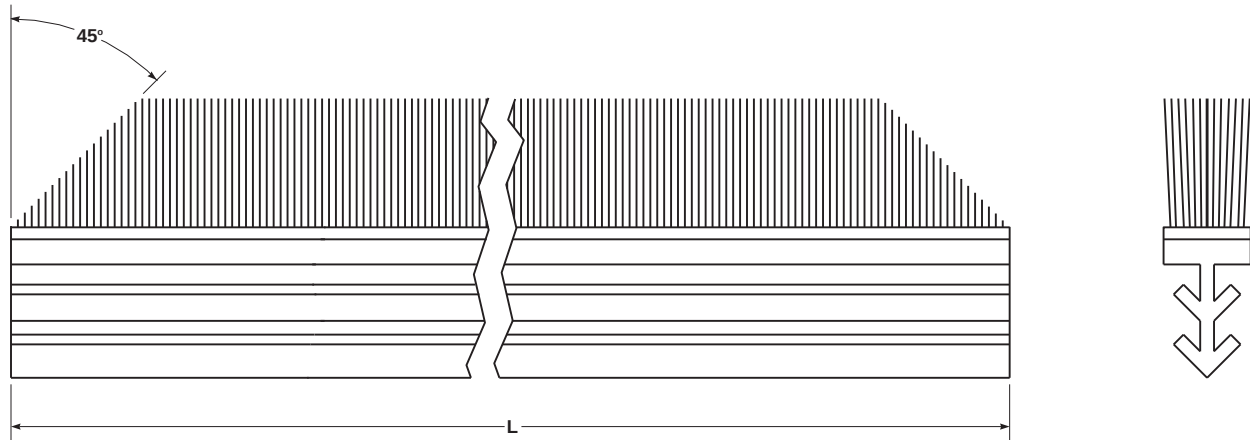

| NOMENCLATURE                   | L LENGTH | PART NUMBER |
|--------------------------------|----------|-------------|
| CREW CHIEF'S WINDOW BRUSH SEAL |          |             |
| UPPER FRONT                    | 14.38    | 0341-0001-3 |
| UPPER REAR                     | 15.04    | 0341-0002-3 |
| LOWER FRONT                    | 14.70    | 0341-0003-3 |
| LOWER REAR                     | 14.12    | 0341-0004-3 |



#### NOTES

1. MAKE FROM POLY-FIN WEATHER STRIPPING, PART NUMBER 0341-0000-3-100, NSN 5330-01-344-3841, CAGE 77824.
2. ALL DIMENSIONS ARE IN INCHES,  $\pm 0.030$  UNLESS NOTED.
3. CUT SEALS TO LENGTH PER CHART.
4. TRIM SEAL PILE TO 45° ANGLE, BOTH ENDS.
5. IDENTIFY PARTS PER MIL-STD-190.

PART NUMBER: 0341-0001-3, 0341-0002-3, 0341-0003-3, 0341-0004-3

FN1982B  
SA

**FIGURE H-183. CREW CHIEF'S WINDOW BRUSH SEAL**

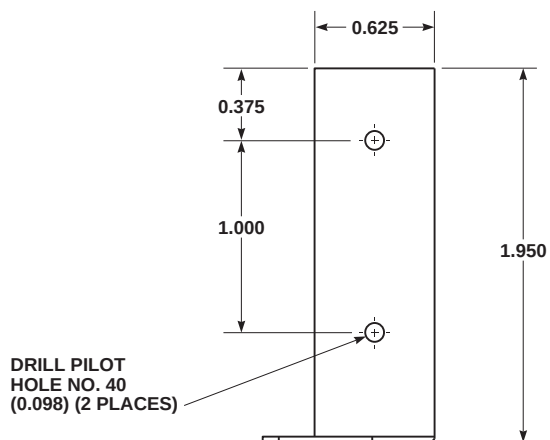

(-158) SHOWN


(-157) OPPOSITE

#### NOTES

1. MAKE FROM 2024-T3 ALUMINUM ALLOY, 0.032 INCH THICK.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. DRILL HOLES PER FIGURE.
4. IDENTIFY PARTS PER MIL-STD-130.

FO0310A  
SA

FIGURE H-184. CLIP

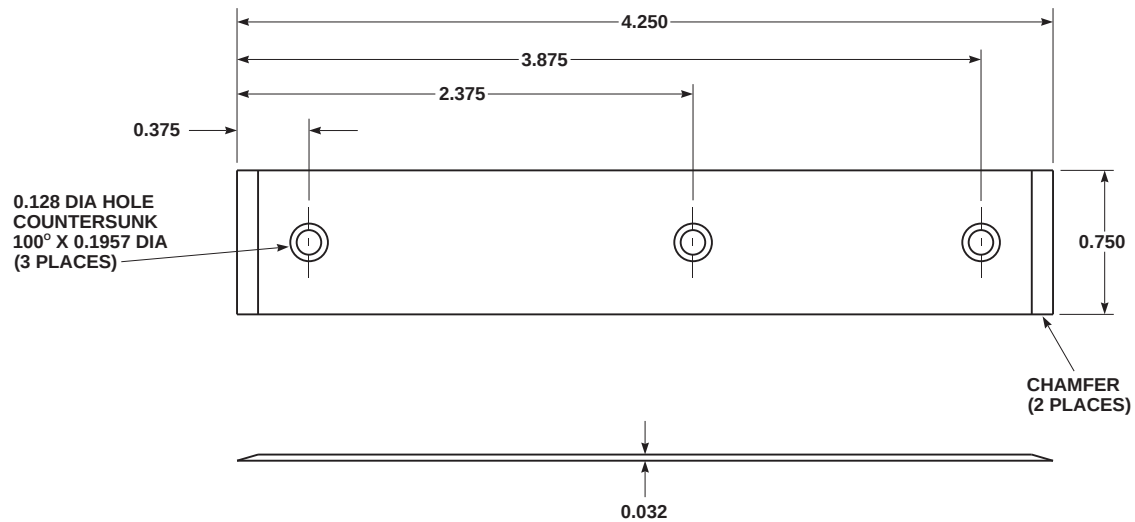


#### NOTES

1. MAKE FROM STAINLESS STEEL, MIL-S-5059, 301 1/4 HARD, 0.032 INCH THICK.
2. ALL DIMENSIONS ARE IN INCHES.
3. INSULATE DISSIMILAR METALS ON INSTALLATION.

AA1376  
SA

**FIGURE H-185. TRACK REPAIR PLATE**

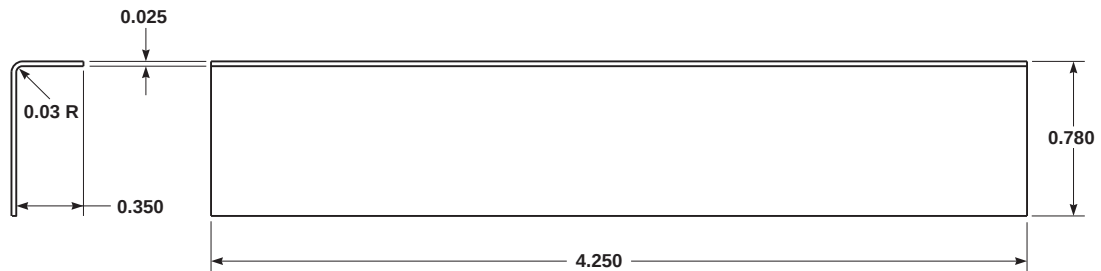

## NOTES

1. MAKE FROM 301 STAINLESS STEEL, MIL-S-5059, 0.025 INCH THICK, TREATED TO 1/4 HARD AFTER FORMING.
2. ALL DIMENSIONS ARE IN INCHES.
3. INSULATE DISSIMILAR METALS ON INSTALLATION.

AA1377  
SA

FIGURE H-186. TRACK REPAIR ANGLE

**FIGURE H-187. MAIN ROTOR BLADE COVER (SHEET 1 OF 2)**

## NOTES

1. MAKE FROM COATED CLOTH, TYPE II, CLASS II, MIL-C-20696, NSN 8305-00-880-8155.
2. CUT CLOTH TO FLAT PATTERN DIMENSIONS.
3. FOLD CLOTH 1 INCH UNDER ON ALL SIDES.
4. STITCHING TO BE PER FED-STD-751, TYPE 301, USING V-T-295, BLACK NYLON THREAD.
5. ALL SEWING PATTERNS TO BE BACK STITCHED 1/4 INCH.
6. POSITION 1730BH025-5 PATCH ASSEMBLY AND 1/4 INCH NYLON CORD, NSN 4020-00-263-1801 ON MAIN ROTOR BLADE COVER AND SEW.
7. ALL DIMENSIONS ARE IN INCHES.
8. IDENTIFY PER MIL-STD-130.

PART NUMBER: 1730BH025-1

AA1378\_2  
SA

## FIGURE H-187. MAIN ROTOR BLADE COVER (SHEET 2 OF 2)

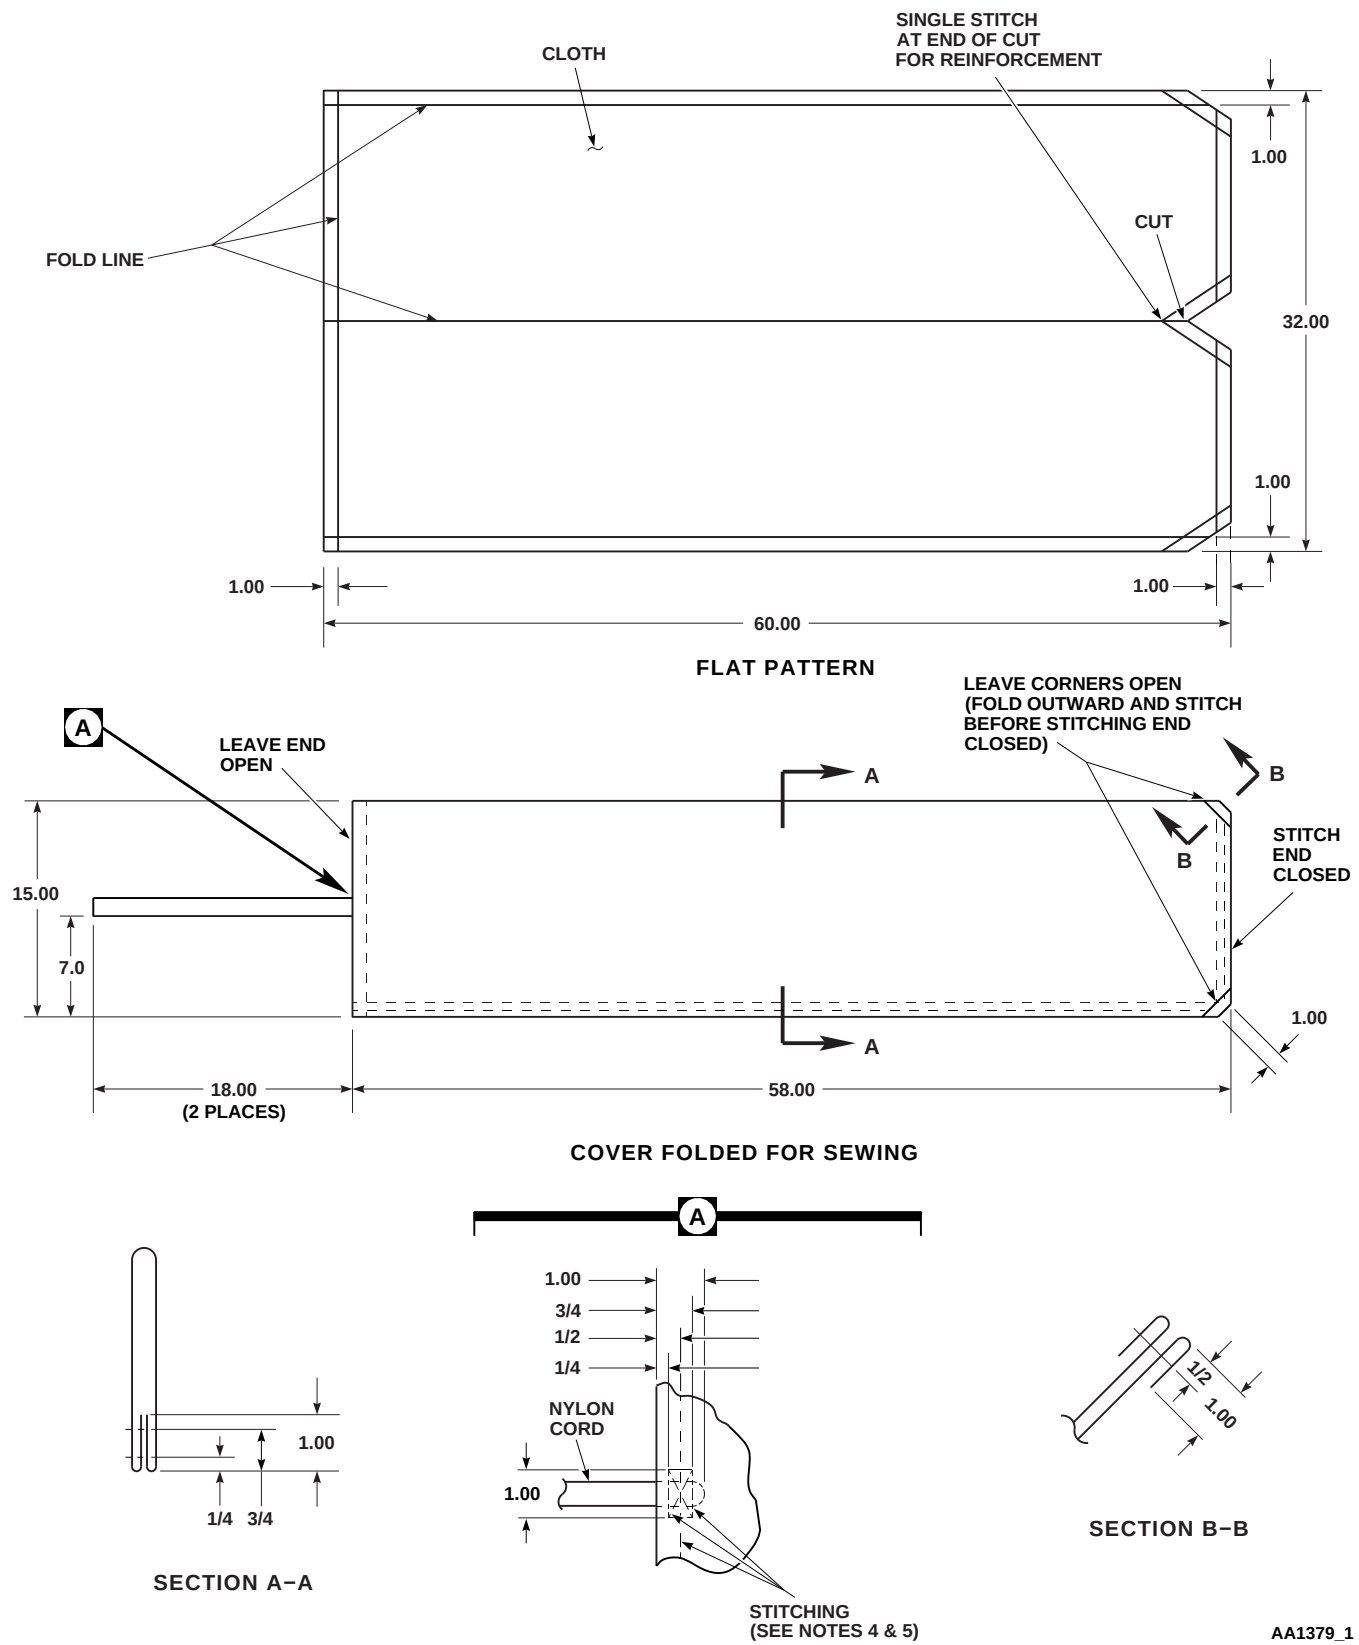


FIGURE H-188. TAIL ROTOR BLADE COVER (SHEET 1 OF 2)




## NOTES

1. MAKE FROM COATED CLOTH, TYPE II, CLASS II, MIL-C-20696, NSN 8305-00-880-8155.
2. CUT CLOTH TO FLAT PATTERN DIMENSIONS.
3. FOLD CLOTH 1 INCH UNDER ON ALL SIDES. POSITION 1/4 INCH NYLON CORD NSN 4020-00-263-1801.
4. STITCHING TO BE PER FED-STD-751, TYPE 301, USING V-T-295, BLACK NYLON THREAD.
5. ALL SEWING PATTERNS TO BE BACK STITCHED 1/4 INCH.
6. ALL DIMENSIONS ARE IN INCHES.
7. IDENTIFY PER MIL-STD-130.

PART NUMBER: 1730BH025-2

AA1379\_2  
SA

## FIGURE H-188. TAIL ROTOR BLADE COVER (SHEET 2 OF 2)

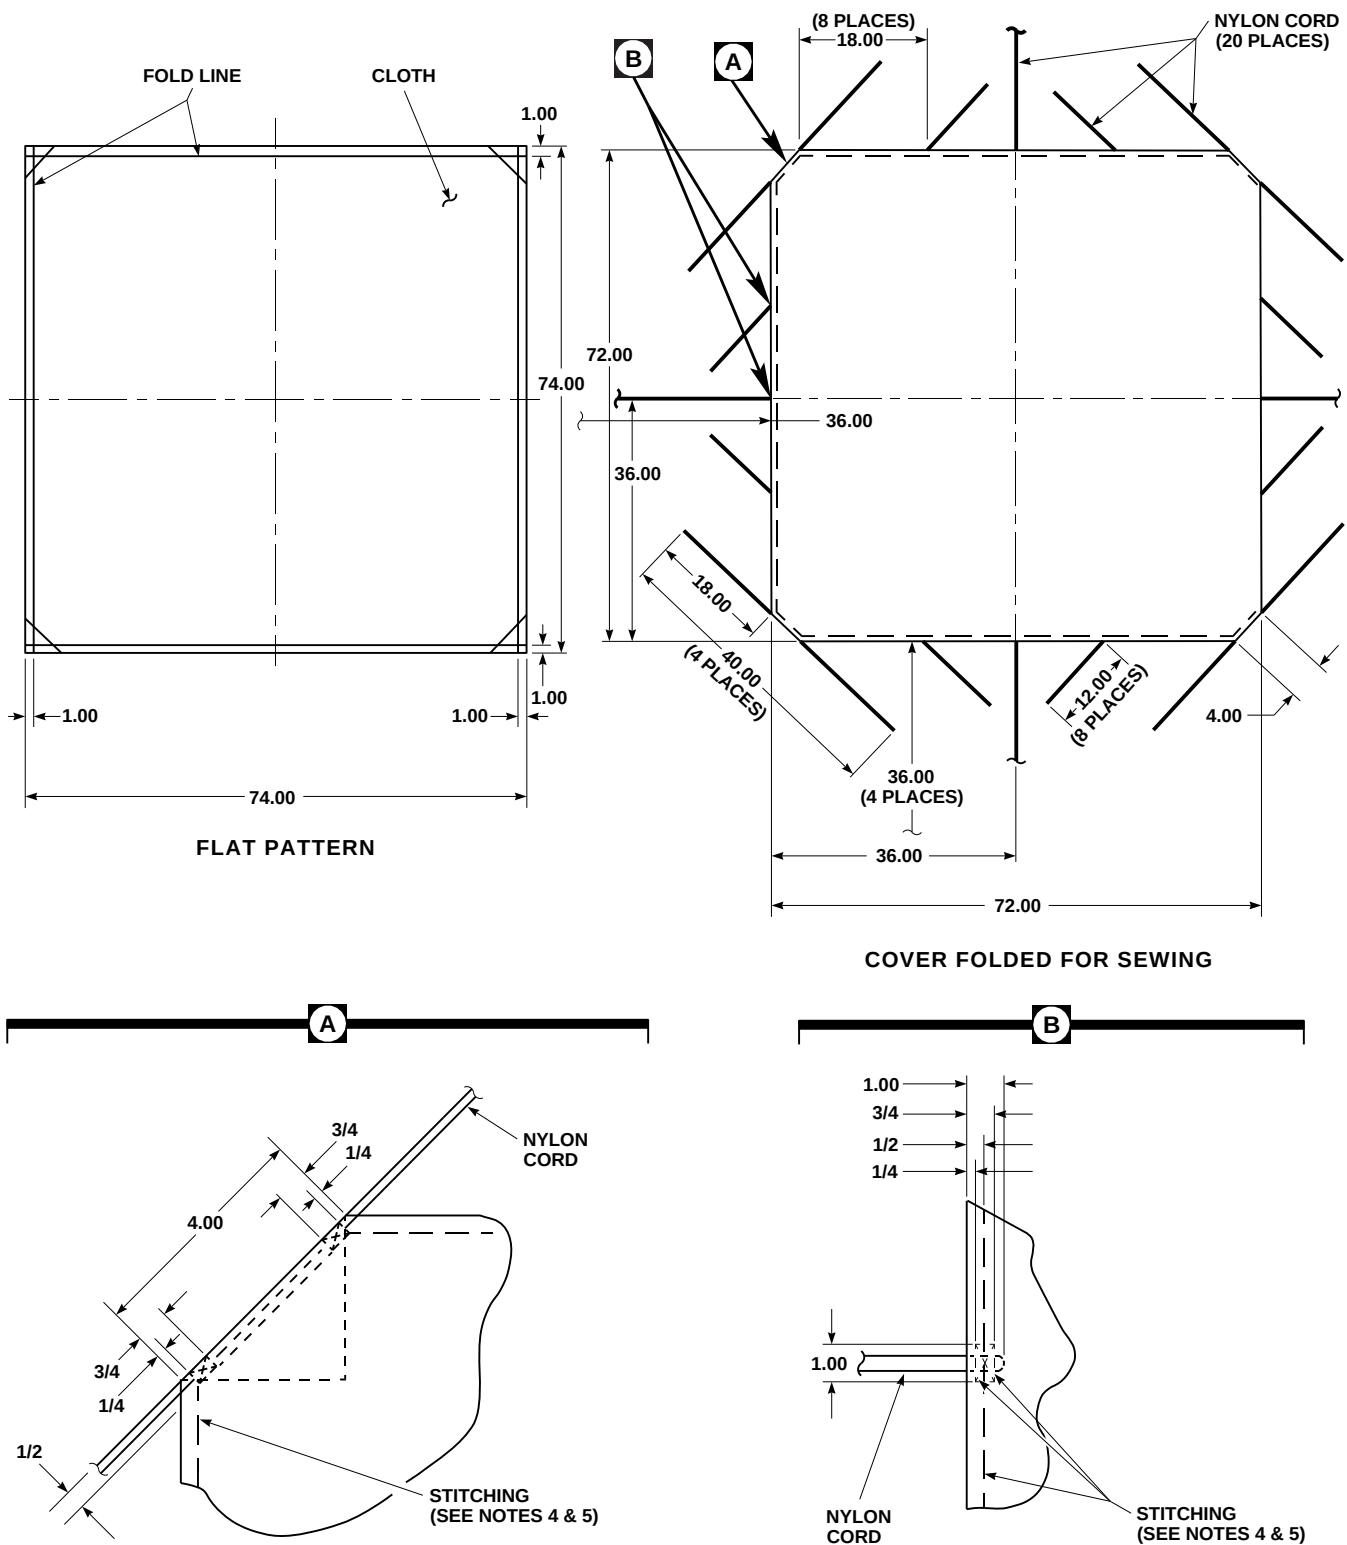

AA1380\_1  
SA


FIGURE H-189. MAIN ROTOR HEAD COVER (SHEET 1 OF 2)

## NOTES

1. MAKE FROM COATED CLOTH, TYPE II, CLASS II, MIL-C-20696, NSN 8305-00-880-8155.
2. CUT CLOTH TO FLAT PATTERN DIMENSIONS.
3. FOLD CLOTH 1 INCH UNDER ON ALL SIDES. POSITION 1/4 INCH NYLON CORD NSN 4020-00-263-1801.
4. STITCHING TO BE PER FED-STD-751, TYPE 301, USING V-T-295, BLACK NYLON THREAD.
5. ALL SEWING PATTERNS TO BE BACK STITCHED 1/4 INCH.
6. ALL DIMENSIONS ARE IN INCHES.
7. IDENTIFY PER MIL-STD-130.

PART NUMBER: 1730BH025-3

AA1380\_2  
SA**FIGURE H-189. MAIN ROTOR HEAD COVER (SHEET 2 OF 2)**

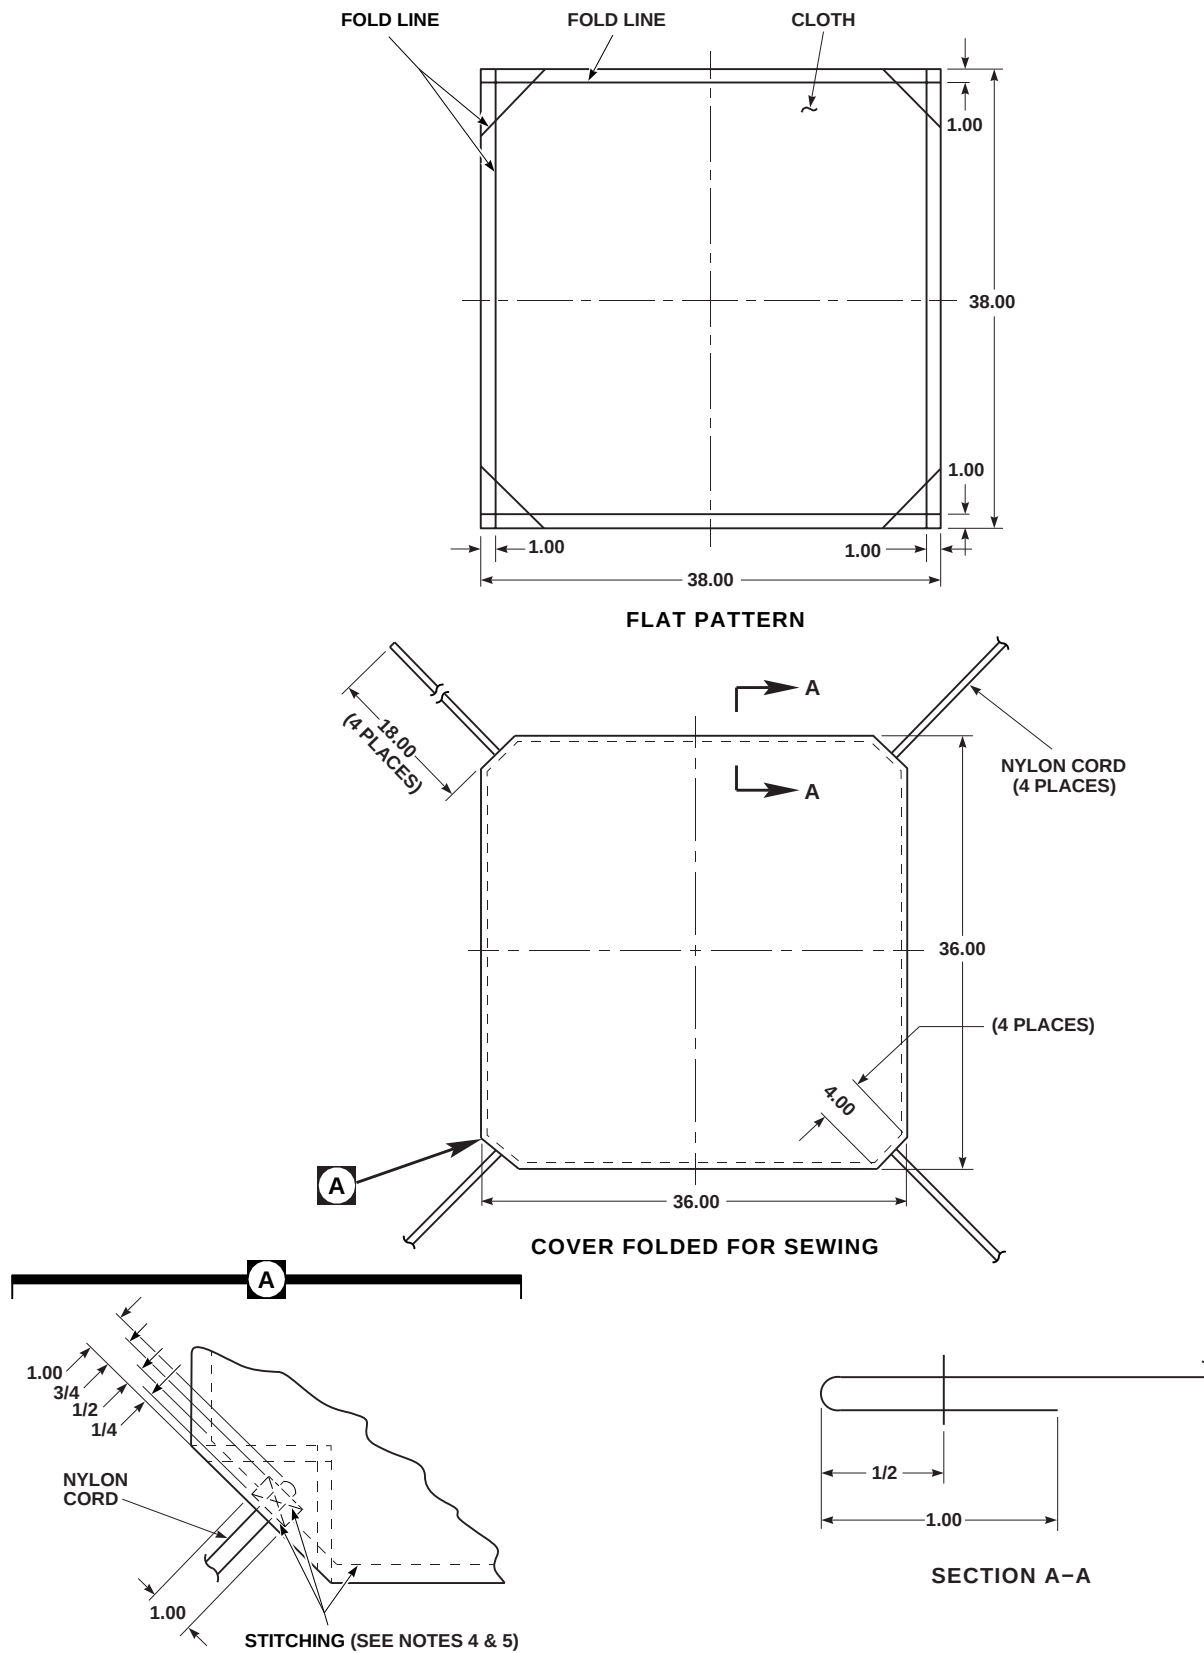

AA1381\_1  
SA


FIGURE H-190. TAIL ROTOR GEAR BOX COVER (SHEET 1 OF 2)

## NOTES

1. MAKE FROM COATED CLOTH, TYPE II, CLASS II, MIL-C-20696, NSN 8305-00-880-8155.
2. CUT CLOTH TO FLAT PATTERN DIMENSIONS.
3. FOLD CLOTH 1 INCH UNDER ON ALL SIDES. POSITION 1/4 INCH NYLON CORD NSN 4020-00-263-1801.
4. STITCHING TO BE PER FED-STD-751, TYPE 301, USING V-T-295, BLACK NYLON THREAD.
5. ALL SEWING PATTERNS TO BE BACK STITCHED 1/4 INCH.
6. ALL DIMENSIONS ARE IN INCHES.
7. IDENTIFY PER MIL-STD-130.

PART NUMBER: 1730BH025-4

AA1381\_2  
SA**FIGURE H-190. TAIL ROTOR GEAR BOX COVER (SHEET 2 OF 2)**

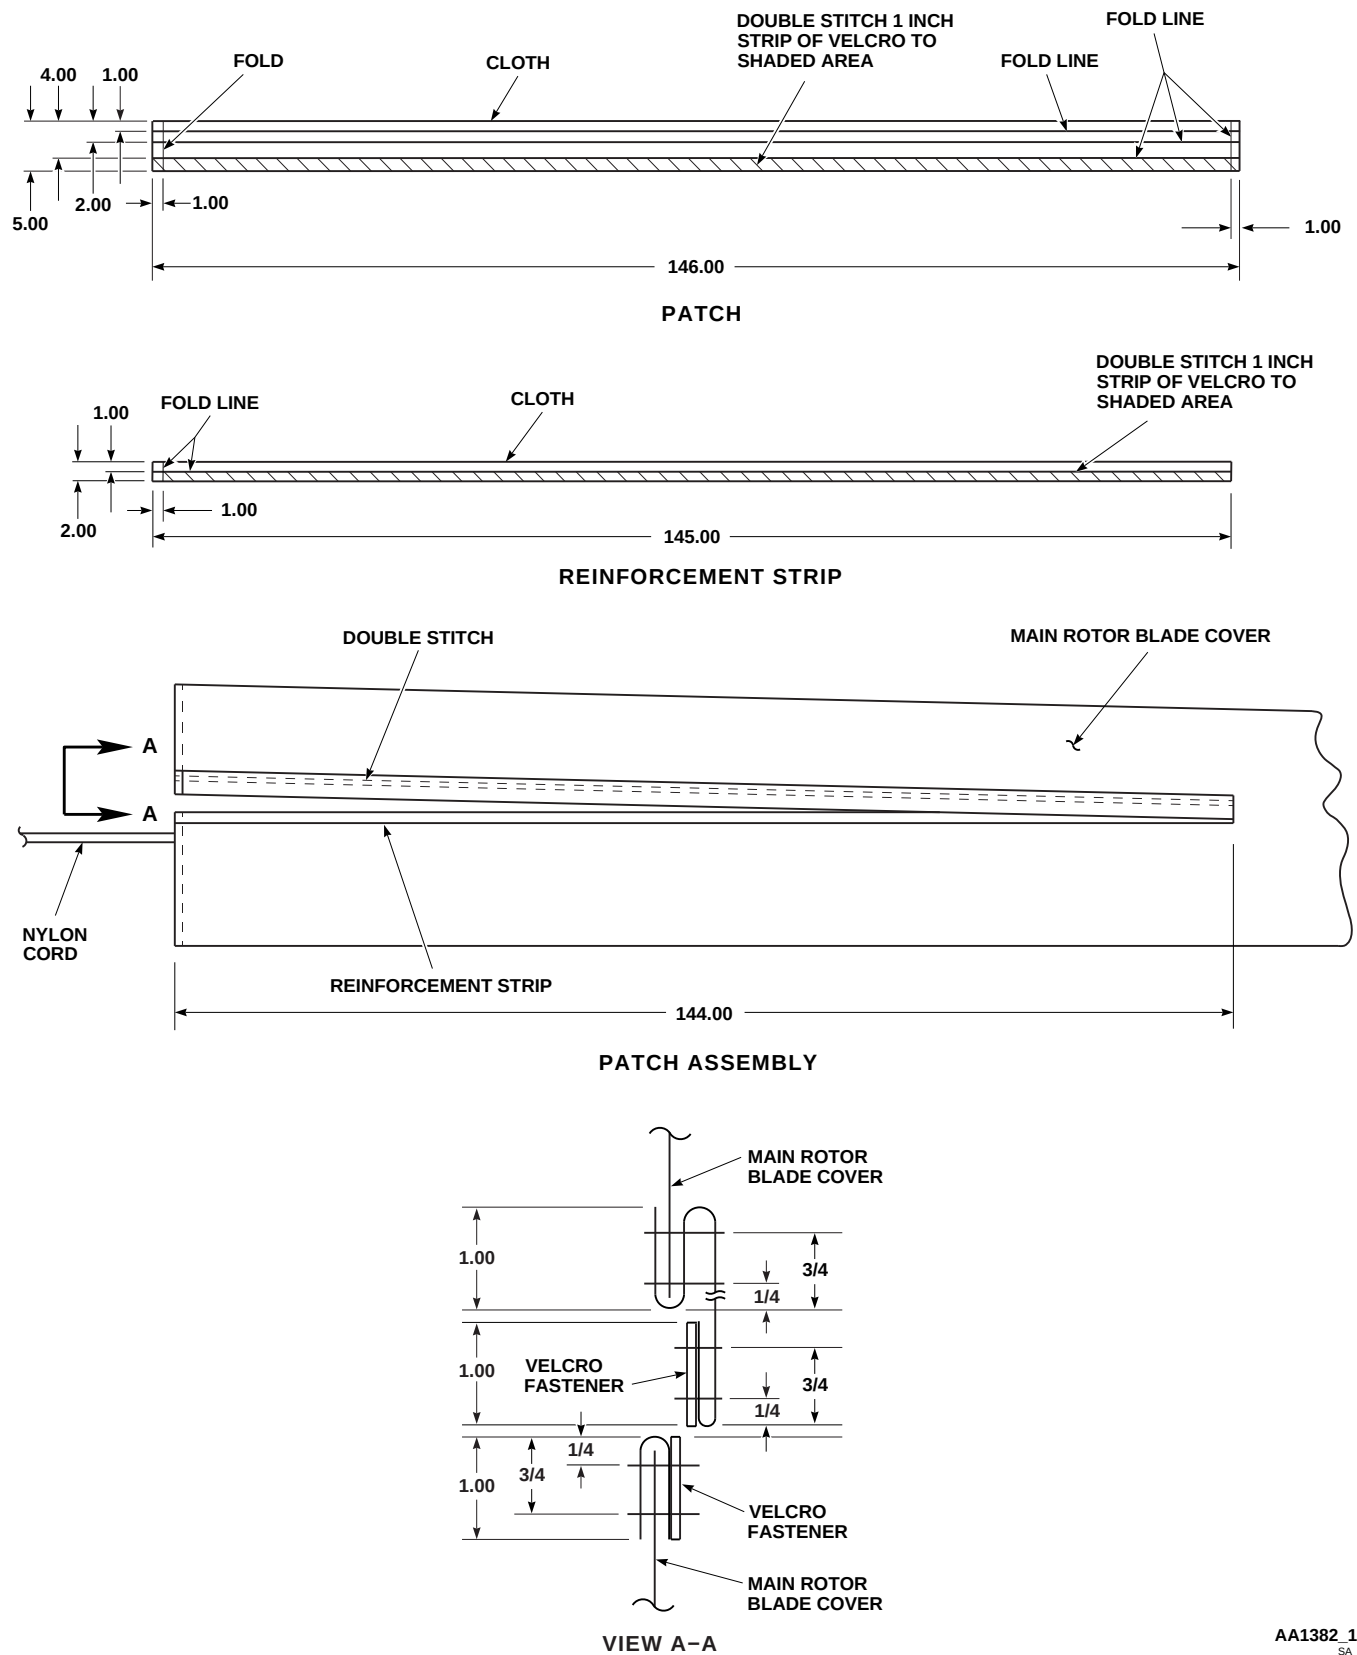

**FIGURE H-191. PATCH ASSEMBLY (SHEET 1 OF 2)**


## NOTES

1. MAKE FROM COATED CLOTH, TYPE II, CLASS II, MIL-C-20696, NSN 8305-00-880-8155.
2. CUT CLOTH TO FLAT PATTERN DIMENSIONS.
3. FOLD CLOTH 1 INCH UNDER ON ALL SIDES. POSITION 1/4 INCH NYLON CORD NSN 4020-00-263-1801.
4. STITCHING TO BE PER FED-STD-751, TYPE 301, USING V-T-295, BLACK NYLON THREAD.
5. ALL SEWING PATTERNS TO BE BACK STITCHED 1/4 INCH.
6. ALL DIMENSIONS ARE IN INCHES.
7. IDENTIFY PER MIL-STD-130.


PART NUMBER: 1730BH025-5

AA1382\_2  
SA



## FIGURE H-191. PATCH ASSEMBLY (SHEET 2 OF 2)

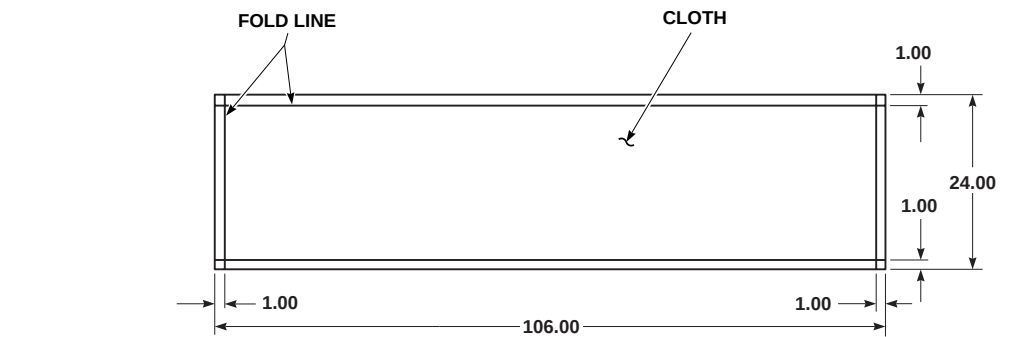

FLAT PATTERN

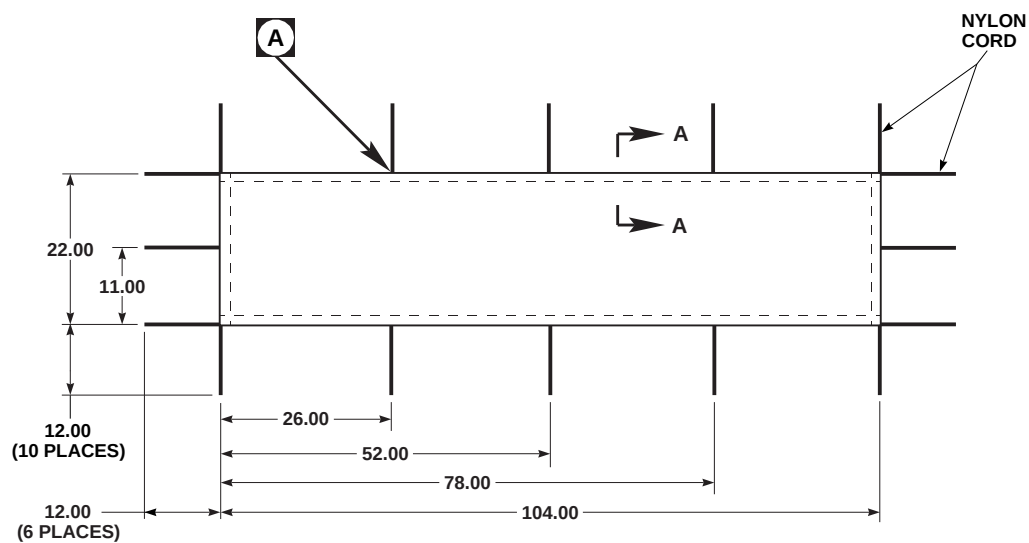

COVER FOLDED FOR SEWING

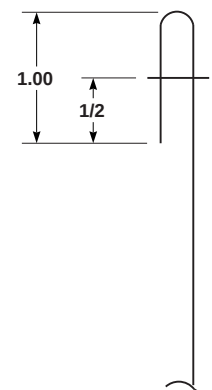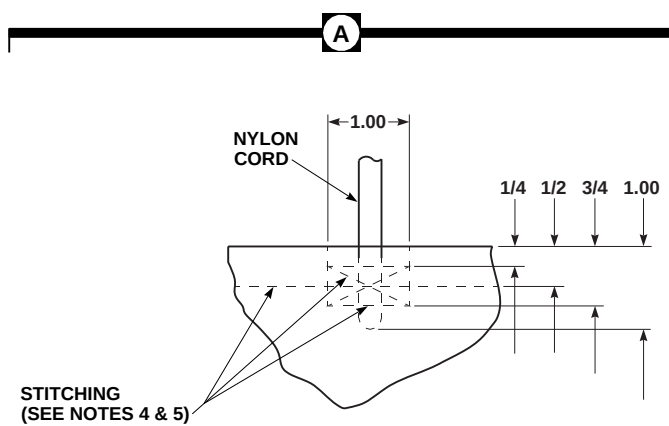

SECTION A-A

AA1383\_1  
SA

FIGURE H-192. MAST COVER (SHEET 1 OF 2)




## NOTES

1. MAKE FROM COATED CLOTH, TYPE II, CLASS II, MIL-C-20696, NSN 8305-00-880-8155.
2. CUT CLOTH TO FLAT PATTERN DIMENSIONS.
3. FOLD CLOTH 1 INCH UNDER ON ALL SIDES. POSITION 1/4 INCH NYLON CORD NSN 4020-00-263-1801.
4. STITCHING TO BE PER FED-STD-751, TYPE 301, USING V-T-295, BLACK NYLON THREAD.
5. ALL SEWING PATTERNS TO BE BACK STITCHED 1/4 INCH.
6. ALL DIMENSIONS ARE IN INCHES.
7. IDENTIFY PER MIL-STD-130.

PART NUMBER: 1730BH025-6

AA1383\_2  
SA

## FIGURE H-192. MAST COVER (SHEET 2 OF 2)

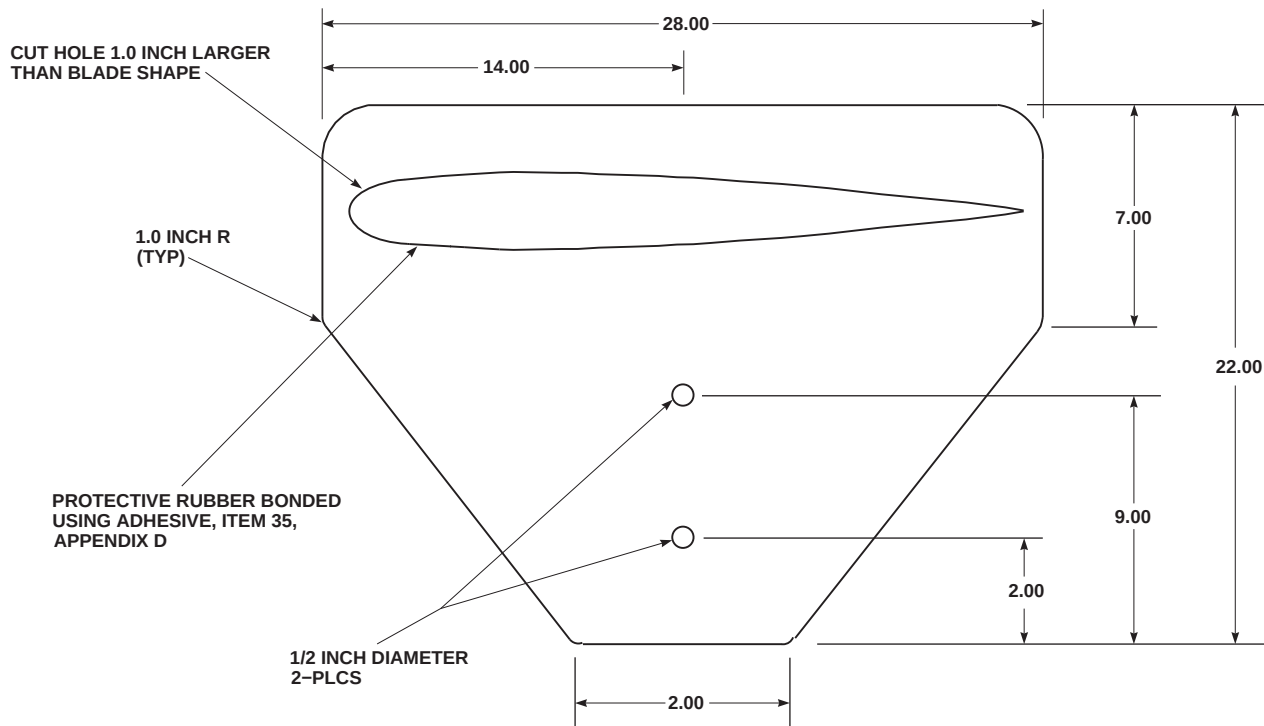


#### NOTES

1. REMOVE UPPER MS9048-238 PIN FROM 70700-20395-041 BLADE POLE.
2. REMOVE IL1456-6 LOCK ASSEMBLY FROM 70700-20395-041 BLADE POLE.
3. MAKE SUPPORT FROM 0.75 INCH THICK EXTERIOR GRADE PLYWOOD, A-A-1417, NSN 5530-00-051-0512.
4. ALL DIMENSIONS ARE IN INCHES.
5. MAKE RUBBER PROTECTIVE STRIP FROM NITRILE RUBBER, MIL-R-6855, CLASS 1, GRADE 40, 0.06 INCH THICK, NSN 9320-00-241-9741.
6. BOND RUBBER USING ADHESIVE, ITEM 35, APPENDIX D.
7. DRILL 1/2 INCH DIAMETER HOLES AS SHOWN IN FIGURE.
8. DRILL TWO 1/2 INCH DIAMETER HOLES LOCATED 67.00 AND 74.00 INCHES UP FROM BASE OF BLADE POLE ASSEMBLY 70700-20395-041.
9. BREAK ALL SHARP EDGES AND DEBURR HOLES.
10. ATTACH BLADE SUPPORT TO BLADE POLE ASSEMBLY USING 2 BOLTS (NSN 5306-01-014-1732), 4 WASHERS (NSN 5318-00-149-9130), AND TWO NUT (NSN 5310-00-126-5754).
11. IDENTIFY PARTS PER MIL-STD-130.

AA1912  
SA

FIGURE H-193. MAIN ROTOR BLADE HOLDER

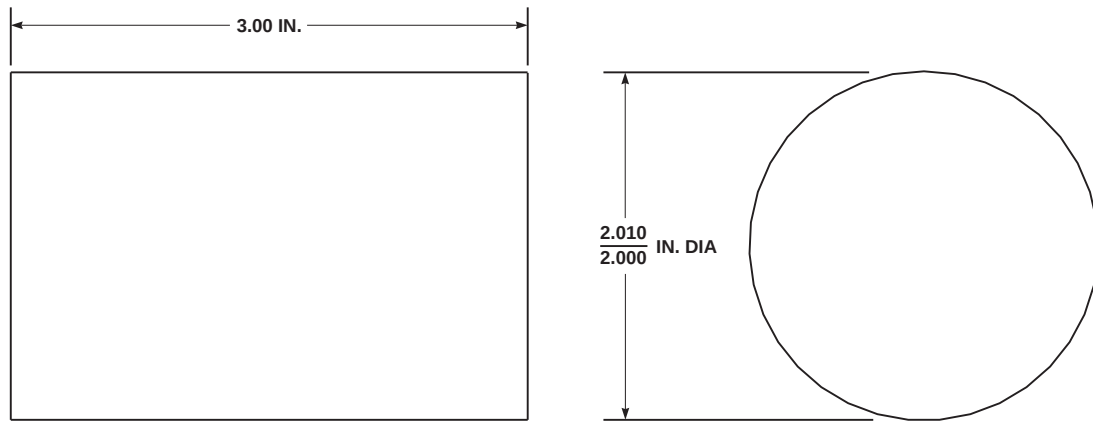


## NOTES

1. MAKE FROM 6061 OR 7075 ALUMINUM ALLOY.
2. ALL DIMENSIONS ARE IN INCHES.
3. TWO PIECES REQUIRED.
4. REMOVE BURRS AND SHARP EDGES.
5. IDENTIFY PARTS PER MIL-STD-130.

AA2186  
SA

FIGURE H-194. CARGO HOOK BUSHING INSTALLATION BLOCK

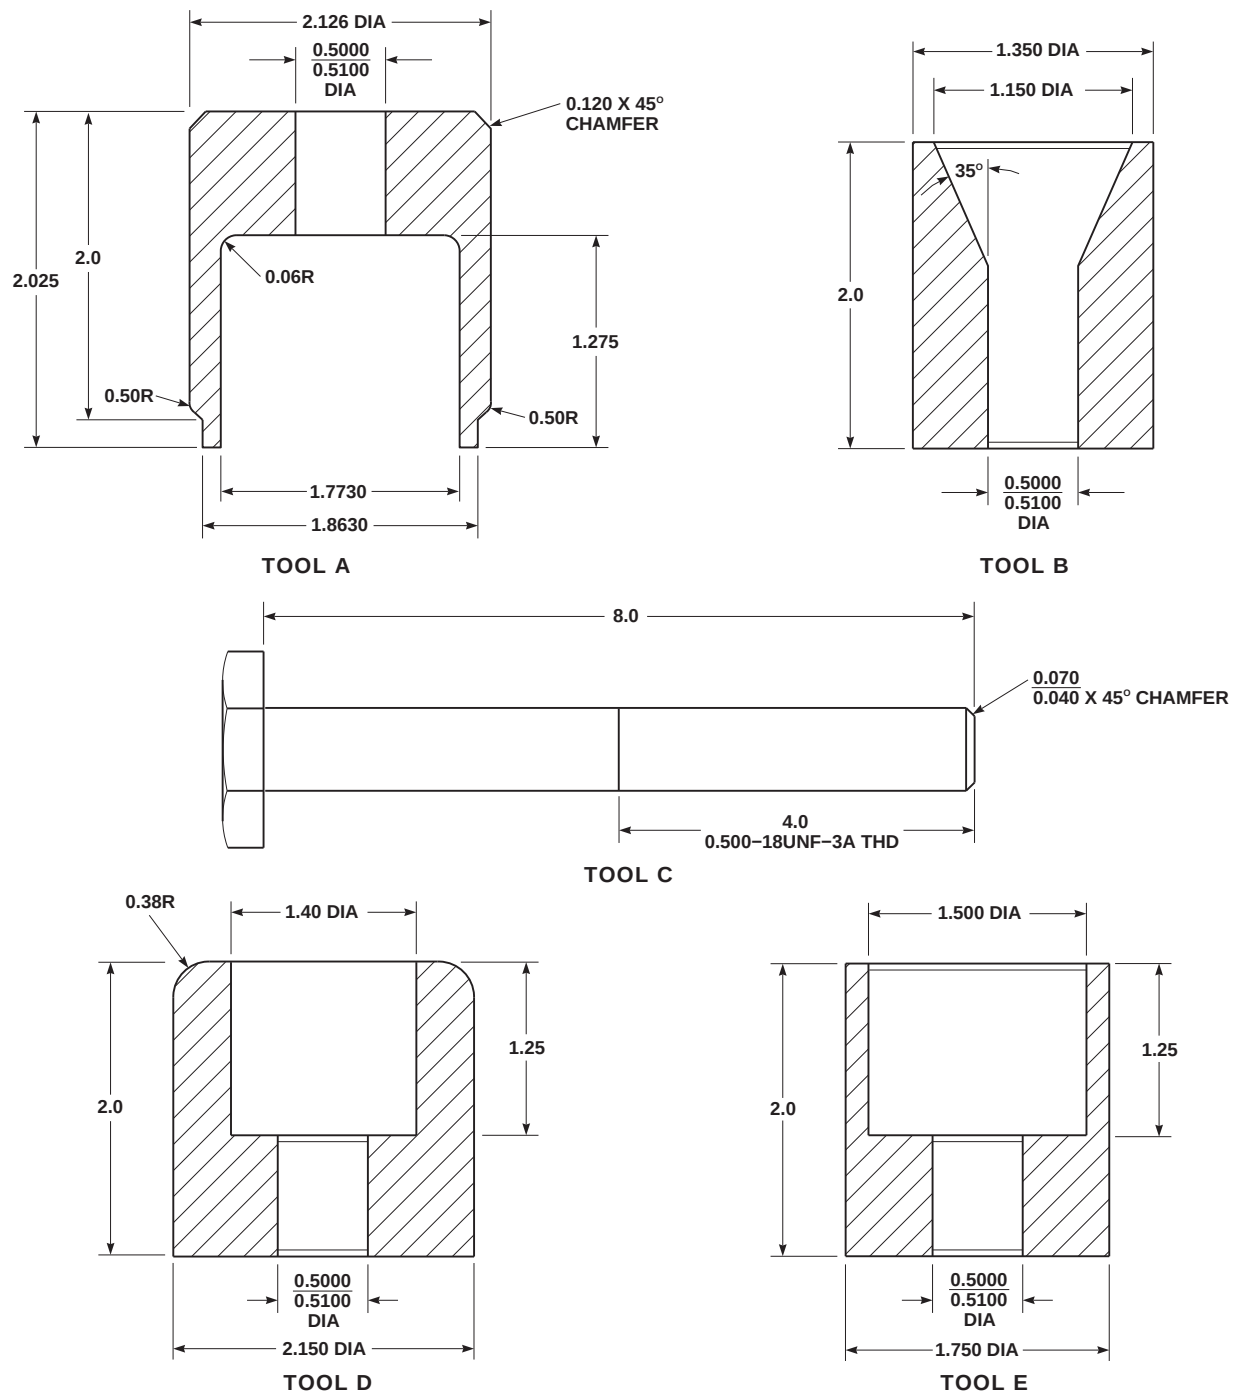


**NOTES**

1. MAKE FROM 4340 COND. C. HEAT TREAT TO 125,000 PSI MIN T.S. ROCKWELL C26-33.
2. ALL DIMENSIONS ARE IN INCHES.
3. TOOL C INCLUDES, AN960-1016 (OR EQUIVALENT), WASHER AND NUT MEASURING, 0.5000-18 UNF-3A THD.

AA2187  
SA


**FIGURE H-195. SPHERICAL BEARING REMOVER/INSTALLER**

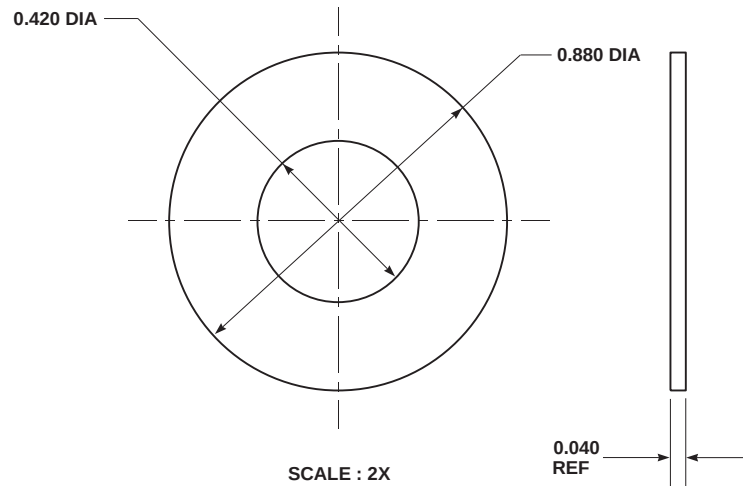**NOTES**

1. MAKE FROM 0.400 IN. THICK PLASTIC SHEET, MIL-P-410, 9330-00-602-5921.
2. ALL DIMENSIONS ARE IN INCHES.

PART NUMBER: 70400-06661-104

AA2188  
SA**FIGURE H-196. WASHER, SPRING CYLINDER**

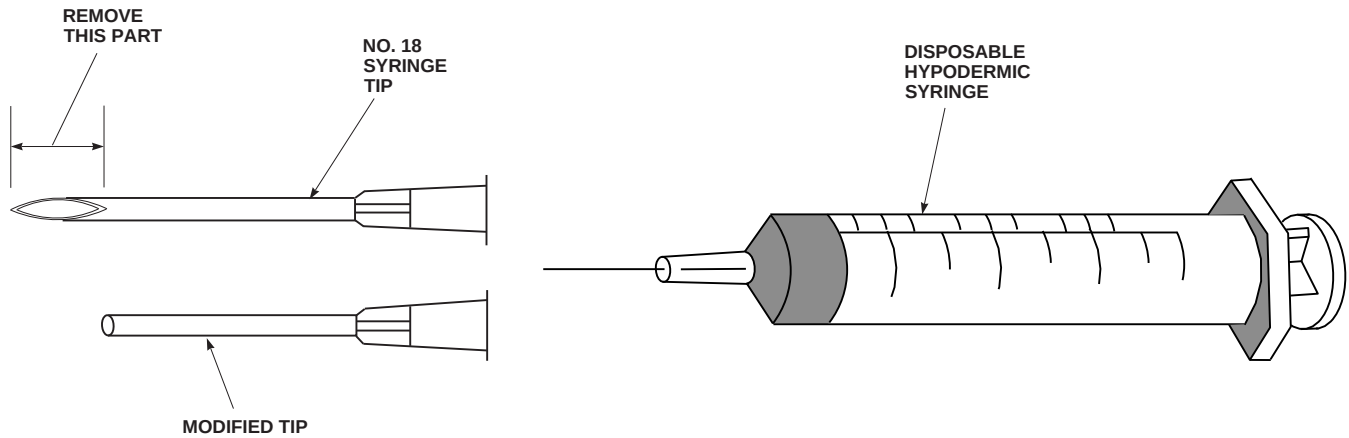


**NOTES**

1. DISPOSABLE HYPODERMIC SYRINGE WITH NO. 18 TIP, MIL-S-36157.
2. MODIFY TIP AS SHOWN.

AA2189  
SA

**FIGURE H-197. HYPODERMIC SYRINGE**

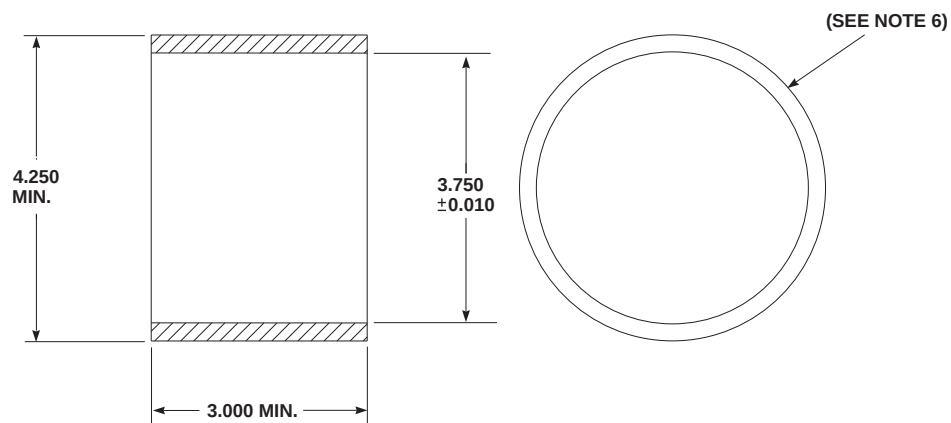


**SPHERICAL BEARING SUPPORT (REMOVAL)**  
P/N AV15-1992

#### NOTES

1. MAKE FROM 6061-T6 ALUMINUM OR EQUIVALENT.
2. ALL DIMENSIONS ARE IN INCHES.
3. MINIMUM DIMENSIONS REPRESENT SPACE TO RECEIVE THE SB5203-202 BEARING DURING REMOVAL.
4. IDENTIFY PART PER MIL-STD-130.
5. REMOVE BURRS AND SHARP EDGES.
6. LENGTH AND O.D. DIMENSIONS CAN BE INCREASED AS DESIRED.
7. APPLY INSULATION TAPE, ITEM 319B, APPENDIX D, OR EQUIVALENT, EVENLY TO EDGE CONTACTING ELASTOMERIC BEARING ENDPLATE TO PREVENT SCORING.

FA2093\_1  
SA

**FIGURE H-198. SLEEVE BEARING REMOVAL/INSTALLATION TOOLS (SHEET 1 OF 3)**

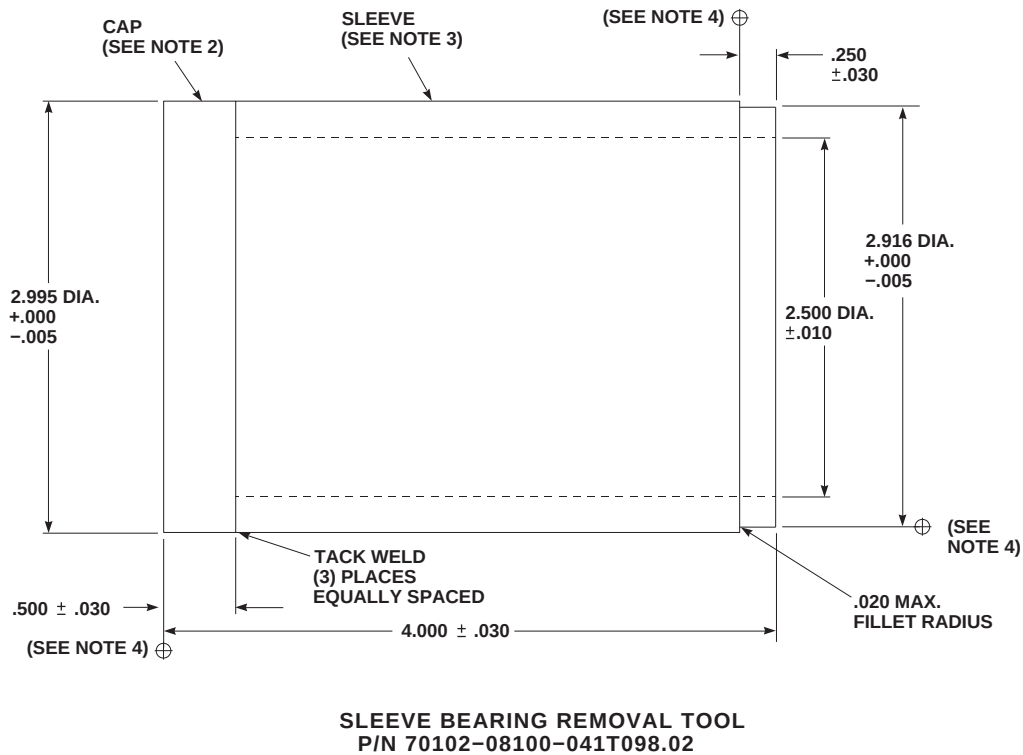


**NOTES**

1. MAKE FROM 4340 STEEL OR EQUIVALENT
2. CAP, DIMENSIONS, 3.000 DIA. x 0.5000.
3. SLEEVE, TUBE DIMENSIONS, 3.000 O.D. x 2.500 I.D. x 3.630.
4. SQUARE AND / OR PARALLEL WITHIN 0.003 INCH.
5. ALL DIMENSIONS ARE IN INCHES.
6. IDENTIFY PART PER MIL-STD-130.


FA2093\_2  
SA

**FIGURE H-198. SLEEVE BEARING REMOVAL/INSTALLATION TOOLS (SHEET 2 OF 3)**



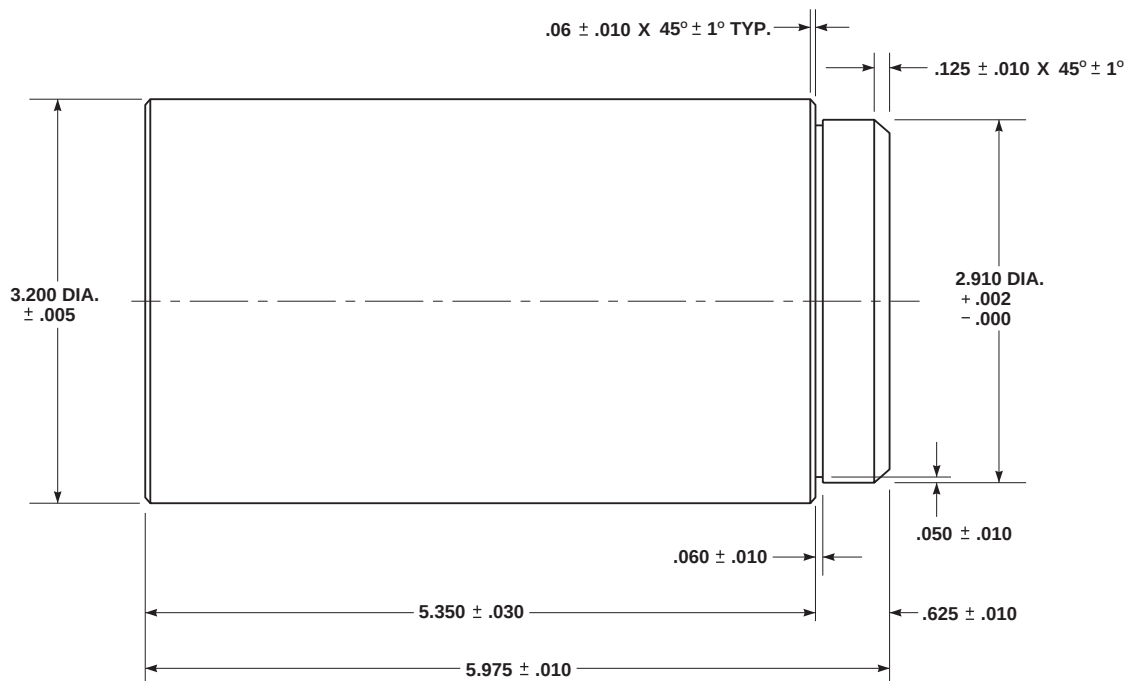

SPHERICAL BEARING SUPPORT (INSTALLATION)  
P/N 70102-08100-041T046.06

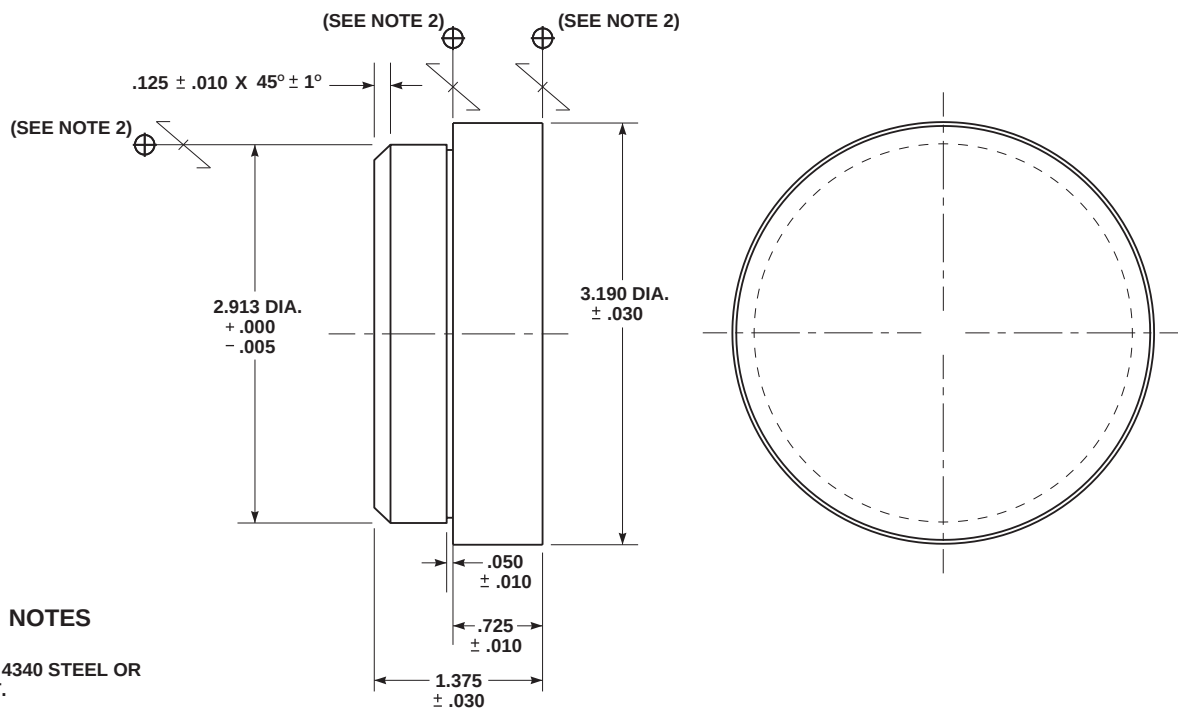


#### NOTES

1. MAKE FROM 4340 STEEL OR EQUIVALENT.
2. SQUARE AND/OR PARALLEL WITHIN 0.003 INCH.
3. ALL DIMENSIONS ARE IN INCHES.
4. IDENTIFY PARTS PER MIL-STD-130.

SLEEVE BEARING INSTALLATION TOOL  
P/N 70102-08100-041T046.06

FA2093\_3  
SA

FIGURE H-198. SLEEVE BEARING REMOVAL/INSTALLATION TOOLS (SHEET 3 OF 3)

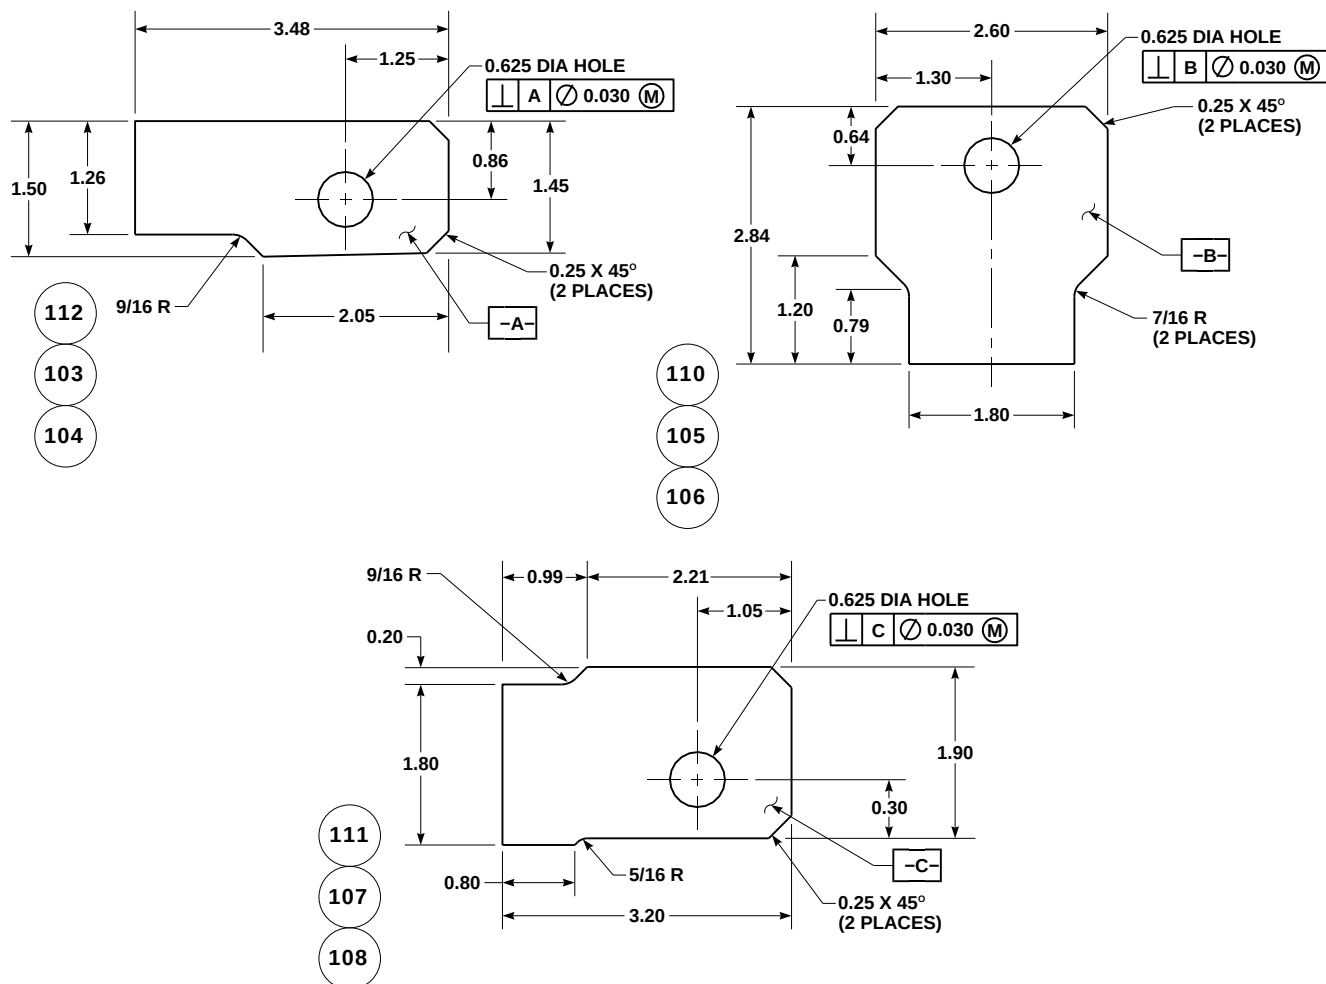

| SIKORSKY PART NUMBER | THICKNESS |
|----------------------|-----------|
| 70219-06000-103      | 0.032     |
| 70219-06000-104      | 0.060     |
| 70219-06000-105      | 0.032     |
| 70219-06000-106      | 0.060     |
| 70219-06000-107      | 0.032     |
| 70219-06000-108      | 0.060     |
| 70219-06000-110      | 0.020     |
| 70219-06000-111      | 0.020     |
| 70219-06000-112      | 0.020     |


NOTES

1. MAKE 70219-06000-103 THROUGH 70219-06000-108 AND 70219-06000-110 THROUGH 70219-06000-112 FROM 7075-T6 ALUMINUM ALLOY, QQ-A-250-13, USING THICKNESS LISTED IN CHART.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70219-06000-103 THROUGH 70219-06000-108 AND 70219-06000-110 THROUGH 70219-06000-112

AA2190A  
SA

FIGURE H-199. GEAR BOX SHIM

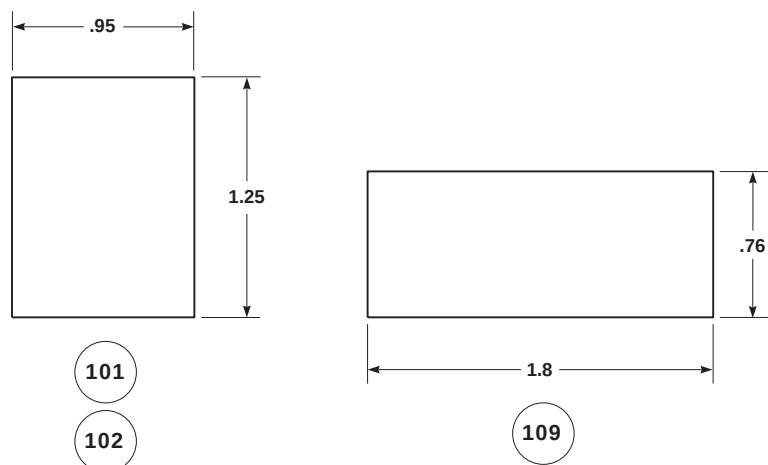

| SIKORSKY PART NUMBER | THICKNESS |
|----------------------|-----------|
| 70219-06000-101      | 0.2150    |
| 70219-06000-102      | 0.2880    |
| 70219-06000-109      | 0.0200    |


## NOTES

1. MAKE 70219-06000-101 AND -102 FROM 7075-T651 PL, ALUMINUM ALLOY, QQ-A-250-13, USING THICKNESS LISTED IN CHART.
2. MAKE 70219-06000-109 FROM 7075-T6, ALUMINUM ALLOY, QQ-A-250-13, USING THICKNESS LISTED IN CHART.
3. ALL DIMENSIONS ARE IN INCHES.
4. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70219-06000-101, -102, -109

AA2191  
SA

FIGURE H-200. GEAR BOX SPACER

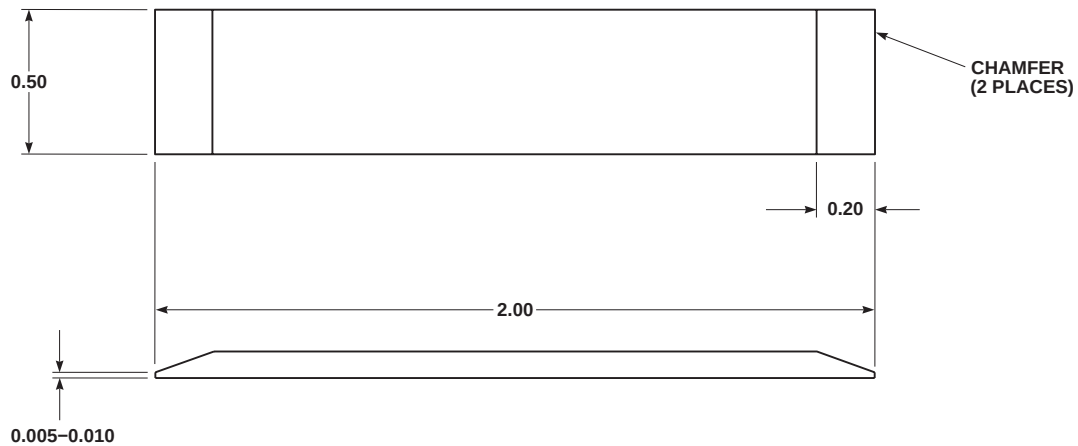

### NOTES

1. MAKE FROM STAINLESS STEEL, AMS5518, 301 1/2 HARD, 0.020 INCH THICK.
2. ALL DIMENSIONS ARE IN INCHES.
3. INSULATE DISSIMILAR METALS ON INSTALLATION.
4. BREAK SHARP EDGES AND DEBURR ALL HOLES.
5. IDENTIFY PARTS PER MIL-STD-130.

FO0311A  
SA

**FIGURE H-201. WEAR STRIP**


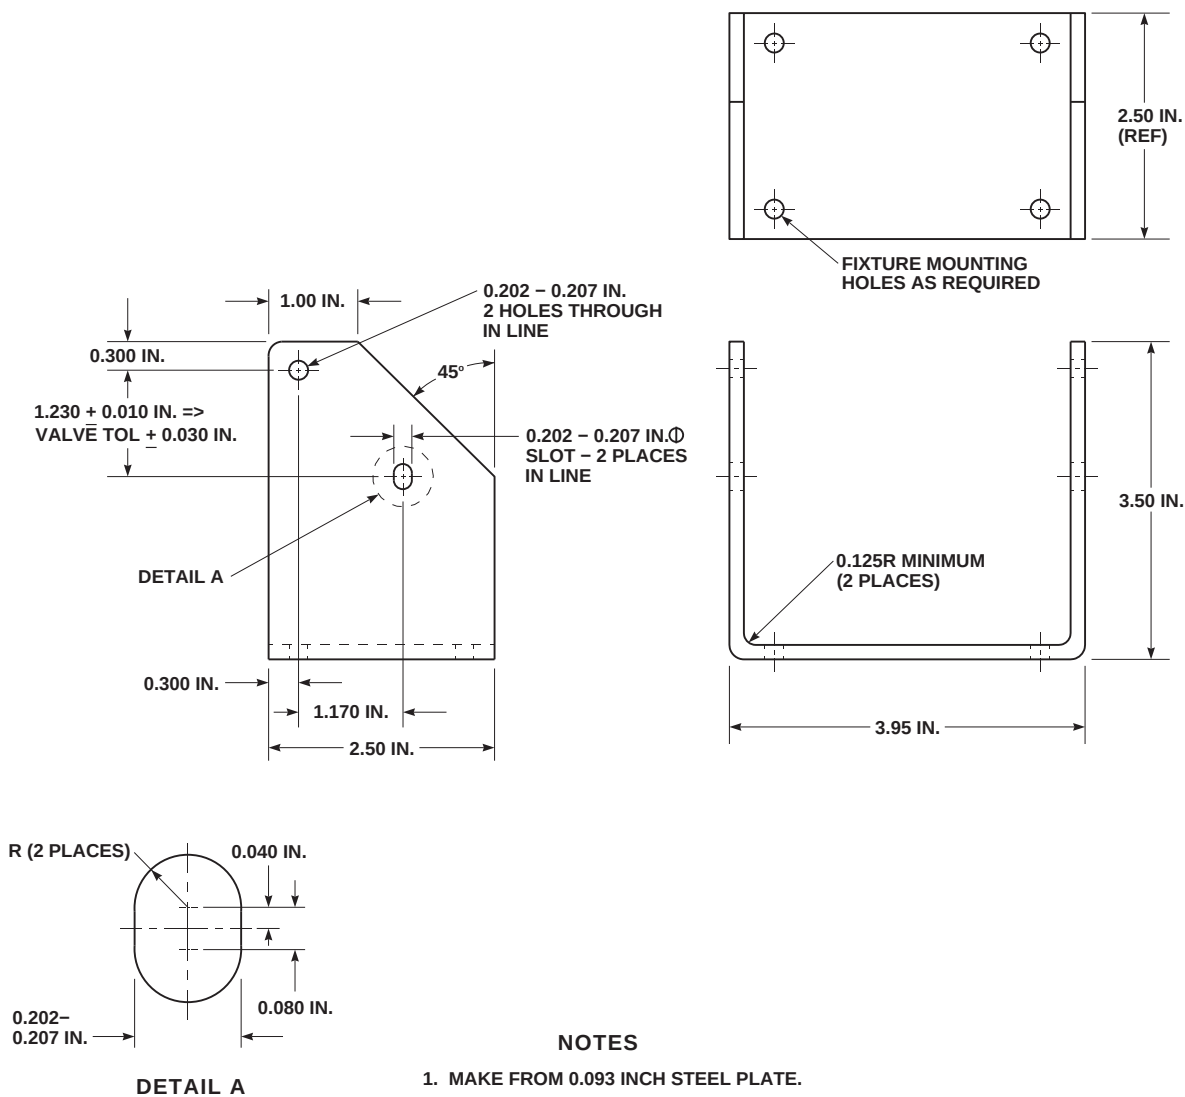


FIGURE H-202. VALVE TEST FIXTURE

AK1825  
SA

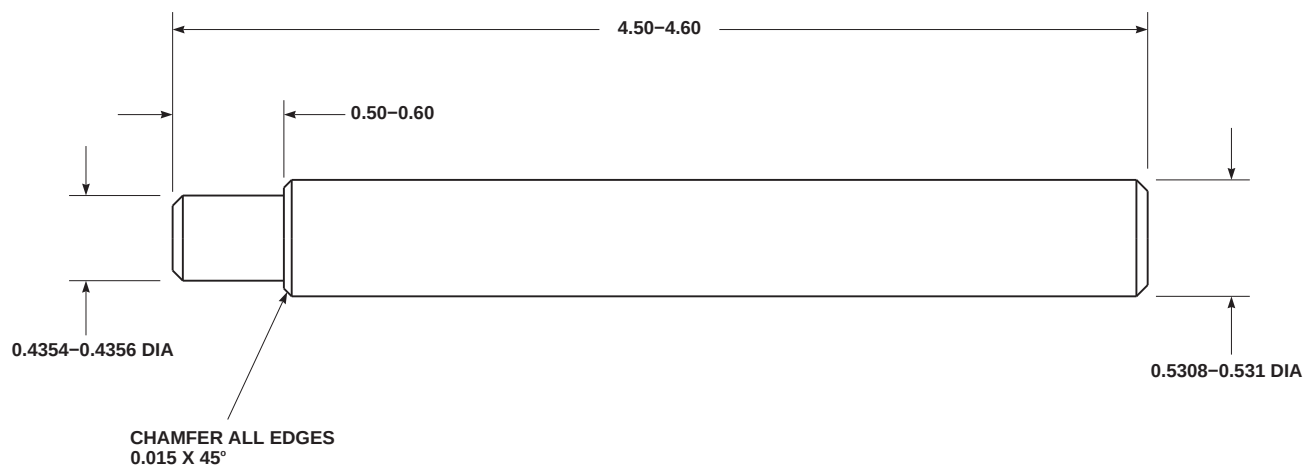


NOTES

1. MAKE FROM MILD STEEL.
2. ALL DIMENSIONS ARE IN INCHES.

AK1823  
SA

FIGURE H-203. TAIL LANDING GEAR LOCK MECHANISM BELLCRANK BUSHING DRIFT

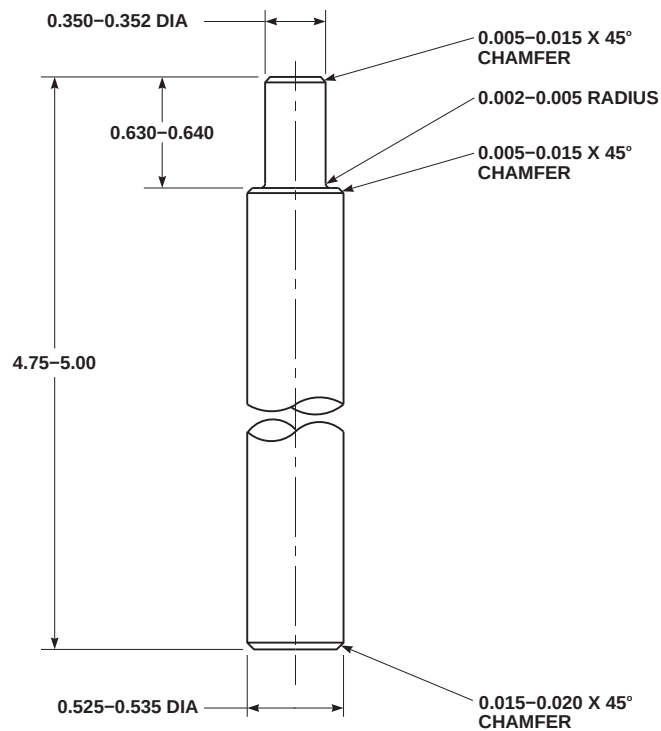


## NOTES

1. MAKE FROM MILD STEEL OR BRASS
2. ALL DIMENSIONS ARE IN INCHES.
3. STAMP OR VIBRO-ETCH TOOL APPLICATION ON BODY "DRIFT" BUSHING, TAIL LG LOCKPIN.

AK1824  
SA

FIGURE H-204. TAIL LANDING GEAR LOCKPIN BUSHING DRIFT

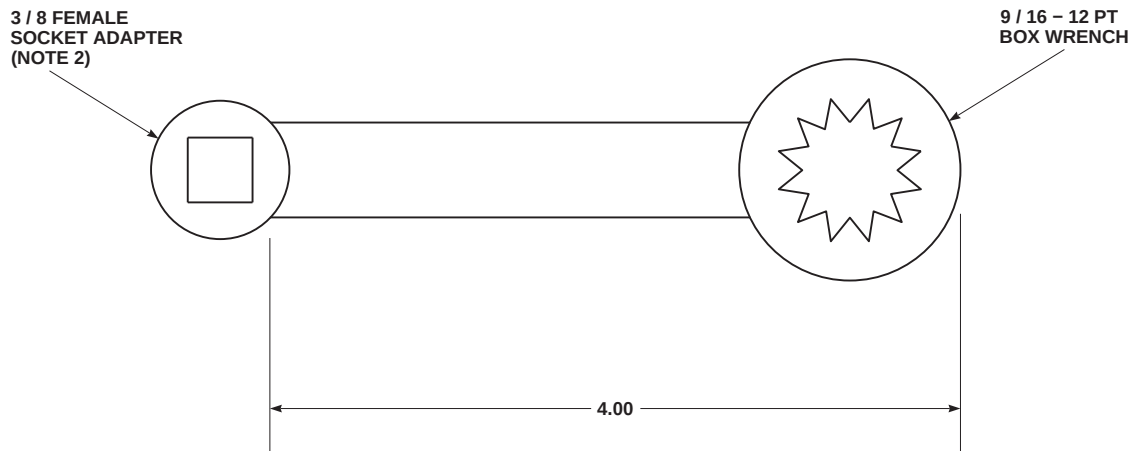

**NOTES**

1. ALL DIMENSIONS ARE IN INCHES.
2. CUT 9/16 INCH BOX END WRENCH, 4 INCHES FROM BOX END.
3. WELD 3/8 INCH FEMALE SOCKET ADAPTER TO BOX END WRENCH WITH SQUARE OF ADAPTER PARALLEL TO WRENCH.
4. GRIND WELD TO SMOOTH CONTOUR.

AK1822  
SA

**FIGURE H-205. SPINDLE HORN NUT TORQUE ADAPTER**



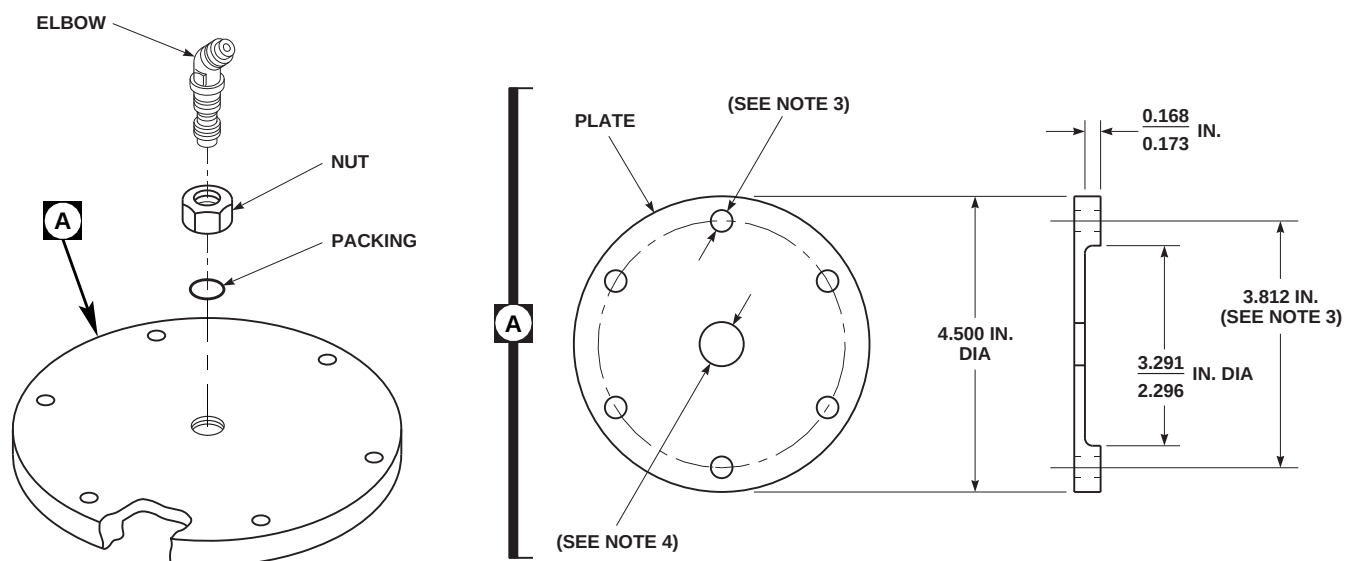


CHART A


| NOMENCLATURE | PART NUMBER | QUANTITY | NSN        |
|--------------|-------------|----------|------------|
| ELBOW        | AN837-6D    | 1        |            |
| NUT          | AN6289-6D   | 1        |            |
| PACKING      | MS29512-6   | 1        |            |
| PLATE        |             | 1        | SEE NOTE 2 |

## NOTES

1. MAKE FUEL CELL PRESSURE TEST PLATE PER FIGURE, USING MATERIAL LISTED IN CHART A, OR APPROVED EQUIVALENT.
2. MAKE FROM 0.292-0.312 INCH THICK ALUMINUM STOCK.
3. SIX HOLES REQUIRED 0.328-0.338 INCH DIAMETER EQUALLY SPACED 60+DG APART.
4. TREAD SIZE IS 0.5625-18. BOSS PER MS33649.06.

AK1821  
SA

FIGURE H-206. FUEL CELL PRESSURE TEST PLATE

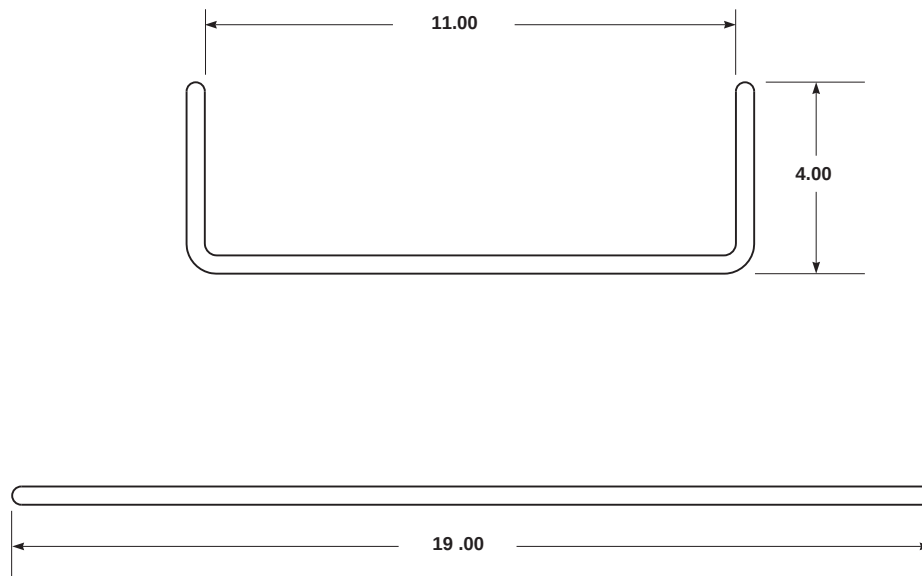


**NOTES**

1. MAKE FROM 3/8 INCH ROD.
2. ALL DIMENSIONS ARE IN INCHES.


AK1826  
SA

**FIGURE H-207. TAIL ROTOR BLADE BOOT INSTALLATION TOOL**

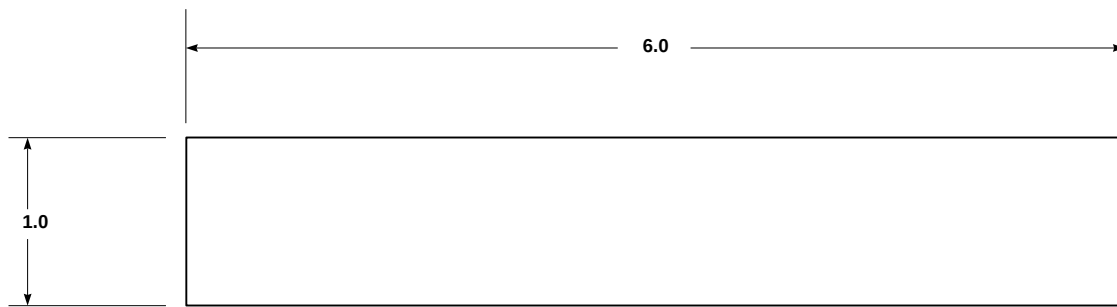**NOTES**

1. MAKE FROM 302 STAINLESS STEEL 0.001 OR 0.002 INCH THICK SHIM STOCK.
2. THIS IS CHECKING SHIM ONLY AND MUST BE REMOVED FROM HELICOPTER AFTER TAIL ROTOR INSTALLATION IS COMPLETED.
3. ALL DIMENSIONS ARE IN INCHES.

AK1827  
SA**FIGURE H-208. TAIL ROTOR INSTALLATION CHECKING SHIM**

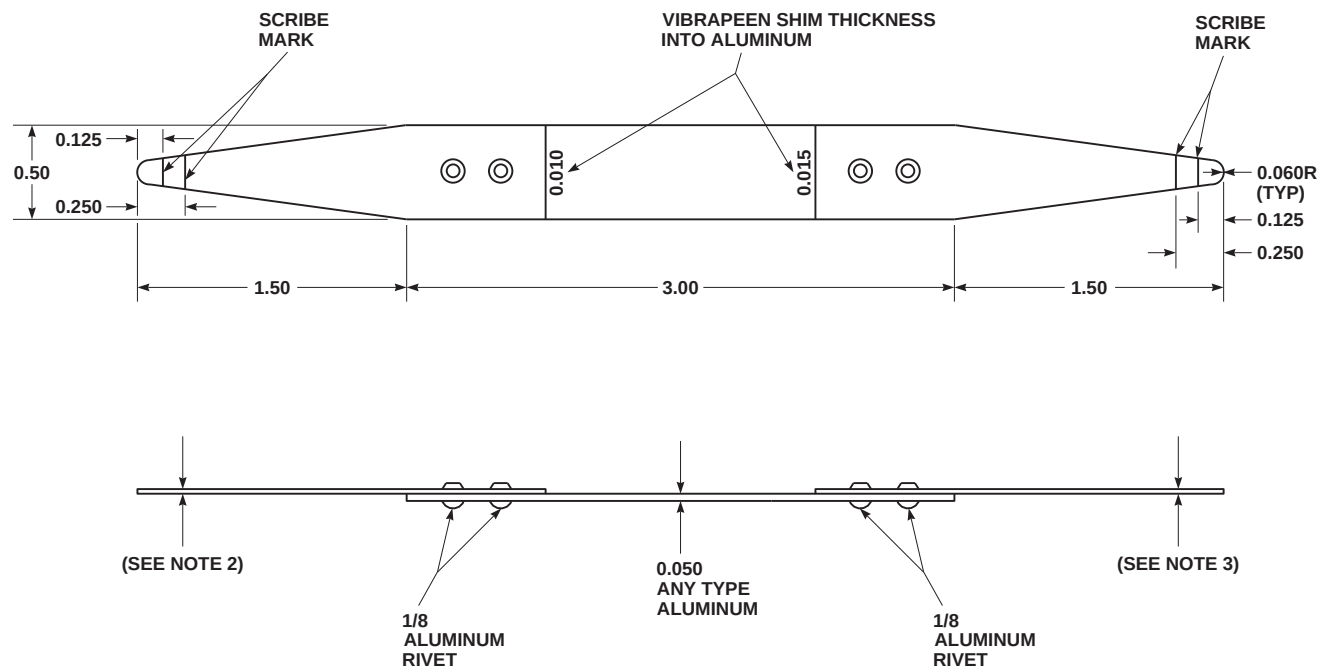


### NOTES

1. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
2. 0.010 PLASTIC SHIM STOCK, ARTUS BROWN, NSN 9330-01-209-9056.
3. 0.015 PLASTIC SHIM STOCK, ARTUS PINK, NSN 9330-01-208-1025.


AK1828A  
SA

**FIGURE H-209. TEFLON LINED SPHERICAL BEARING PLASTIC FEELER GAGE**

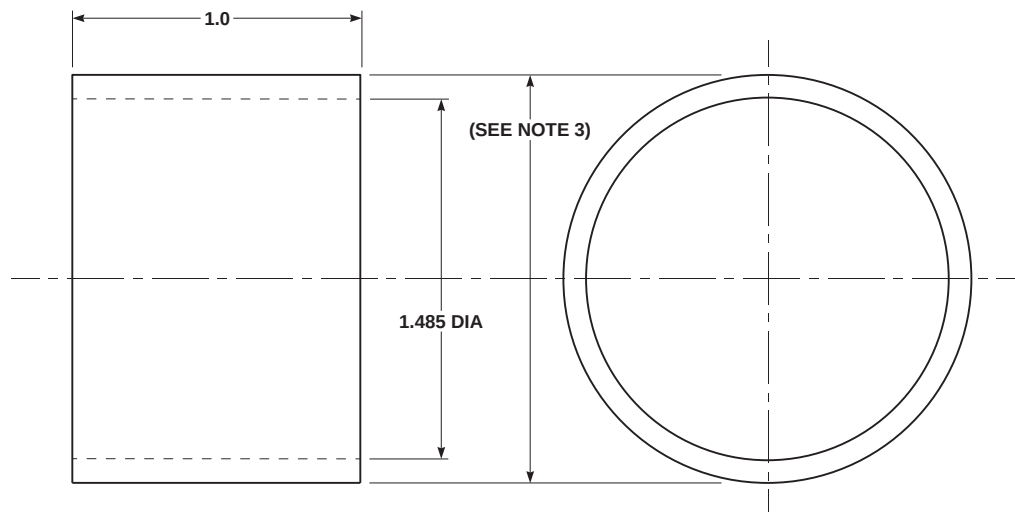**NOTES**

1. MAKE FROM NICKEL / ALUMINUM / BRONZE MATERIAL PER AMS-4590.
2. ALL DIMENSIONS ARE IN INCHES.
3. O.D. TO BE 0.001 TO 0.0035 INCH I.D. OF BUSHING BORE IN TAIL LANDING GEAR FORK TO PROVIDE PRESS FIT.
4. IDENTIFY PART PER MIL-STD-130.

AK3067A  
SA**FIGURE H-210. TAIL LANDING GEAR OVERSIZED AXLE BUSHING**

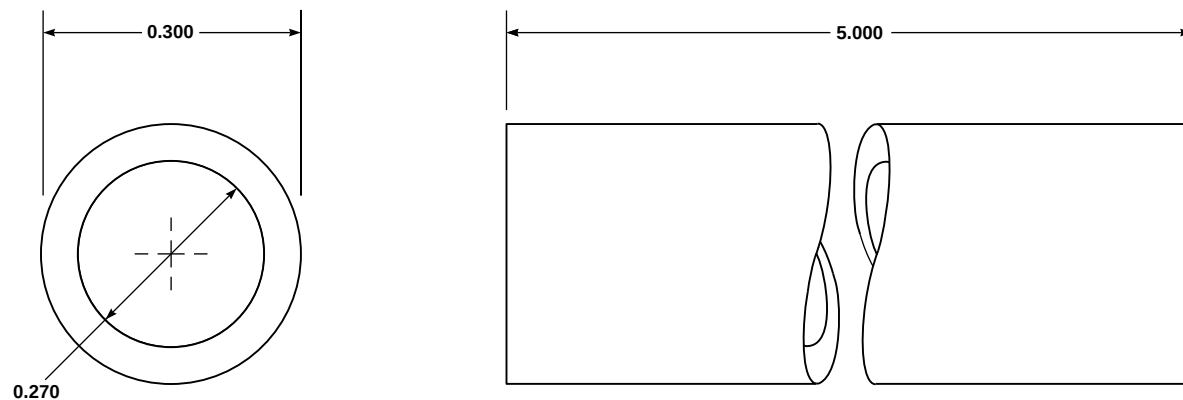


#### NOTES

1. MAKE FROM STEEL TUBING, MIL-T-6736.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PART PER MIL-STD-130, 0.270 ID/0.300 OD

AA8550  
SA

**FIGURE H-211. ROTARY INPUT BEARING REMOVAL TUBE**

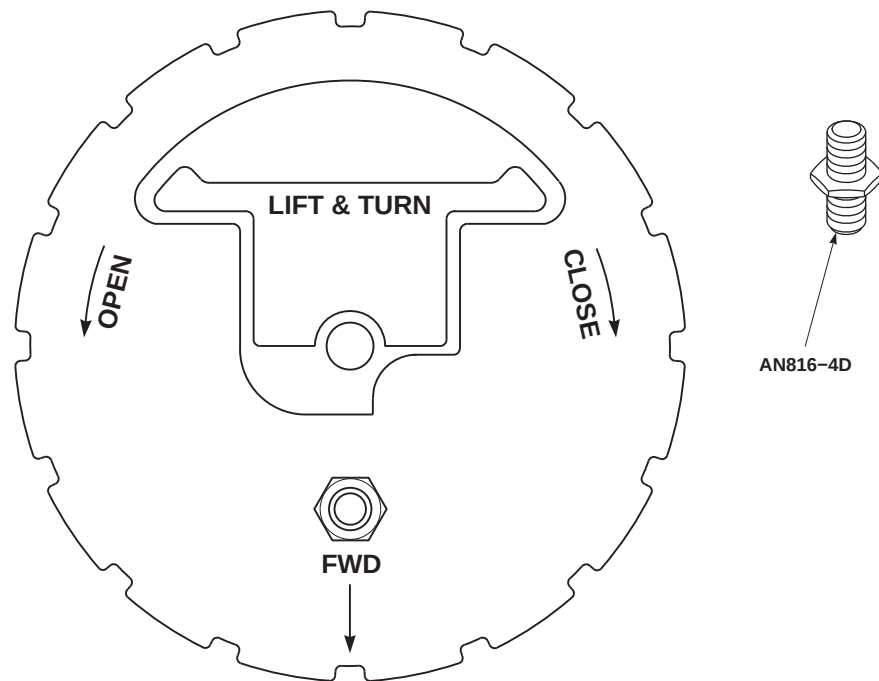**NOTES**

1. USE "R" DRILL BIT.
2. TAP WITH 1/8 INCH PIPE THREAD TAP.

AA8914  
SA**FIGURE H-212. FUEL CELL CAP PRESSURE TEST ADAPTER**


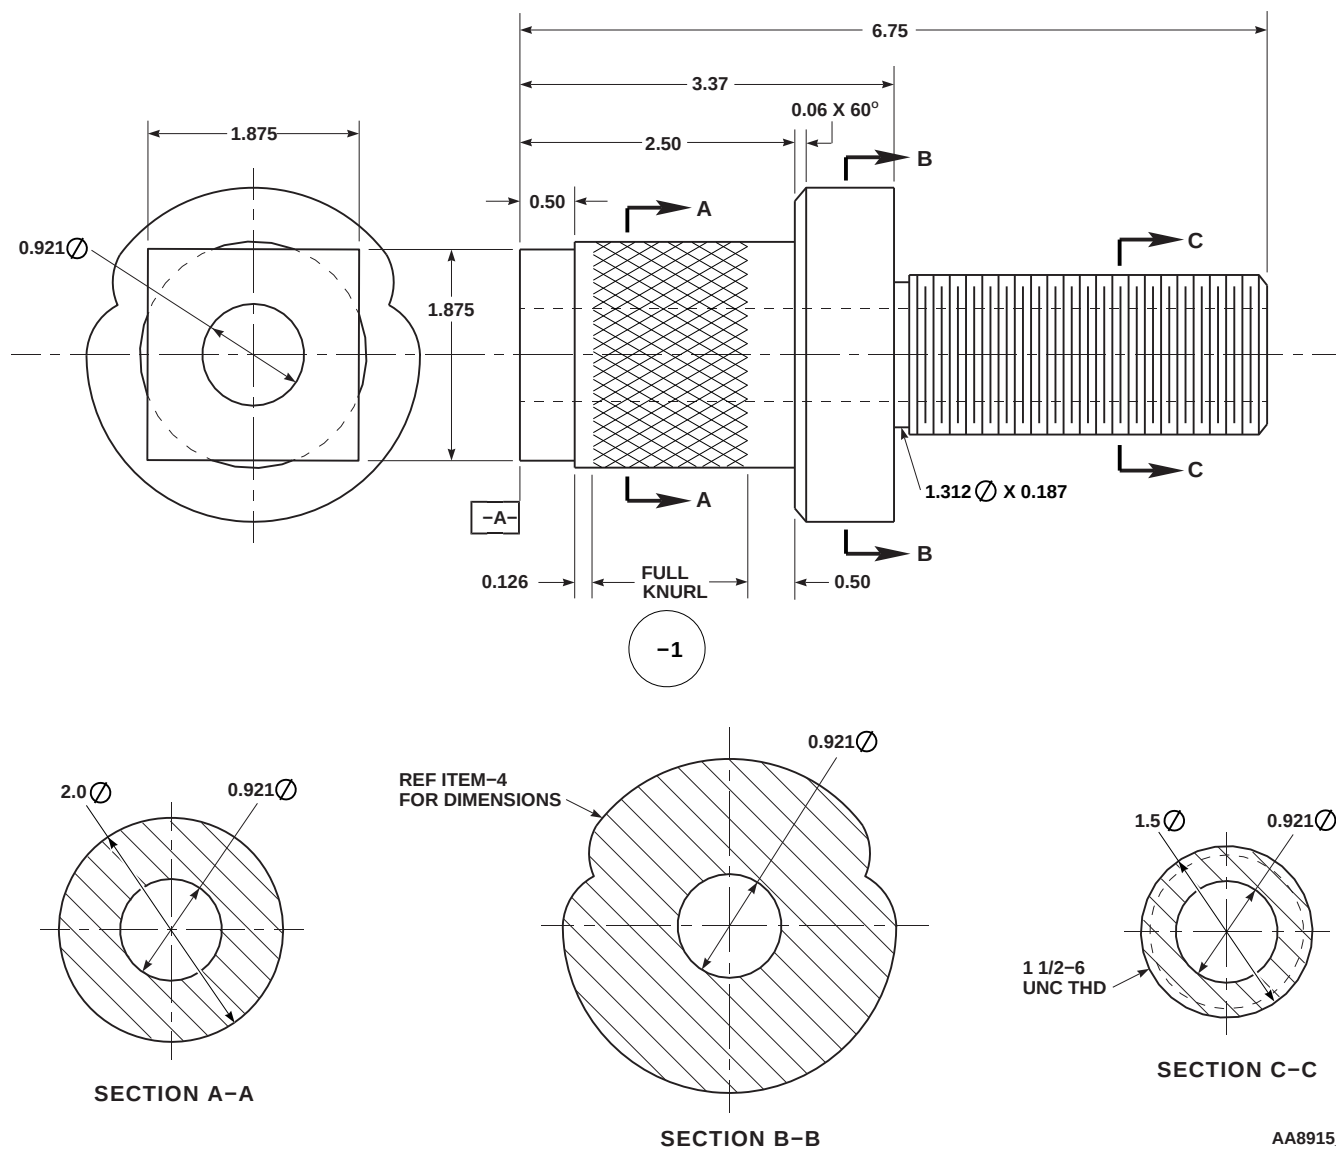



FIGURE H-213. BIFILAR BUSHINGS REPLACEMENT TOOLS (SHEET 1 OF 5)



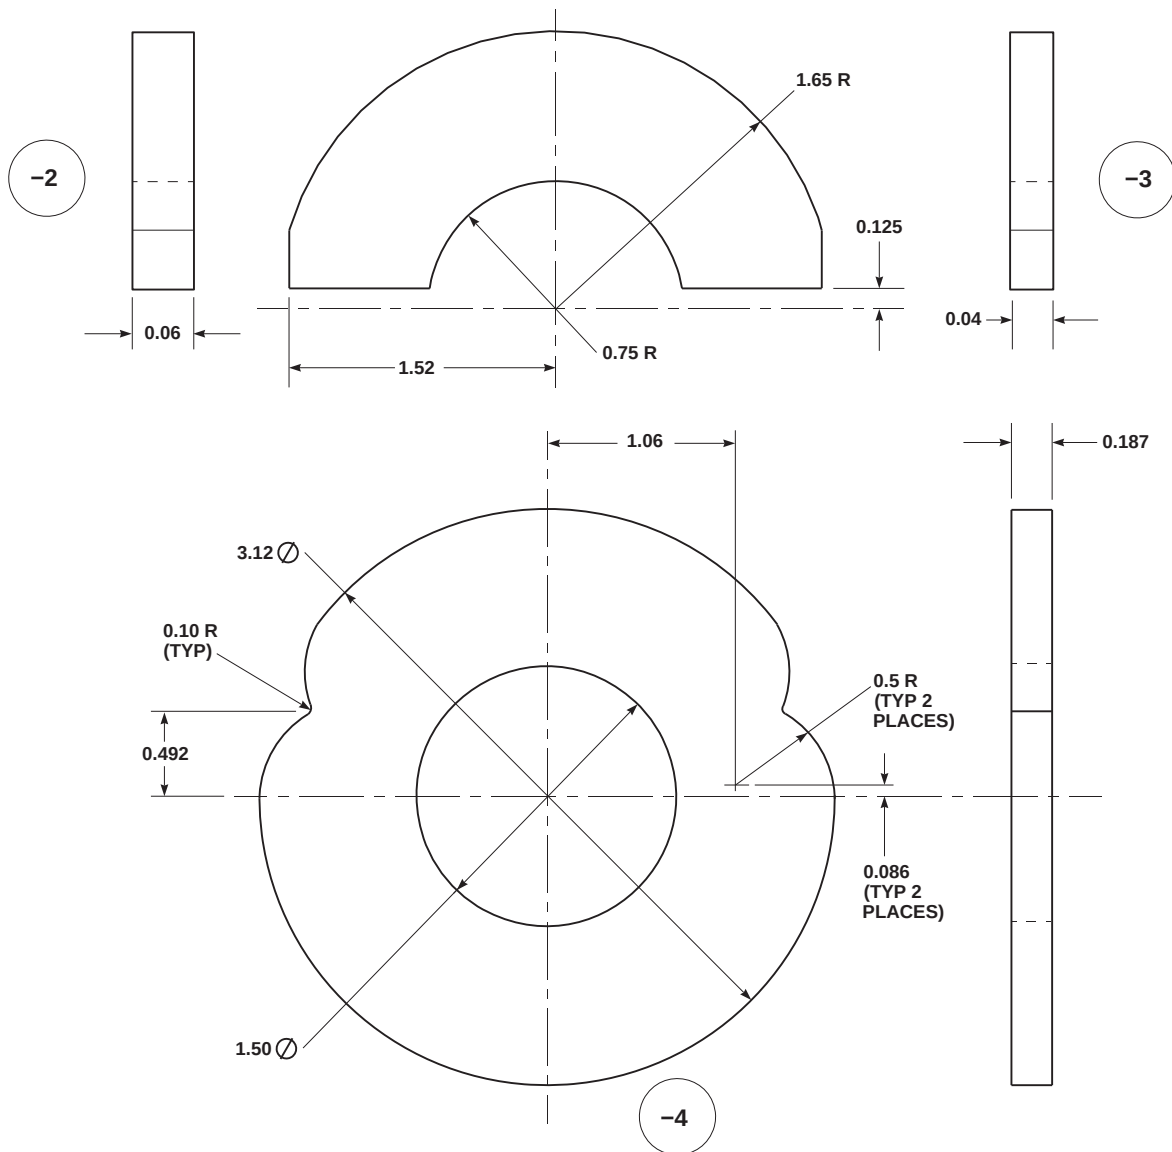


AA8915\_2A  
SA

FIGURE H-213. BIFILAR BUSHINGS REPLACEMENT TOOLS (SHEET 2 OF 5)

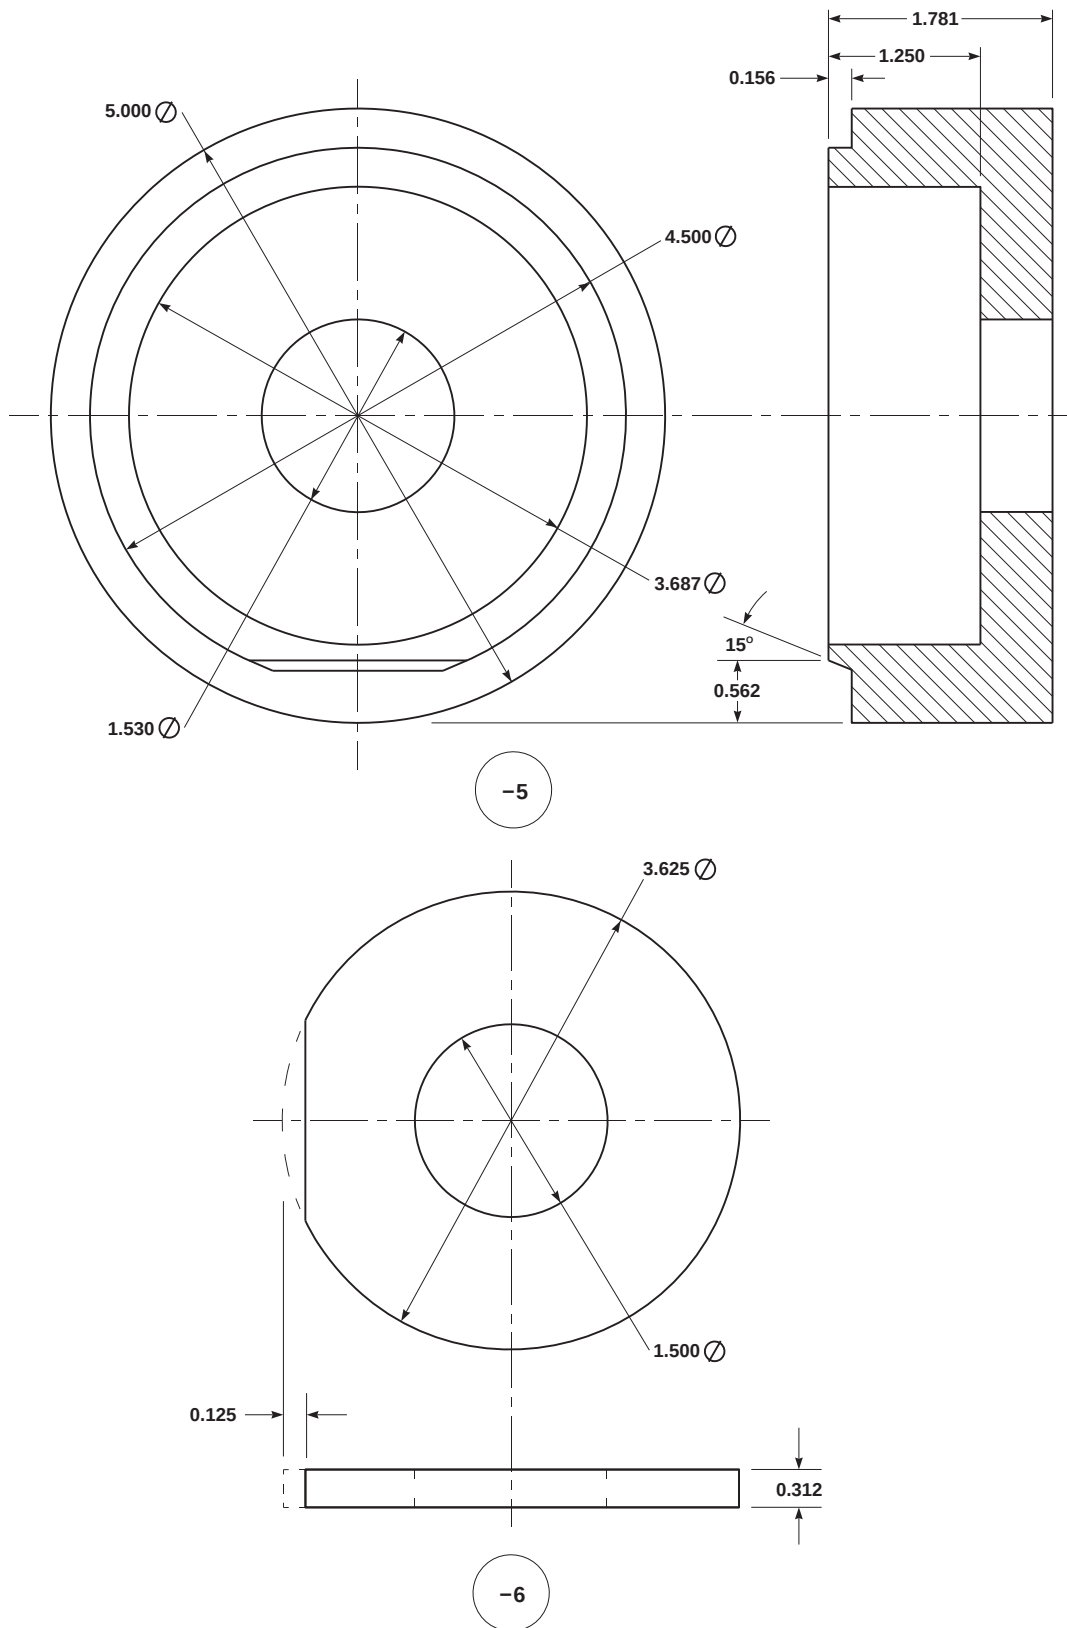

AA8915\_3  
SA

FIGURE H-213. BIFILAR BUSHINGS REPLACEMENT TOOLS (SHEET 3 OF 5)

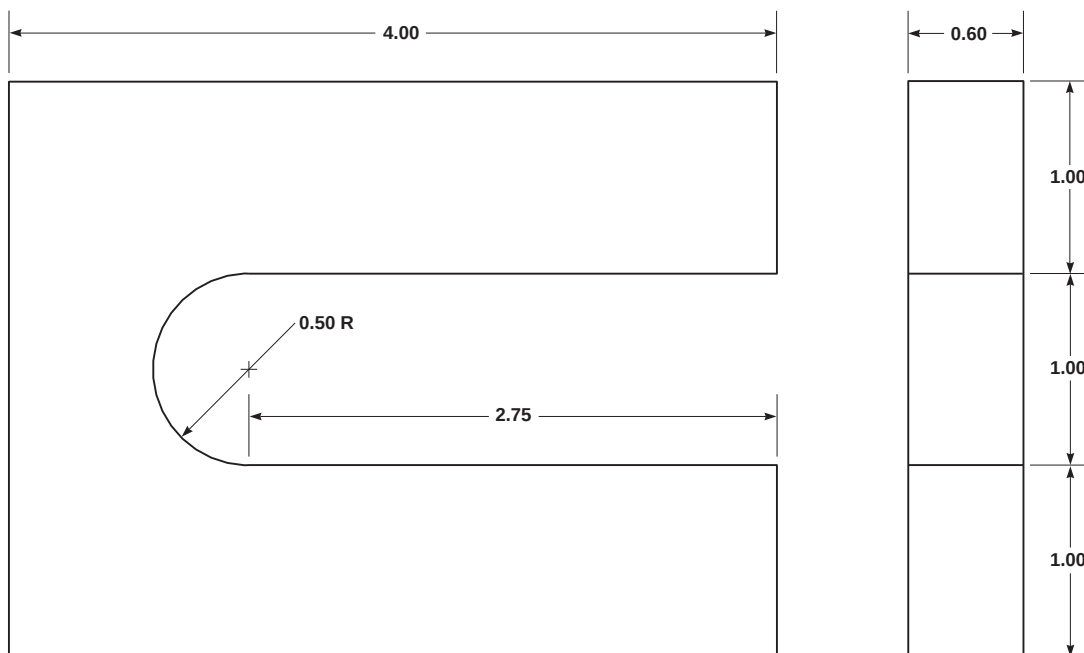

-7



| NOMENCLATURE             | PART NUMBER |
|--------------------------|-------------|
| BIFILAR BUSHINGS         | 2763-1      |
| REMOVAL AND INSTALLATION | 2763-2      |
| TOOLS                    | 2763-3      |
|                          | 2763-4      |
|                          | 2763-5      |
|                          | 2763-6      |
|                          | 2763-7      |
|                          | 2803-1      |
|                          | 2803-2      |

## NOTES

1. ALL DIMENSIONS ARE IN INCHES.
2. PARTS 2763-1 THRU -4 AND -7 MAKE FROM 4130 STEEL.
3. PARTS 2763-5 AND -6 MAKE FROM 2024-T3 ALUMINUM.



AA8915\_4  
SA

FIGURE H-213. BIFILAR BUSHINGS REPLACEMENT TOOLS (SHEET 4 OF 5)

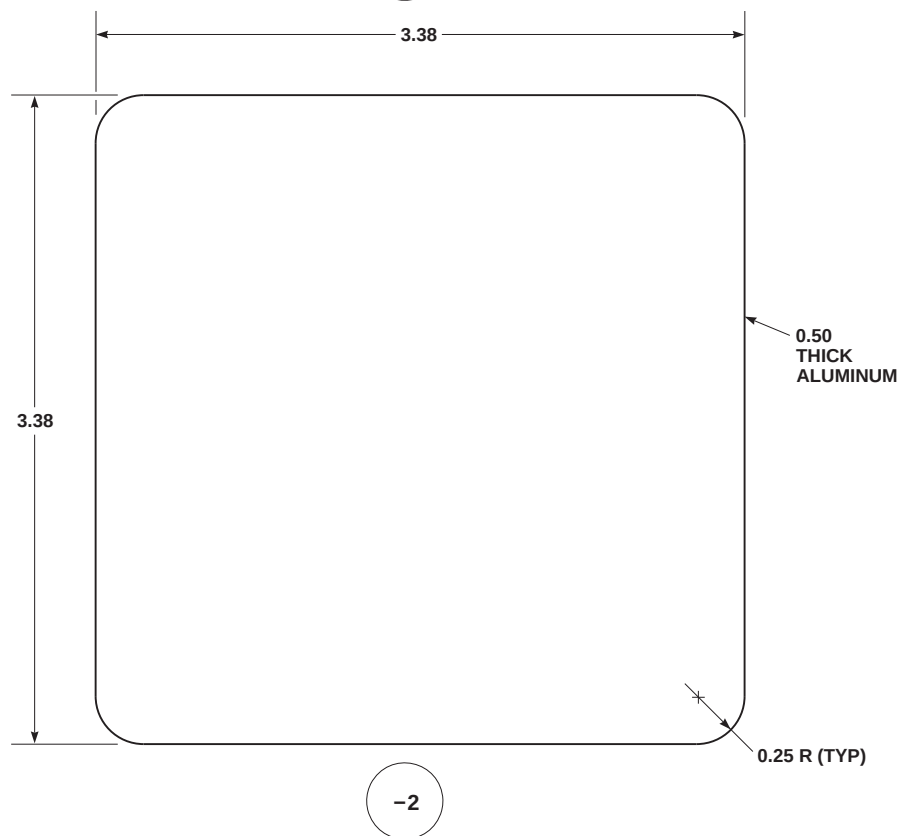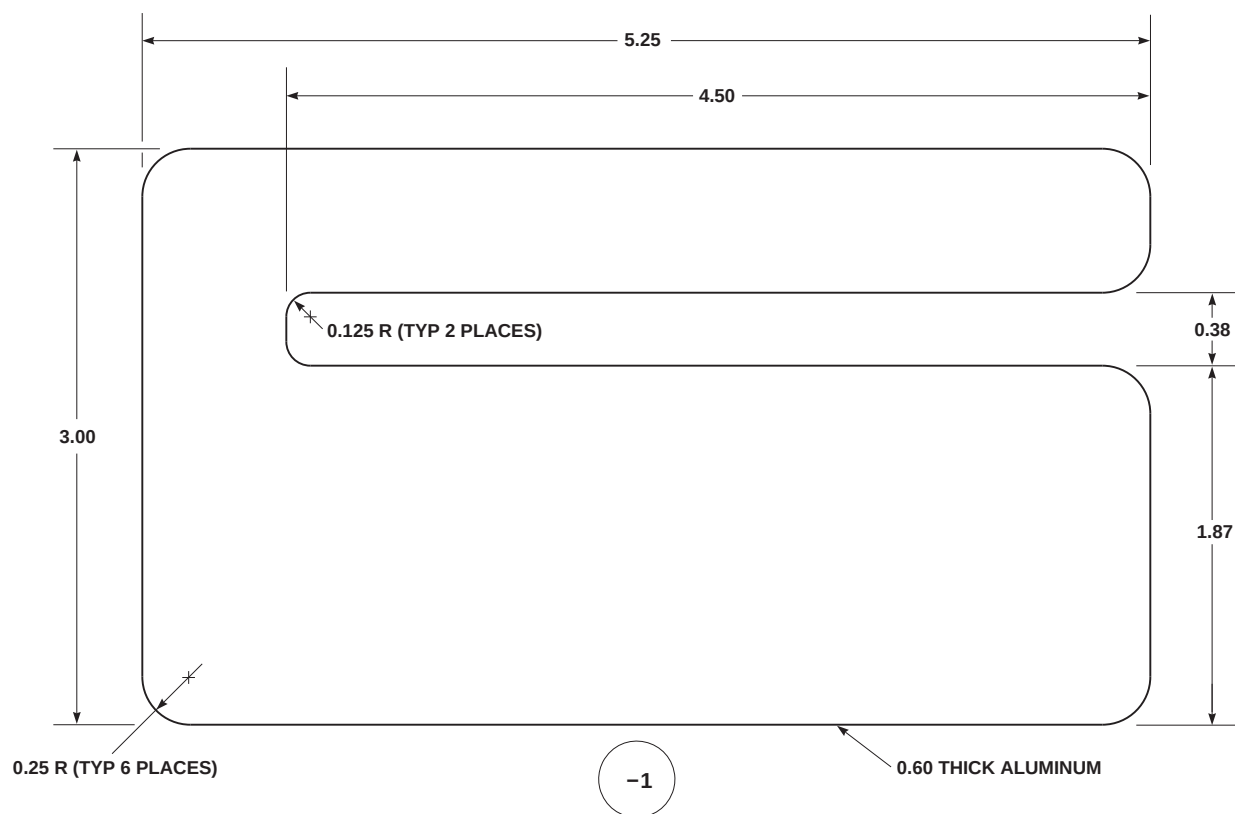



AA8915\_5  
SA

FIGURE H-213. BIFILAR BUSHINGS REPLACEMENT TOOLS (SHEET 5 OF 5)

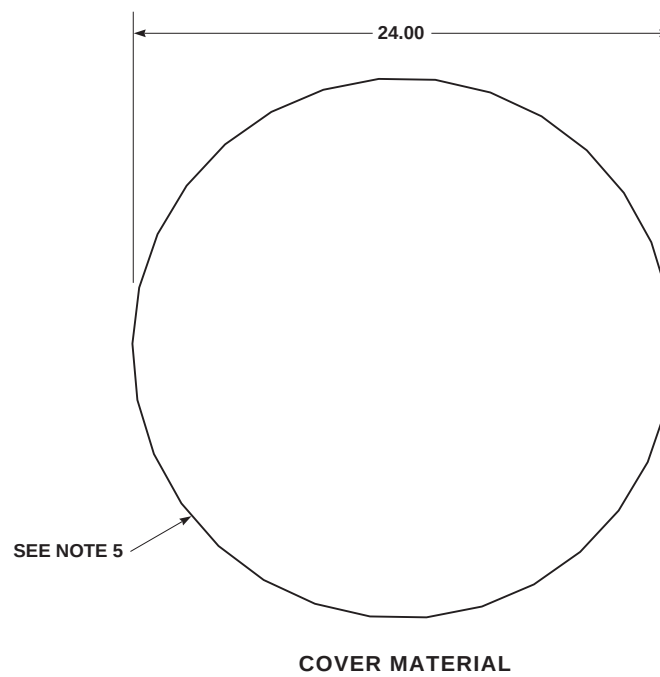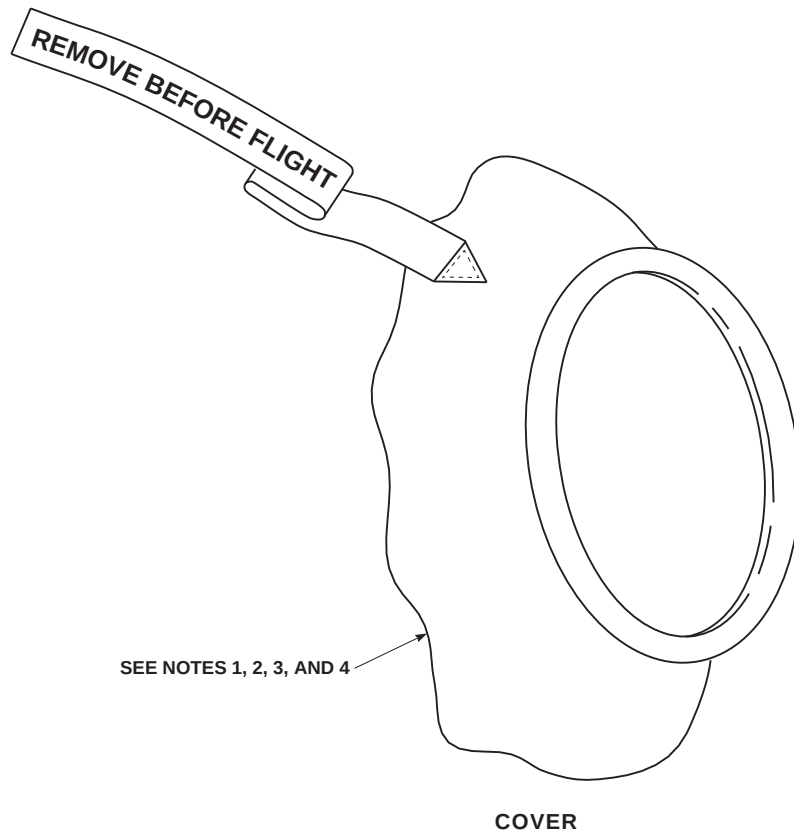

AA8916\_1  
SA

FIGURE H-214. CHAFF/FLARE DISPENSER COVER (SHEET 1 OF 4)

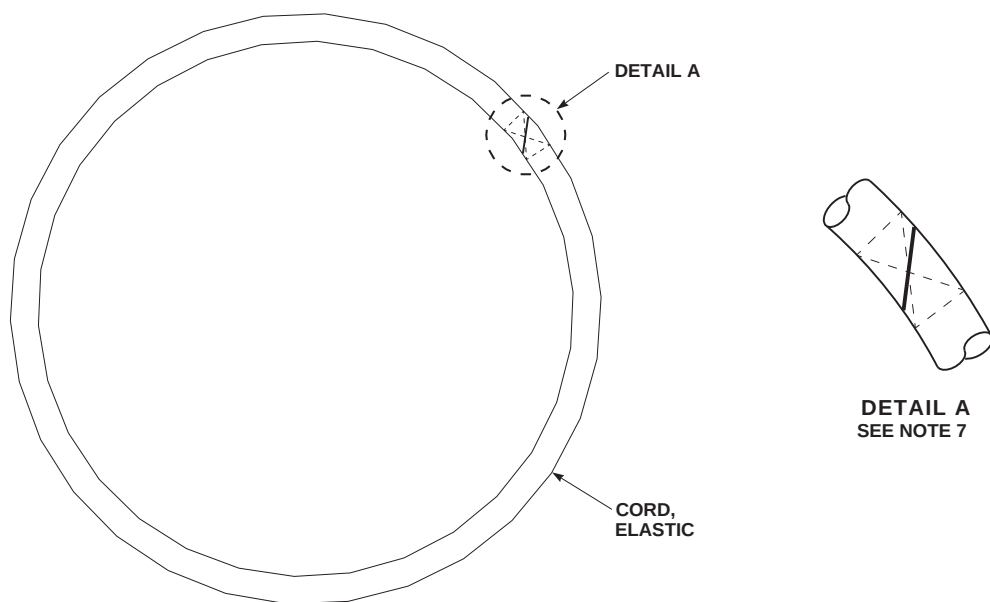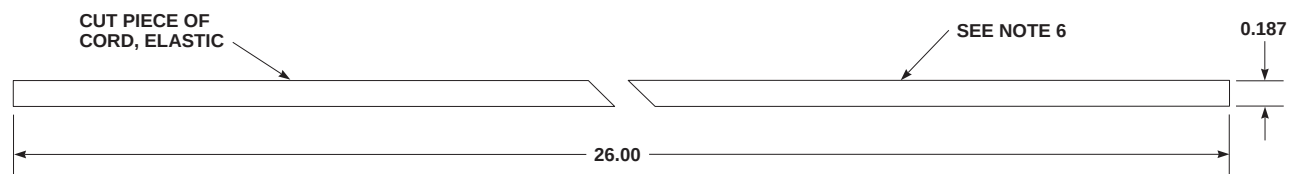

AA8916\_2  
SA

FIGURE H-214. CHAFF/FLARE DISPENSER COVER (SHEET 2 OF 4)

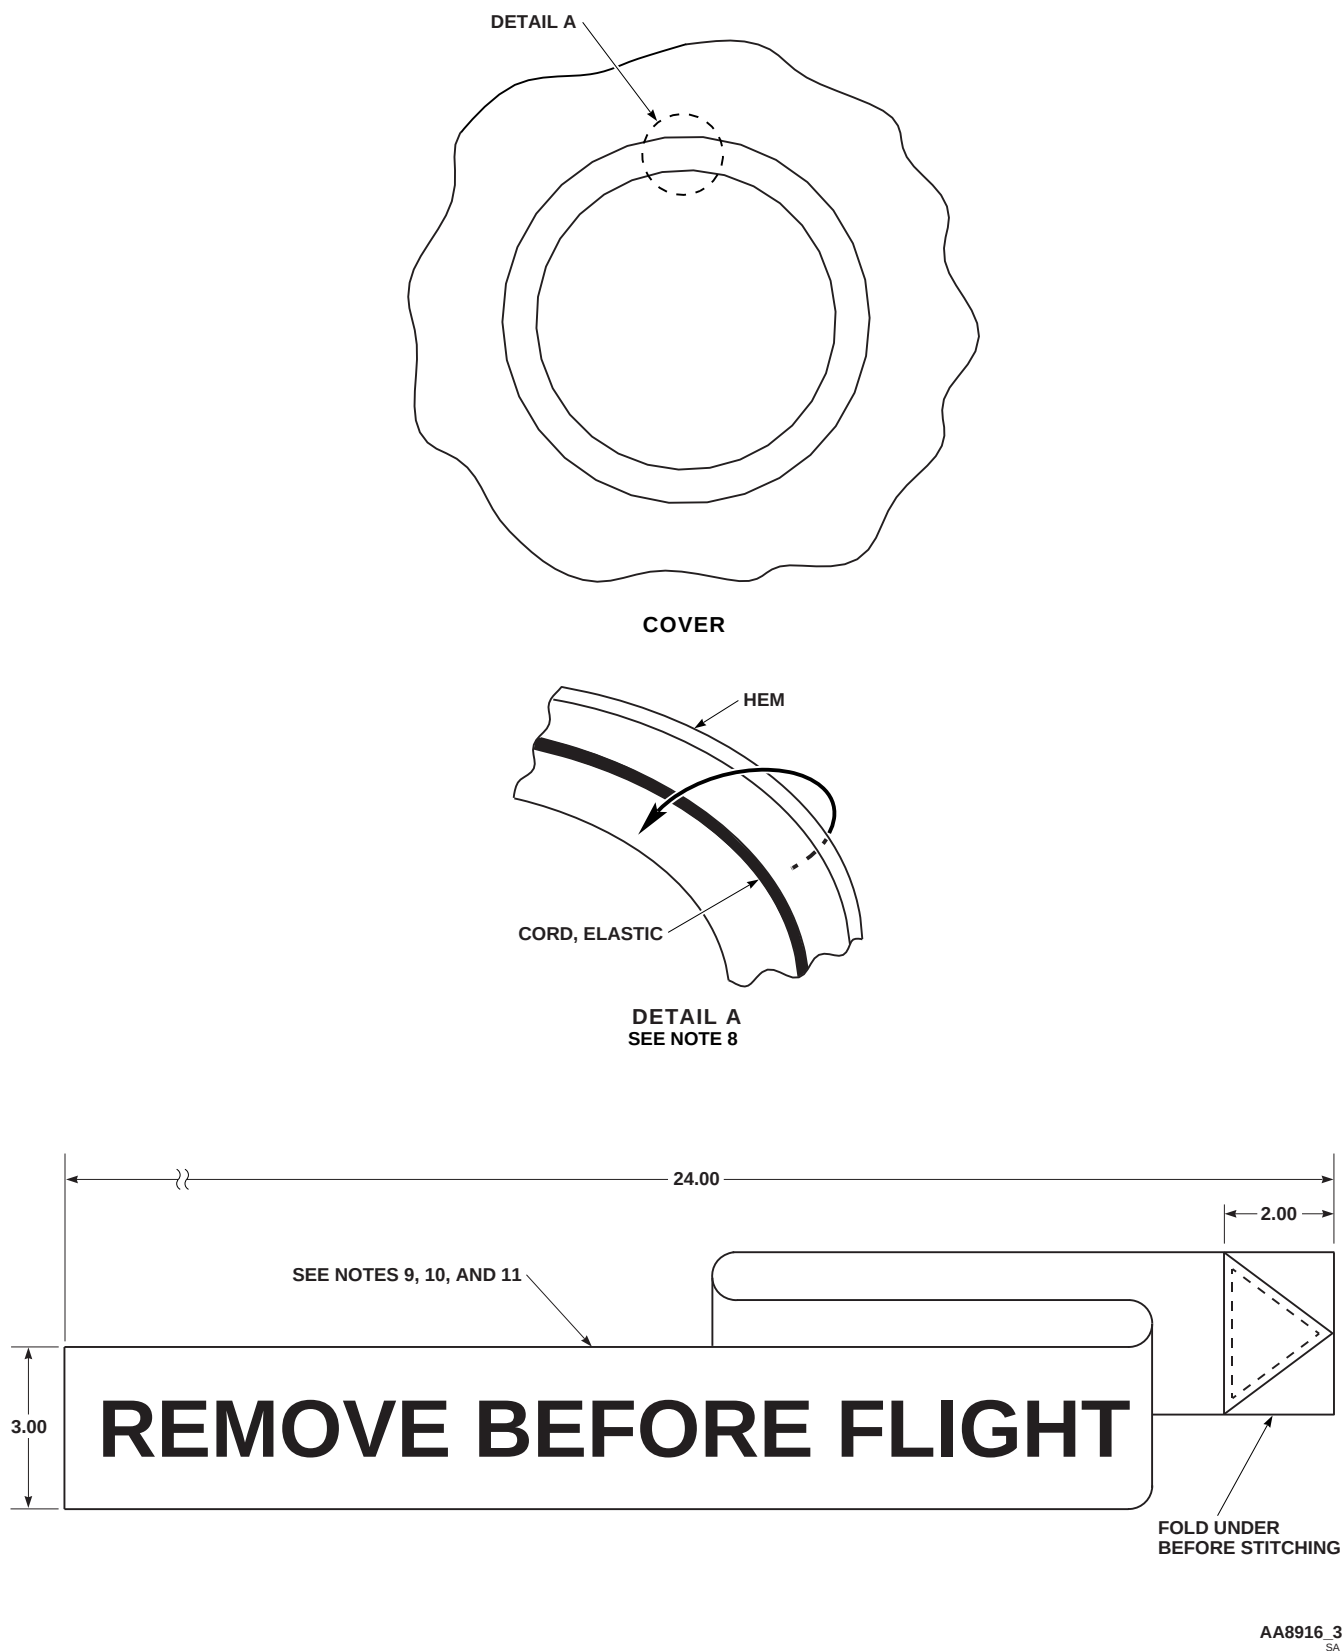


FIGURE H-214. CHAFF/FLARE DISPENSER COVER (SHEET 3 OF 4)

| SIKORSKY<br>PART NUMBER   | DESCRIPTION                                     | MATERIAL                                                                           | NSN                                                      |
|---------------------------|-------------------------------------------------|------------------------------------------------------------------------------------|----------------------------------------------------------|
| 70700-20511-119<br>—<br>— | ELASTIC CORD<br>PROTECTIVE COVER<br>NYLON CLOTH | MIL-C-5651, TYPE 3<br>MIL-C-20696, TYPE 1, CLASS 2<br>MIL-C-20696, TYPE 1, CLASS 2 | 8305-00-267-3116<br>8415-00-111-7028<br>8305-01-234-5049 |

## NOTES

1. MAKE PROTECTIVE COVER FROM NSN 8415-01-111-7028.
2. ALL DIMENSIONS ARE IN INCHES,  $\pm 0.010$  UNLESS NOTED.
3. IDENTIFY PARTS PER MIL-STD-130.
4. ALL SEAMS AND STITCHING PER FED-STD-751.
5. CUT PROTECTIVE COVER MATERIAL TO 24 INCH DIA.
6. CUT ELASTIC CORD TO 26 INCH LENGTH.
7. SEW ENDS OF CORD TOGETHER (OVERLAP 1 INCH).
8. FOLD HEM 0.385 INCH THEN FOLD OVER ELASTIC CORD AND SEW (APPROX 1 INCH FOLD).
9. MAKE FROM RED VINYL COATED NYLON CLOTH.
10. STENCIL LETTERS "REMOVE BEFORE FLIGHT", 1.50 INCH HIGH, WHITE COLOR, IN CENTER OF STRIP.
11. SEW FOLDER END TO COVER 3 INCHES FROM ELASTIC BAND.


PART NUMBER: BH102-9311434

CHAFF / FLARE DISPENSER COVER

FO0312\_4A  
SA


FIGURE H-214. CHAFF/FLARE DISPENSER COVER (SHEET 4 OF 4)

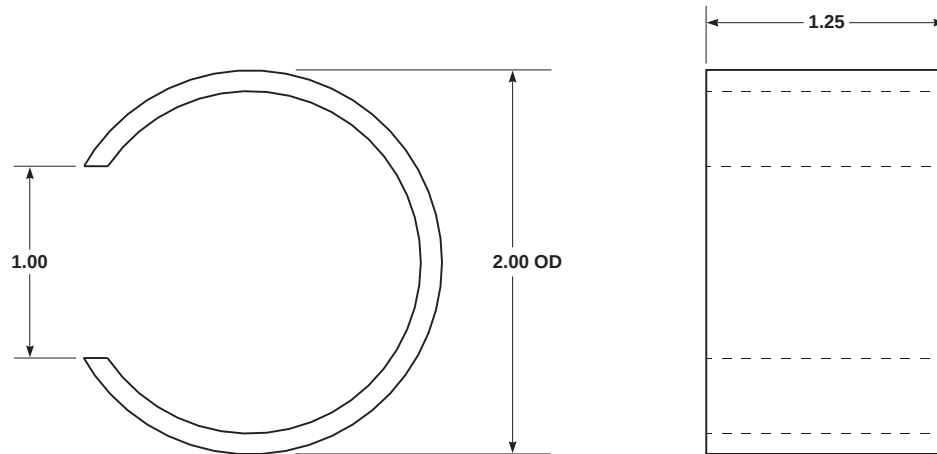

**NOTES**


1. MAKE FROM PVC TUBING, SCHEDULE 40, PROCURE LOCALLY.
2. ALL DIMENSIONS ARE IN INCHES.
3. DEBURR ALL SHARP EDGES.

AA8917  
SA**FIGURE H-215. DAMPER INDICATOR HANDLE RETAINER**

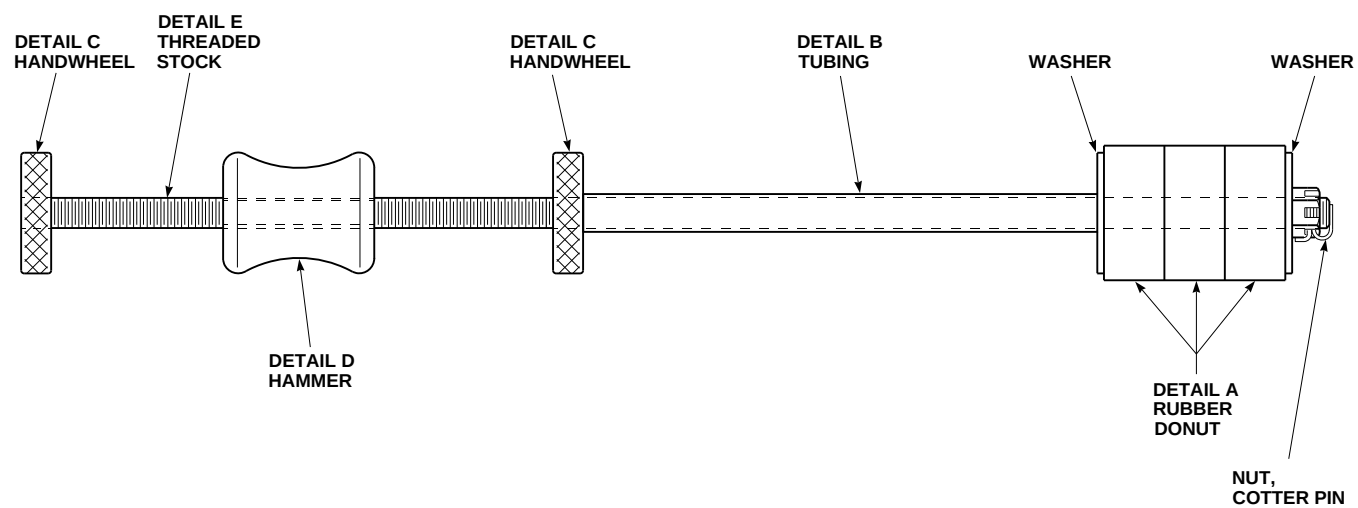


AA8918\_1  
SA


FIGURE H-216. OUTPUT DRIVE SHAFT PULLER (SHEET 1 OF 3)

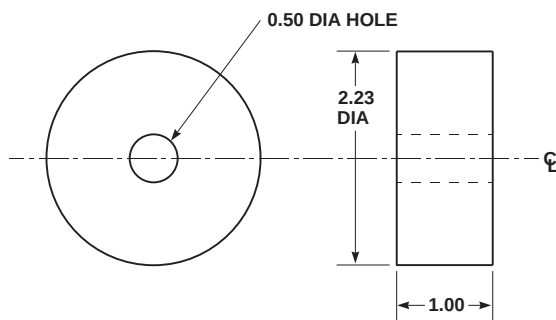


**DETAIL A  
RUBBER DONUT  
(3 PLACES)**

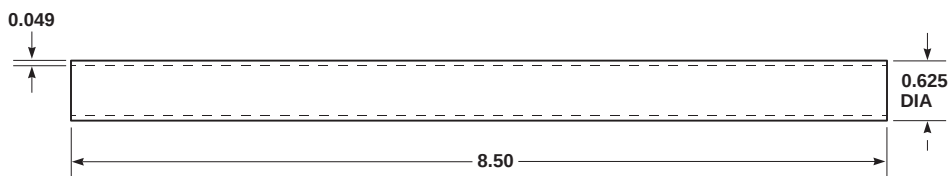

**DETAIL B  
TUBING**

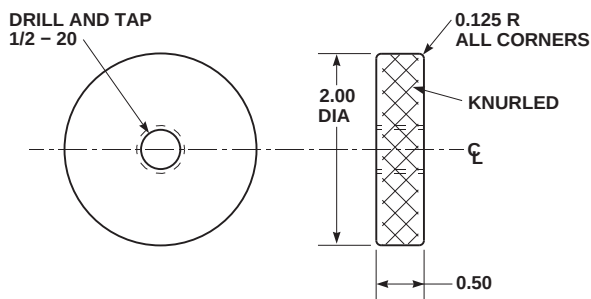

**DETAIL C  
HANDWHEEL**

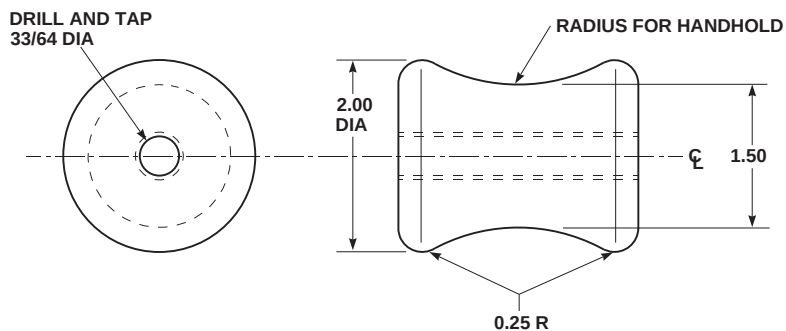

**DETAIL D  
HAMMER**

AA8918\_2A  
SA

**FIGURE H-216. OUTPUT DRIVE SHAFT PULLER (SHEET 2 OF 3)**

## PARTS LIST


| NOMENCLATURE               | NSN              | QUANTITY | UI |
|----------------------------|------------------|----------|----|
| RUBBER 1 INCH THICK        | 9320-00-261-5907 | 3        | SH |
| STAINLESS STEEL TUBING     | 4710-00-278-3302 | 1        | FT |
| ROUND STOCK STEEL 1045     | 9510-00-229-4835 | 3        | FT |
| THREADED ROD 1/2 X 20 + PI | 5300-01-205-3580 | 1        | EA |
| NUT 1/2 X 20               | 5310-00-732-0560 | 1        | PK |
| COTTER PIN                 | -                | AR       | HD |
| WASHERS                    | 5310-00-167-0769 | 2        | HD |
| RTV ITEM 31 APPD           | 8040-00-522-3424 | AR       | AR |

## NOTES

1. SEAL END WITH NUT AND COTTER PIN WITH RTV.
2. WELD ROUND STOCK TO THREADED ROD END.
3. DRILL END OF THREADED ROD TO ACCEPT COTTER PIN.
4. DRILL AND TAP HOLES.
5. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
6. IDENTIFY PARTS PER MIL-STD-130.

FO0313\_3A  
SA

FIGURE H-216. OUTPUT DRIVE SHAFT PULLER (SHEET 3 OF 3)


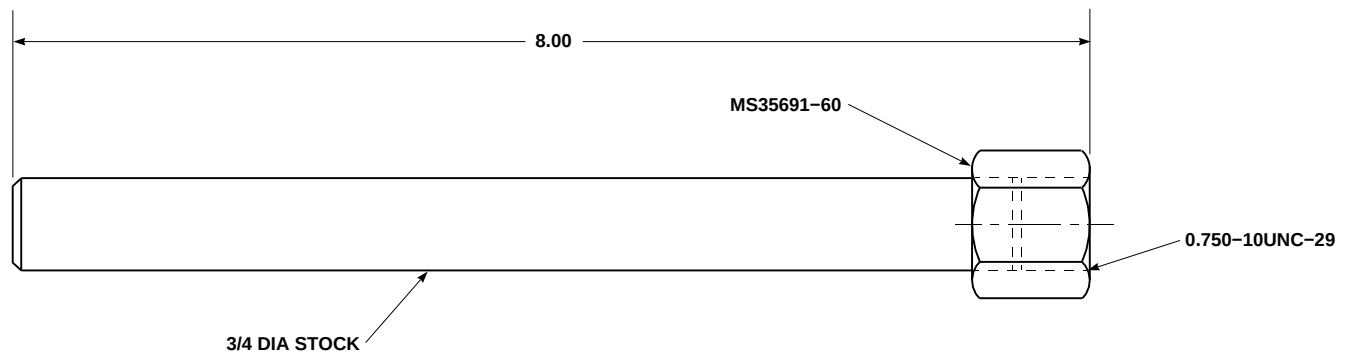


**NOTES**

1. MAKE TOOL FROM BRASS.
2. ALL DIMENSIONS ARE IN INCHES.

AA8919  
SA

**FIGURE H-217. SWITCH ADJUSTMENT TOOL**

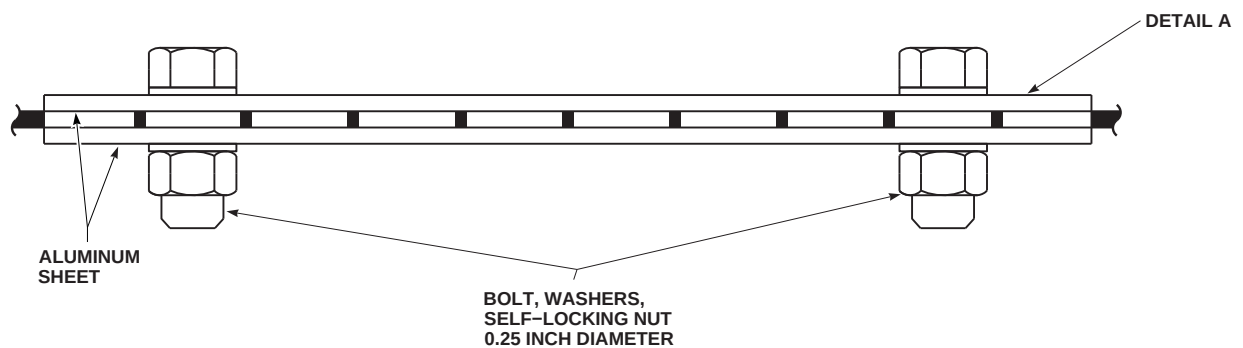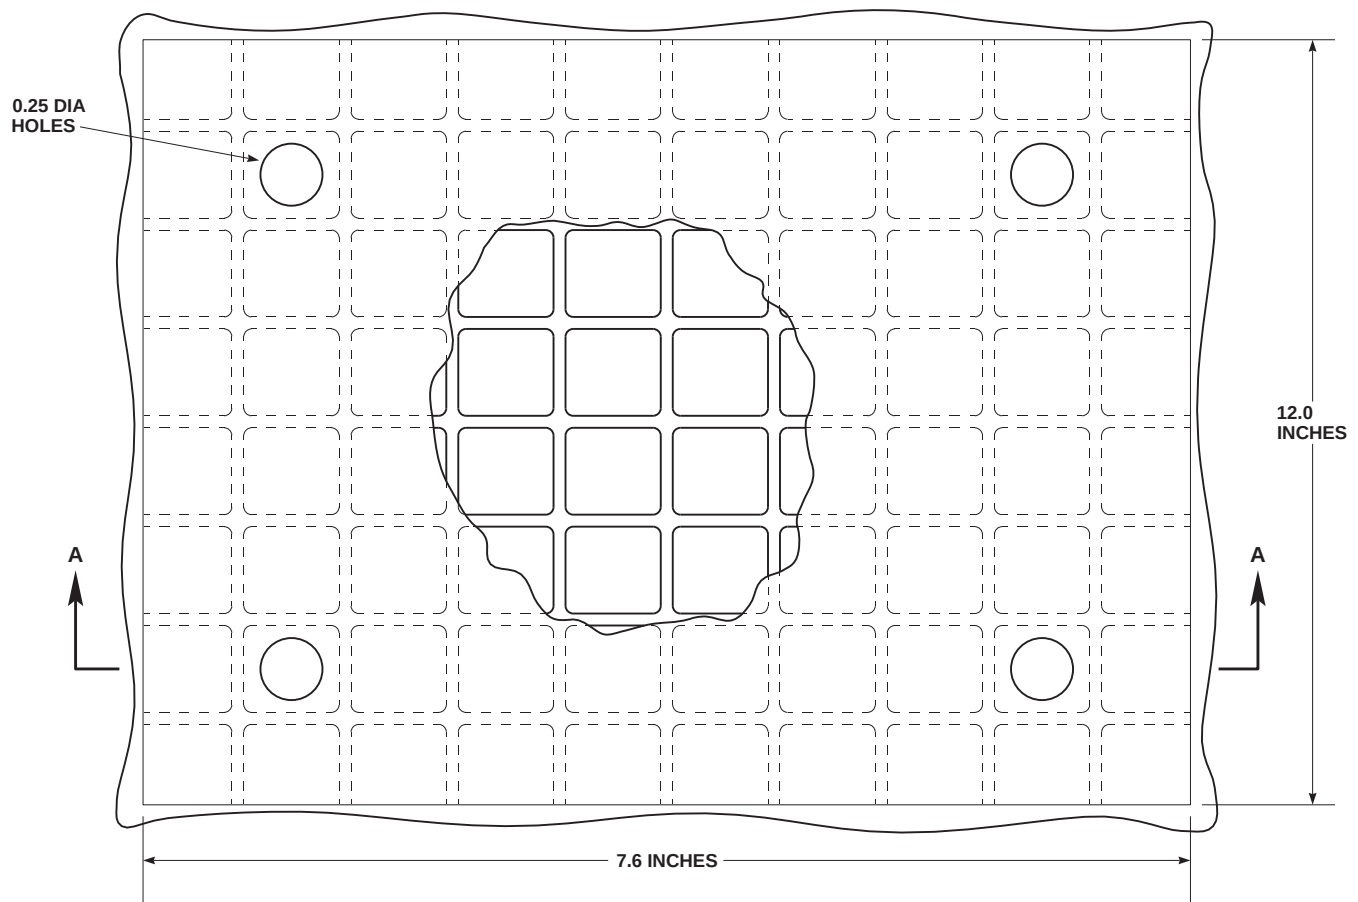


#### NOTES

1. MAKE FROM 0.030 ALUMINUM SHEET.
2. CUT FOUR 0.25 DIA HOLES AS REQUIRED.
3. ANODIZE PER MIL-A-8625.
4. PRIME PER MIL-P-23377 AND PAINT PER SS8555.
5. ALL DIMENSIONS ARE IN INCHES.

AA9250  
SA

FIGURE H-218. AFCS SCREEN COVER

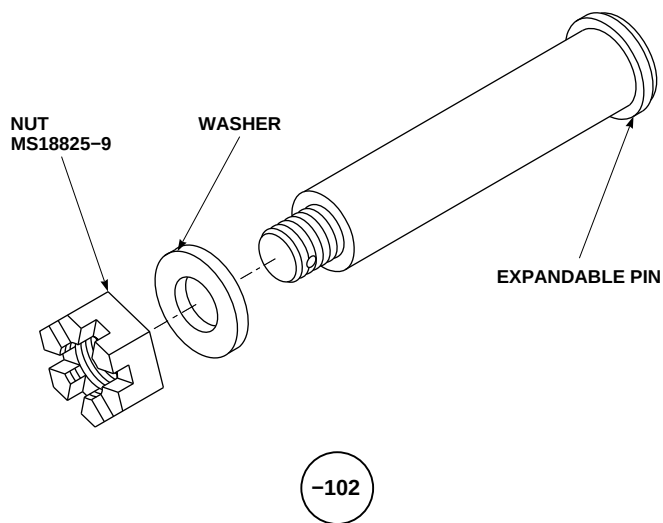

| NOMENCLATURE        | SIKORSKY<br>PART NUMBER |
|---------------------|-------------------------|
| SPACER REMOVAL TOOL | 70104-08015-102         |

#### NOTES

1. MAKE PIN FROM NSN 5315-01-096-9169
2. MAKE NUT FROM NSN 5310-00-181-6789.
3. PAINT TOOL RED, TAG "NOT FOR FLIGHT".

AA9408  
SA

FIGURE H-219. SPACER REMOVAL TOOL


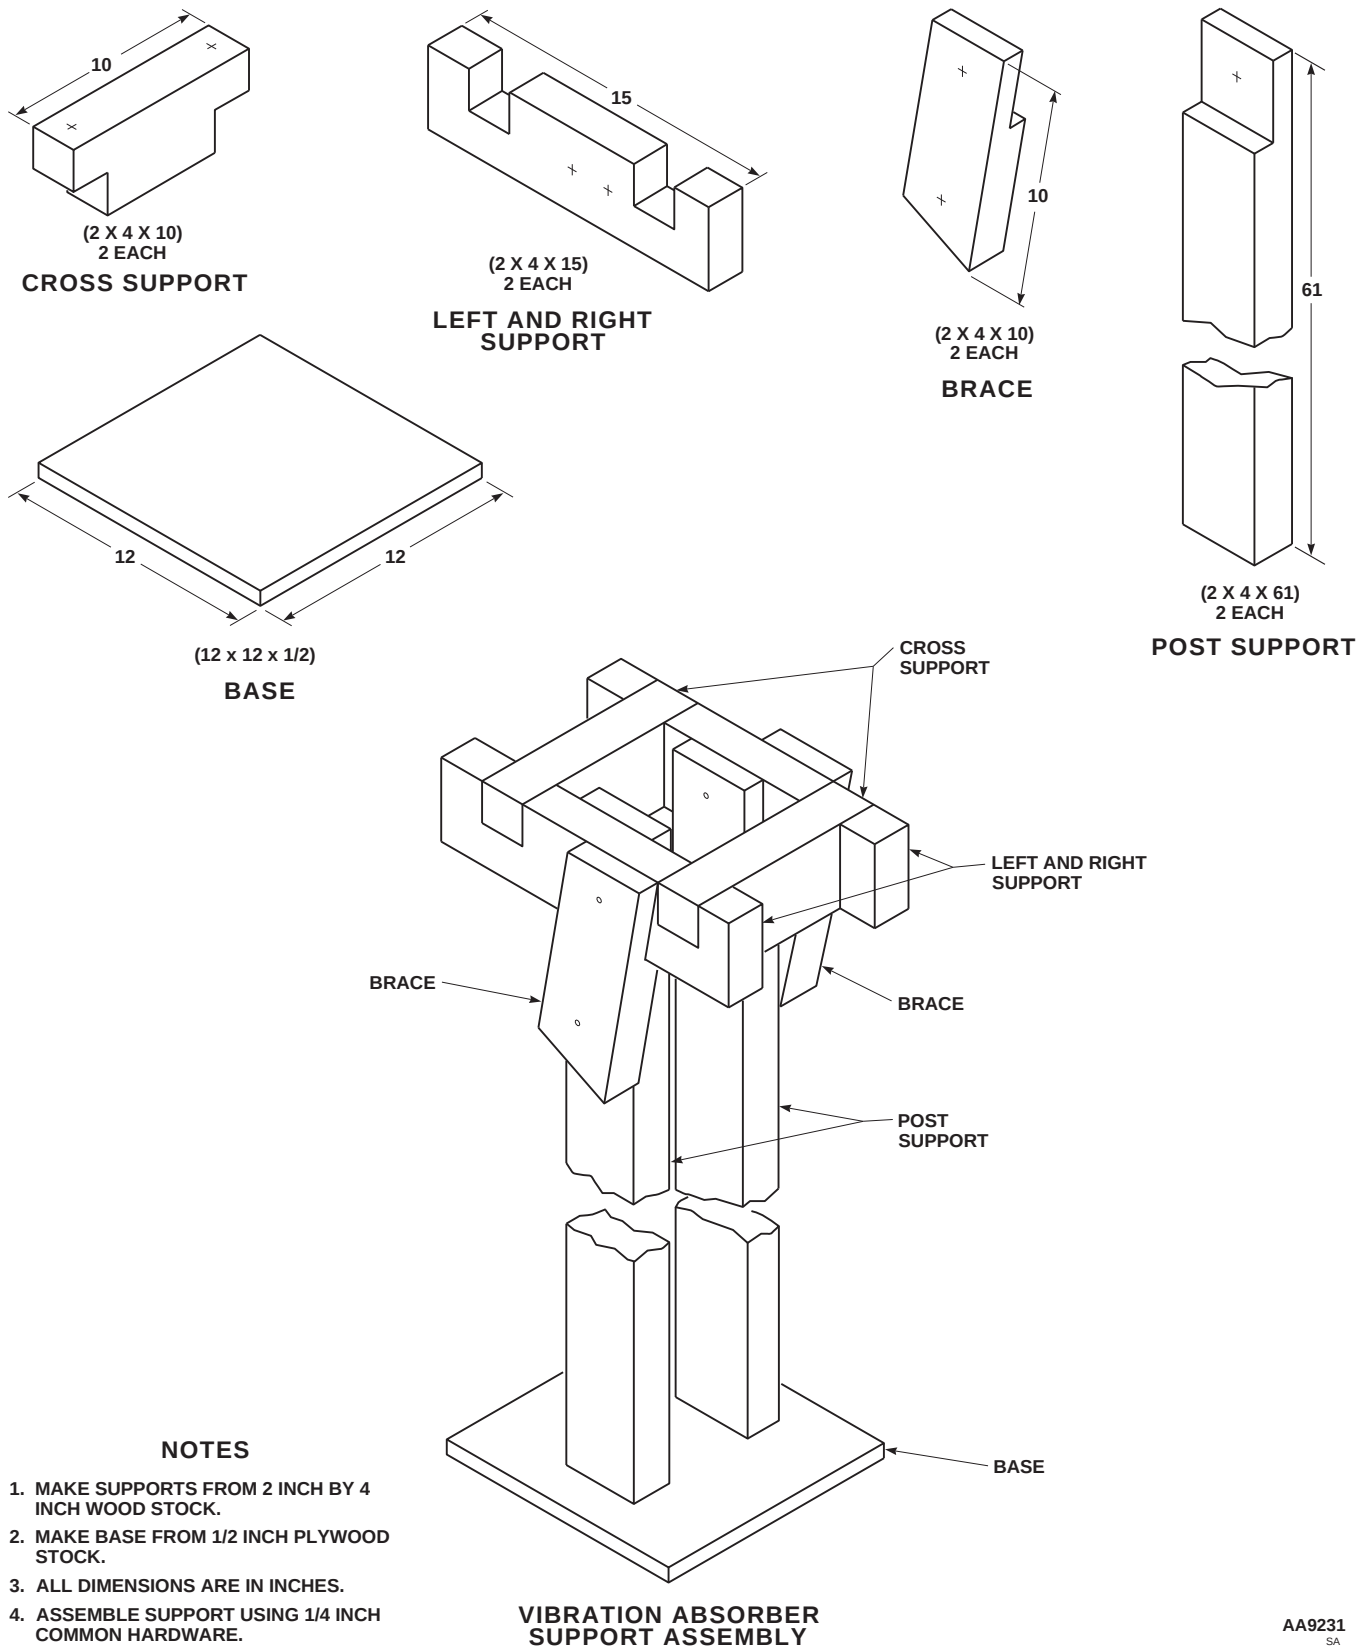



FIGURE H-220. VIBRATION ABSORBER SUPPORT ASSEMBLY

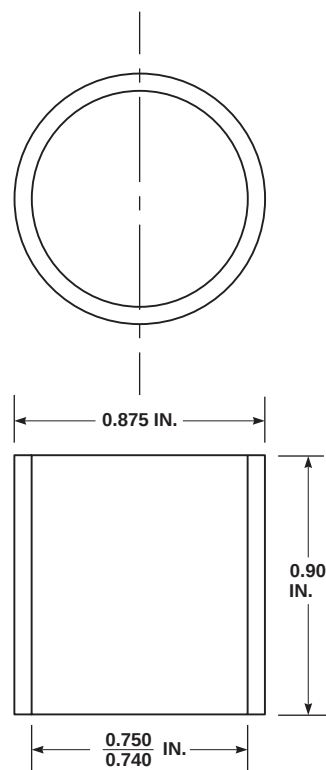


| NOTES                                    |
|------------------------------------------|
| 1. MAKE FROM 304 STAINLESS STEEL TUBING. |
| 2. ALL DIMENSIONS ARE IN INCHES.         |
| 3. IDENTIFY PART PER MIL-STD-130.        |

PART NUMBER: 1560-EG-159

AA9448  
SA**FIGURE H-221. TAIL LANDING GEAR LOCKPIN OVERSIZE BUSHING**

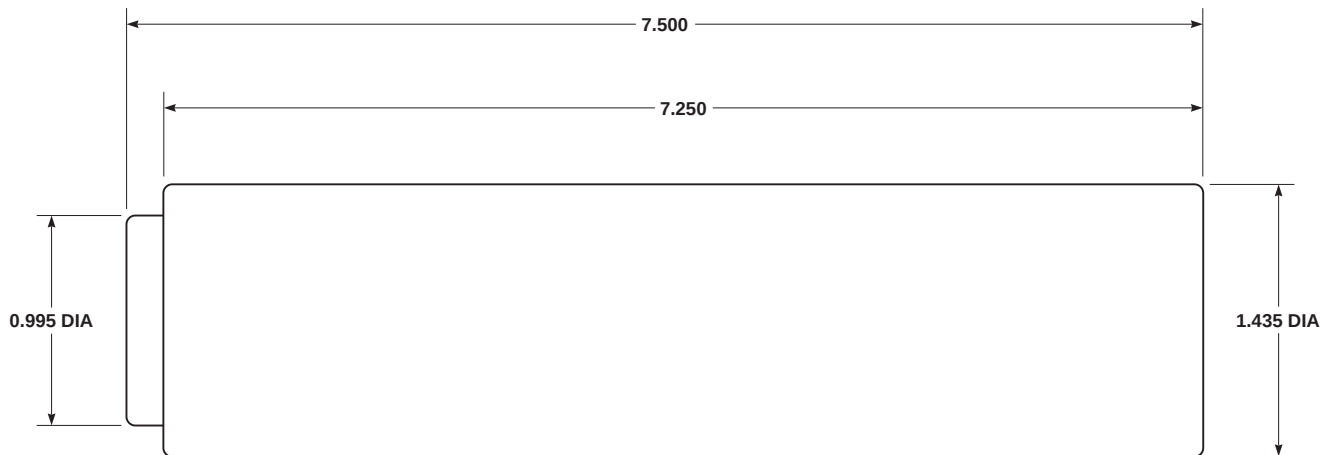

INSTALLATION TOOL  
DETAIL A

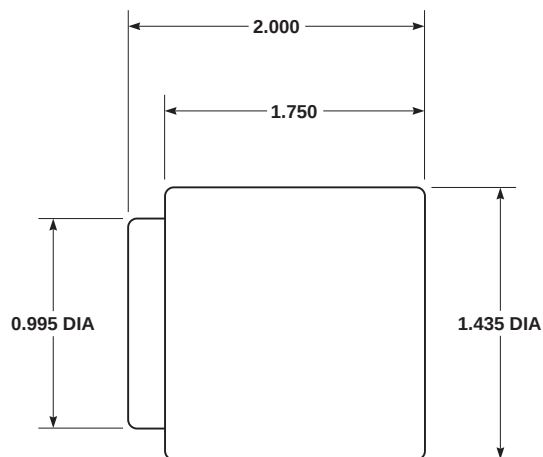


REMOVAL TOOL  
DETAIL B

#### NOTES

1. MAKE BUSHING INSTALLATION TOOL PER DIMENSIONS IN DETAIL A, USING ALUMINUM ALLOY BAR.
2. IMPRESSION STAMP PART NUMBER 70106-08100-T1A.
3. MAKE BUSHING REMOVAL TOOL PER DIMENSIONS IN DETAIL B, USING ALUMINUM ALLOY BAR.
4. IMPRESSION STAMP PART NUMBER 70106-08100-T1B.

AA9533  
SA

FIGURE H-222. MAIN ROTOR DAMPER SLEEVE BEARING INSTALLATION/REMOVAL TOOL

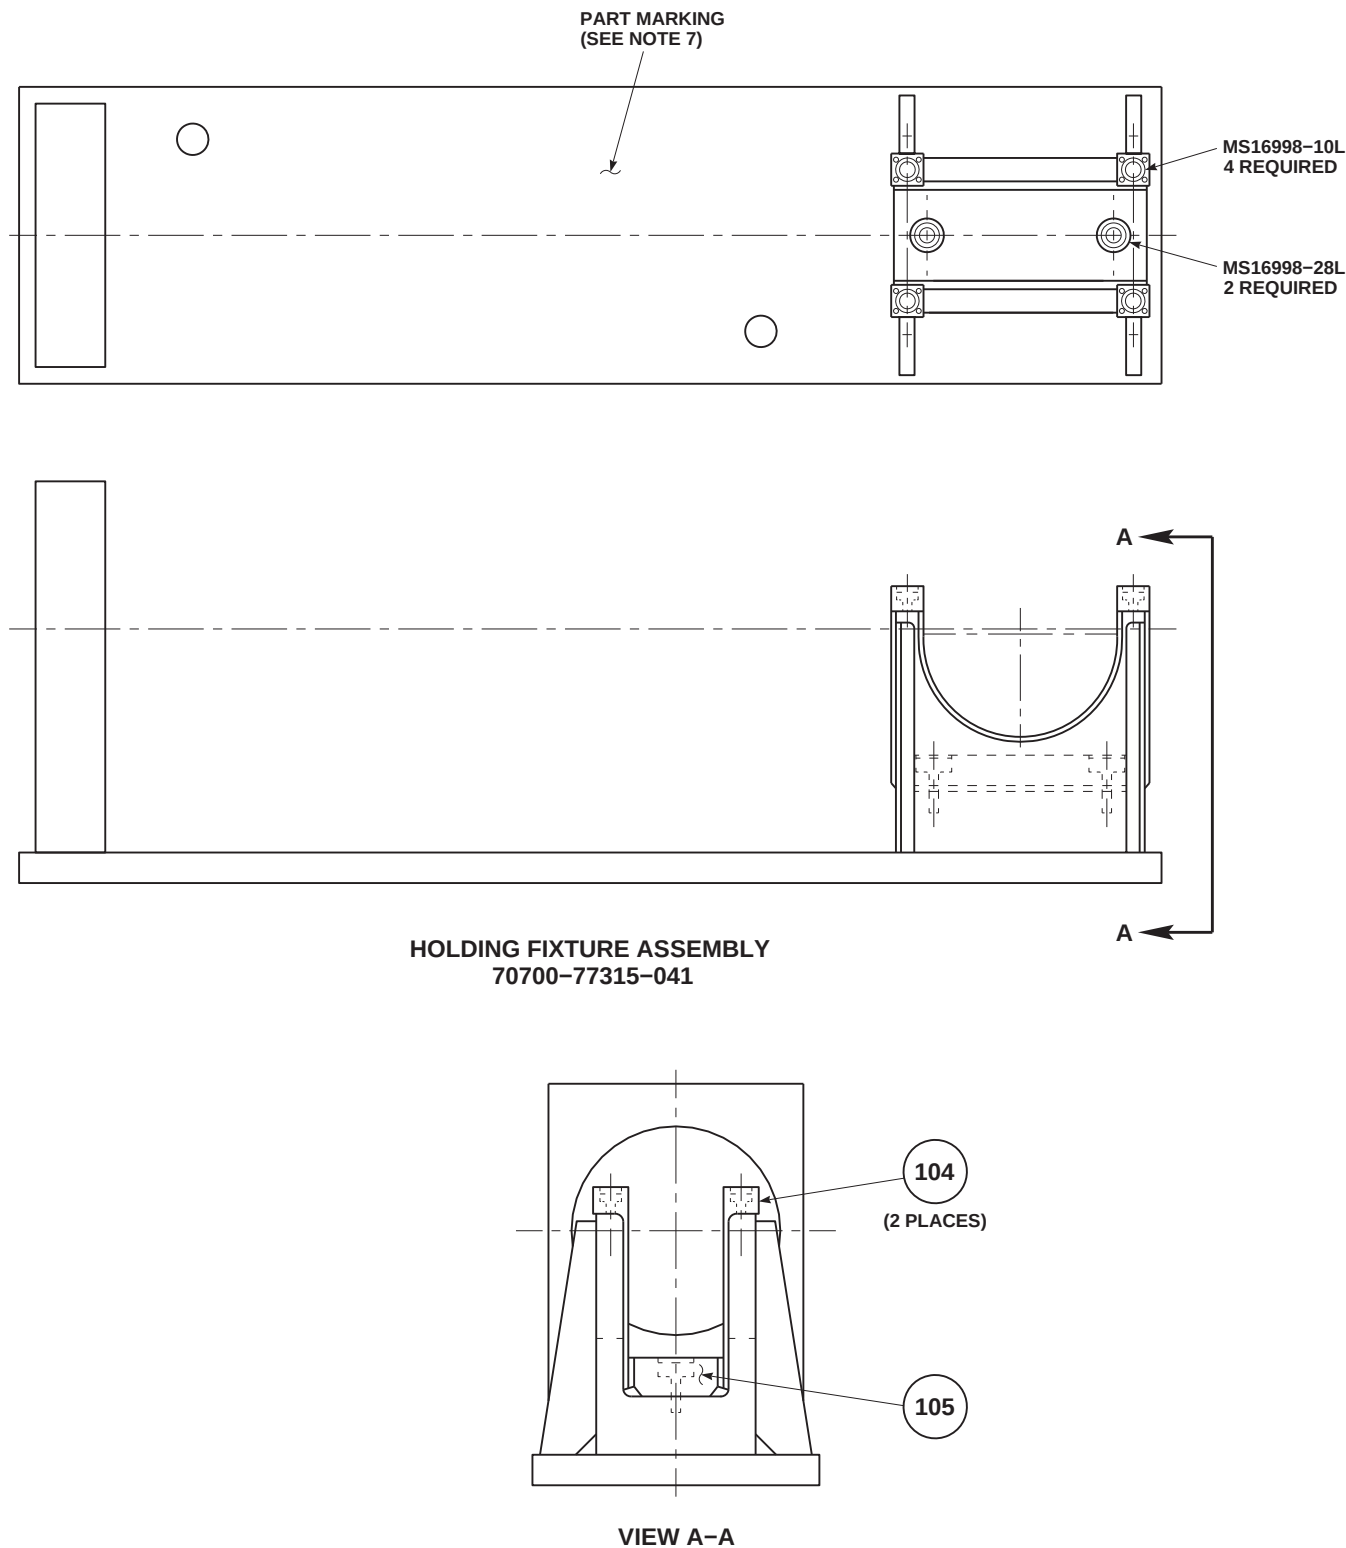

AA9534\_1  
SA

FIGURE H-223. MAIN ROTOR DAMPER HOLDING FIXTURE (SHEET 1 OF 4)



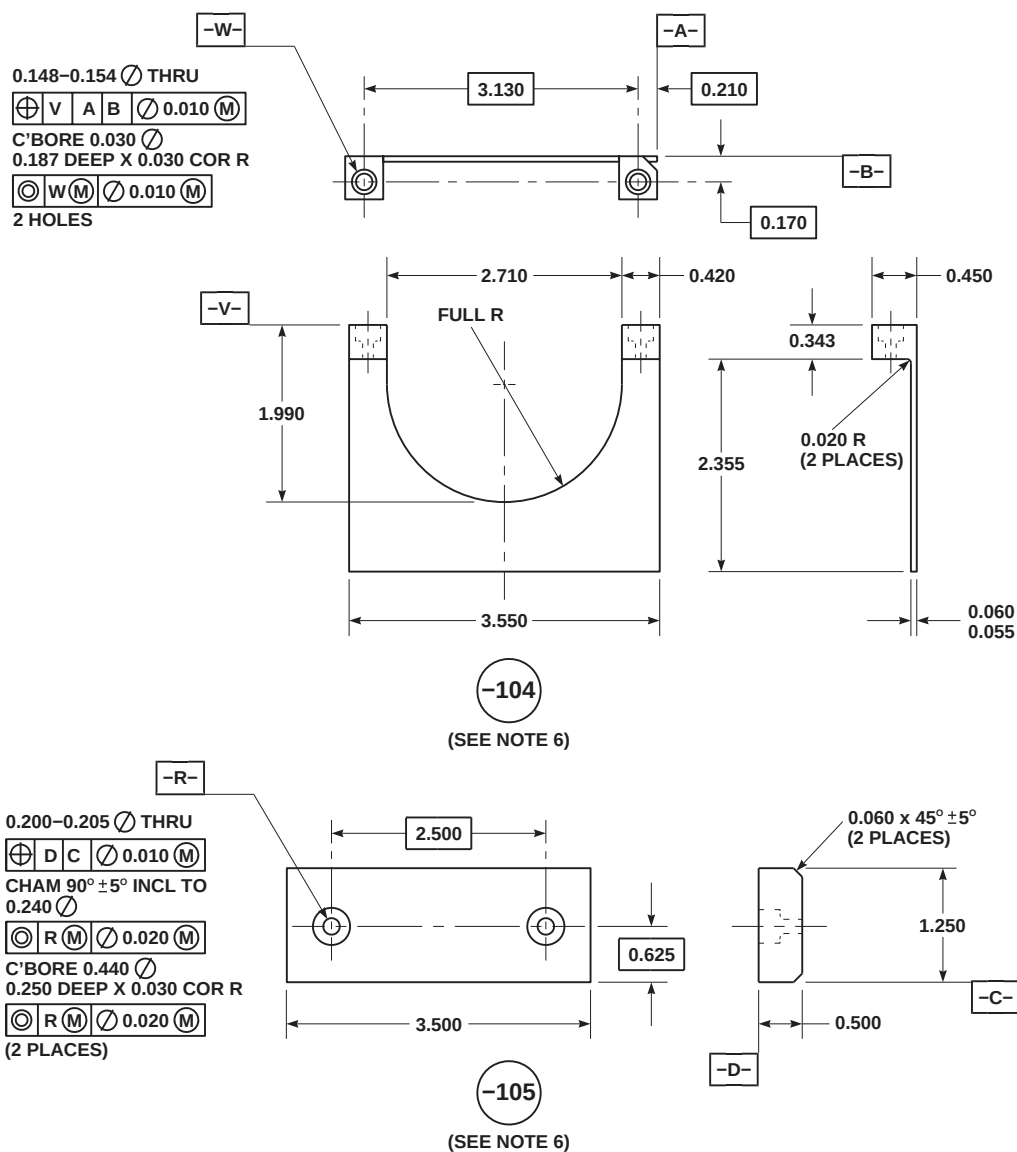
AA9534\_3  
SA


FIGURE H-223. MAIN ROTOR DAMPER HOLDING FIXTURE (SHEET 3 OF 4)

# NOTES

1. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED.
2. BREAK ALL SHARP EDGES 0.005 – 0.015 RADIUS UNLESS OTHERWISE NOTED.
3. 125 MICROINCH SURFACE FINISH ON ALL MACHINED SURFACES UNLESS OTHERWISE SPECIFIED.
4. WELD PER MIL-STD-2219.
5. MAKE FROM STEEL PLATE.
6. MAKE FROM NYLON, PHENOLIC, TEFLON, OR OTHER SUITABLE MATERIAL WHICH WILL NOT DAMAGE DAMPER ASSEMBLY SURFACES.
7. IMPRESSION STAMP 70700-77315-041 IN LOCATION SHOWN.
8. TOLERANCES UNLESS OTHERWISE NOTED:  
 ANGULAR  $\pm 0^{\circ} 30'$   
 LINEAR (EXCEPT HOLES):  
     X.XX  $\pm 0.03$   
     X.XXX  $\pm 0.010$
9. SYMBOL(S):  
 ⊕ TRUE POSITION  
 ◎ CONCENTRICITY  
 ∅ DIAMETER  
 Ⓜ MAXIMUM MATERIAL CONDITION (MMC)  
 □ BASIC DIMENSION
10. MAKE HOLDING FIXTURE ASSEMBLY DETAIL PARTS PER DIMENSIONS AND MATERIALS SHOWN.
11. WELD DETAIL PARTS TO BASE PLATE PER MIL-STD-2219.
12. AFTER WELDING, DRILL AND TAP HOLES AS SHOWN.
13. ATTACH DETAIL -104 TO HOLDING FIXTURE WITH CAP SCREWS, MS16698-10L. ATTACH DETAIL -105 WITH SCREWS MS16998-28L.
14. IMPRESSION STAMP 70700-77315-041 ON HOLDING FIXTURE TO IDENTIFY FOR FUTURE USE.

AA9534\_4  
SA

FIGURE H-223. MAIN ROTOR DAMPER HOLDING FIXTURE (SHEET 4 OF 4)

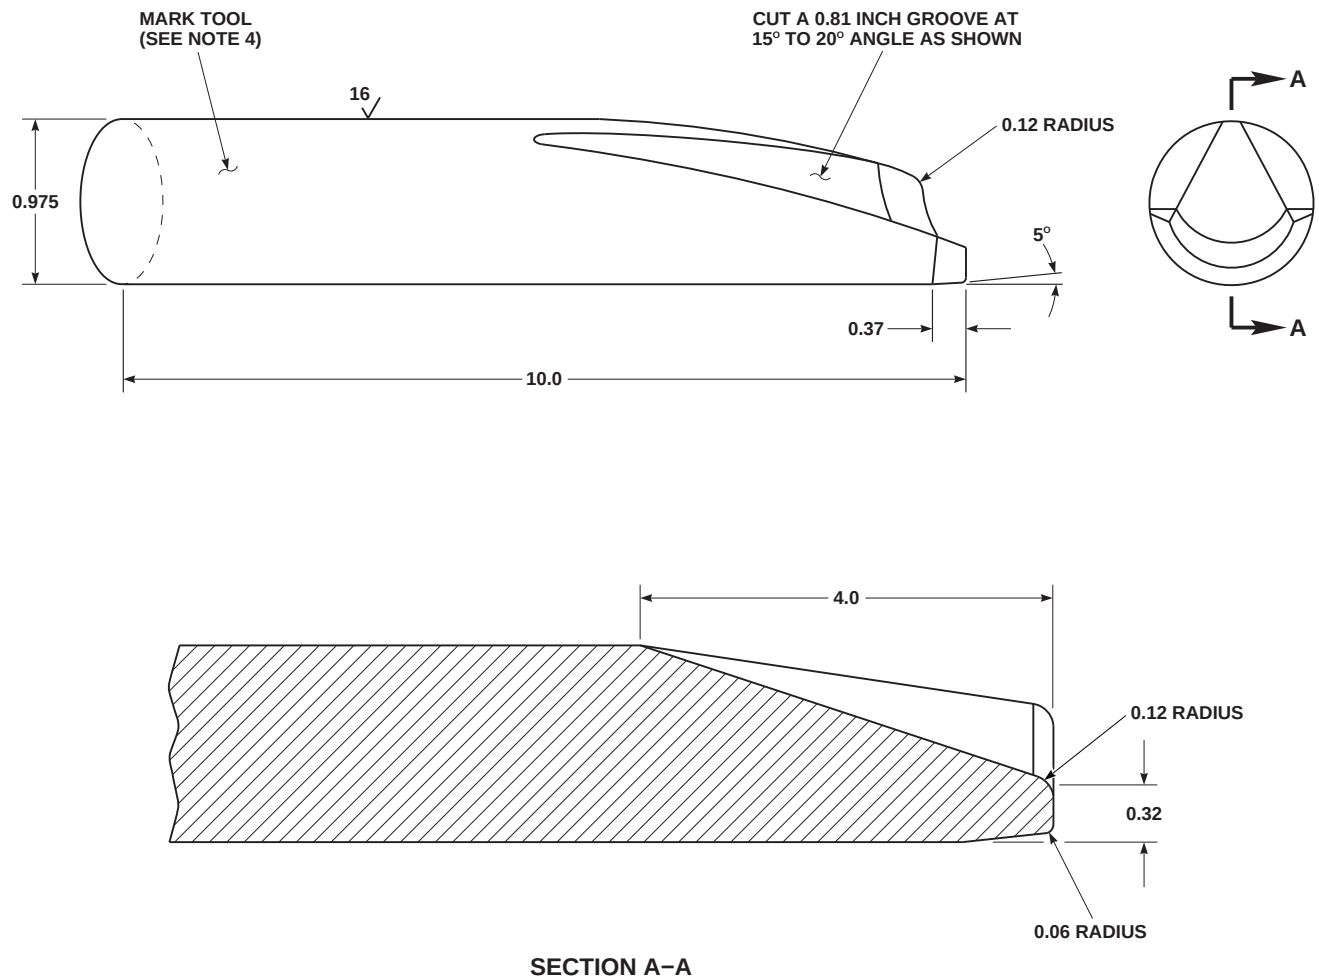


### NOTES

1. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED.
2. BREAK ALL SHARP CORNERS 0.005 TO 0.015 RADIUS.
3. MAKE FROM NYLON ROD.
4. IMPRESSION STAMP AS SEAL EXPANSION TOOL. 70106-28000-045T046.
5. SYMBOL(S):  
✓ MICROINCH FINISH
6. TOLERANCES UNLESS OTHERWISE NOTED:  
ANGULAR  $\pm 0^{\circ} 30'$   
LINEAR (EXCEPT HOLES):  
X.XX  $\pm 0.03$   
X.XXX  $\pm 0.010$
7. MAKE SEAL EXPANSION TOOL PER DIMENSIONS.
8. MAKE FROM NYLON MATERIAL.
9. IMPRESSION STAMP 70106-08100-T4 TO IDENTIFY FOR FUTURE USE.

AA9535  
SA

FIGURE H-224. MAIN ROTOR DAMPER SEAL EXPANSION TOOL

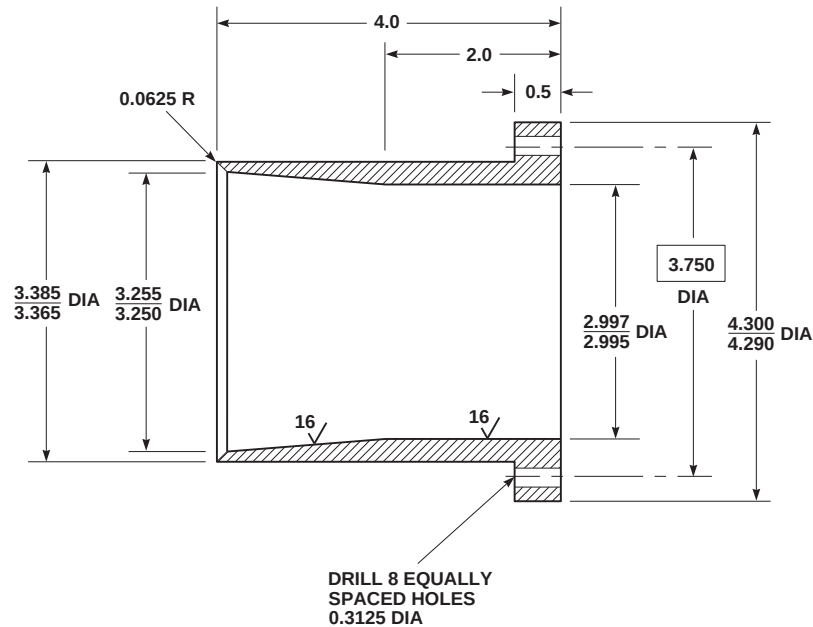

### NOTES

1. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED.
2. BREAK ALL SHARP CORNERS 0.005 TO 0.015 RADIUS.
3. SYMBOL(S):  


✓ MICROINCH FINISH

BASIC DIMENSION
4. MAKE PISTON ROD INSERTION TOOL SEAL EXPANSION TOOL PER DIMENSION.
5. MAKE FROM NYLON MATERIAL.
6. IMPRESSION STAMP 70106-08100-T5 TO IDENTIFY FOR FUTURE USE.

AA9536  
SA

FIGURE H-225. MAIN ROTOR DAMPER PISTON ROD INSERTION TOOL



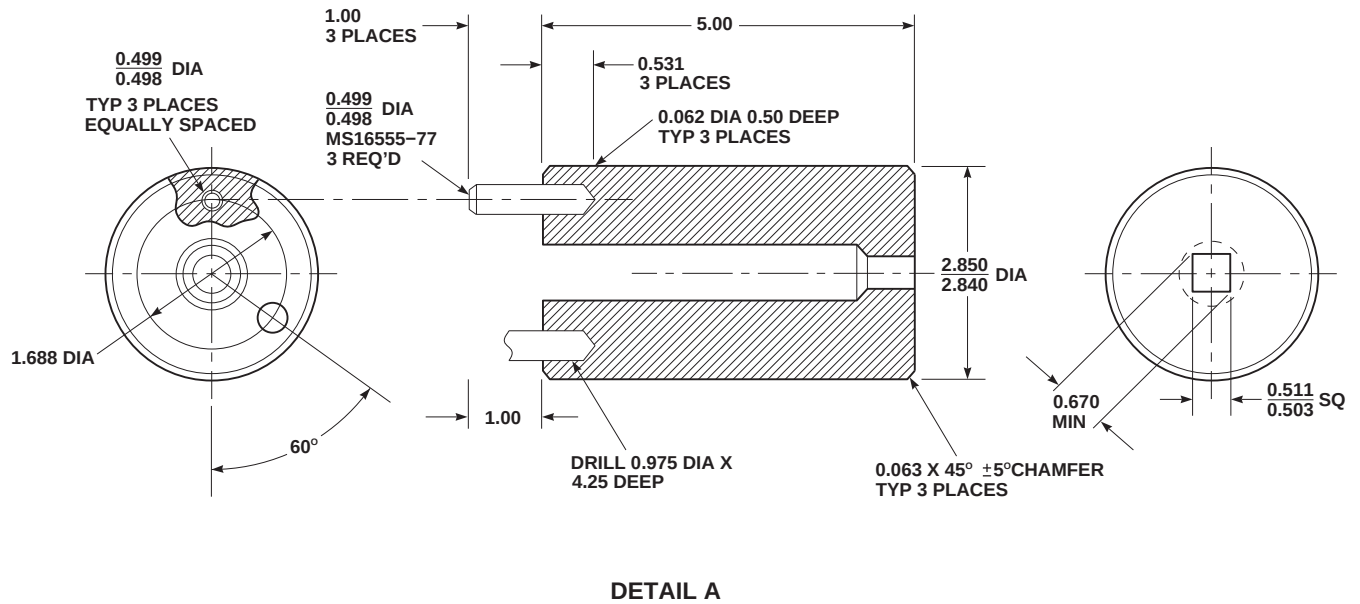

#### NOTES

1. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED.
2. MAKE FROM STEEL BAR STOCK 4340.
3. MAKE PISTON ROD ASSEMBLY WRENCH PER DIMENSIONS.
4. USING STEEL BAR STOCK 4340.
5. IMPRESSION STAMP PART NUMBER 70106-08100-T6.

AA9537  
SA

**FIGURE H-226. MAIN ROTOR DAMPER PISTON ROD WRENCH**






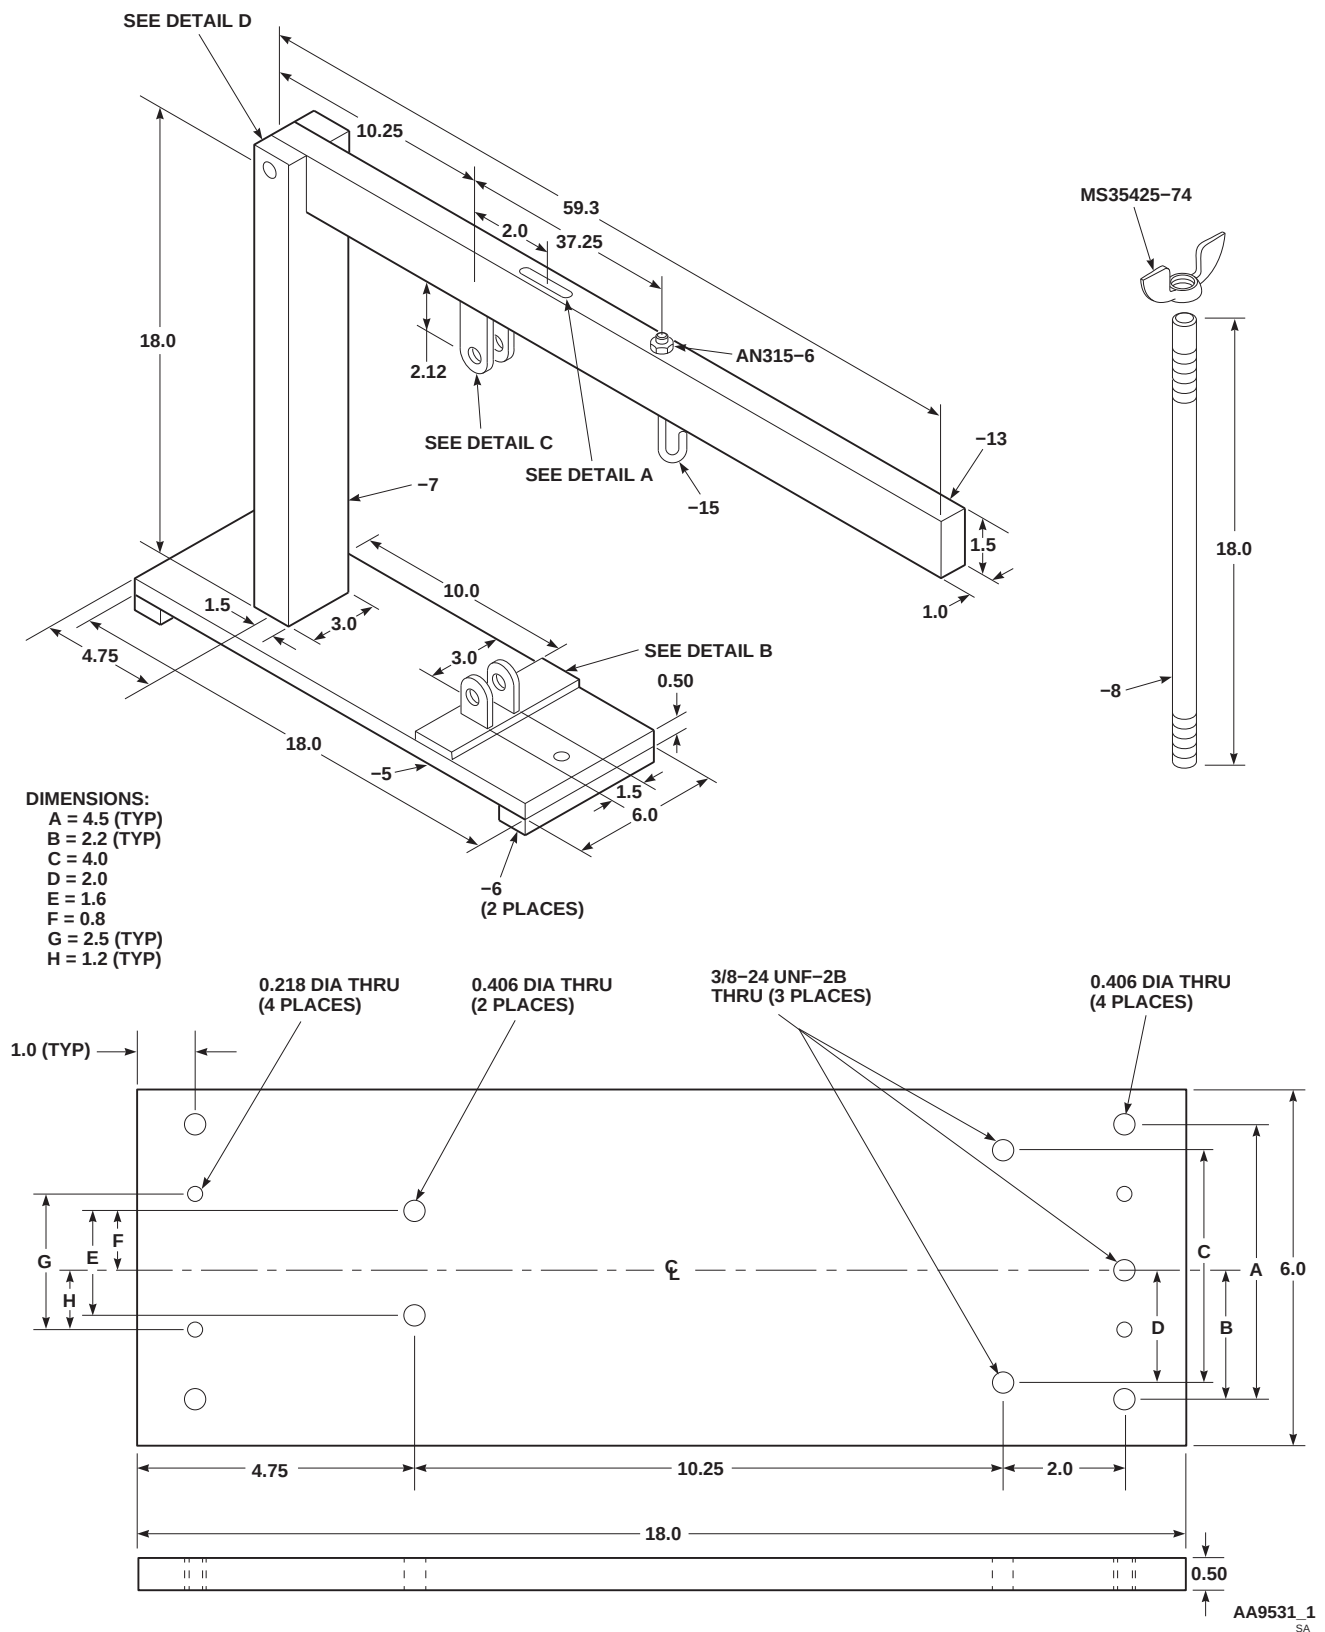


FIGURE H-227. MASTER BRAKE CYLINDER TEST STAND (SHEET 1 OF 4)

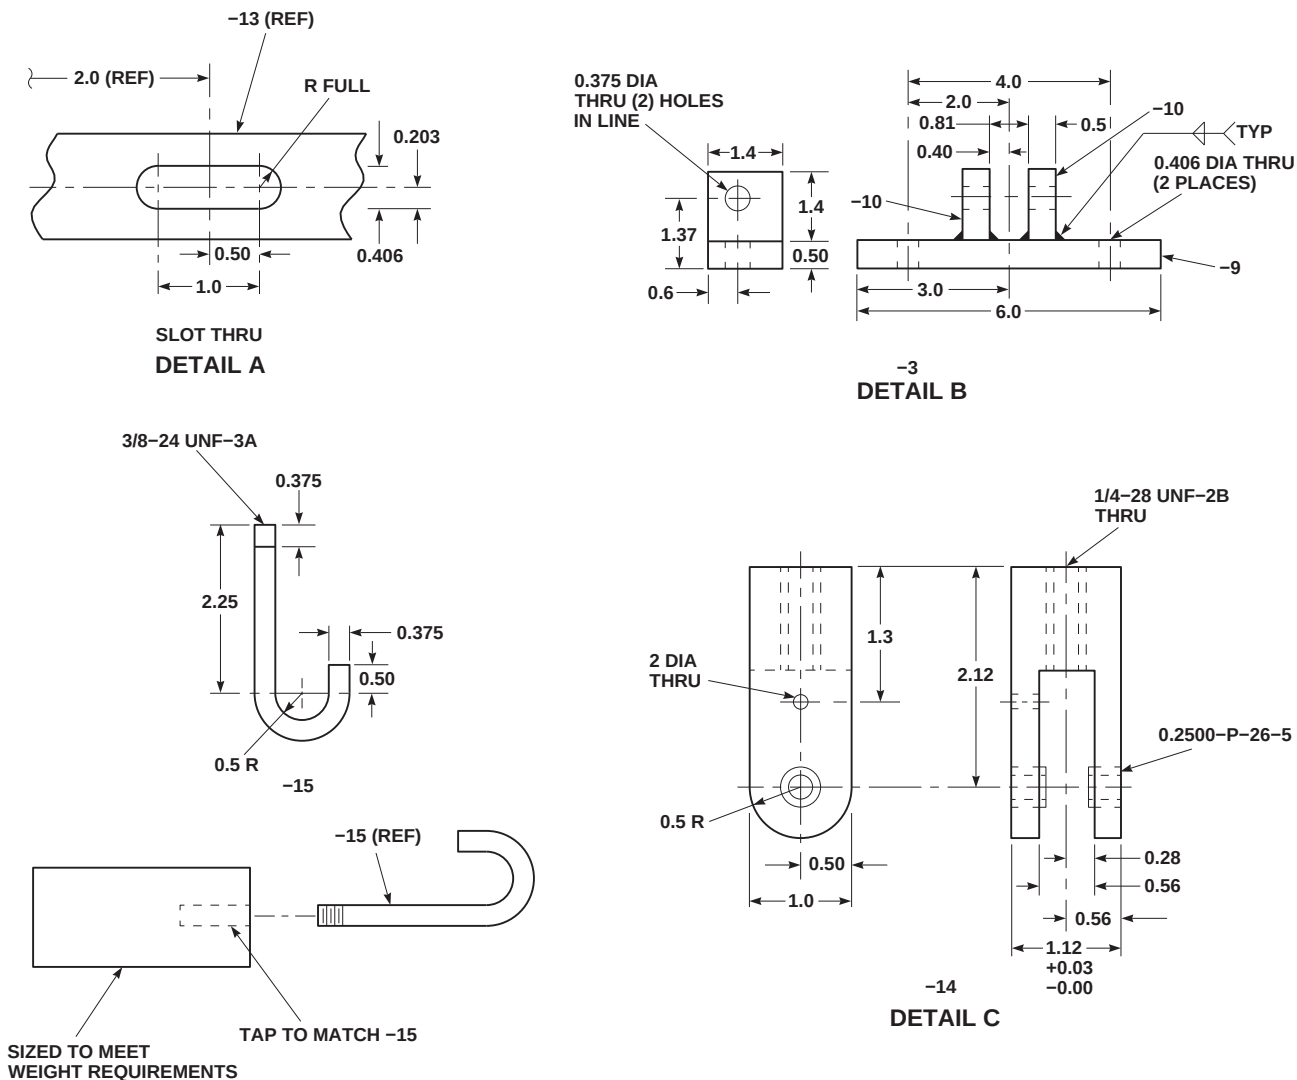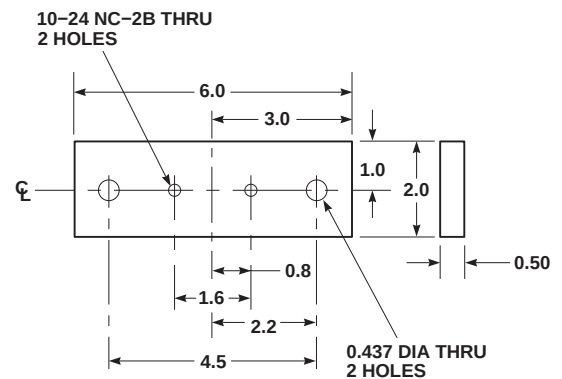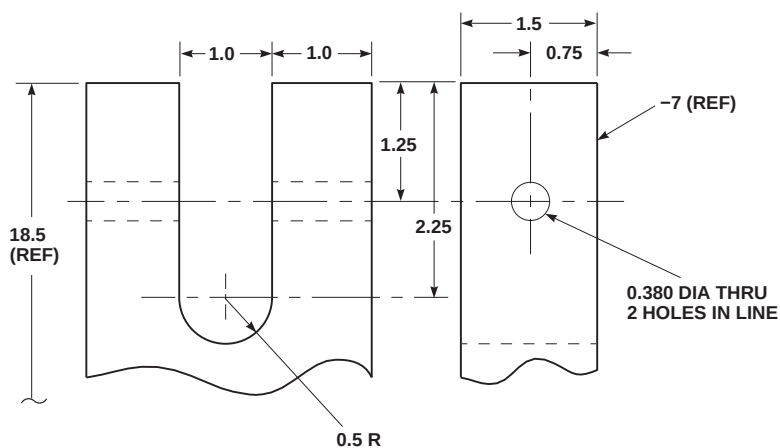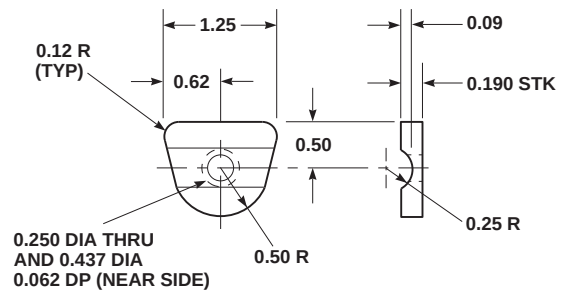

AA9531\_2  
SA

FIGURE H-227. MASTER BRAKE CYLINDER TEST STAND (SHEET 2 OF 4)

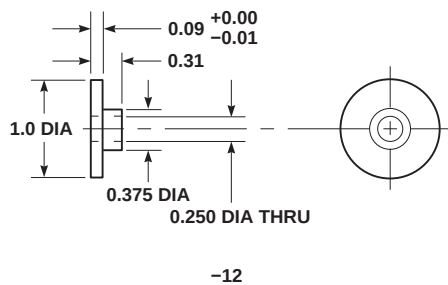

AA9531\_3  
SA


FIGURE H-227. MASTER BRAKE CYLINDER TEST STAND (SHEET 3 OF 4)

| NOMENCLATURE             | MATERIAL                       | NSN              |
|--------------------------|--------------------------------|------------------|
| CARR LANE CL-9-LP        | L PIN                          | 5315-00-547-3809 |
| CARR LANE CL-5-LP        | L PIN                          | 5315-00-075-7845 |
| CARR LANE CL-2-C-9.0     | NYLON CABLE                    | 4018-00-069-5180 |
| CARR LANE CL-2-F         | FERRULE                        | 4030-01-219-8678 |
| ACE OR EQUIV 2500-P-26-5 | HEADLESS P.F. BUSHING          | 3120-00-598-8720 |
| MS35425-74               | WING NUT                       | 5310-01-088-2490 |
| MS27039-4-12             | PAN HD SCREW                   | 5305-00-891-1784 |
| AN315-6                  | SELF-LOCKING NUT               | 5310-00-843-4824 |
| AN960-616                | FLAT WASHER                    | 5310-01-016-4871 |
| AN960-416                | FLAT WASHER                    | 5310-00-141-1795 |
| AN6-10A                  | HEX HD BOLT                    | 5306-00-208-3636 |
| AN526-1032R7             | TRUSS HD MACH SCREW            | 5305-00-272-4951 |
| AN4-17A                  | HEX HD BOLT                    | 5306-00-151-1417 |
| HOOK                     | CRS 3/8 DIA X 8.1              | 9510-00-607-1491 |
| BRACKET                  | CRS 1 X 1-1/4 X 2.8            | 9510-00-481-0671 |
| ARM                      | 2024-T351 1 X 1-1/2 X 59.3     |                  |
| BUSHING                  | CRS 1.0 DIA X 0.5              | 9510-00-975-2640 |
| SPACER                   | 2024-T3 0.190 X 1.2 X 1.5      |                  |
| LUG                      | 6061-T651 1/2 X 1.4 X 1.4      |                  |
| BASE                     | 6061-T651 1/2 X 1.4 X 6.0      |                  |
| RETAINER                 | CRS 3/8-16 UNC X 18.0          | 9510-00-607-1491 |
| COLUMN                   | CRS 1-1/2 X 3 X 18-1/2         |                  |
| PAD                      | 2024-T351 ALUM BAR 1/2 X 2 X 6 |                  |
| BASE                     | CRS 1/2 X 6 X 18.0             | 9510-00-001-3315 |

**NOTE**

ALL DIMENSIONS IN INCHES.

AA9531\_4  
SA**FIGURE H-227. MASTER BRAKE CYLINDER TEST STAND (SHEET 4 OF 4)**

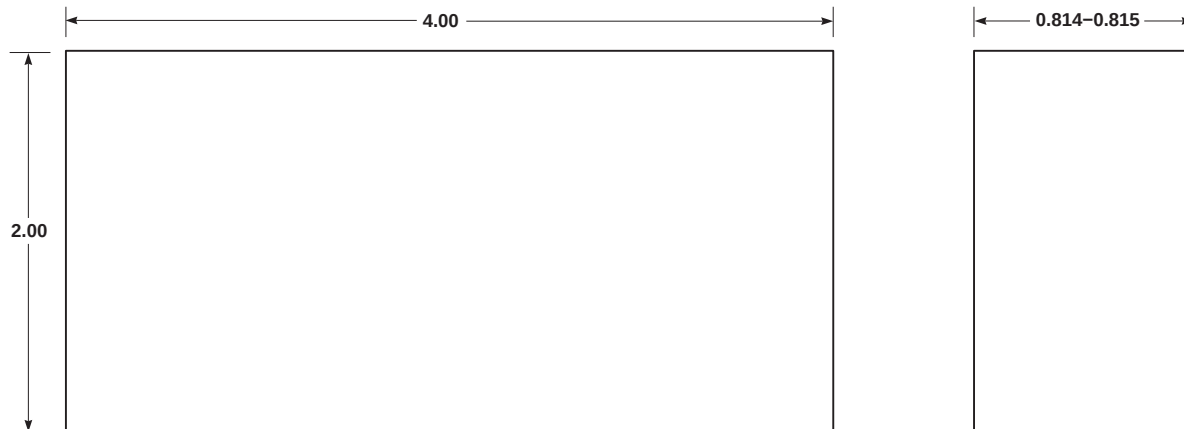


PART NUMBER: 1420-BH-002

**NOTES**

1. MAKE FROM STEEL STOCK, MIL-S-5626, NSN 9510-00-596-2176.
2. ALL DIMENSIONS ARE IN INCHES.
3. BREAK ALL SHARP EDGES TO 0.005-0.015 RADIUS.
4. IDENTIFY PARTS PER MIL-STD-130.

AA9538  
SA

**FIGURE H-228. PITCH BEAM/HORN BUSHING SIZING BLOCK**

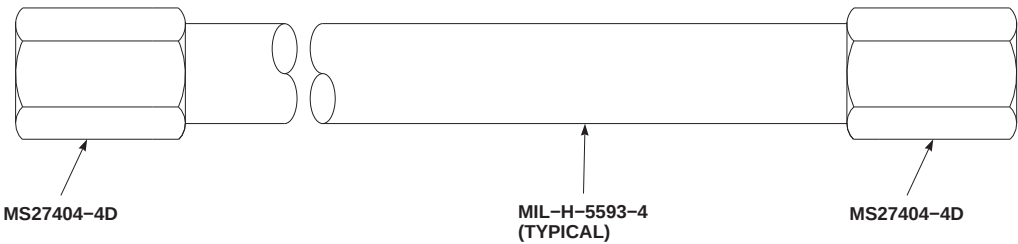


| PART NUMBER  | DESCRIPTION                 | LENGTH (QUANTITY) | NSN              |
|--------------|-----------------------------|-------------------|------------------|
| MS27404-4D   | ADAPTER, 1/4-INCH TUBE OD   | 8-INCH (1 EACH)   | 4730-00-497-4281 |
| MIL-H-5593-4 | HOSE, FLEXIBLE, 1/4-INCH ID | 4-INCH (3 EACH)   | 4720-00-540-1962 |
| MIL-H-5593-4 | HOSE, FLEXIBLE, 1/4-INCH ID | 36-INCH (1 EACH)  | 4720-00-540-1962 |

NOTES

- 1. MAKE HOSE ASSEMBLIES USING MATERIALS LISTED, OR APPROVED EQUIVALENT.
- 2. CAP ENDS OF HOSE WHEN NOT IN USE.

FR0610  
SA


FIGURE H-229. FUEL FEED SYSTEM TEST HOSE ASSEMBLY

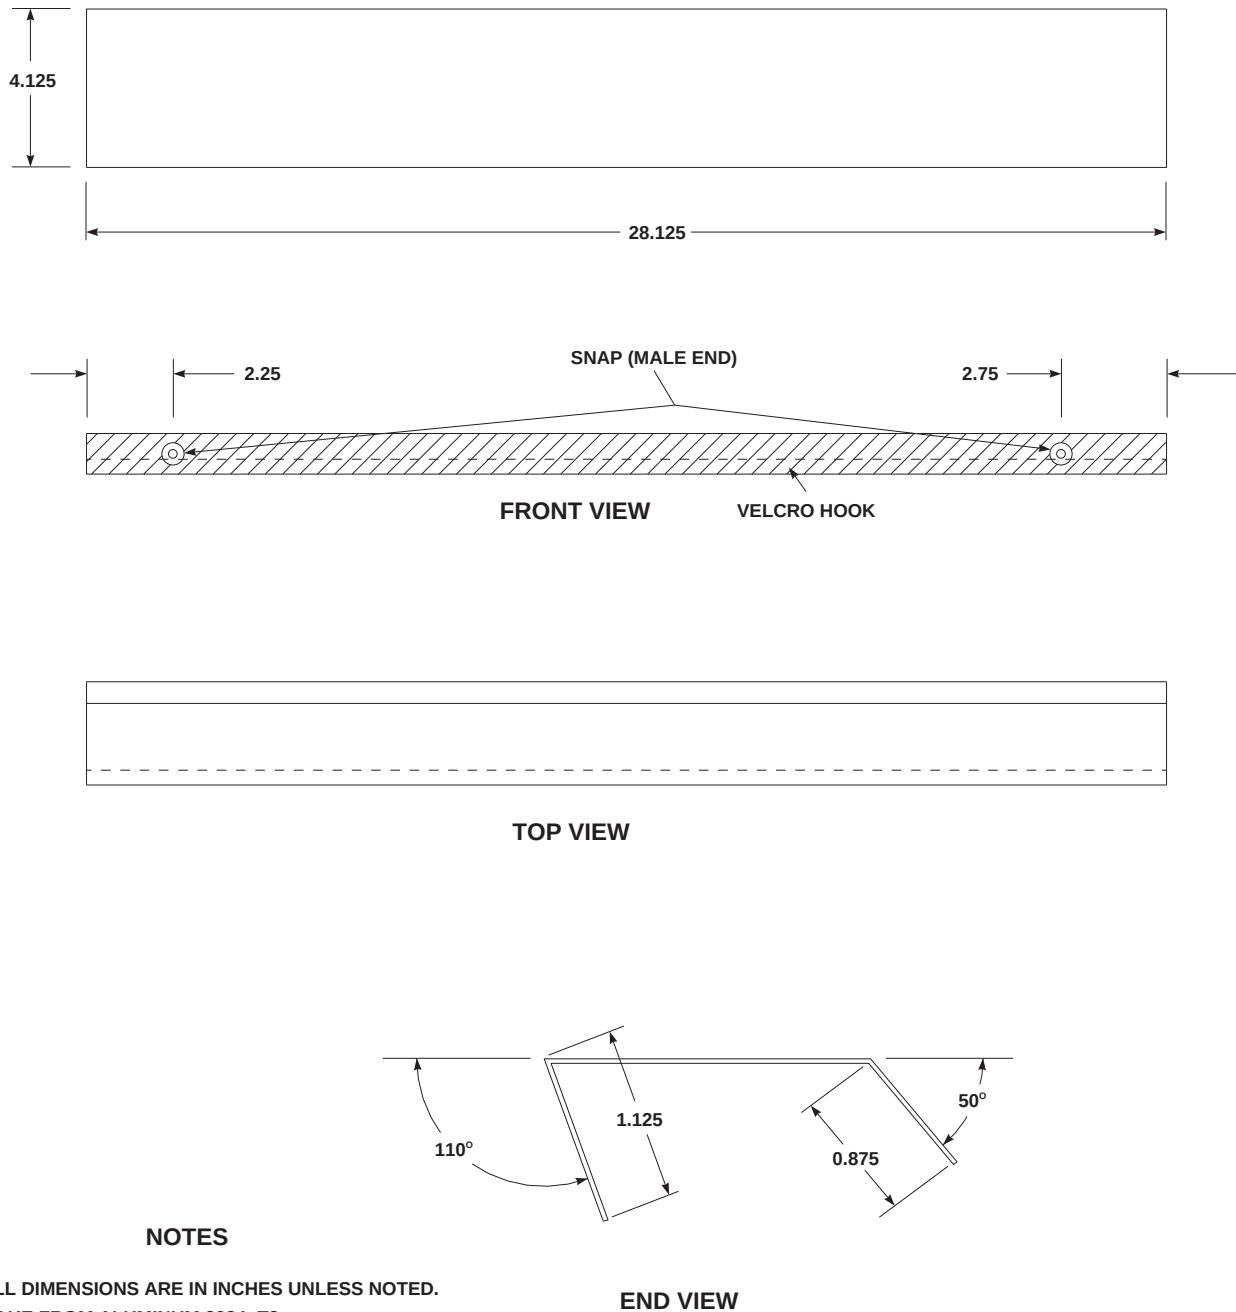

FA2139  
SA

**FIGURE H-230. CREW CHIEF'S WINDOW UPPER CHANNEL INSERT/SUPPORT**



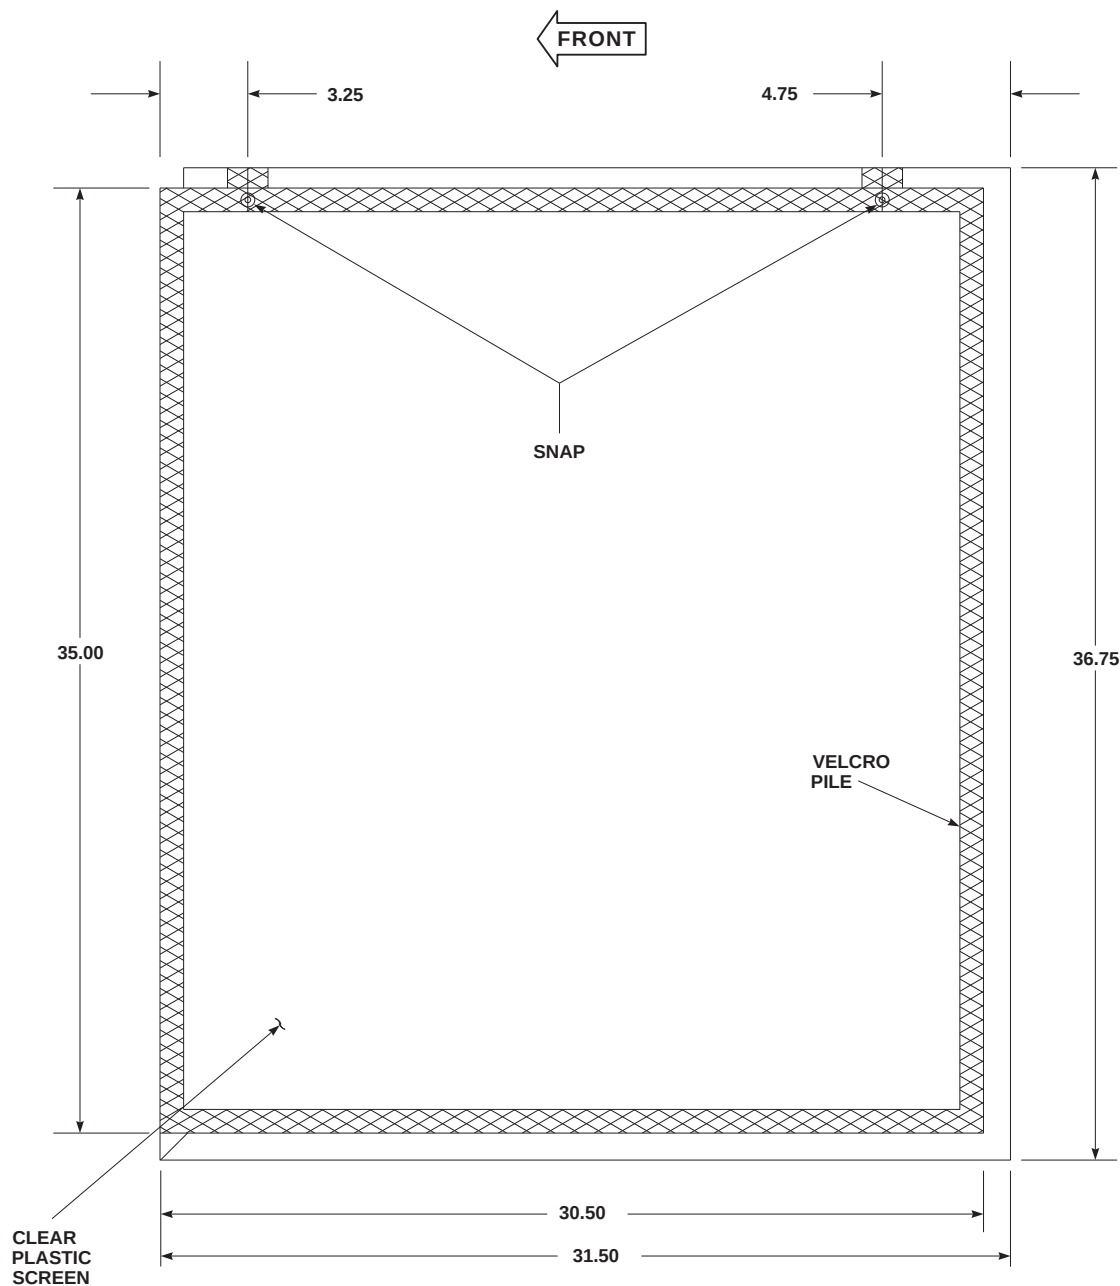


#### NOTES

1. ALL DIMENSIONS ARE IN INCHES.
2. MAKE FROM PLASTIC SHEET, ITEM 236A, APPENDIX D.
3. INSTALL SNAPS (FEMALE END).
4. FASTENER TAPE, PILE, ITEM 137B, APPENDIX D.

FA2140  
SA

**FIGURE H-231. CREW CHIEF'S WINDOW CLEAR PLASTIC SCREEN**

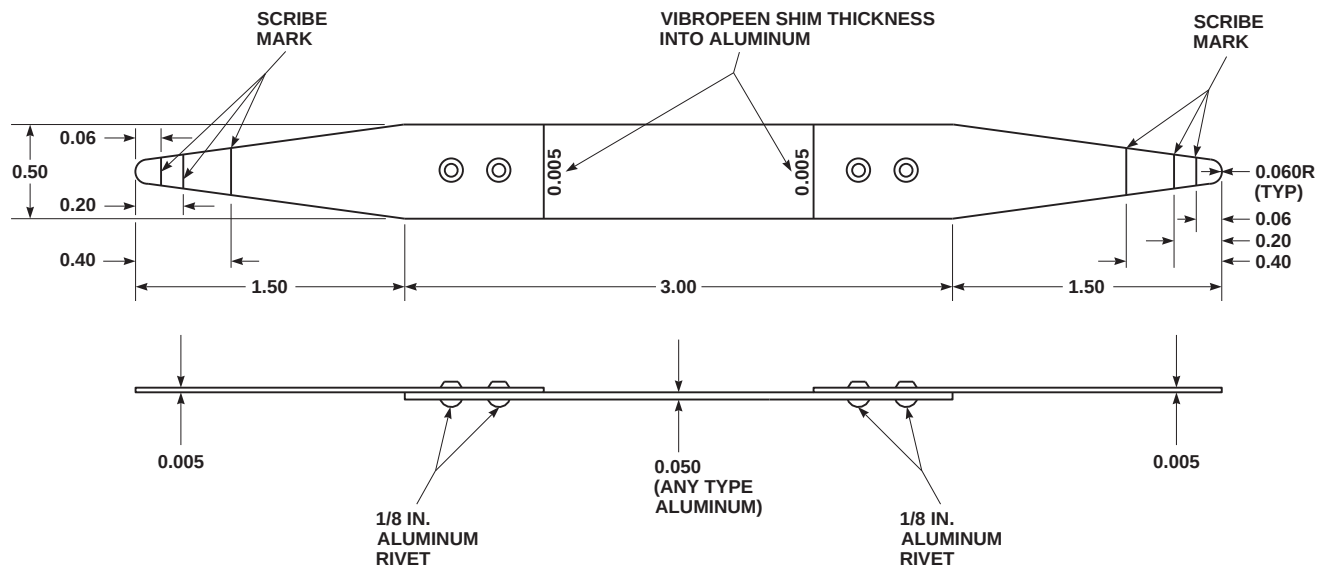


**NOTES**

1. PLASTIC SHEET, 0.005 INCH THICK, P/N 20INX20INX0.005INTHK BLUE, NSN 9330-01-293-7678, CAGE 96013.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.

FT2551  
SA

**FIGURE H-232. ELASTOMERIC ROD END BEARING PLASTIC FEELER GAGE**

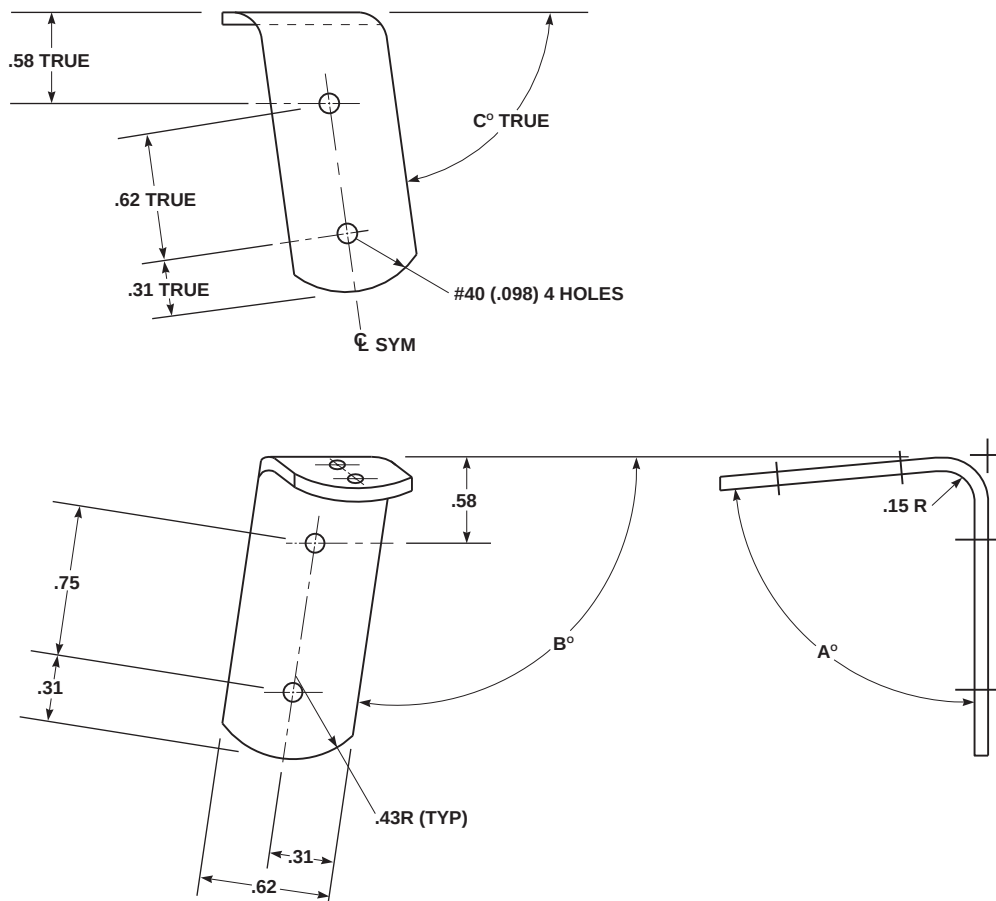

| DASH NUMBER | A° | B° | C°  |
|-------------|----|----|-----|
| -65         | 87 | 90 | 96  |
| -131        | 90 | 69 | 102 |
| -147        | 90 | 75 | 90  |
| -194        | 90 | 90 | 100 |
| -328        | 93 | 90 | 96  |

| PART NUMBER | MAKE FROM                                  |
|-------------|--------------------------------------------|
| SS1082-65   | ALUMINUM STOCK 7075-T6<br>0.040 INCH-THICK |
| SS1082-131  |                                            |
| SS1082-147  |                                            |
| SS1082-194  |                                            |
| SS1082-328  |                                            |

AB0122\_1  
SA


FIGURE H-233. BRACKET ANGLE (SHEET 1 OF 2)

**NOTES**


1. MAKE FROM 7075-T6 ALUMINUM STOCK, 0.040 INCH THICK.
2. ALL DIMENSIONS ARE IN INCHES.
3. DRILL PILOT HOLES PER FIGURE.
4. IDENTIFY PARTS PER MIL-STD-130.

FO0314\_2  
SA


**FIGURE H-233. BRACKET ANGLE (SHEET 2 OF 2)**

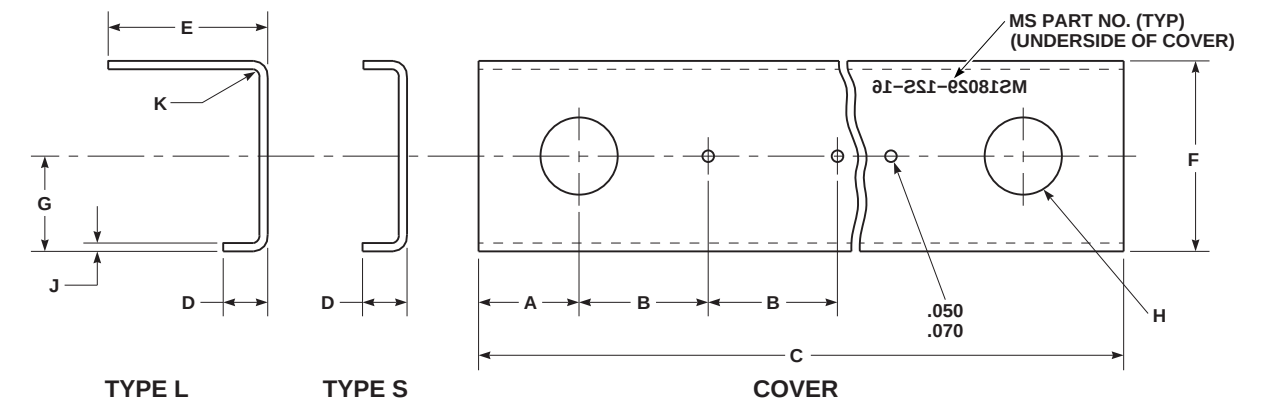

| MS DASH NO. |          | STUD SIZE<br>(REF) | MAX. NO.<br>OF STUDS<br>(REF) | A          | B            | C          | D      | E                 | F          | G    | H    | J    | K    |
|-------------|----------|--------------------|-------------------------------|------------|--------------|------------|--------|-------------------|------------|------|------|------|------|
| TYPE L      | TYPE S   |                    |                               | $\pm .016$ | MAX<br>(REF) | $\pm .030$ | TYPE L | DIA<br>$\pm .002$ | $\pm .010$ | RAD  |      |      |      |
| -12L-(N)    | -12S-(N) | .190-32            | 16                            | .593       | .750         | 12.454     | .234   | .906              | 1.063      | .531 | .430 | .034 | .062 |

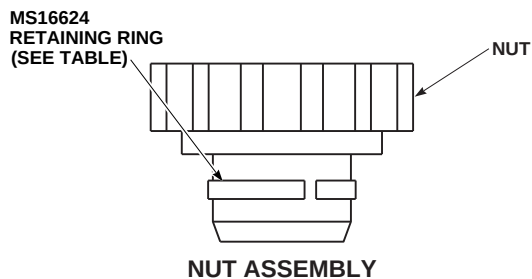

| MS<br>DASH<br>NO. | THREAD T       | RETAINING RING | A    | B    | C    | D    | E    | F                 | H    | J          | K    | M          | N                 | O    | P                    |
|-------------------|----------------|----------------|------|------|------|------|------|-------------------|------|------------|------|------------|-------------------|------|----------------------|
|                   | INSERT         |                | REF  | REF  | REF  | REF  | REF  | DIA<br>$\pm .005$ | DIA  | DIA<br>REF | REF  | DIA<br>REF | DIA<br>$\pm .008$ |      | $\pm .0312$<br>(REF) |
| 22                | .190-32 UNC 2B | MS16624-1040   | .129 | .176 | .250 | .313 | .500 | .373              | .397 | .562       | .310 | .750       | .365              | .125 | .365                 |

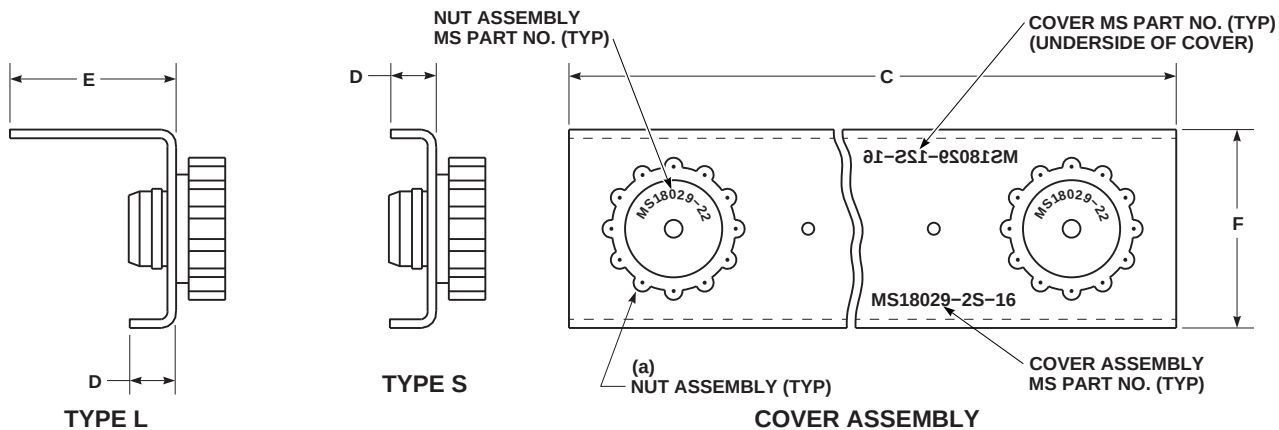

| ASSEMBLY<br>NO.  | COVER DASH NO. |          | STUDS    |        | NUT<br>ASSEMBLY<br>DASH NO. | C      | D     | E     | F     |
|------------------|----------------|----------|----------|--------|-----------------------------|--------|-------|-------|-------|
|                  | TYPE L         | TYPE S   | (N) MAX. | SIZE   |                             | (REF)  | (REF) | (REF) | (REF) |
| MS18029-2(L)-(4) | -12L-(N)       |          | 16       | 190-32 | 22                          | 12.454 | .234  | .906  | 1.063 |
| MS18029-2S-4     |                | -12S-(N) | 16       | 190-32 | 22                          | 12.454 | .234  |       | 1.063 |

AB0121 1  
SA


FIGURE H-234. TERMINAL BOARD COVER (SHEET 1 OF 2)

**NOTES**

1. MAKE COVER MS18029-2L-4 FROM MS18029-12L COVER.
2. MAKE COVER MS18029-2S-4 FROM MS18029-12S COVER.
3. CUT COVER TO SIZE.
4. REMOVE BURRS AND SHARP EDGES.
5. INSTALL NUT ASSEMBLY INTO COVER WITH RETAINER.
6. INK STAMP MS18029 (SIZE DASH NUMBERS) ON INSIDE AND OUTSIDE COVER.

AB0121\_2  
SA

**FIGURE H-234. TERMINAL BOARD COVER (SHEET 2 OF 2)**

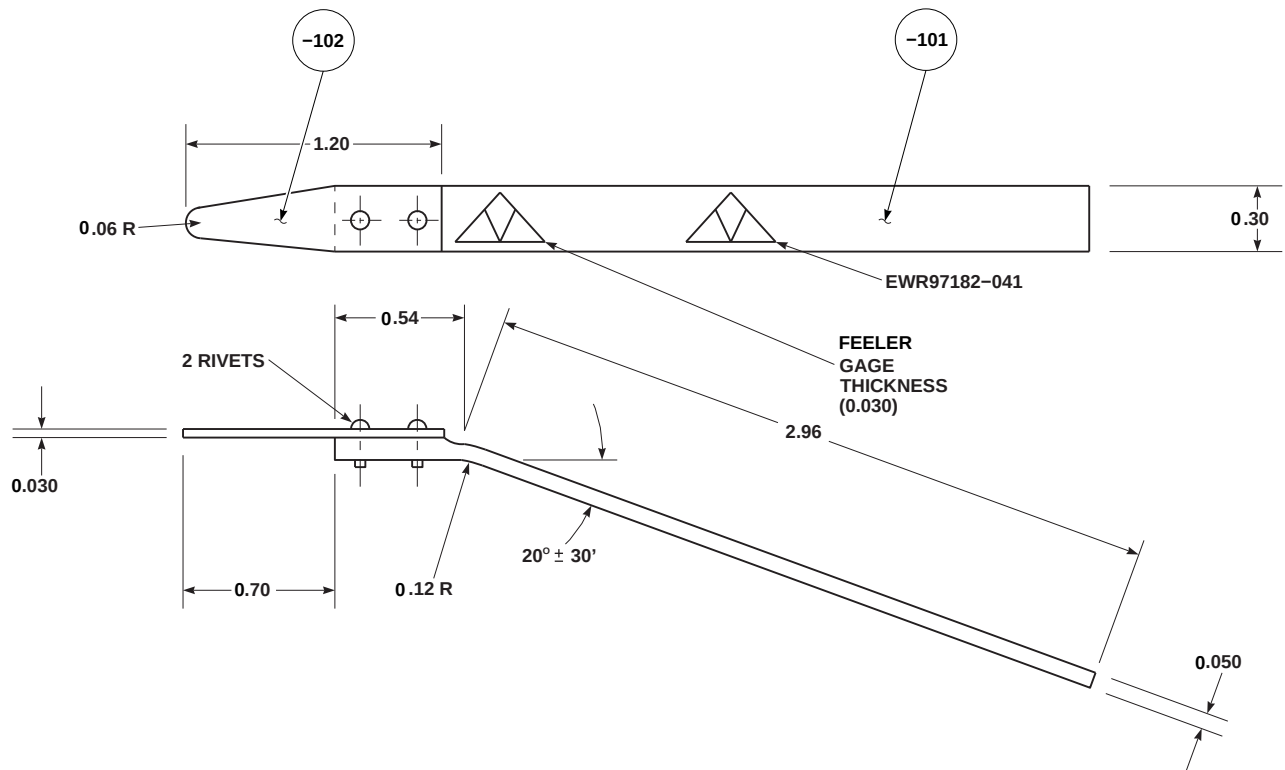


#### NOTES

1. MAKE FROM ANY TYPE ALUMINUM AND PLASTIC SHIMSTOCK.
2. MAKE PER MIL-STD-190.
3. ALL DIMENSIONS IN INCHES UNLESS NOTED.

PART NUMBER : EWR97182-041

FO0972  
SA

FIGURE H-235. FEELER GAGE

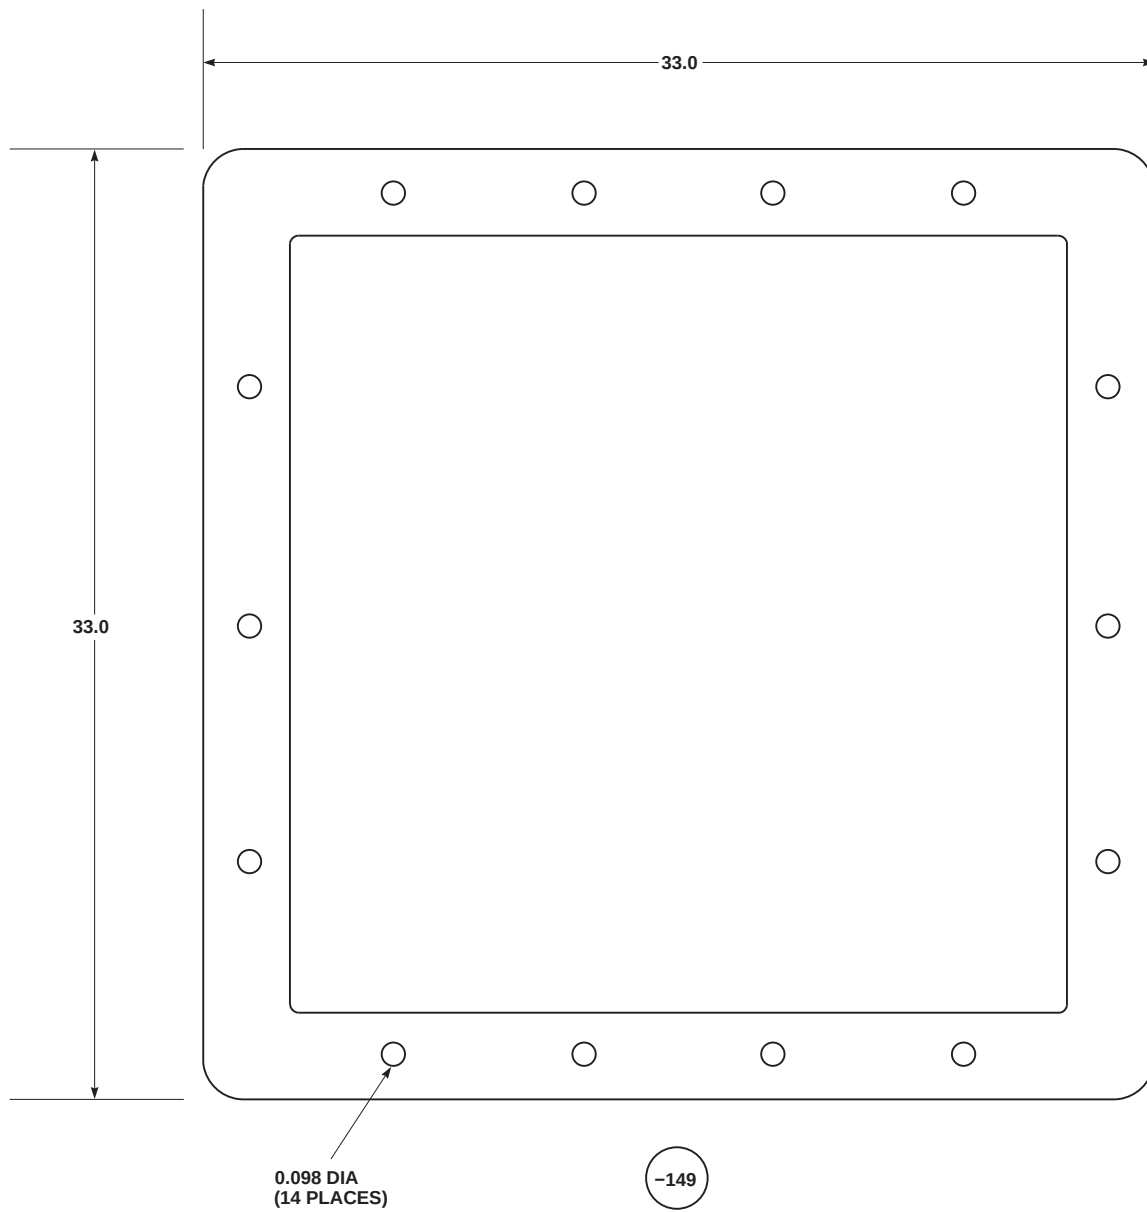


#### NOTES

1. MAKE FROM SCE-3L RUBBER SHEET, 0.125 INCH THICK, MIL-STD-670, NSN 9320-01-154-2235.
2. ALL DIMENSIONS IN INCHES UNLESS NOTED.
3. CUT TO FIT.

FB3628  
SA


FIGURE H-236. DRIP PAN SEAL

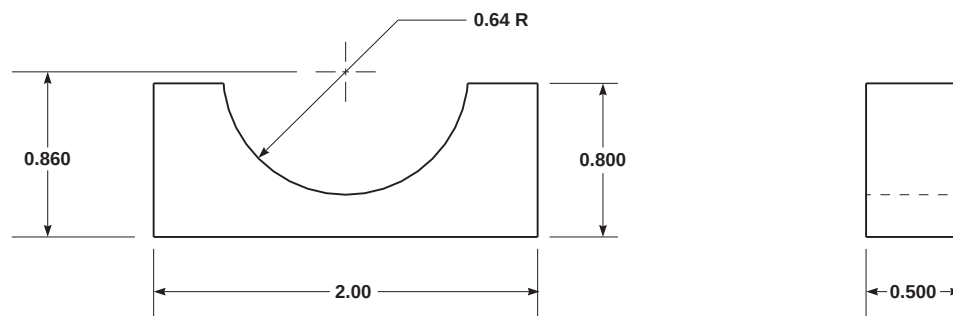

**NOTES**

1. MAKE FROM 6061-T6 ALUMINUM ALLOY, PER QQ-A225/8.
2. ALL DIMENSIONS ARE IN INCHES.

AB0225  
SA**FIGURE H-237. DAMPER INDICATOR DISASSEMBLY TOOL**

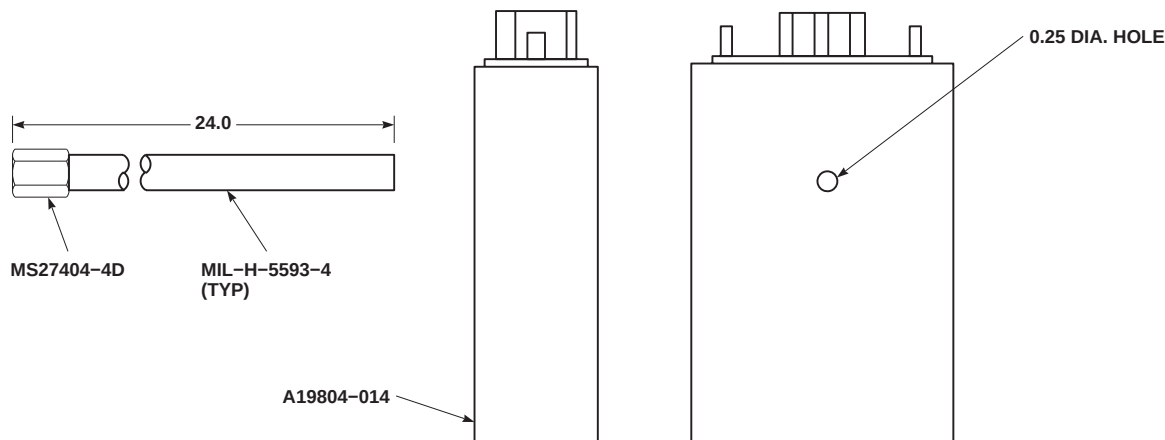

| PART NUMBER  | DESCRIPTION                 | QUANTITY | NSN              |
|--------------|-----------------------------|----------|------------------|
| MIL-H-5593-4 | HOSE, FLEXIBLE, 1/4-INCH ID | 24.0 IN. | 4720-00-540-1962 |
| MS27404-4D   | ADAPTER, 1/4-INCH TUBE OD   | 1        | 4730-00-497-4281 |
| A19804-014   | CELL, NICKEL-CADMIUM, 5H120 | 1        | -                |

WARNING


INJURY TO PERSONNEL COULD OCCUR WHEN MANUFACTURING BATTERY TEST CELL. MAKE SURE TECHNICIAN IS AWARE OF PROPER TOOLS/MATERIAL, ALL WARNINGS, CAUTIONS, AND NOTES CONTAINED IN PARA 9-5-27 FOR HANDLING OF ELECTROLYTE.

NOTES

1. MAKE BATTERY TEST CELL USING MATERIAL LISTED IN CHART OR APPROVED EQUIVALENT.
2. NICKEL-CADMIUM CELL ELECTROLYTE MUST BE NEUTRALIZED, SOLUTION OF 3 PARTS BORIC ACID TO 7 PARTS WATER, AND FLUSHED CLEAN WITH FRESH WATER.
3. DRAIN FLUIDS AND ALLOW TO AIR-DRY.
4. INSERT FLEXIBLE HOSE INTO CELL AND EPOXY, MIL-C-22750.
5. CAP END OF HOSE WHEN NOT IN USE.
6. ALL DIMENSIONS ARE IN INCHES.

FB1423  
SA

FIGURE H-238. BATTERY TEST CELL

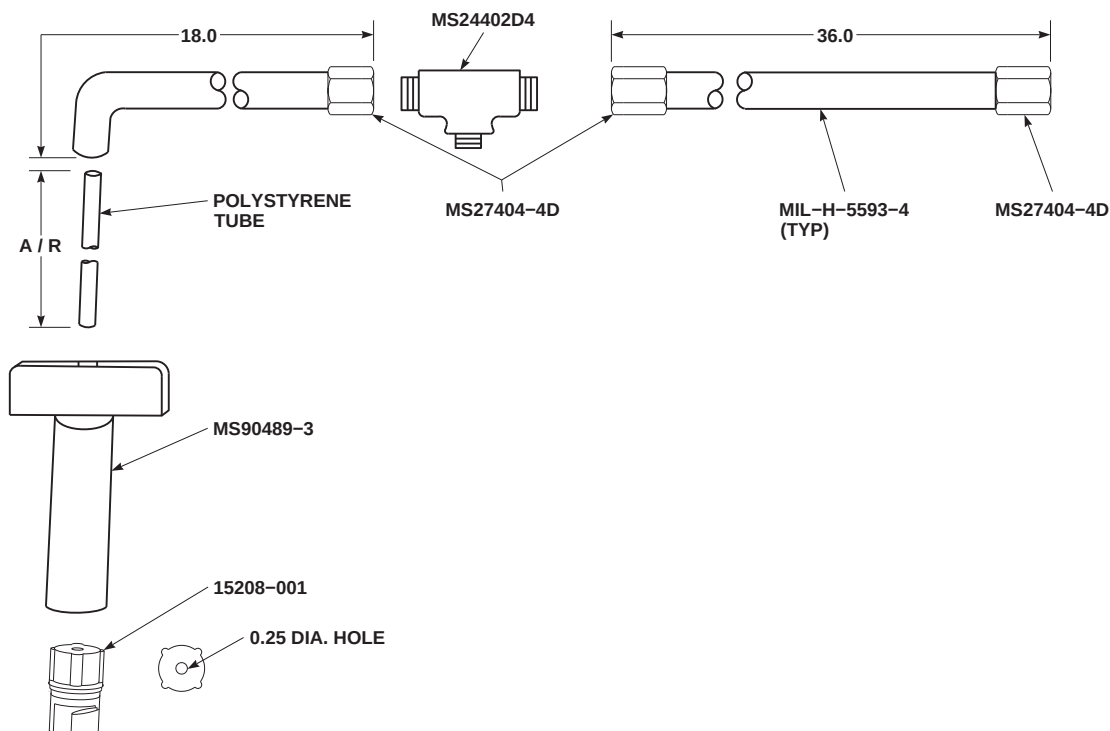


| PART NUMBER  | DESCRIPTION                    | QUANTITY | NSN              |
|--------------|--------------------------------|----------|------------------|
| MIL-H-5593-4 | HOSE, FLEXIBLE, 1/4-INCH ID    | 54.0 IN. | 4720-00-540-1962 |
| MS24402D4    | TEE, TUBE, 1/4-INCH TUBE OD    | 1        | 4730-00-722-1207 |
| MS27404-4D   | ADAPTER, 1/4-INCH TUBE OD      | 3        | 4730-00-497-4281 |
| MS90489-3    | WRENCH, VENT CAP               | 1        | 5120-00-618-5320 |
| 15208-001    | VENT CAP ASSY                  | 1        |                  |
|              | TUBE, POLYSTYRENE, 1/4-INCH OD | A/R      |                  |

## NOTES

1. MAKE BATTERY TEST VENT CAP AND TEE USING MATERIAL LISTED IN CHART OR APPROVED EQUIVALENT.
2. REMOVE VENT PLUG FROM VENT CAP ASSY.
3. DRILL 1/4-INCH DIA. HOLE THROUGH TOP TO BOTTOM OF VENT CAP WRENCH.
4. INSERT POLYSTYRENE TUBE THROUGH VENT CAP WRENCH AND VENT CAP. EPOXY, MIL-C-22750, TUBE AND VENT CAP TO VENT CAP WRENCH.
5. EPOXY TOP OF POLYSTYRENE TUBE TO FLEXIBLE HOSE.
6. CAP END OF HOSE AND TEE WHEN NOT IN USE.
7. ALL DIMENSIONS ARE IN INCHES.


FB1422  
SA

FIGURE H-239. BATTERY TEST VENT CAP AND TEE

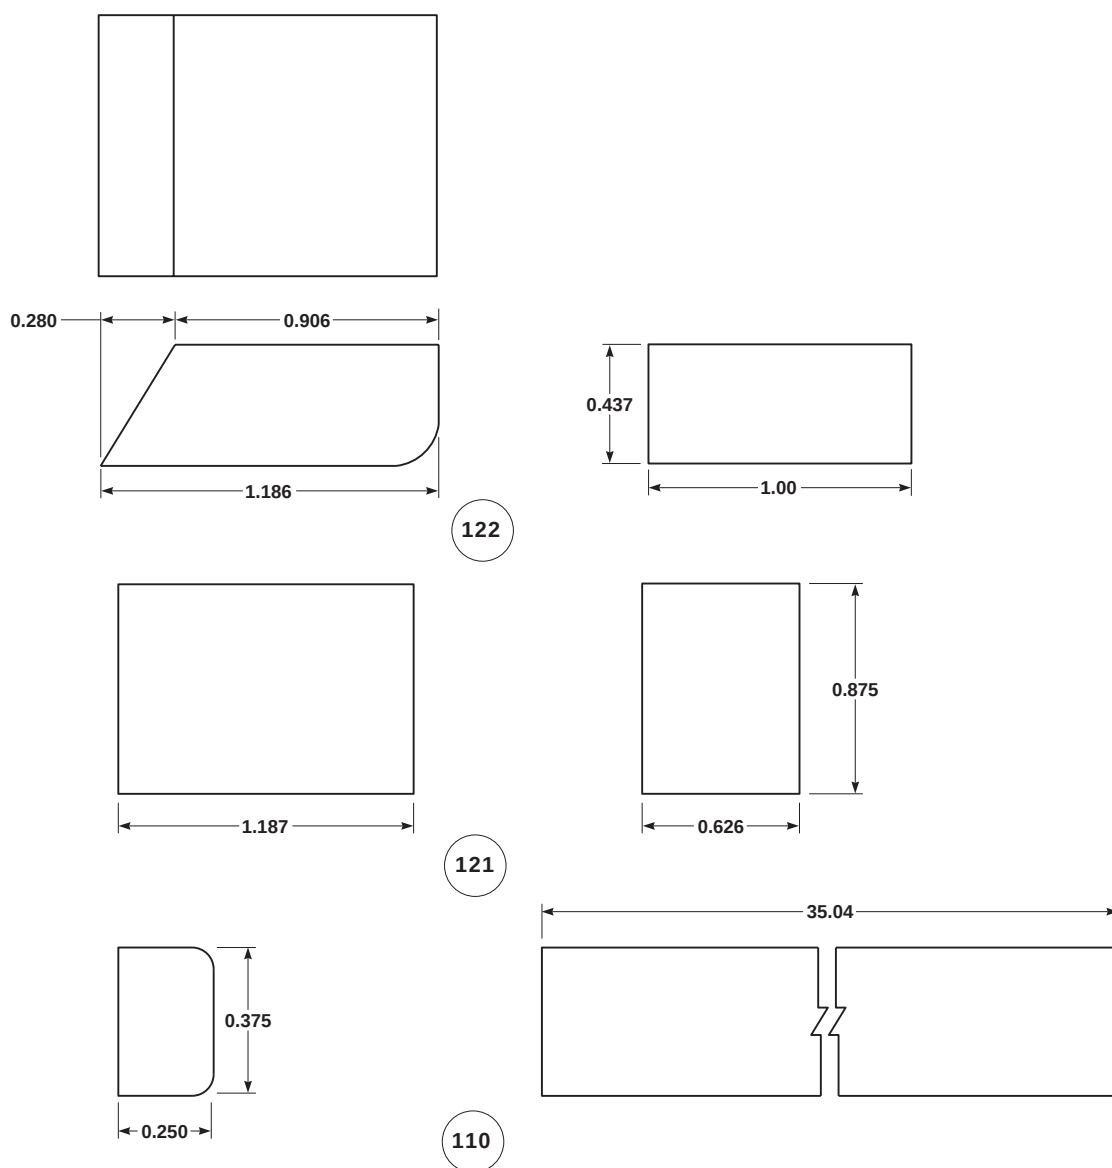

FB2114\_1  
SA

FIGURE H-240. CREW CHIEF'S WINDOW SEAL (SHEET 1 OF 2)

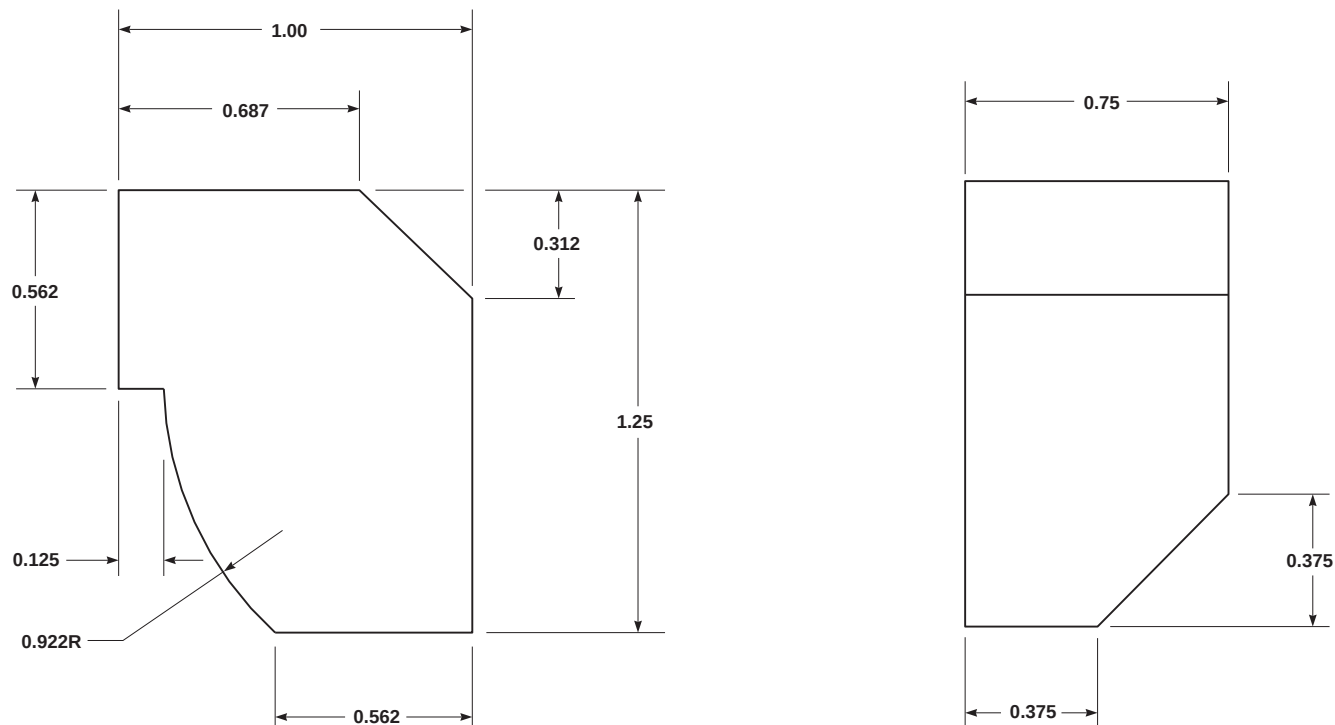

-129

| NOMENCLATURE             | SIKORSKY PART NUMBER |
|--------------------------|----------------------|
| CREW CHIEF'S WINDOW SEAL | 70216-02401-110      |
|                          | 70216-02401-121      |
|                          | 70216-02401-122      |
|                          | 70216-02401-129      |

#### NOTES


1. MAKE -122 FROM NEOPRENE, 0.437 INCH THICK, MIL-R-6855, CLASS 2, GRADE 60, NSN 9320-00-800-1819.
2. MAKE -121 FROM NEOPRENE, 0.626 INCH THICK, MIL-R-6855, CLASS 2, GRADE 60, NSN 9320-00-241-9766.
3. MAKE -110 FROM SILICONE SPONGE RUBBER, S6105-2108-2, NSN 5330-00-804-6813.
4. MAKE -129 FROM SILICONE SPONGE, 0.50 INCH-THICK, AMS 3195, NSN 9320-01-037-2499.
5. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
6. IDENTIFY PARTS PER MIL-STD-190. STAMP OR STENCIL PART NUMBER AND DATE OF MANUFACTURE ON PARTS WITH OPAQUE GREEN INK, TT-I-1795. USE 1/16 - 1/8 INCH HIGH SANS SERIF CHARACTERS.

EXAMPLE: P/N 70216-02401-107      3Q 86  
                     PART NUMBER                      THIRD QUARTER 1986

PART NUMBER: 70216-02401-110, -121, -122, -129

FB2114 2B  
SA

**FIGURE H-240. CREW CHIEF'S WINDOW SEAL (SHEET 2 OF 2)**

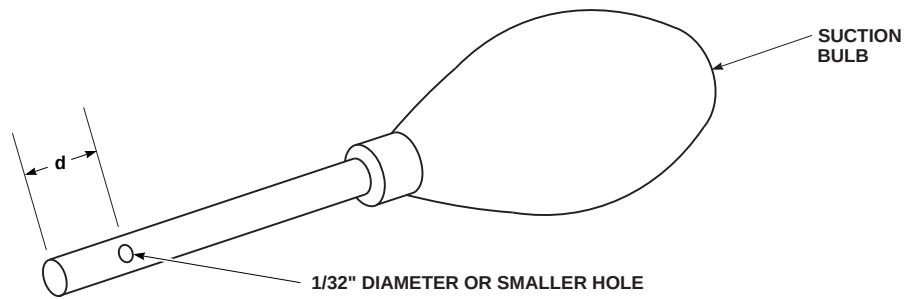


#### NOTES

1. MAKE FROM STANDARD SYRINGE.
2. DRILL 1/32-INCH HOLE IN END OF SYRINGE TUBE AS SHOWN IN DIMENSION "d".
  - A. IF THE ELECTROLYTE LEVEL IS CHECKED ONE HOUR AFTER COMPLETION OF CHARGE, DRILL HOLE 1/4-INCH FROM END OF TUBE.
  - B. IF THE ELECTROLYTE LEVEL IS CHECKED THREE HOURS AFTER COMPLETION OF CHARGE, DRILL HOLE 1/8-INCH FROM END OF TUBE.
3. ALL DIMENSIONS ARE IN INCHES.

FB1122  
SA

FIGURE H-241. ELECTROLYTE REMOVAL TOOL

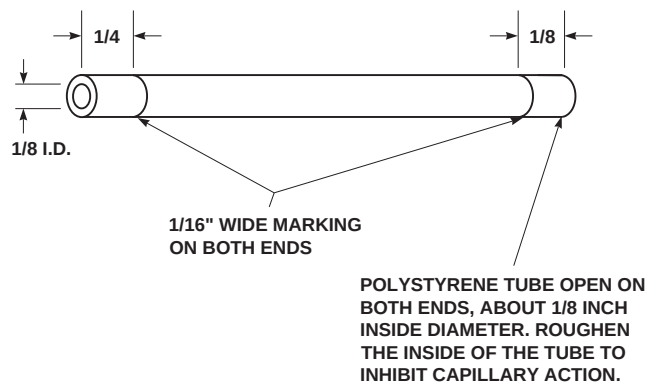

## NOTES

1. MAKE FROM POLYSTYRENE TUBE, 4-INCH LONG, WITH 1/8-INCH I.D.
2. ALL DIMENSIONS ARE IN INCHES.
3. BREAK ALL SHARP EDGES.

FB1121  
SA

FIGURE H-242. ELECTROLYTE LEVEL CHECKER

**PROCEDURE FOR COVERING OF MASTER WARNING PANEL LIGHTS WHILE OPERATING WITH SOFT LIGHTING.**


PRIOR TO SOFT LIGHTING OPERATION, APPLY TAPE MODIFICATION TO THE PILOT'S AND COPILOT'S MASTER WARNING PANELS. THE FOLLOWING PROCEDURES WILL ALLOW THE NAKED EYE TO SEE THE MASTER WARNING LIGHTS IF ACTIVATED, AND PREVENT ADHESIVE BUILD-UP ON THE WARNING SEGMENT PANELS. THE FOLLOWING PROCEDURES WILL BE FOLLOWED:

- a. USING TWO PIECES OF DUCT TAPE, NSN 7510-00-074-5174, (ONE HUNDRED MPH TAPE, GREEN TAPE).
  - (1) CUT FIRST PIECE OF TAPE TO 1-1/4 INCHES WIDE BY 6 INCHES IN LENGTH.
  - (2) CUT SECOND PIECE OF TAPE TO 1 INCH WIDE BY 4 INCHES IN LENGTH. USING A PAPER PUNCH, PUNCH FIVE EACH 1/4 INCH HOLES IN TAPE SO THAT THEY WILL CENTER ON EACH SEGMENT OF THE MASTER CAUTION WARNING PANEL LIGHTS. PLACE THE PIECES OF TAPE TOGETHER TO ENSURE THAT THE ADHESIVE IS TO ADHESIVE AND THAT THE SMALLER PIECE OF TAPE IS CENTERED TO ALLOW APPROXIMATELY 1 INCH OF ADHESIVE TO REMAIN AT EACH END AND 1/8 INCH TO REMAIN AT TOP AND BOTTOM.
  - (3) CENTER THE TAPE OVER THE MASTER WARNING PANEL SO THAT THE EXPOSED ADHESIVE ENDS MATE TO ALL SIDES OF MASTER WARNING PANEL, AND SECURE THE TAPE.
- b. ADJUST THE LIGHT INTENSITY TO MID-INTENSITY POSITION AND INSURE THAT THE LIGHT IS VISIBLE TO THE UNAIDED EYE; FURTHER ADJUST THE LIGHT INTENSITY TO PILOT'S PREFERENCE.
- c. IT IS RECOMMENDED THAT TEMPLATES BE LOCALLY MANUFACTURED FOR BOTH TAPE PIECES.
- d. AFTER COMPLETION OF SOFT LIGHTING FLIGHT, REMOVE TAPE.

FB2129  
SA

**FIGURE H-243. SOFT LIGHTING MASTER WARNING PANEL**



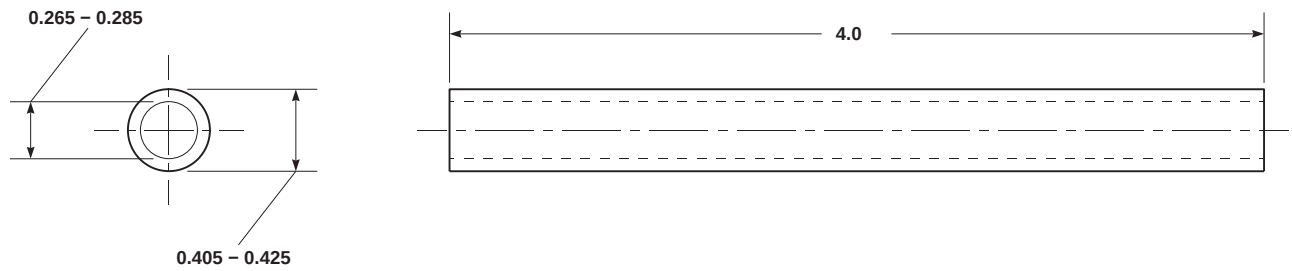


#### NOTES

1. MAKE FROM ALUMINUM TUBING.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-130.

AK1829  
SA

FIGURE H-244. TORQUELESS GRIP INSTALLATION TOOL

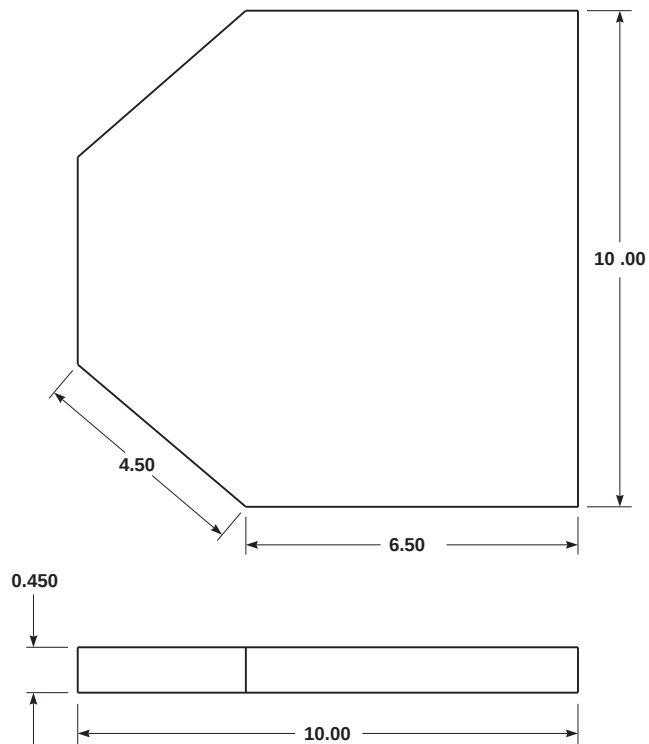


#### NOTES

1. MAKE FROM 0.450 INCH THICK STEEL, ALUMINUM, OR WOOD.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-130.

AK1830  
SA

**FIGURE H-245. TORQUELESS GRIP INSTALLATION PLATE**

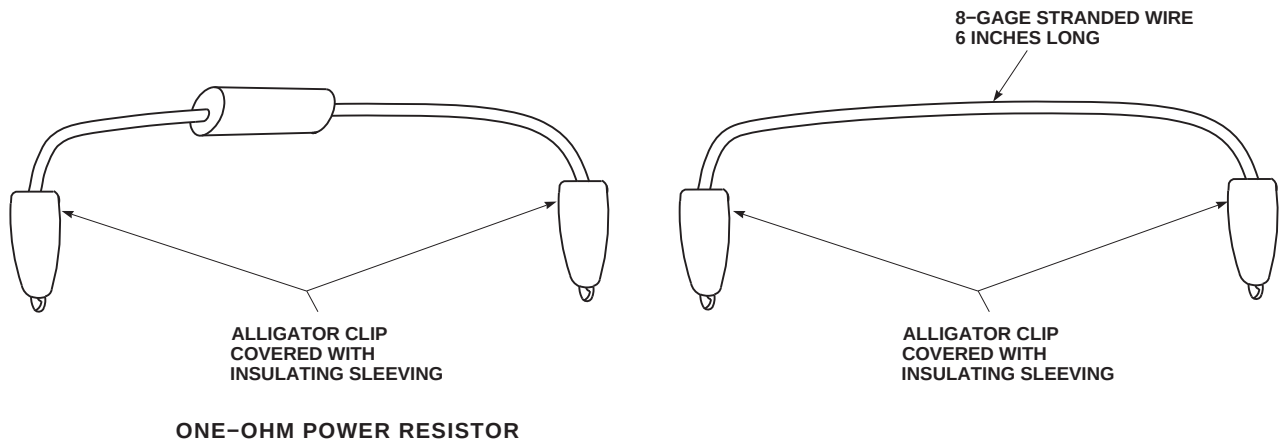


#### NOTES

1. MAKE SHORTING CLIPS FROM:
  - A. WIRE, 8 GAGE STRANDED, 6-INCH LONG.
  - B. RESISTOR, ONE-OHM POWER RESISTOR FOR ONE SHORTING CLIPS.
  - C. ALLIGATOR CLIPS WITH INSULATING SLEEVING.
2. ALL DIMENSIONS ARE IN INCHES.

FB1120  
SA

**FIGURE H-246. SHORTING JUMPERS**

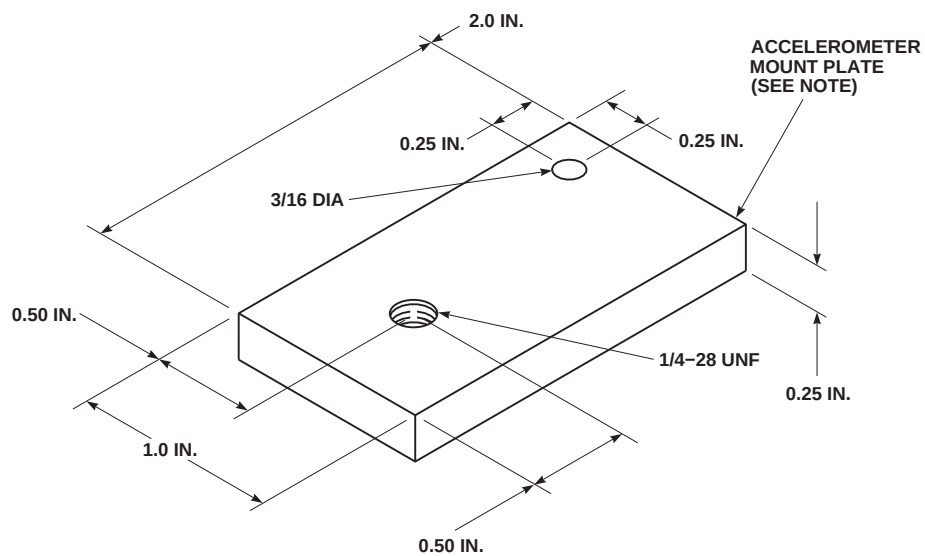


**NOTE**

MAKE LOCALLY USING STEEL PLATE

AK1798  
SA

**FIGURE H-247. ACCELEROMETER MOUNT PLATE**

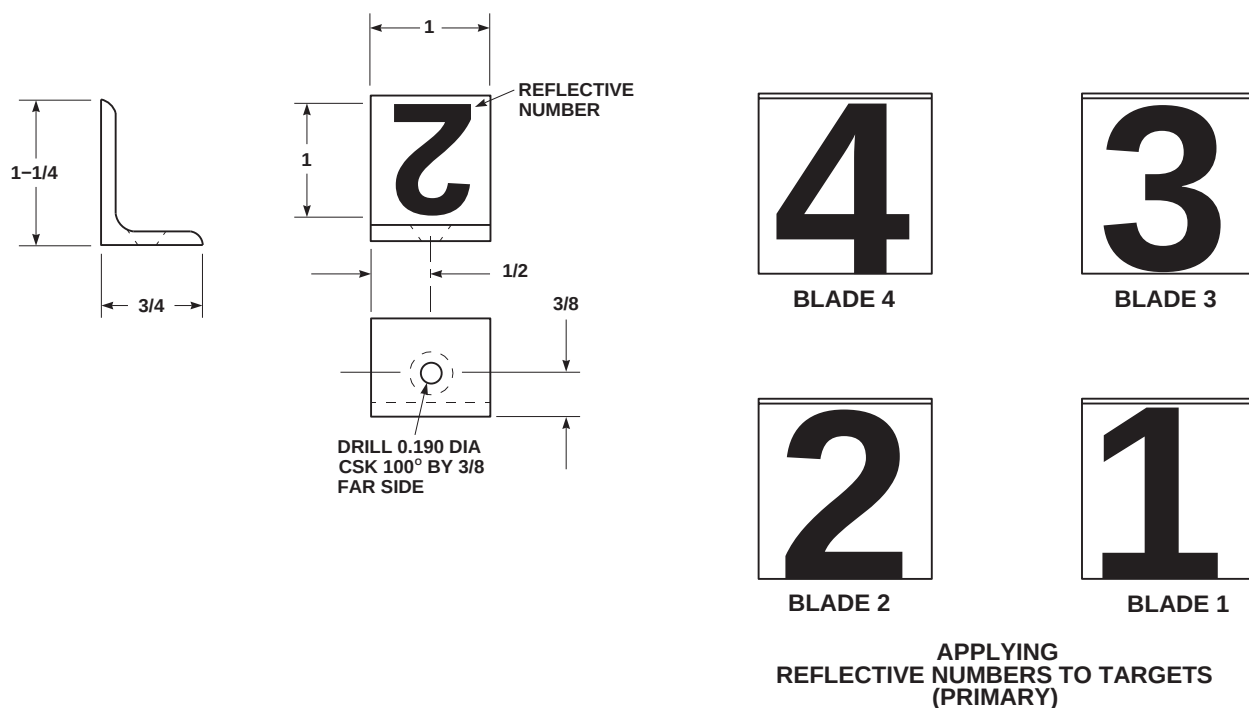

### NOTES

1. MAKE BRACKETS FROM 2024-T4 ALUMINUM ALLOY OR EQUIVALENT.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. MAKE PRIMARY TIP TARGET NUMBERS USING HIGH GRAIN REFLECTIVE TAPE, 1 INCH HIGH AND 1/8 INCH WIDE.
4. MAKE ALTERNATOR TIP TARGET MARKINGS USING HIGH GRAIN REFLECTIVE TAPE, CUT TO 1/8 INCH WIDE.
5. CLEAN ALL TIP TARGETS USING ISOPROPYL ALCOHOL, ITEM 72, APPENDIX D.
6. REMOVE BACKING PAPER FROM REFLECTIVE TAPE. AVOID CONTACT WITH ADHESIVE ON REFLECTIVE TAPE.
7. POSITION REFLECTIVE TAPE ON BRACKET AS SHOWN. CENTER NUMBER ON TIP TARGET BRACKET. PRESS INTO PLACE. MAKE SURE EDGES OF NUMBERS ARE SECURED.
8. DO 6. AND 7. TO INSTALL REMAINING MARKING ON TIP TARGET BRACKETS.
9. IDENTIFY MAIN ROTOR TIP TARGETS PER MIL-STD-130.


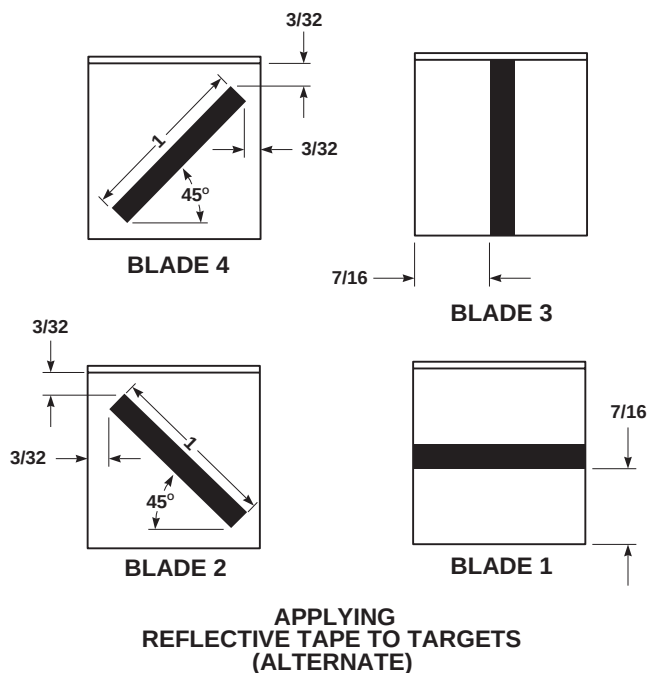


FIGURE H-248. MAIN ROTOR BLADE TIP TARGETS


FA2116  
SA

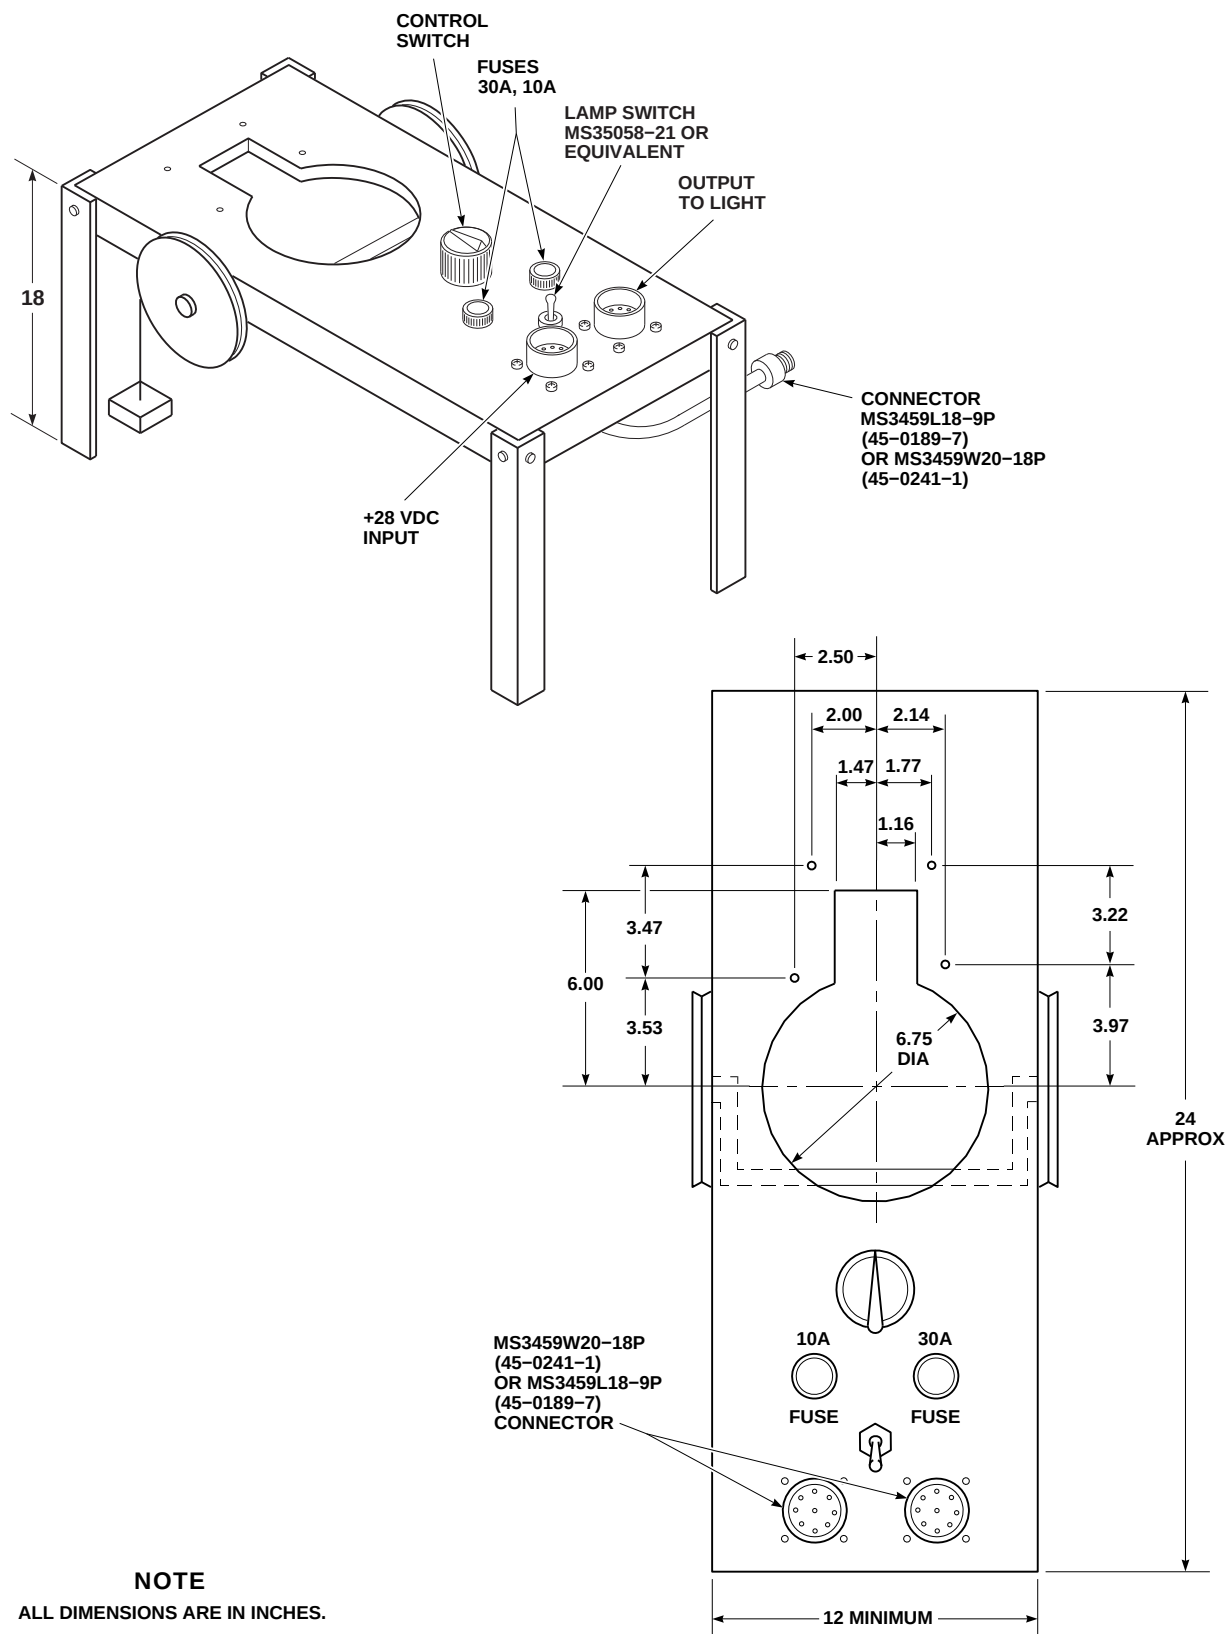

**NOTE**  
ALL DIMENSIONS ARE IN INCHES.

AB0793\_1  
SA


**FIGURE H-249 SEARCHLIGHT TEST STAND (SHEET 1 OF 4)**

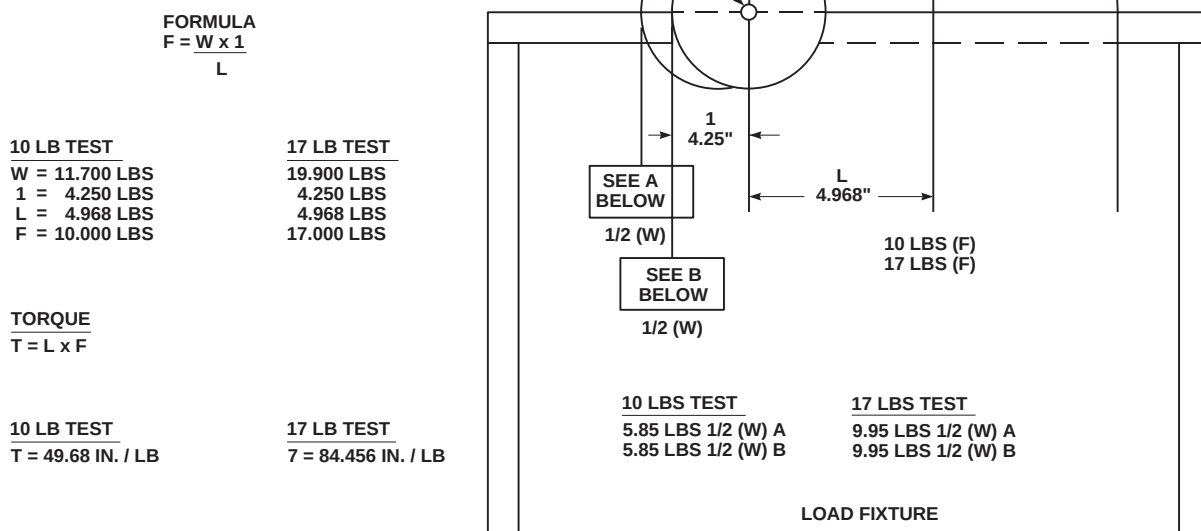

SHOWN IN EXTENDED POSITION

AB0793 2  
SA

FIGURE H-249. SEARCHLIGHT TEST STAND (SHEET 2 OF 4)

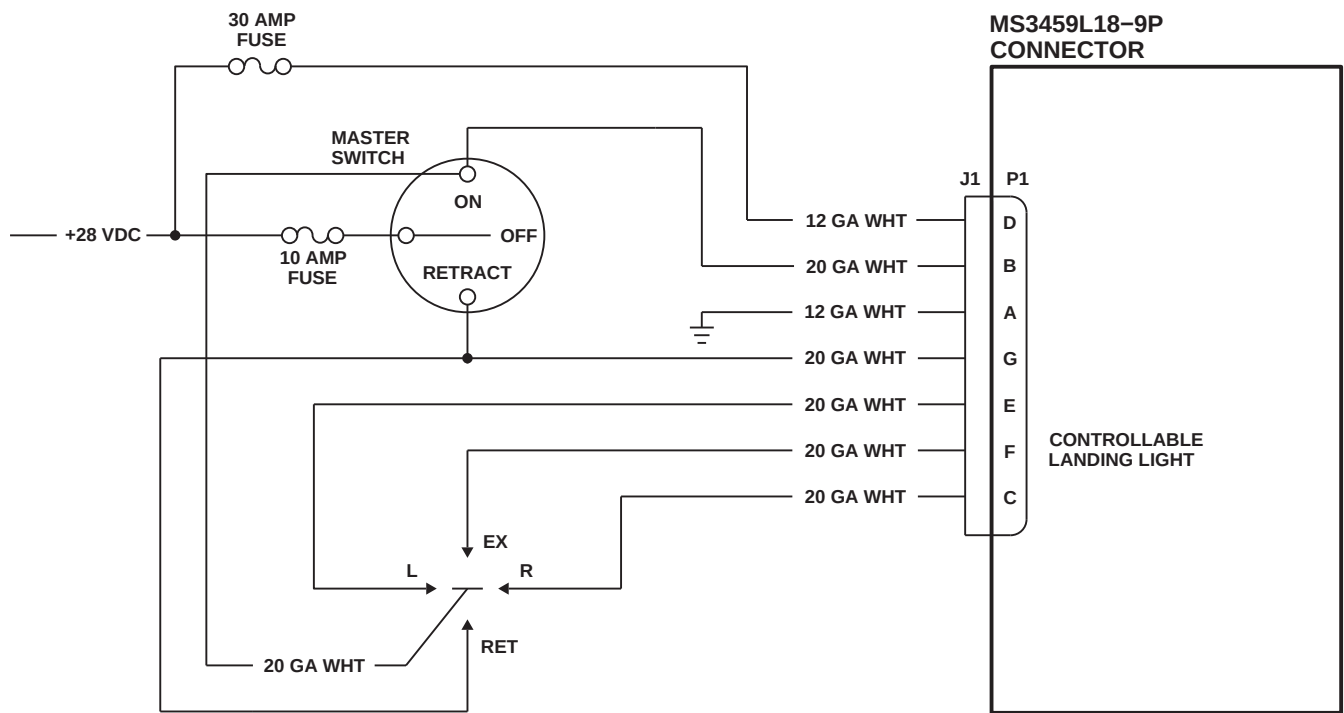


FOR 45-0189-7 ONLY

AB0793\_3  
SA

FIGURE H-249. SEARCHLIGHT TEST STAND (SHEET 3 OF 4)




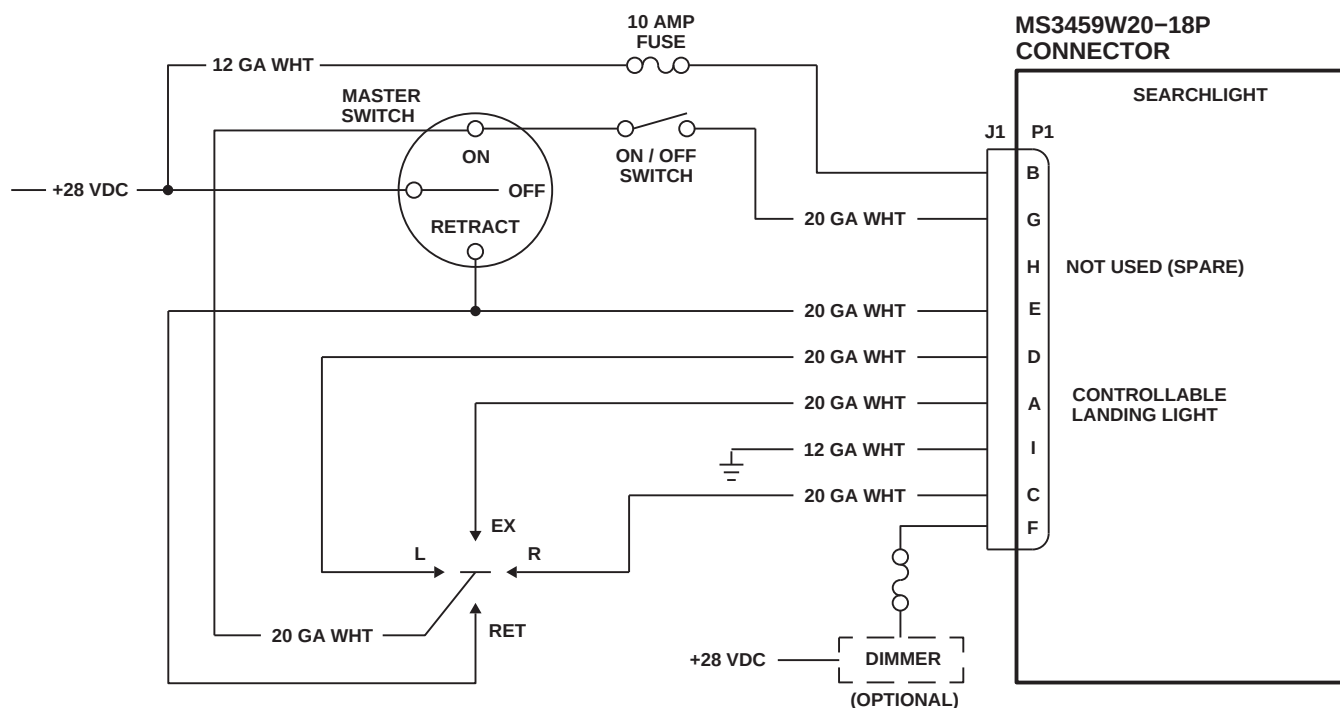

**FOR 45-0241-1 ONLY**

AB0793\_4

**FIGURE H-249. SEARCHLIGHT TEST STAND (SHEET 4 OF 4)**

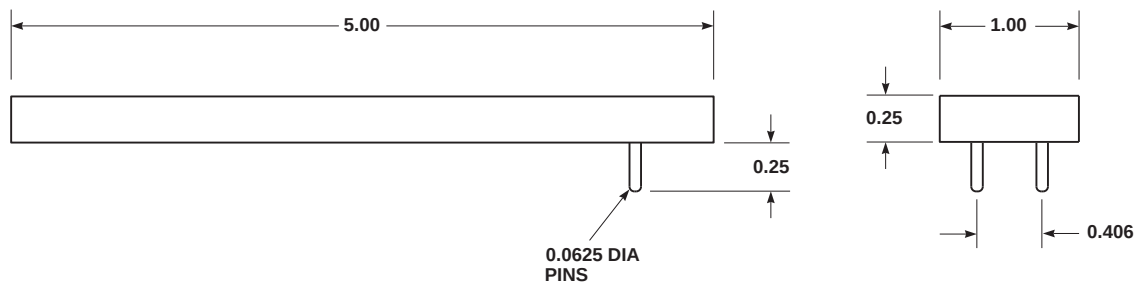



**NOTE**

1. DIMENSIONS ARE IN INCHES.
2. MATERIAL: 7075 ALUMINUM

AB0794  
SA


**FIGURE H-250. SEARCHLIGHT SPANNER WRENCH**

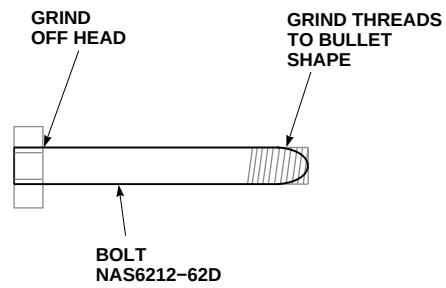AB0796  
SA**FIGURE H-251. STABILATOR DRIFT PIN**

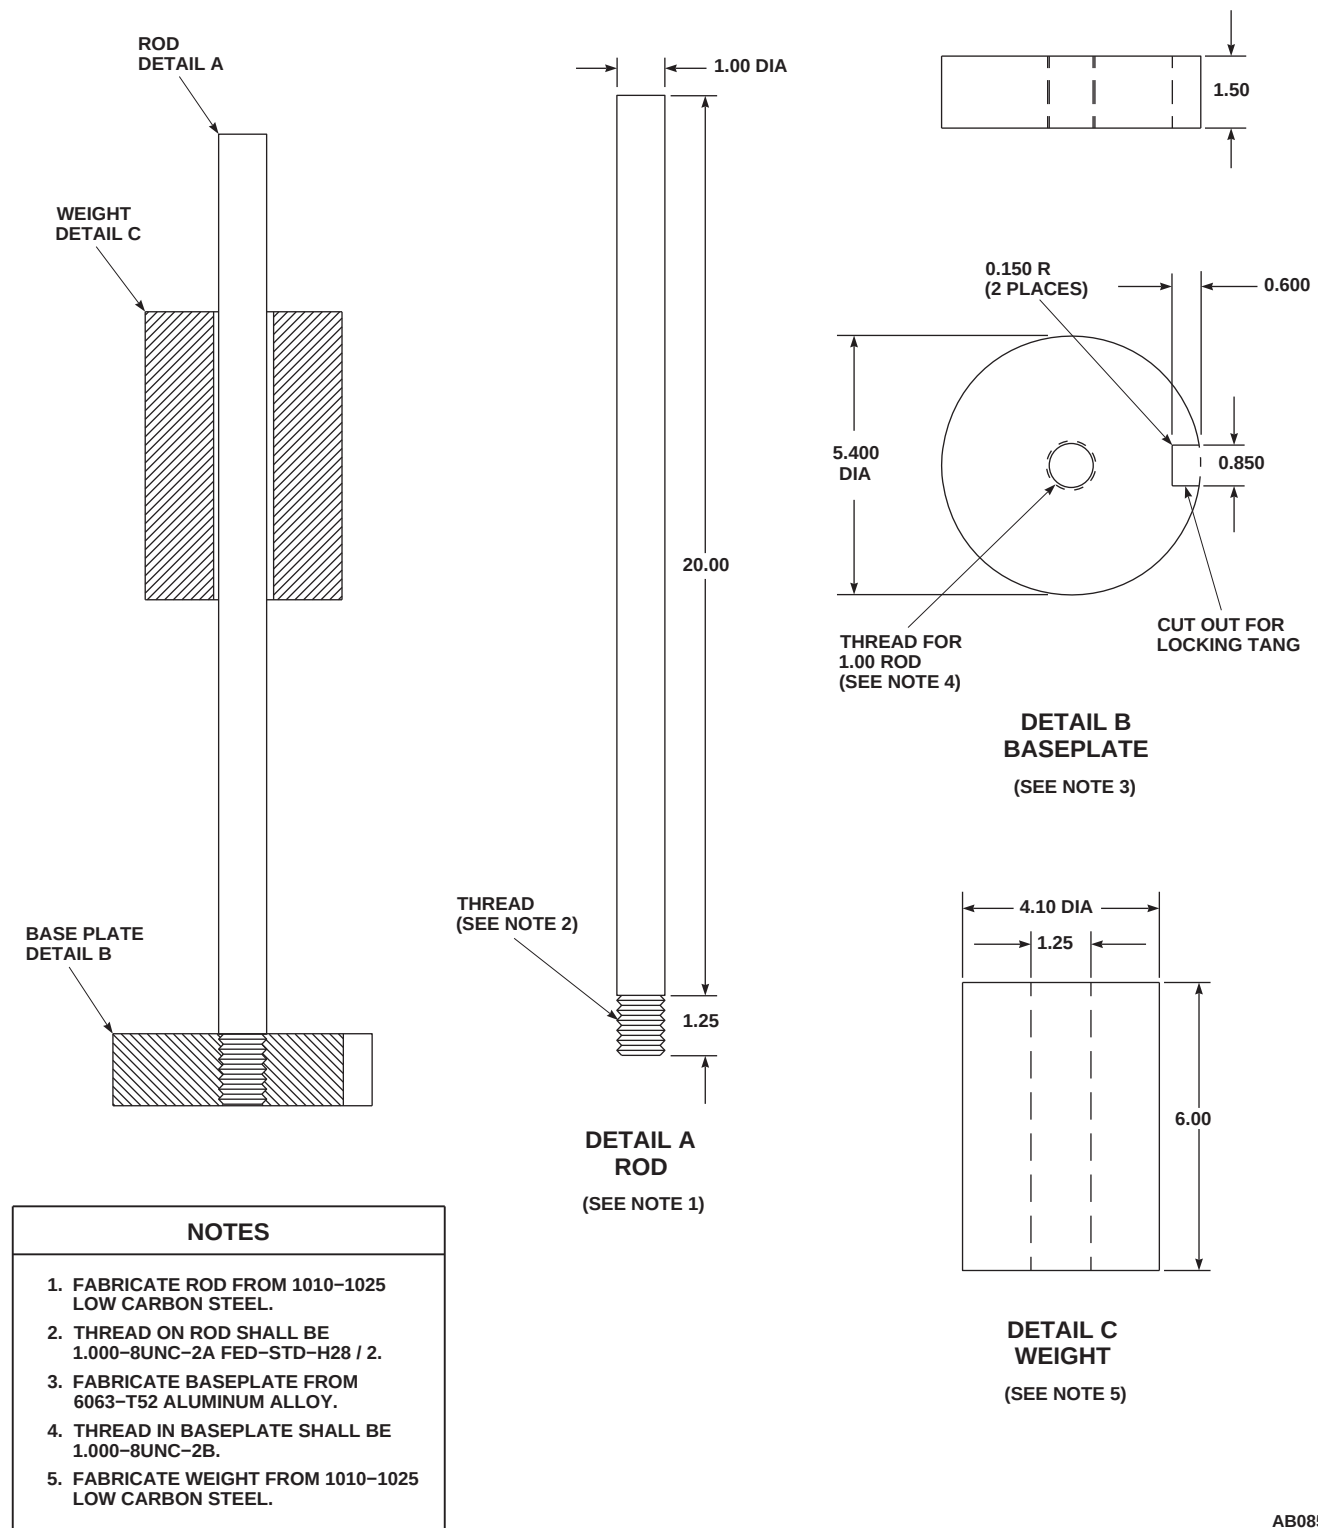

AB0858\_1  
SA

FIGURE H-252. MAIN ROTOR SHAFT IMPACT TOOL

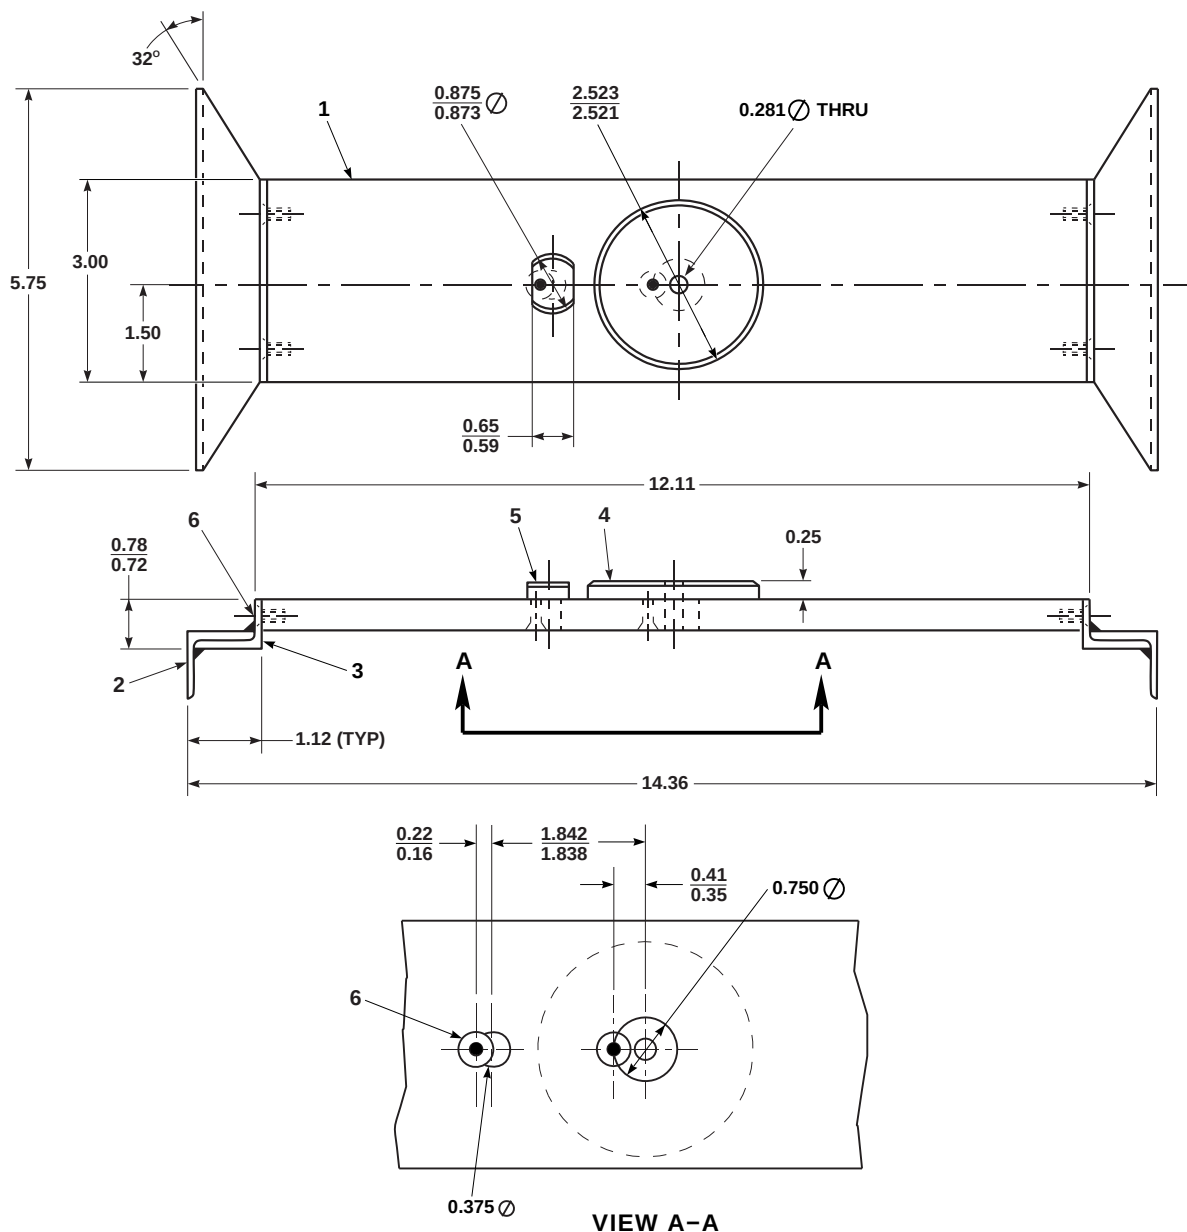


### NOTES

- ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED.
- BREAK ALL SHARP EDGES 0.005 TO 0.015 RADIUS.
- HOLE PREPARATION AND WELDING SHALL BE BEST TOOL MAKING PRACTICES.
- TOLERANCES:  
ANGULAR  $\pm 5^\circ$   
LINEAR X.XX  $\pm 0.03$   
X.XXX  $\pm 0.010$
- SYMBOL:  
Ø DIAMETER

| ITEM NO. | NOMENCLATURE    | SIZE/MATERIAL                                 |
|----------|-----------------|-----------------------------------------------|
| 1        | PLATE           | 0.50 X 3.00 X 12.38<br>QQ-A-250 / 12F, 7075T6 |
| 2        | ANGLE           | 1.00 X 1.00 X 0.125<br>QQ-A-200 / 3F, 2024T3  |
| 3        | ANGLE           | 1.00 X 1.00 X 0.125<br>QQ-A-200 / 3F, 2024T3  |
| 4        | LOCATOR         | 2.63 Ø X 1.00<br>QQ-A-200 / 3F, 2024T3        |
| 5        | LOCATOR         | 1.00 Ø X 1.00<br>QQ-A-200 / 3F, 2024T3        |
| 6        | SCREW, FLATHEAD | NO. 10-24 X 0.375                             |

FB3347  
SA

FIGURE H-253. BOOT SUPPORT LOCATOR

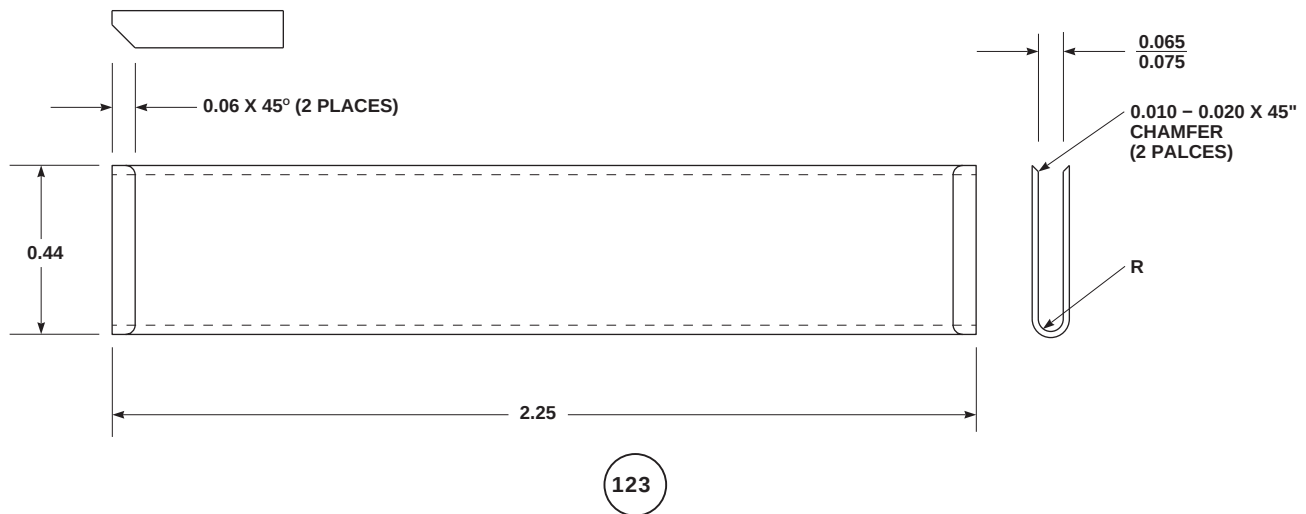


NOTES

1. MAKE FROM MIL-S-5059, CLASS 301, 1/4 HARD, 0.032 INCH THICK.
2. ALL DIMENSIONS ARE IN INCHES.
3. IDENTIFY PARTS PER MIL-STD-130.

PART NUMBER: 70216-02407-123

AB0954  
SA


FIGURE H-254. WEAR STRIP

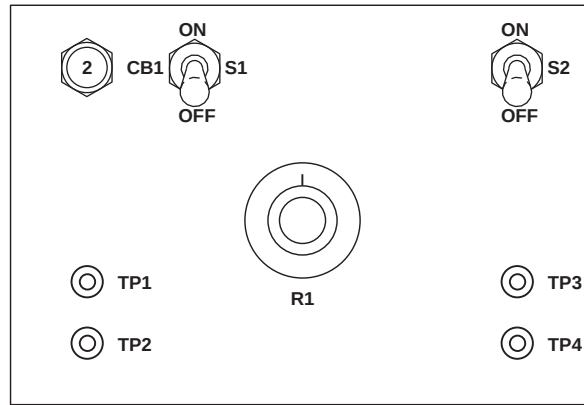



FRONT PANEL

FB4393\_1  
SA

FIGURE H-255. BATTERY SENSOR RELAY TESTER (SHEET 1 OF 3)

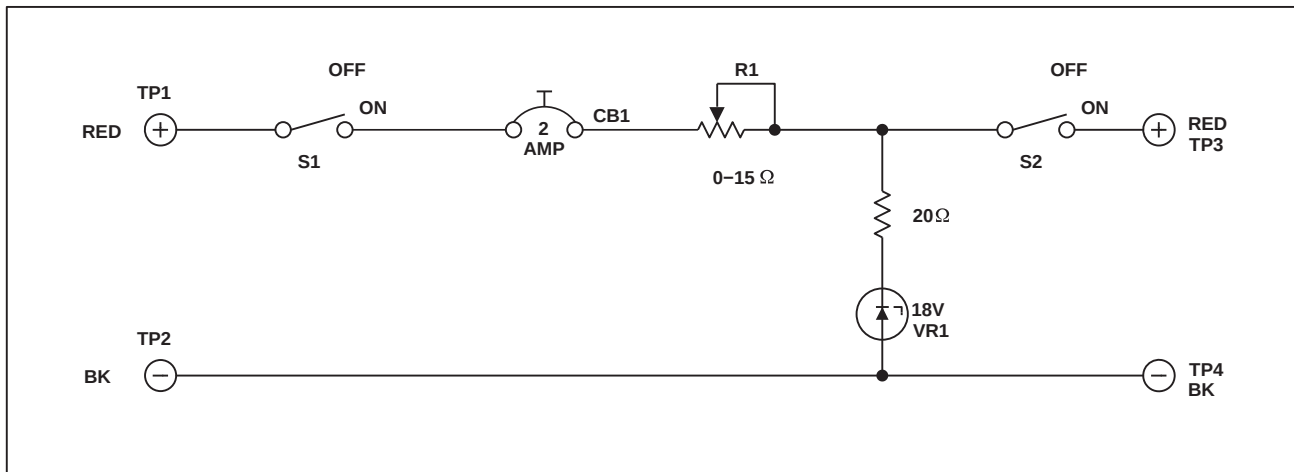

SCHEMATIC

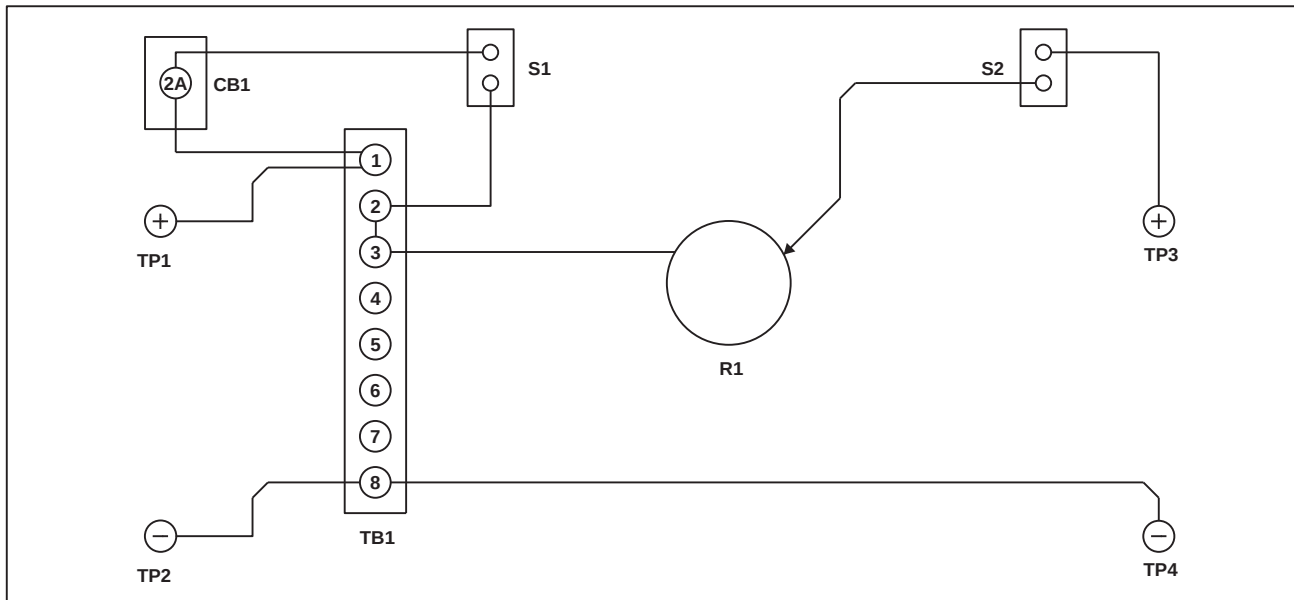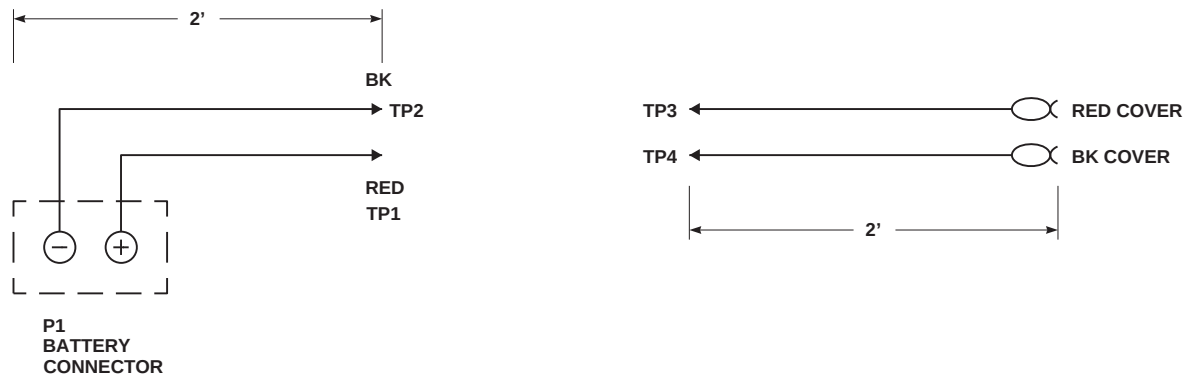

WIRING DIAGRAM


FB4393\_2  
SA

FIGURE H-255. BATTERY SENSOR RELAY TESTER (SHEET 2 OF 3)



| CIRCUIT PART NO/PARTS LIST/QTY                                  | PART NUMBER/CAGE            | STOCK NUMBER                               | QUANTITY |
|-----------------------------------------------------------------|-----------------------------|--------------------------------------------|----------|
| (P1) BATTERY PLUG                                               | MS25182-2 / 96906           | 9N-5935-00-686-0447                        | 1        |
| BUD BOX                                                         | CU-347 / 71218              | 9G-5975-00-124-2980                        | 1        |
| (R1) RHEOSTAT 0-15 OHMS @ 12.5 WATTS                            | 1159 / 17745                | 9N-5905-00-193-2098                        | 1        |
| KNOB FOR RHEOSTAT                                               | 452 / 17745                 | 9Z-5355-01-044-2843                        | 1        |
| DIAL FOR R1                                                     | 14F2604 / 17745             | 9Z-5355-01-044-2811                        | 1        |
| (TB1) 8 POST TERMINAL BLOCK                                     | MS27212-1-8 / 96906         | 9G-5940-00-950-1610                        | 1        |
| (R1) 20 OHM 1 WATT $\pm 10\%$                                   | RCR 32G200JP / 818349       | 9N-5905-00-106-1277                        | 1        |
| (VR1) 18V 5 WATT ZENER                                          | 1N5355B / 04713             | 9N-5961-00-422-3719                        | 1        |
| 20 AWG WIRE                                                     | MS22759 / 43-20-9 / 81349   | 9N-6145-01-195-3394                        | 3 FEET   |
| TERMINAL LUGS                                                   | MS25036-101 / 96906         | 9G-5940-00813-0698                         | 24       |
| TERMINAL LUGS                                                   | MS25036-27                  | 5940-00-557-4340                           | 2        |
| (S1, S2) SPST                                                   | (23F337) MS24523-23 / 91929 | 9N-5930-01-065-2684                        | 2        |
| (CB1) CIRCUIT BREAKER 2 AMP (2CT12-2)                           | MS3320-2 / 96906            | 9N-5925-00-224-7425                        | 1        |
| (TP1, TP3) RED 5 WAY BIND PST                                   | 899-102                     | 9N-5940-00-269-2220                        | 2        |
| (TP2, TP4) BK 5 WAY BIND POST                                   | 899-103                     | 9G-5940-00-269-2219                        | 2        |
| BLACK BANANA PLUG<br>RED BANANA PLUG                            | MIL-39024<br>MIL-39024      | 9N-5935-00-762-0312<br>9N-5935-01-033-5275 | 2<br>2   |
| BOOT, ALLIGATOR BLACK<br>BOOT, ALLIGATOR RED<br>ALLIGATOR CLIPS | 331-BLACK<br>331-RED        | 4935-01-302-8186<br>4935-01-302-8185       | 1<br>1   |

FIGURE H-255. BATTERY SENSOR RELAY TESTER (SHEET 3 OF 3)

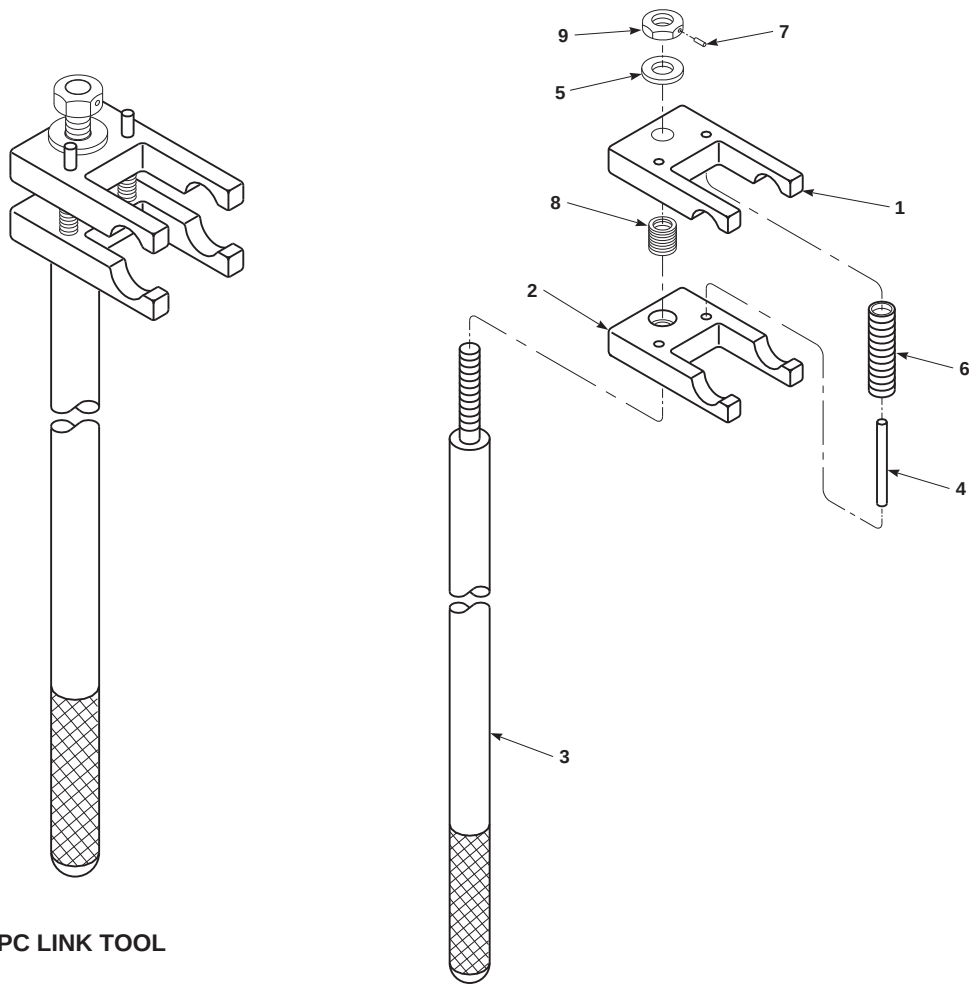


PC LINK TOOL

| ITEM NO. | PART NO.  | FSCM NO. | NOMENCLATURE   | SIZE/MATERIAL                    | QTY |
|----------|-----------|----------|----------------|----------------------------------|-----|
| 1        |           |          | TOP            | ALUM PLT, 6061-T6, 0.625 THK     | 1   |
| 2        |           |          | BOTTOM         | ALUM PLT, 6061-T6, 0.625 THK     | 1   |
| 3        |           |          | HANDLE         | ALUM BAR, 6061-T6, 1.00 OD       | 1   |
| 4        | 98381A552 | 39428    | PIN            | STL, 0.25 OD X 2.50 LG           | 2   |
| 5        | 90126A033 | 39428    | WASHER, FLAT   | STL, 0.531 ID X 1.06 ID          | 1   |
| 6        | LC049HL-8 |          | SPRING         | 0.660 OD X 0.042 WIRE X 1.875 LG | 2   |
| 7        | 90692A179 | 39428    | PIN, SPRING    | STL, 0.125 DIA X 0.625 LG        | 1   |
| 8        | 91732A385 | 39428    | HELICAL INSERT | STL, 0.50-13                     | 1   |
| 9        | 93839A823 | 39428    | NUT, THIN HEX  | STL, 0.50-13                     | 1   |

AB1094\_1  
SA


FIGURE H-256. PITCH CONTROL LINK TOOL (SHEET 1 OF 2)

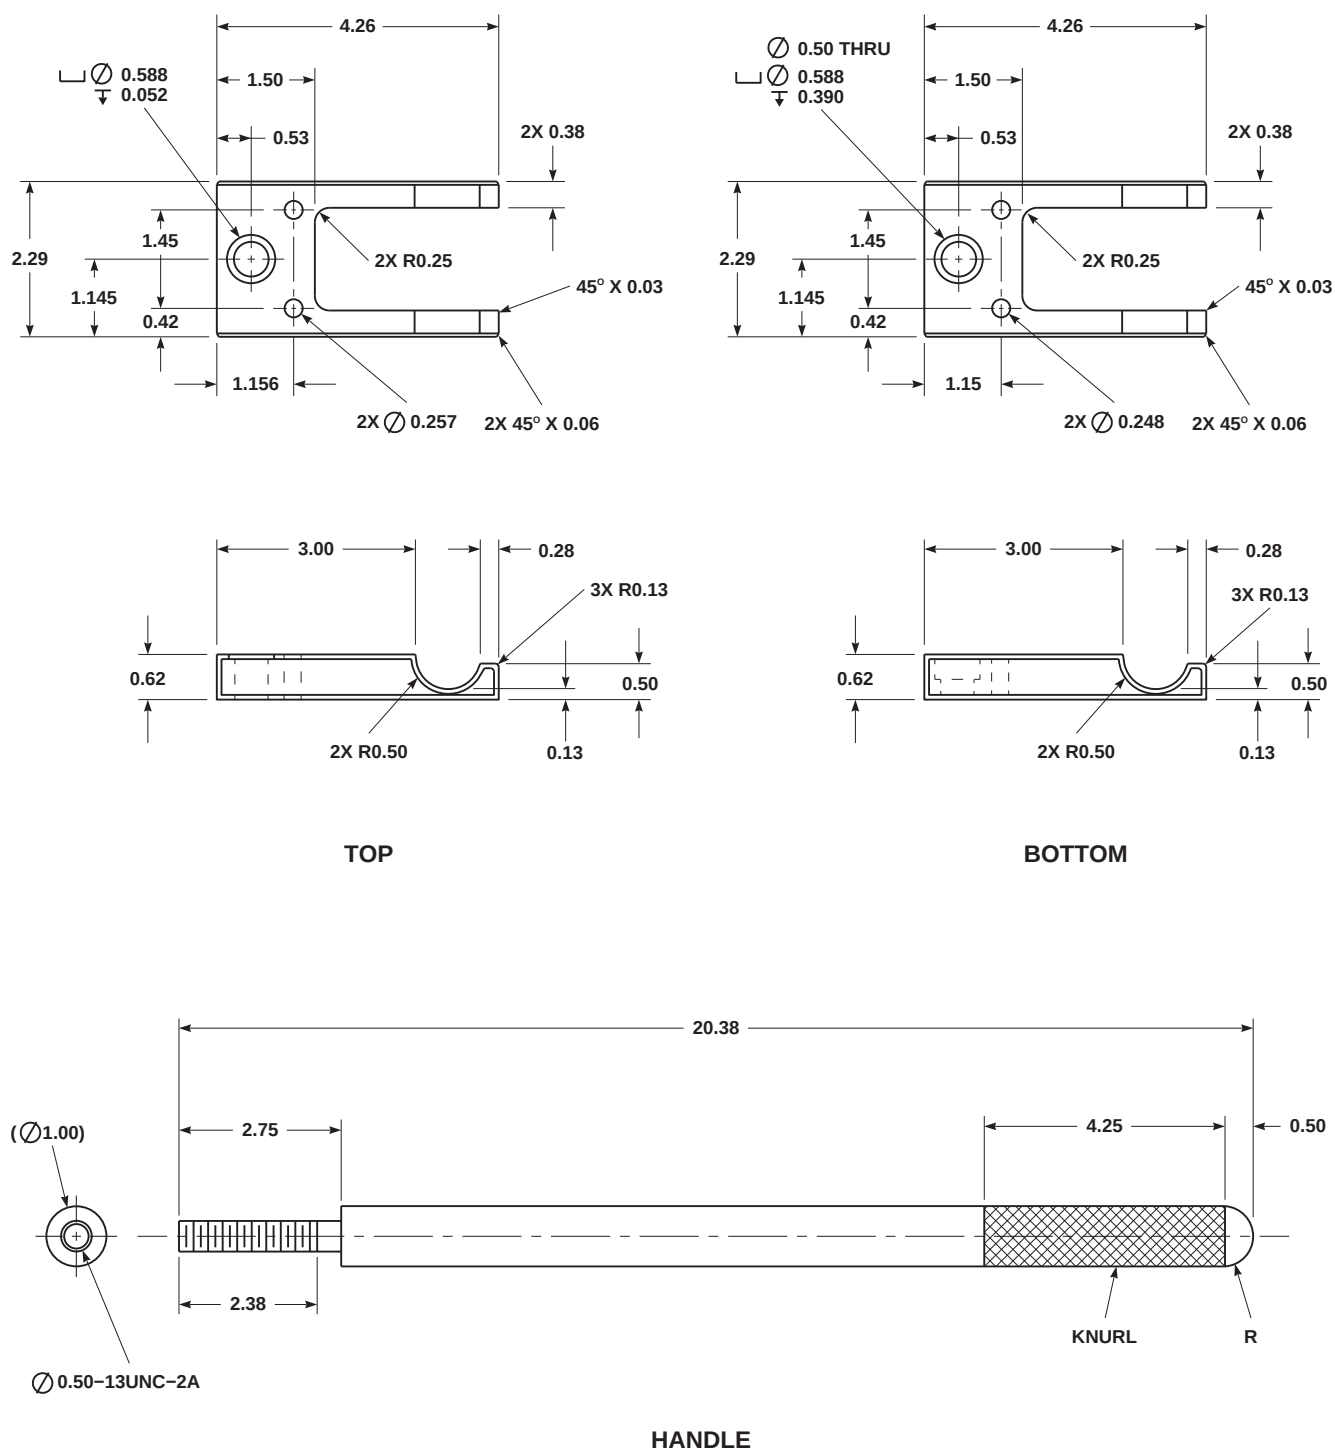AB1094\_2  
SA

**FIGURE H-256. PITCH CONTROL LINK TOOL (SHEET 2 OF 2)**

## Change 9

H-411

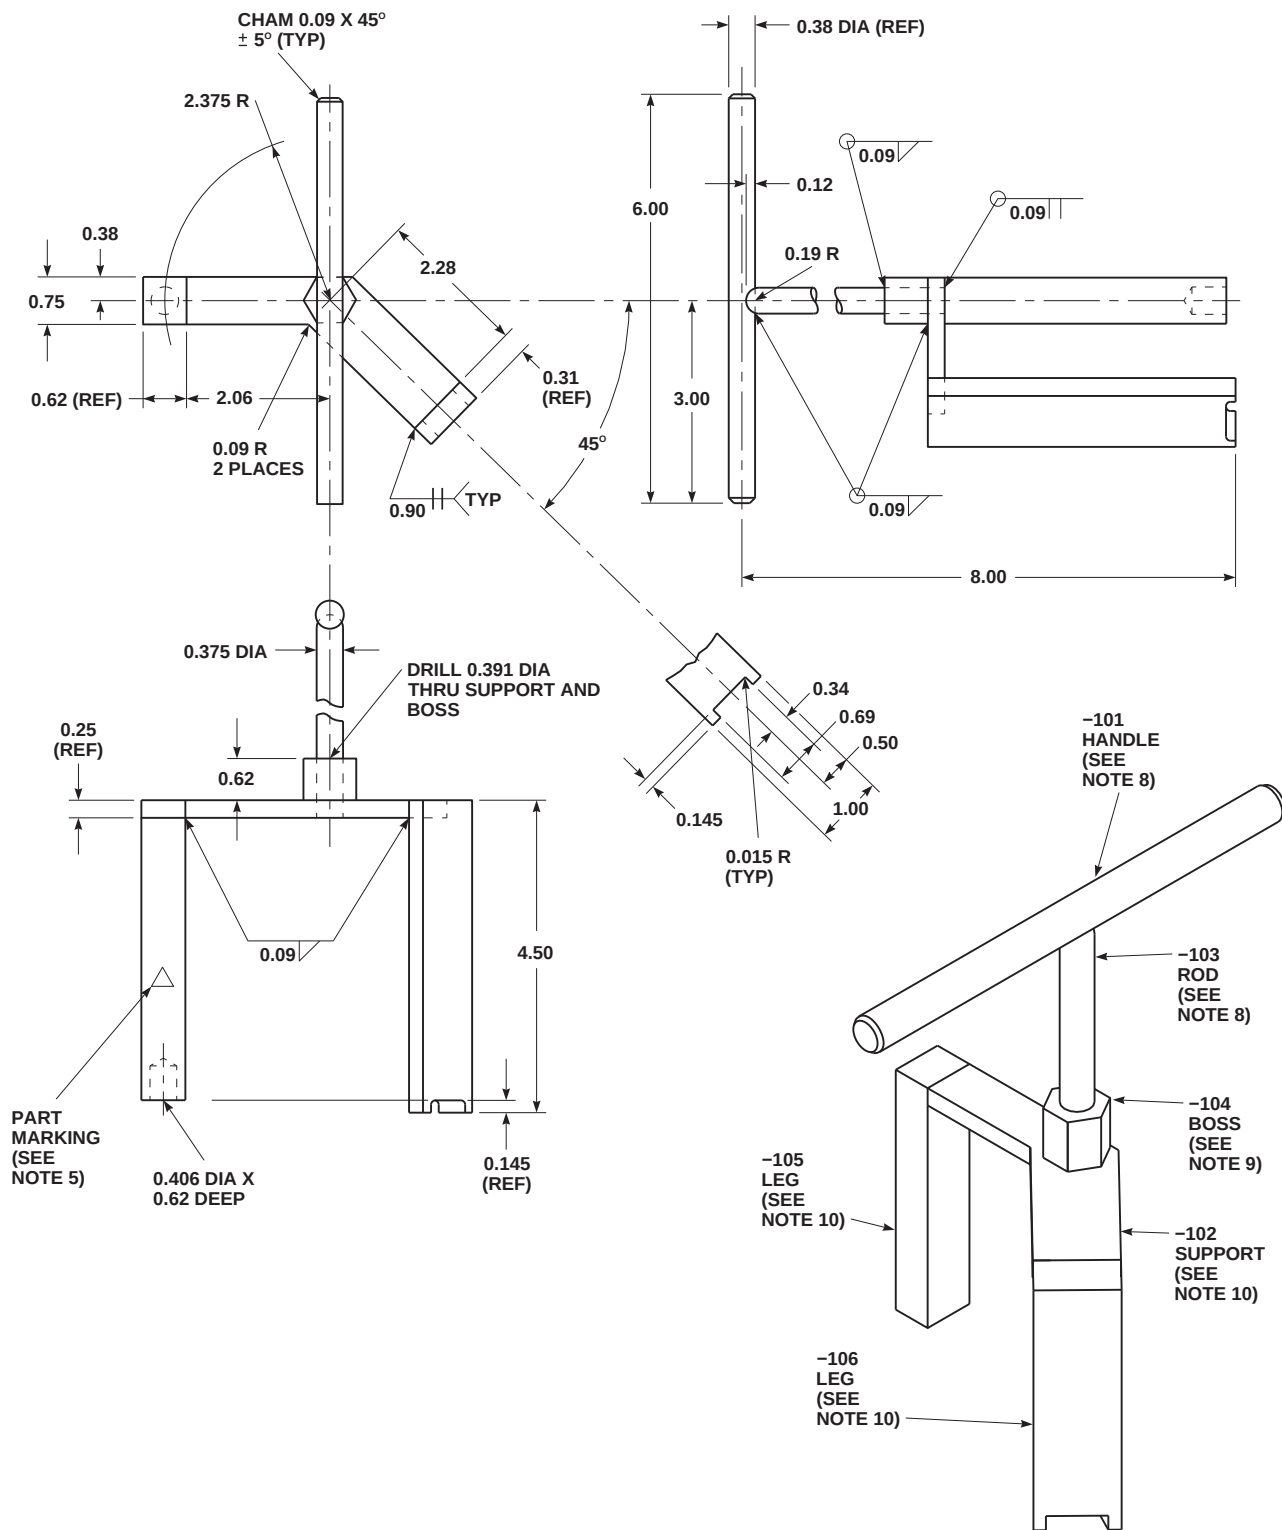

POSITIONER TOOL

PART NUMBER: 70700-02403-041

FO0973  
SA


FIGURE H-257. POSITIONER TOOL (SHEET 1 OF 2)

## NOTES

1. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
2. BREAK ALL SHARP EDGES 0.005 - 0.015 RADIUS, UNLESS OTHERWISE NOTED.
3. 125 MICROINCH SURFACE FINISH ON ALL MACHINED SURFACES.
4. WELD PER MIL-W-8611 USING FILER WIRE, MIL-R-5632, TYPE 3, CLASS 2.
5. IMPRESSION STAMP 70700-20403-041 IN LOCATION SHOWN.
6. TOLERANCES, UNLESS OTHERWISE NOTED:  
     ANGULAR  $\pm 0^{\circ} 30'$   
     LINEAR (EXCEPT HOLES):  
         X.XX  $\pm 0.03$   
         X.XXX  $\pm 0.010$
7. AFTER WELDING AND BEFORE FINISH MACHINING, HEAT TREAT TO 125,000 PSI MIN. ROCKWELL C 26-33, PER MIL-4-6875.
8. MAKE FROM 4130 STEEL ROD STOCK, 0.375 INCH DIAMETER, MIL-S-6758, CONDITION C.
9. MAKE FROM 4130 STEEL HEX STOCK, 0.750 INCH ACROSS FLATS, MIL-S-6758, CONDITION C.
10. MAKE FROM 4130 STEEL, MIL-S-18729, CONDITION N.
11. CADMIUM-PLATE ASSEMBLY PER QQ-P-416, TYPE II, CLASS 2.

FO0315\_2A  
SA

FIGURE H-257. POSITIONER TOOL (SHEET 2 OF 2)

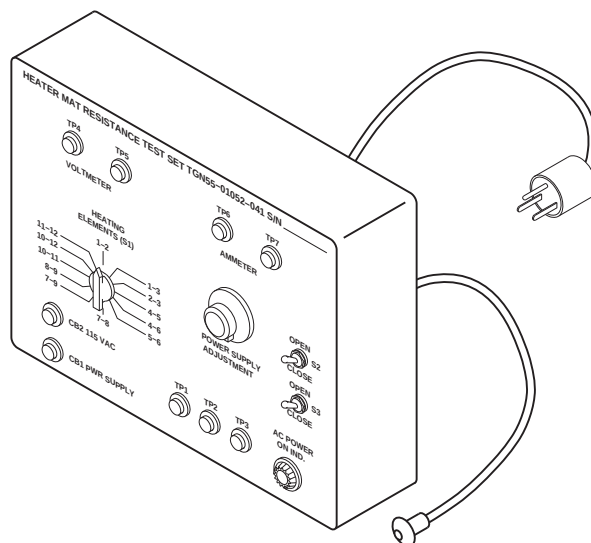


| NOMENCLATURE                                                                                                                                               | PART NUMBER       | NSN              | QUANTITY |
|------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------------|----------|
| TERMINAL STRIP                                                                                                                                             | MS27212-1-3       | 5940-00-950-1610 | 1        |
| TERMINAL STRIP                                                                                                                                             | MS27212-1-12      | 5940-01-005-4733 | 1        |
| COVER ASSEMBLY                                                                                                                                             | MS18029-1S-3      | 5940-00-082-4642 | 2        |
| CIRCUIT BREAKER                                                                                                                                            | MS3320-2          | 5925-00-224-7425 | 2        |
| TOGGLE SWITCH                                                                                                                                              | MS75028-23        | 5930-01-160-8920 | 2        |
| ELECTRICAL CONNECTOR                                                                                                                                       | M83723 / 86W2212N | 5935-01-169-4135 | 1        |
| CLAMP, STRAIN RELIEF                                                                                                                                       | M85049 / 52-1-22W | 5935-01-172-8574 | 1        |
| SWITCH, 1 POLE, 12 POSITION, 2 DECK ROTARY                                                                                                                 | M3786 / 4-0033    | 5930-00-224-5969 | 1        |
| RESISTOR, VARIABLE, 0-6 OHM, 50 WATT                                                                                                                       | RP151FD6R0KK      | 5905-00-258-0253 | 1        |
| BINDING POST, BLACK                                                                                                                                        | 29-1 BLACK        | 5935-00-724-4720 | 3        |
| BINDING POST, RED                                                                                                                                          | 29-1 RED          | 5935-00-828-0612 | 4        |
| LIGHT, INDICATOR                                                                                                                                           | 262-2342-010      | 6210-00-809-4274 | 1        |
| LENS, LIGHT                                                                                                                                                | 262-0674-00       | 6210-00-978-8463 | 1        |
| POWER SUPPLY, 12 VOLT @ 1.8 AMP                                                                                                                            | 83-12-218-03      | CAGE 0RJ90       | 1        |
| WIRE, 16 AWG                                                                                                                                               | M22759 / 11-16-9  | 6145-00-013-8651 | 72 FT    |
| WIRE, 20 AWG                                                                                                                                               | M22759 / 11-20-9  | 6145-00-939-4964 | 6 FT     |
| INSULATION SLEEVING                                                                                                                                        | MIL-I-631         | 5970-00-057-9987 | 6FT      |
| TERMINAL LUG                                                                                                                                               | MS25036-101       | 5940-00-813-0698 | 32       |
| TERMINAL LUG                                                                                                                                               | MS25036-106       | 5940-00-283-5280 | 12       |
| KNOB                                                                                                                                                       | MS91528-2F2B      | 5355-00-579-6390 | 1        |
| KNOB                                                                                                                                                       | MS91528-2L2B      | 5355-00-999-4007 | 1        |
| POWER CORD, 3 CONDUCTOR                                                                                                                                    | 17513             | 6150-01-121-7893 | 1        |
| PORTACAB, 8X8X10.5                                                                                                                                         | WA-1542           | 5975-00-901-6113 | 1        |
| DURAMARK TAG                                                                                                                                               | TMSCM124H9        | 9905-01-159-6447 | 1        |
| TIEDOWN STRAP                                                                                                                                              | MS3367-1-9        | 5975-00-074-2072 | 2        |
| NOTE: THE ABOVE LISTED PARTS ARE PREFERRED PARTS, REASONABLE AND LIKE EQUIVALENT PARTS MAY BE SUBSTITUTED TO FABRICATE THE HEATER MAT RESISTANCE TEST SET. |                   |                  |          |

PART NUMBER: TGN55-01052-041


FO0974\_1  
SA

FIGURE H-258 HEATER MAT RESISTANCE TEST SET (SHEET 1 OF 5)

| HOLE LEGEND |       |     |
|-------------|-------|-----|
| SYM         | DIA   | QTY |
| A           | 0.093 | 2   |
| B           | 0.125 | 3   |
| C           | 0.187 | 5   |
| D           | 0.253 | 2   |
| E           | 0.390 | 5   |
| F           | 0.453 | 2   |
| G           | 0.469 | 1   |

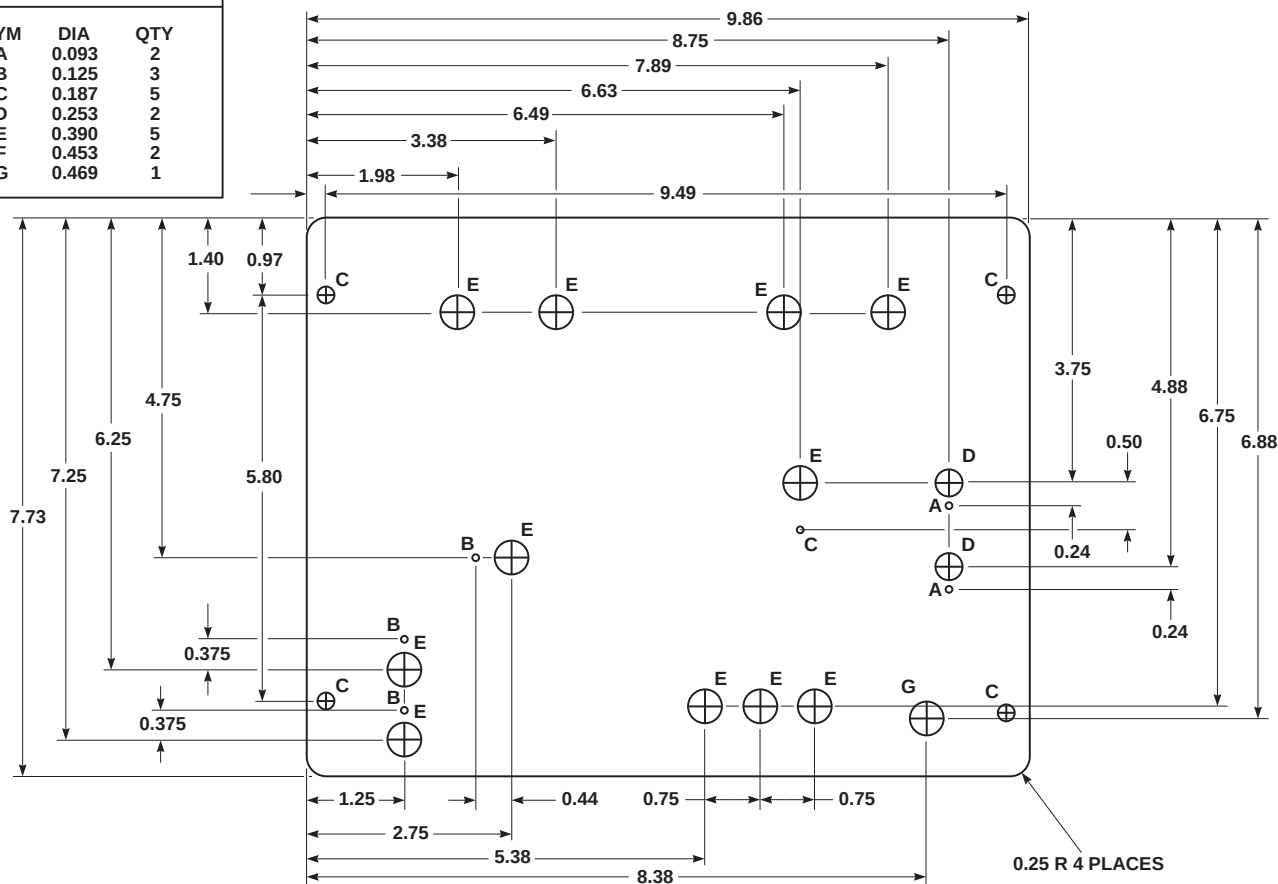


HEATER MAT RESISTANCE TEST SET FRONT PANEL LAYOUT

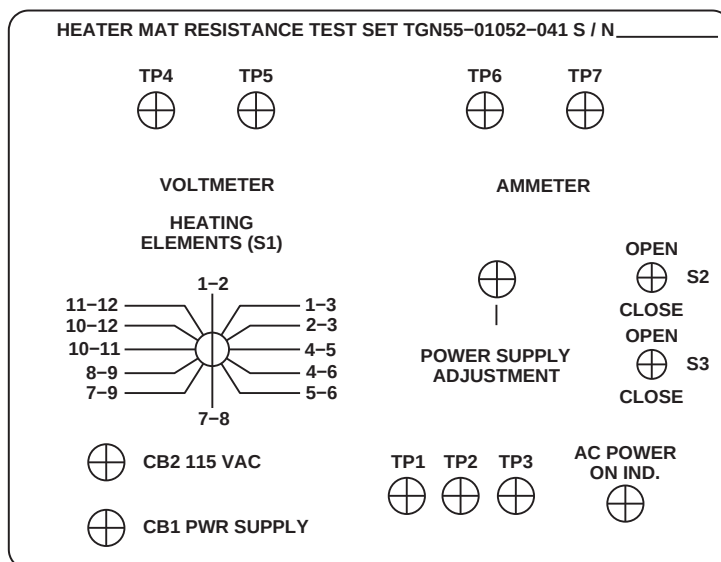

HEATER MAT RESISTANCE TEST SET FRONT PANEL MARKING

FO0974 2  
SA

FIGURE H-258. HEATER MAT RESISTANCE TEST SET (SHEET 2 OF 5)

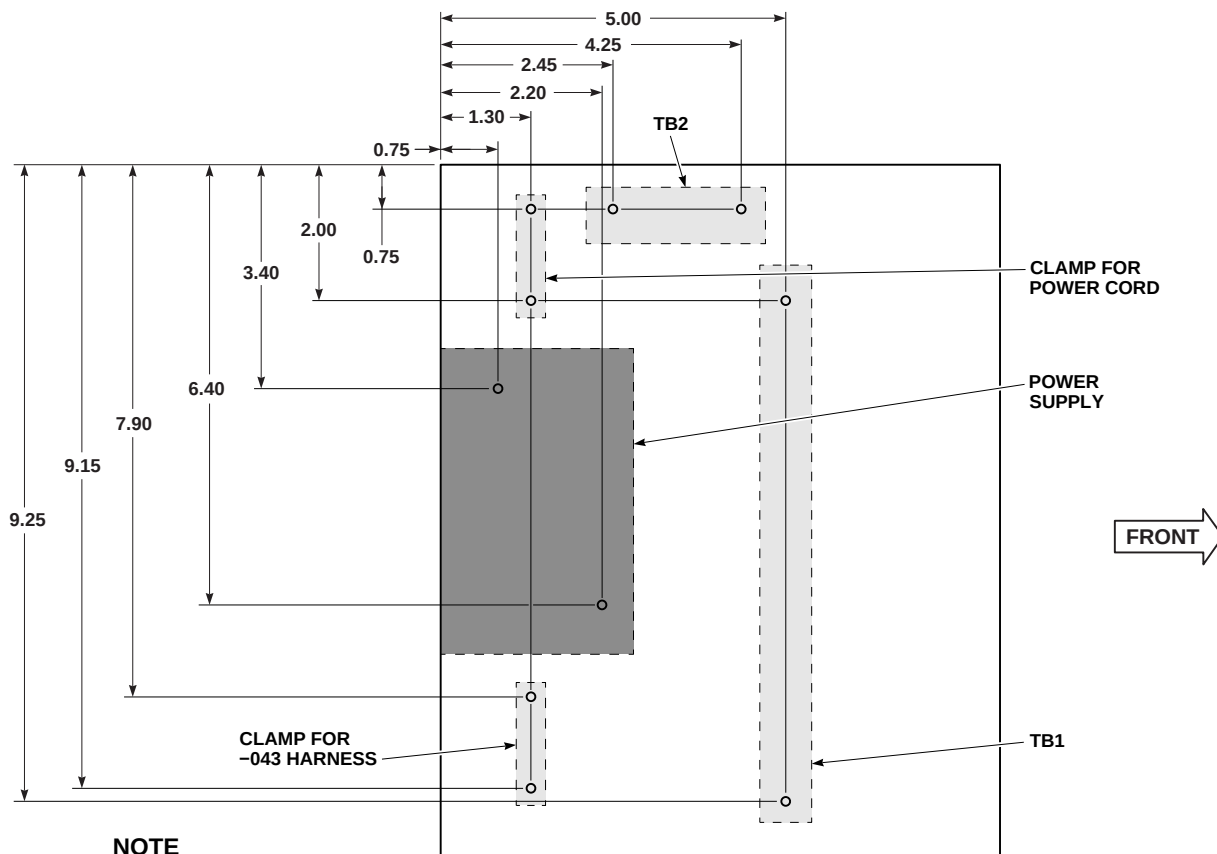

**NOTE**  
ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.

### HEATER MAT RESISTANCE TEST SET BOX LAYOUT


#### INSTRUCTIONS

1. FABRICATE FRONT PANEL PER SHEET 1 LAYOUT PATTERN.
  - A. DRILL 0.390 DIAMETER HOLES, NINE PLACES, PER SHEET 1 FOR TP1 THROUGH TP7, R1, AND S1 WAFER SWITCH.
  - B. DRILL 0.125 DIAMETER HOLE FOR S1 SWITCH LOCKING TANG.
  - C. DRILL 0.187 DIAMETER HOLE FOR R1 LOCKING TANG.
  - D. DRILL 0.187 DIAMETER HOLE, FOUR PLACES, FOR FRONT PANEL MOUNTING.
  - E. DRILL 0.253 DIAMETER HOLES, TWO PLACES, FOR S2 AND S3 SWITCHES.
  - F. DRILL 0.093 DIAMETER HOLES, FOR S2 AND S3 LOCKING TANGS.
  - G. DRILL 0.435 DIAMETER HOLES, 2 PLACES, FOR CB1 AND CB2 CIRCUIT BREAKERS.
  - H. DRILL 0.125 DIAMETER HOLES, TWO PLACES, FOR CB1 AND CB2 LOCKING TANGS.
2. MARK COMPONENTS PER SHEET 2. ALL LETTERING TO BE 0.187 HIGH GOTHIC STYLE, EXCEPT "OPEN" AND "CLOSE" NOMENCLATURE FOR S2 AND S3 WHICH ARE 0.125.
3. MOUNT COMPONENTS ON FRONT PANEL USING SHEET 2 AS A GUIDE.
  - A. MOUNT S1 WAFER SWITCH, M3786 / 4-0033, IN APPROPRIATE 0.390 DIAMETER HOLE. TAKE CARE TO ENGAGE LOCKING TANG.  
NOTE: YOU MAY WISH TO LEAVE S1 LOOSE TO ALLOW ACCESS FOR ATTACHING WIRING TO BE INSTALLED IN STEP 4.
  - B. MOUNT RED BINDING POST, 29-1 RED, IN HOLES FOR TP1, TP2, TP4, AND TP7.
  - C. MOUNT BLACK BINDING POST, 29-1 BLACK, IN HOLES FOR TP3, TP5, AND TP6.
  - D. MOUNT R1 VARIABLE RESISTOR, RP151FD6R0KK, IN HOLE MARKED "POWER SUPPLY ADJUSTMENT". TAKE CARE TO ENGAGE LOCKING TANG.
  - E. MOUNT SWITCHES S2 AND S3, MS75028-23, IN APPROPRIATE HOLES. TAKE CARE TO ENGAGE LOCKING TANGS.
  - F. MOUNT CIRCUIT BREAKERS CB1 AND CB2, MS3320-2, IN APPROPRIATE HOLES. TAKE CARE TO ENGAGE LOCKING TANGS.
  - G. MOUNT LAMP ASSEMBLY, CONSISTING OF, 262-2342-010, INDICATOR LAMP AND LENS, 262-0674-00, IN HOLE MARKED "AC POWER ON IND."
4. DRILL HOLES PER SHEET 3 FOR MOUNTING OF TB1, TB2, POWER SUPPLY, AND TWO ELECTRICAL CABLE CLAMPS.
5. FABRICATE WIRING HARNESS, TGN55-01052-043, PER SHEET 4. WRAP INSULATION SLEEVING WITH SILICON TAPE, 594 (OR EQUIVALENT) IN A SUFFICIENT QUANTITY SO THAT WHEN STRAIN RELIEF CLAMP, M85049 / 52-1-22W, IS INSTALLED THE WIRES SHALL BE SECURED ON THE SILICON TAPE. TAG AS SHOWN IN SHEET 4 WITH DURAMARK TAGS, TMSCM124H9, WITH BLACK 0.12 HIGH BOLD FACE LETTERING "TO BLADE". SECURE TAG WITH TIEDOWN STRAPS, MS3367-1-9.
6. ROUTE WIRING PER SHEET 5 WIRING PER SCHEMATIC. WIRES ARE 20 AWG, M22759 / 11-20-9, EXCEPT FOR -043 HARNESS.

FO0974 3  
SA

**FIGURE H-258. HEATER MAT RESISTANCE TEST SET (SHEET 3 OF 5)**




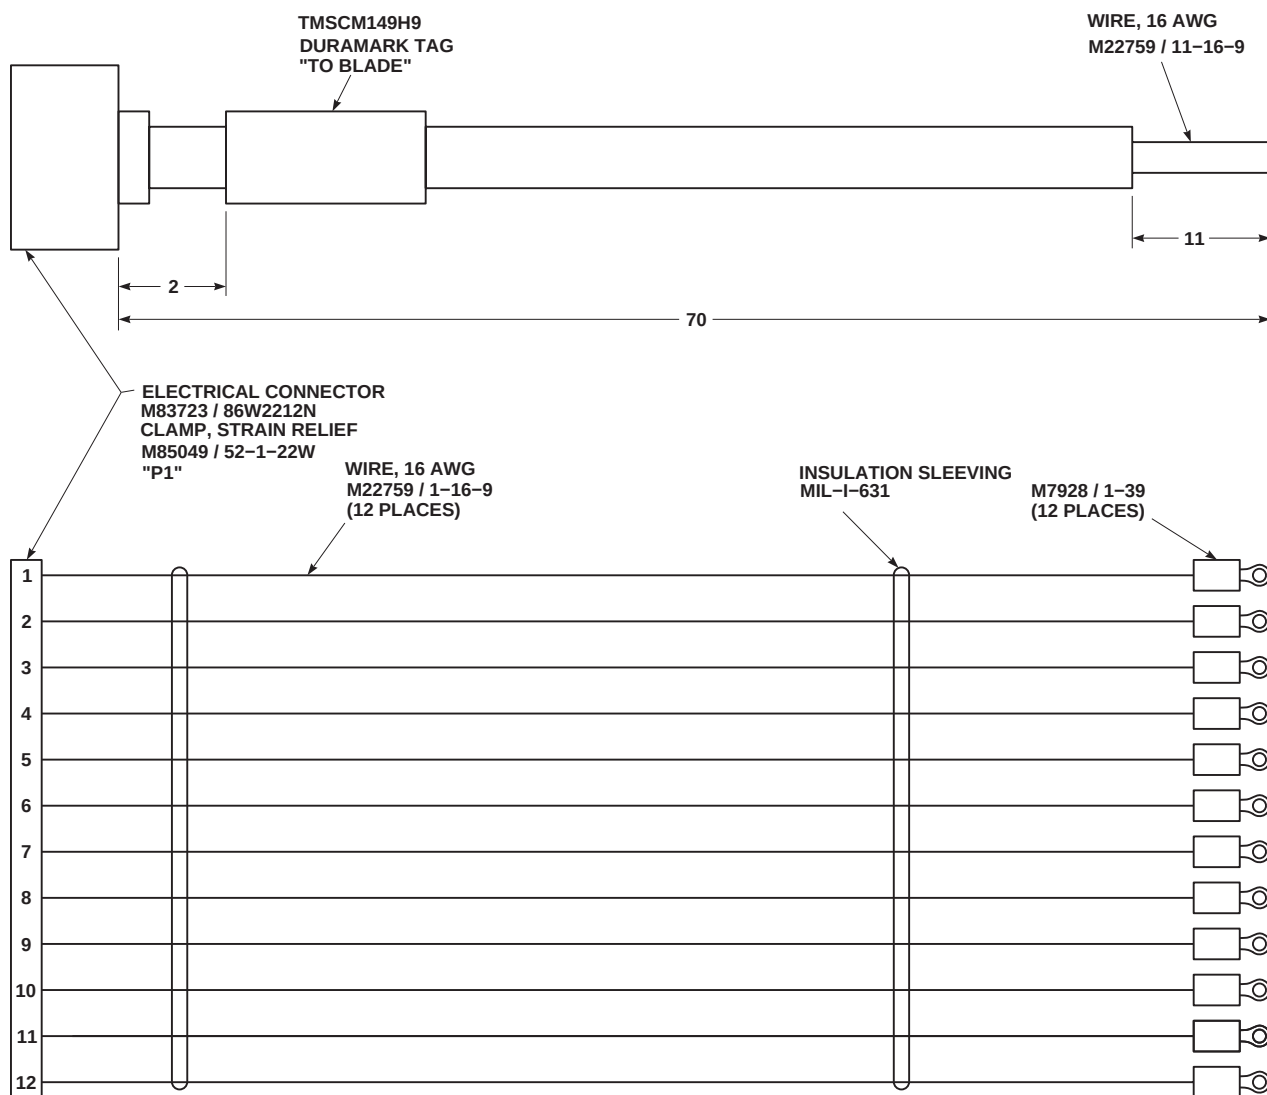

HEATER MAT RESISTANCE TEST SET BLADE HARNESS

FO0974\_4  
SA


FIGURE H-258. HEATER MAT RESISTANCE TEST SET (SHEET 4 OF 5)

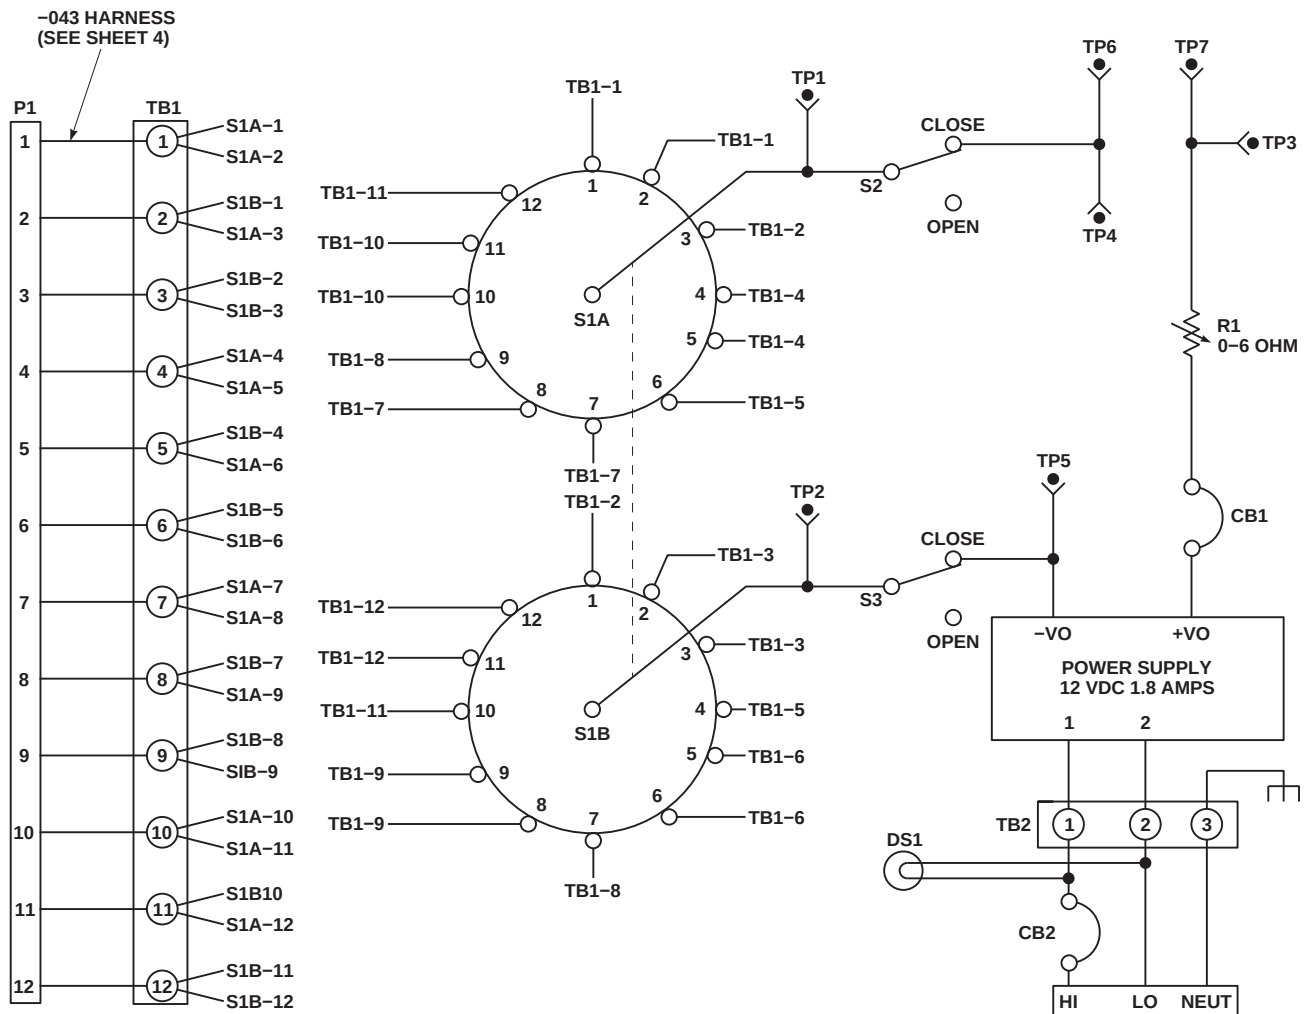

HEATER MAT RESISTANCE TEST SET

FO0974\_5  
SA

FIGURE H-258. HEATER MAT RESISTANCE TEST SET (SHEET 5 OF 5)

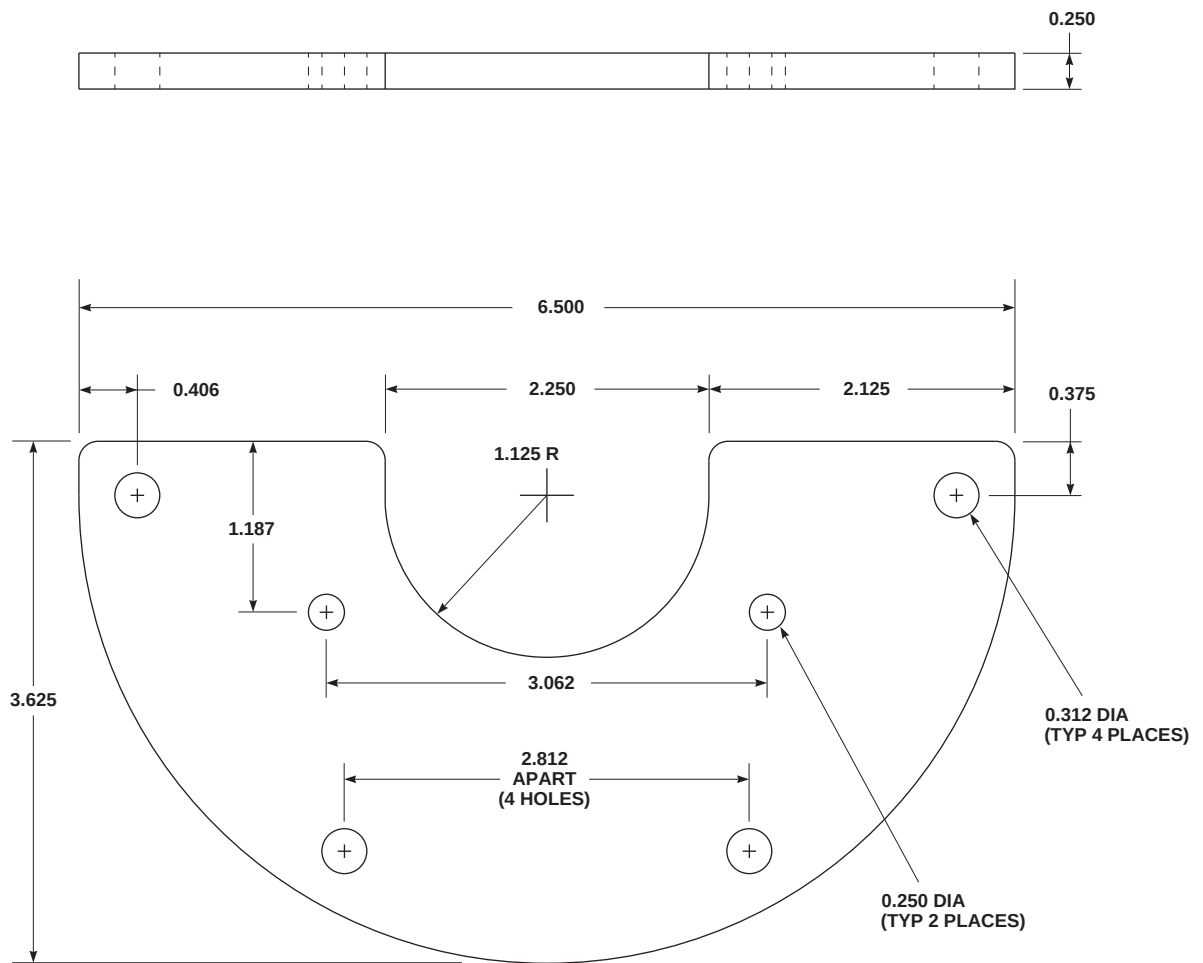


# NOTES

1. MAKE FROM 7075-T6 ALUMINUM STOCK, 0.250 INCH THICK.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.

AB1704A  
SA

FIGURE H-259. TORQUE REACTOR PLATE

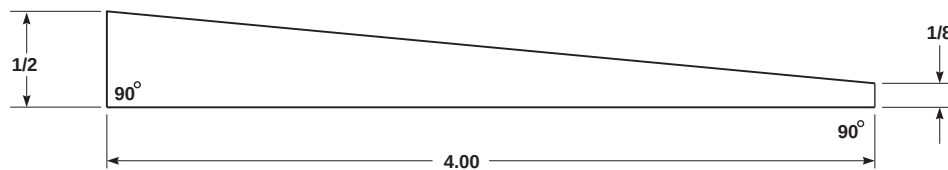


#### NOTES

1. MAKE FROM NYLON.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. NYLON WEDGE IS TO BE THE SAME WIDTH, OR SLIGHTLY WIDER, THAN THE SEAL PULLER.


FB3441  
SA

FIGURE H-260. NYLON WEDGE

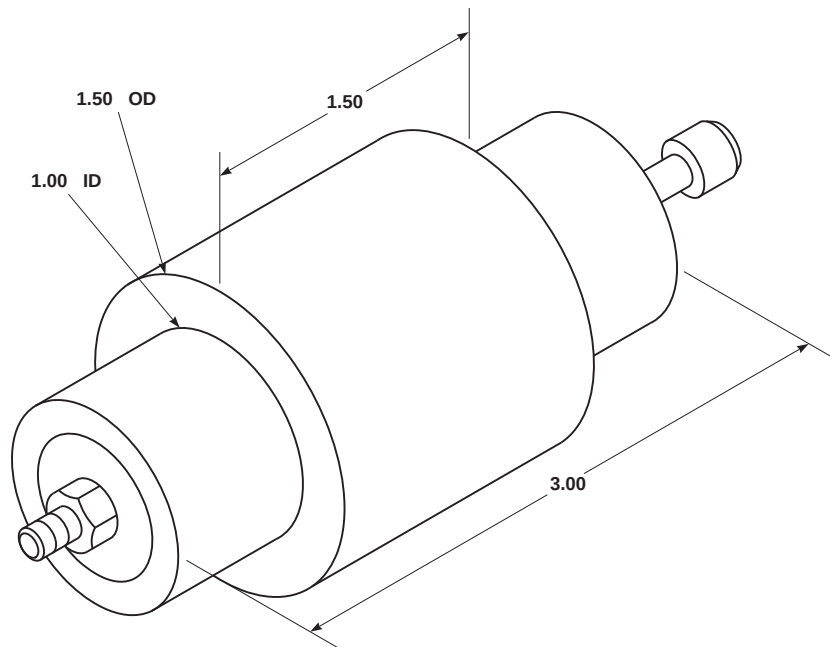**NOTES**

1. MAKE FROM ALUMINUM ROUND, MS14258C069, NSN 9530-00-236-1379.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.

FB3442  
SA**FIGURE H-261. SPLINE ADAPTER REMOVAL TOOL**


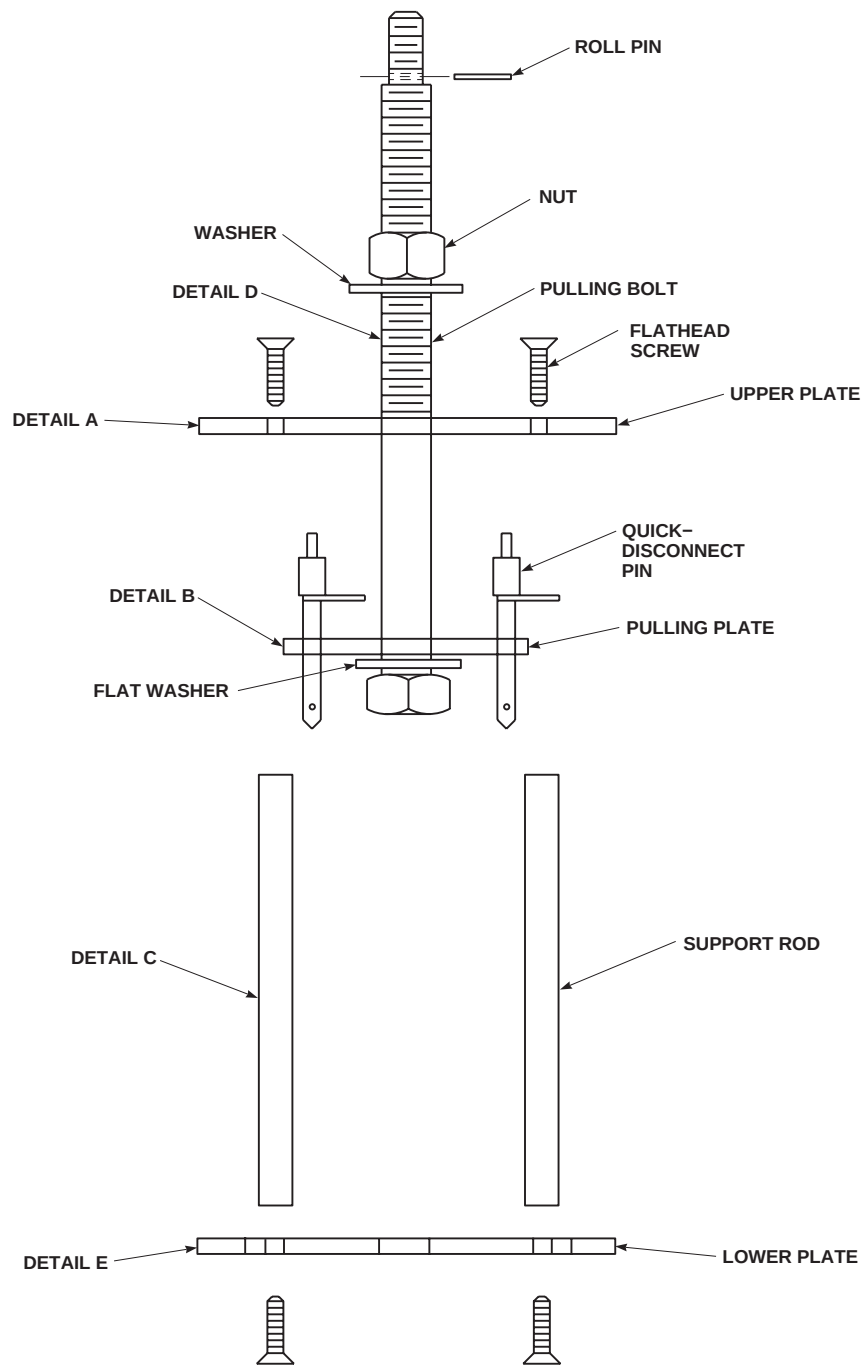


#### NOTES

1. MAKE FROM ALUMINUM, 7075-T6, 0.25 INCH THICK FLAT STOCK.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. ENDS SLIGHTLY CHAMFERED.
4. REMOVE ALL BURRS AND SHARP EDGES.


FT2552\_1  
SA

FIGURE H-262. OUTPUT DRIVE SHAFT PULLER (SHEET 1 OF 4)

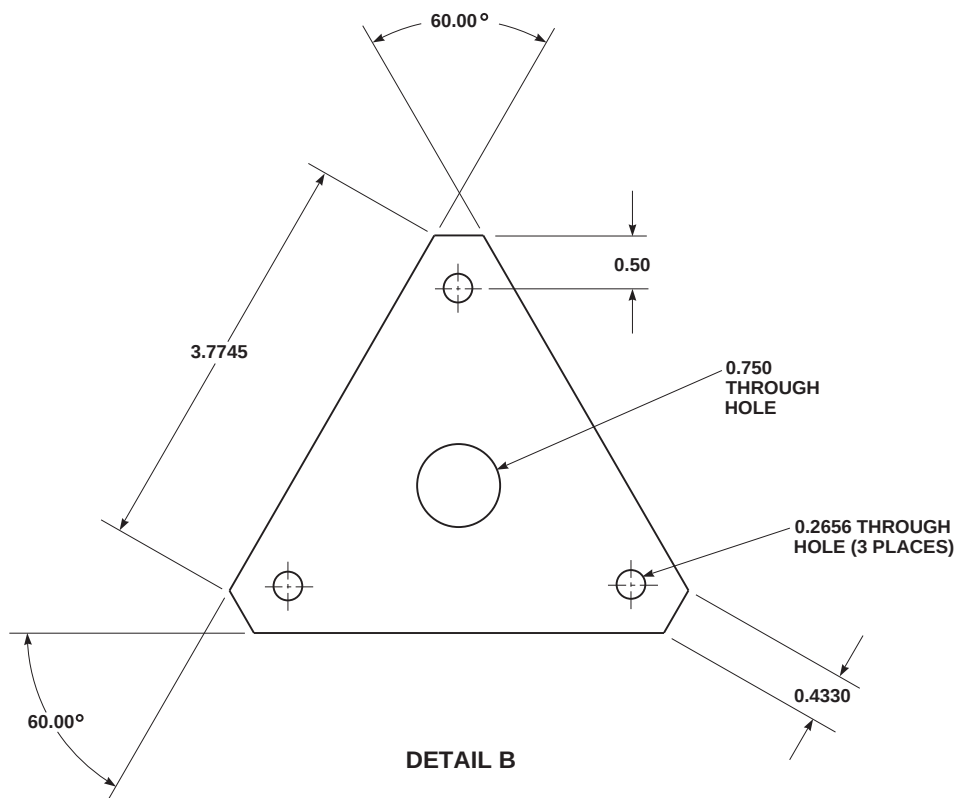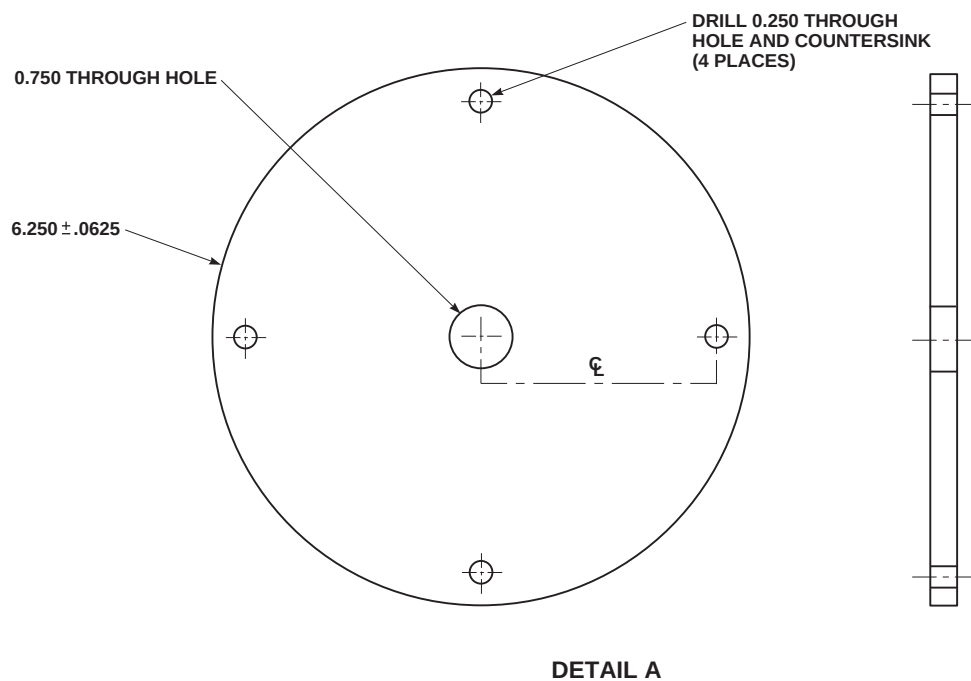


FT2552\_2  
SA


FIGURE H-262 OUTPUT DRIVE SHAFT PULLER (SHEET 2 OF 4)

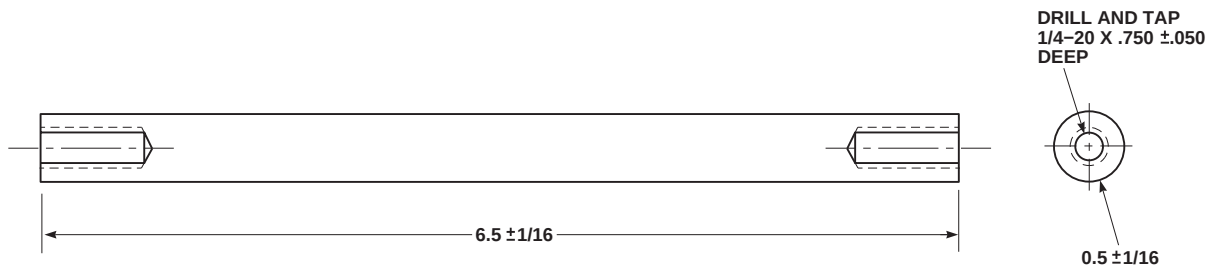

DETAIL C

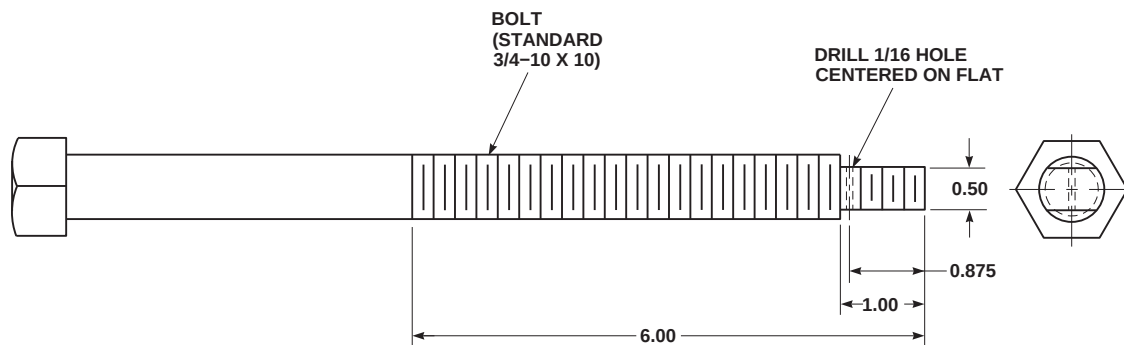

DETAIL D

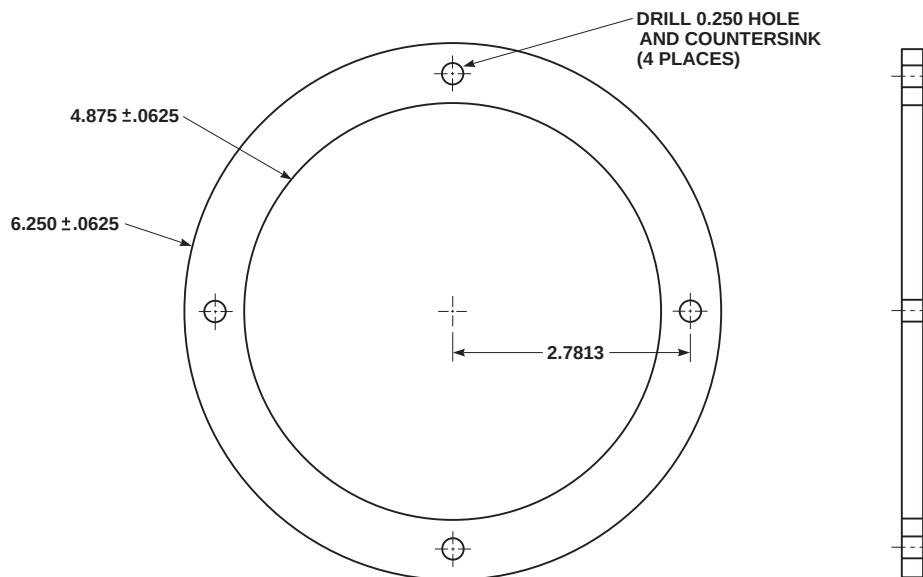

DETAIL E

FT2552\_3  
SA

FIGURE H-262 OUTPUT DRIVE SHAFT PULLER (SHEET 3 OF 4)




## PARTS LIST

| NOMENCLATURE                     | NSN              | QUANTITY |
|----------------------------------|------------------|----------|
| QUICK-DISCONNECT PIN<br>1/4 X 2  | 5315-00-952-2617 | 3        |
| ROLL PIN, 1/16 X 1               | 5305-00-150-9212 | 1        |
| FLATHEAD SCREW<br>1/4 - 20 X 3/4 | LOCAL PURCHASE   | 8        |
| FLAT WASHER<br>GRADE 5 3/4       | 5310-00-187-2404 | 2        |
| NUT                              | LOCAL PURCHASE   | 1        |
| BOLT                             | DETAIL D         | 1        |
| PULLING PLATE                    | DETAIL B         | 1        |
| LOWER PLATE                      | DETAIL E         | 1        |
| UPPER PLATE                      | DETAIL A         | 1        |
| SUPPORT ROD                      | DETAIL C         | 4        |

FT2552\_4  
SA

FIGURE H-262 OUTPUT DRIVE SHAFT PULLER (SHEET 4 OF 4)

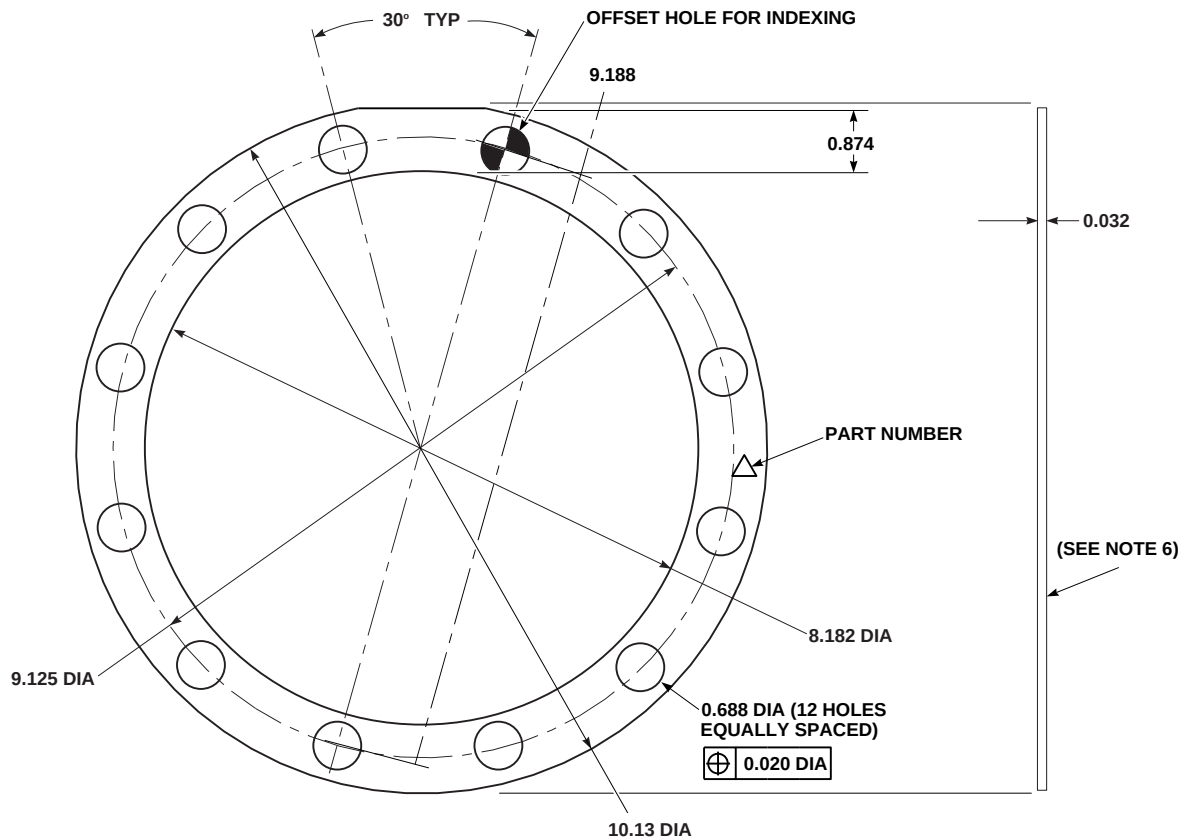


### NOTES

1. MAKE FROM STAINLESS STEEL, 0.032 INCH THICK, MIL-S-5059, TYPE 301, ½ HARD.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. ALL DIAMETERS ON A COMMON AXIS TO BE CONCENTRIC TO EACH OTHER WITHIN 0.010 DIA UNLESS NOTED.
4. BREAK ALL SHARP EDGES WITH 0.015 - 0.030 INCH RADIUS.
5. TOLERANCES:  
ANGULAR  $\pm 0^{\circ}30'$   
LINEAR  $X.XXX \pm 0.010$   
HOLES  $+0.005 -0.001$
6. PRIME SURFACE OF LINER SHOWN USING ADHESIVE PRIMER, EC-3917, AS FOLLOWS:
  - (A) USING 600-GRIT ABRASIVE MAT, MIL-A-9962, NSN 5350-00-967-5089, CAGE 76301, ABRASE SIDE OF LINER TO BE BONDED (SIDE OPPOSITE PART MARKING).
  - (B) USING MACHINERY TOWEL, DDD-T-541, NSN 7920-00-260-1279, CAGE 81348, DAMPENED WITH DRY-CLEANING SOLVENT, P-D-680, TYPE 2, NSN 6580-00-274-5421, CAGE 81348, CLEAN LINER.
  - (C) USING ADHESIVE PRIMER, EC-3917, NSN 8040-01-192-2491, CAGE 04963, PRIME ABRASED SIDE OF LINER, PROVIDING 100% COVERAGE.
  - (D) ALLOW ADHESIVE PRIMER TO CURE AT ROOM TEMPERATURE FOR A MINIMUM OF 30 MINUTES.
7. SYMBOL:  
⊕ TRUE POSITION


PART NUMBER: 70103-08002-120

FC3696C  
SA

FIGURE H-263. LINER

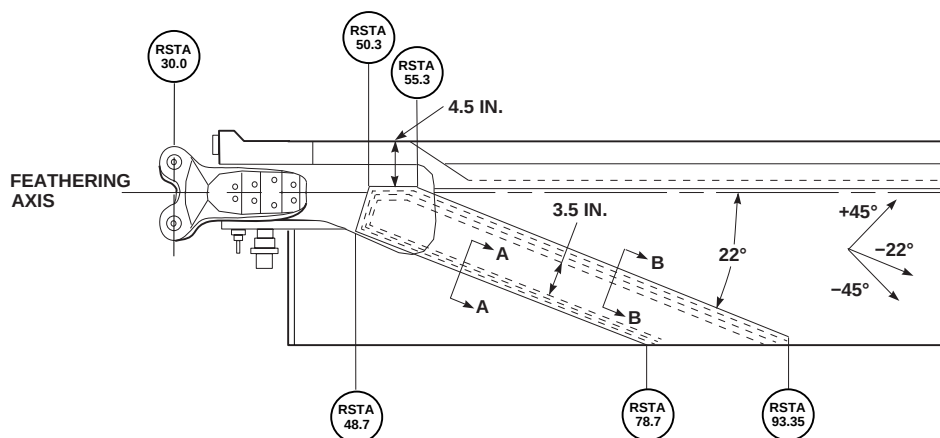

**CHEVRON PATCH**  
 -041 UPPER (SHOWN)  
 -042 LOWER (OPPOSITE)

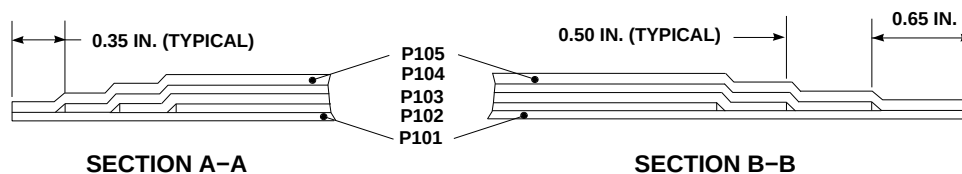

**PATCH PLY TABLE**

| -101 PLY KIT<br>(FOR -041) | -102 PLY KIT<br>(FOR -042) | SEQ.<br>NO. | FIBER<br>ORIENTATION | TOTAL<br>QUANTITY | MAKE FROM<br>MATERIAL |
|----------------------------|----------------------------|-------------|----------------------|-------------------|-----------------------|
| PLY NO.                    | PLY NO.                    |             |                      |                   |                       |
| P101                       | P106                       | A1          | ±45°                 | 1                 | SS9578-004            |
| P102                       | P107                       | A2          | -22°                 | 1                 | SS9626-006            |
| P103                       | P108                       | A3          | -22°                 | 1                 | SS9626-006            |
| P104                       | P109                       | A4          | -22°                 | 1                 | SS9626-006            |
| P105                       | P110                       | A5          | ±45°                 | 1                 | SS9578-004            |


**NOTES**

1. FABRICATE CHEVRON PATCH PLIES FROM MATERIAL AND ORIENTATION LISTED IN PATCH PLY TABLE.
2. FABRICATE CHEVRON PATCH PER SIKORSKY DRAWING NUMBER 38023-15000.

PART NUMBER: 70100-100-1-041, -042

FC4202  
SA

**FIGURE H-264. MAIN ROTOR BLADE CHEVRON PATCH**

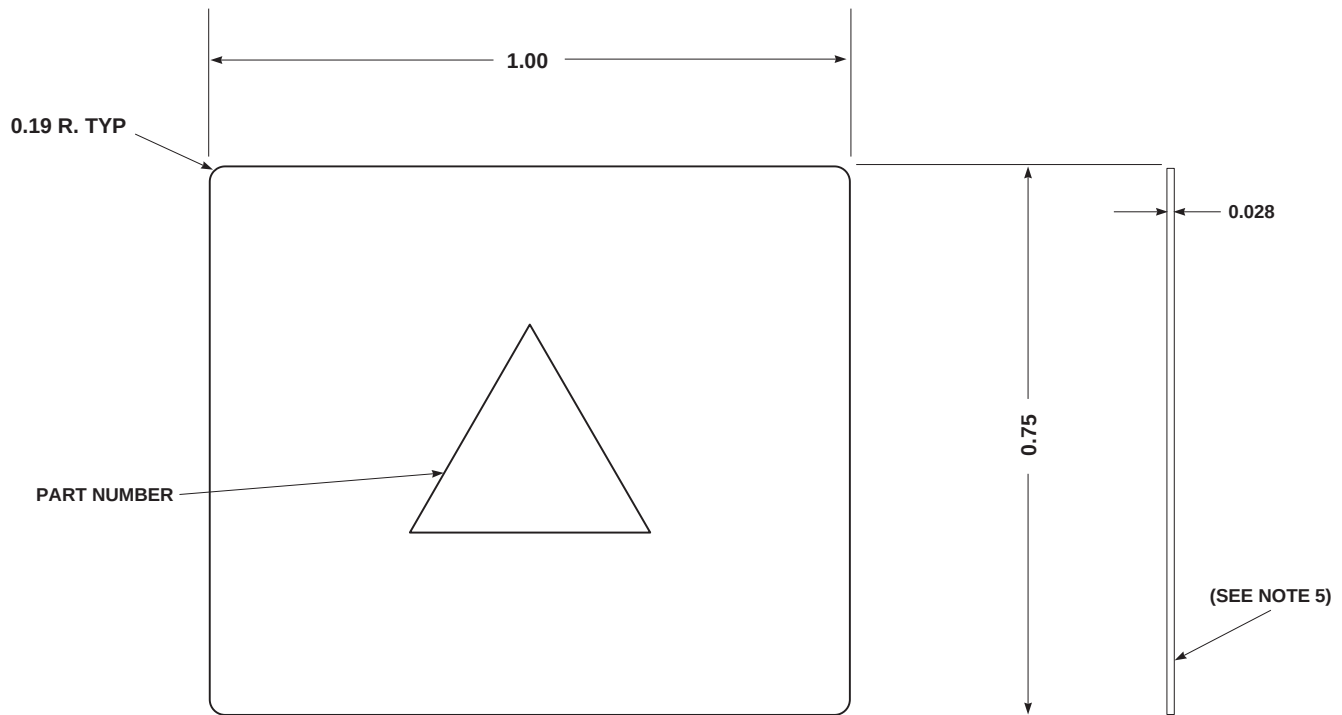

### NOTES


1. MAKE FROM STAINLESS STEEL, 0.028 INCH THICK, MIL-S-5059, TYPE 301, ½ HARD.
2. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED.
3. BREAK ALL SHARP EDGES WITH 0.015 - 0.030 INCH RADIUS.
4. TOLERANCES:  
ANGULAR  $\pm 0^{\circ}30'$   
LINEAR X.XXX  $\pm 0.010$
5. PRIME SURFACE OF LINER SHOWN USING ADHESIVE PRIMER, EC-3917, AS FOLLOWS:
  - (A) USING 600-GRIT ABRASIVE MAT, MIL-A-9962, NSN 5350-00-967-5089, CAGE 76301, ABRASE SIDE OF LINER TO BE BONDED (SIDE OPPOSITE PART MARKING).
  - (B) USING MACHINERY TOWEL, DDD-T-541, NSN 7920-00-260-1279, CAGE 81348, DAMPENED WITH DRY-CLEANING SOLVENT, P-D-680, TYPE 2, NSN 6580-00-274-5421, CAGE 81348, CLEAN LINER.
  - (C) USING ADHESIVE PRIMER, EC-3917, NSN 8040-01-192-2491, CAGE 04963, PRIME ABRASED SIDE OF LINER, PROVIDING 100% COVERAGE.
  - (D) ALLOW ADHESIVE PRIMER TO CURE AT ROOM TEMPERATURE FOR A MINIMUM OF 30 MINUTES.

PART NUMBER: 70103-08002-116

FA3124  
SA


FIGURE H-265. LINER

H-428 Change 9

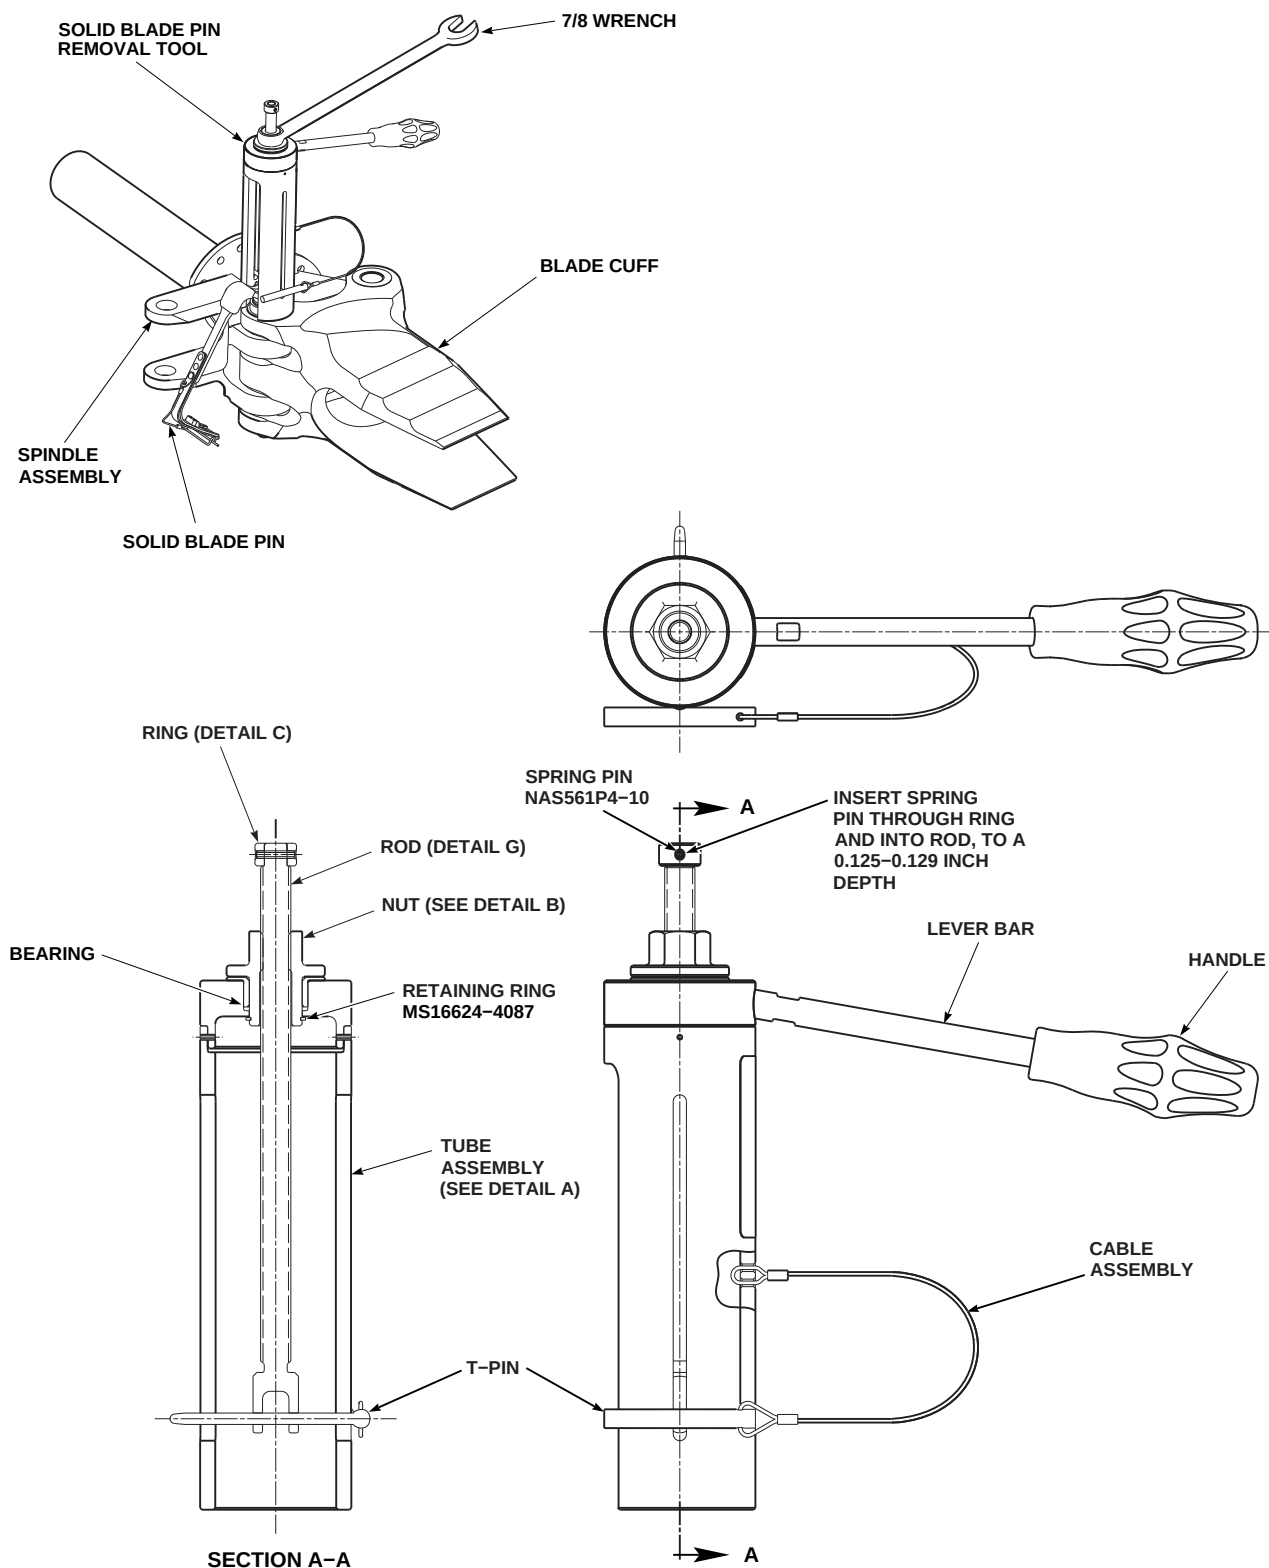


AB4352\_1  
SA

FIGURE H-266. MAIN ROTOR BLADE SOLID PIN REMOVAL TOOL (SHEET 1 OF 6)

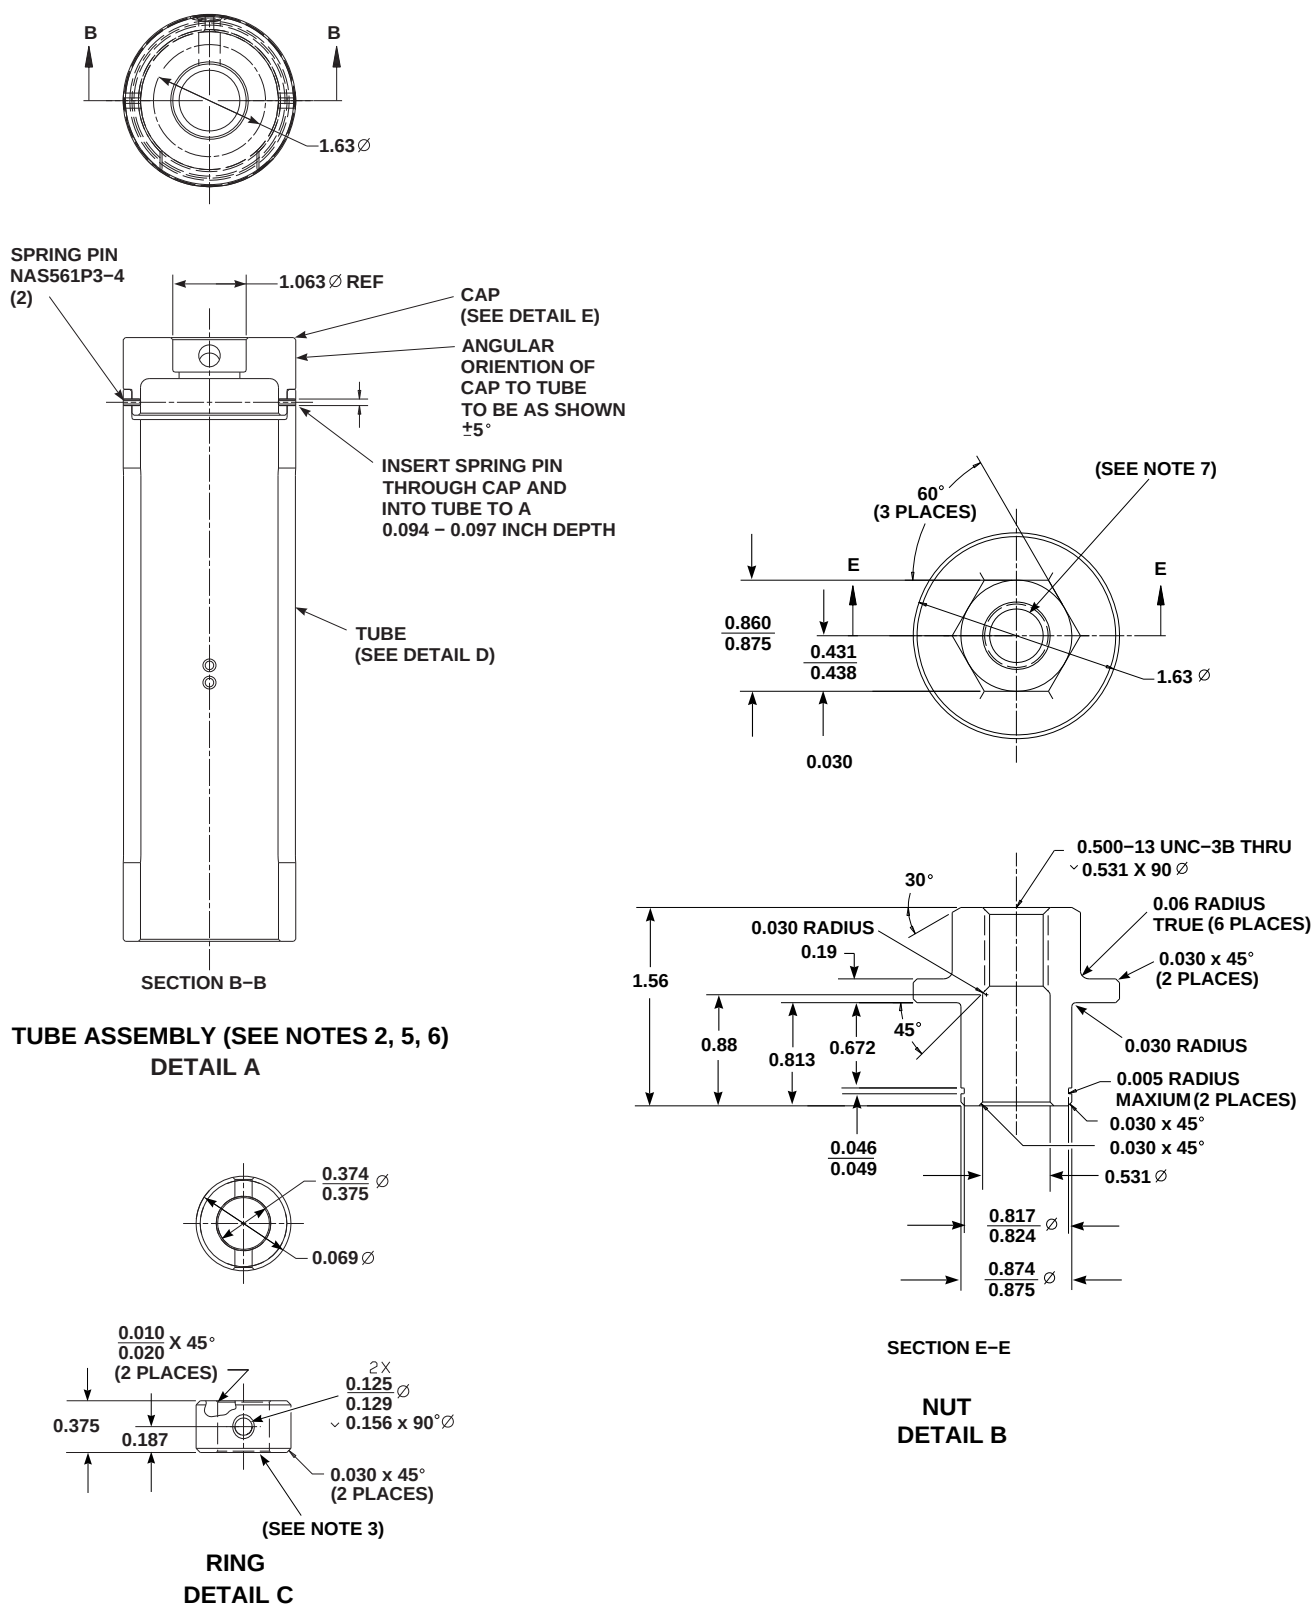


AB4352\_2  
SA



FIGURE H-266. MAIN ROTOR BLADE SOLID PIN REMOVAL TOOL (SHEET 2 OF 6)



TUBE

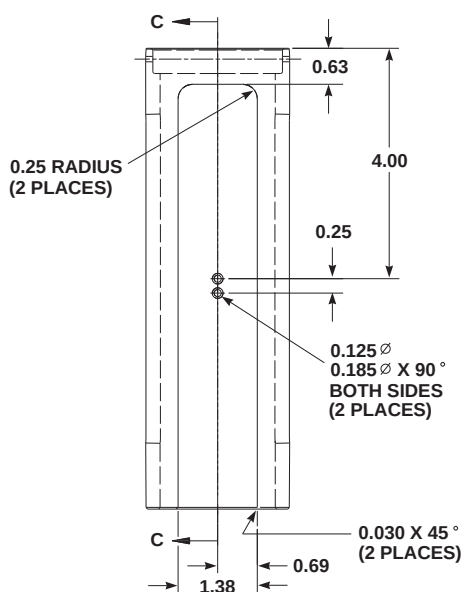

BREAK SHARP  
EDGES ALL AROUND  
1.38 WIDE SLOT

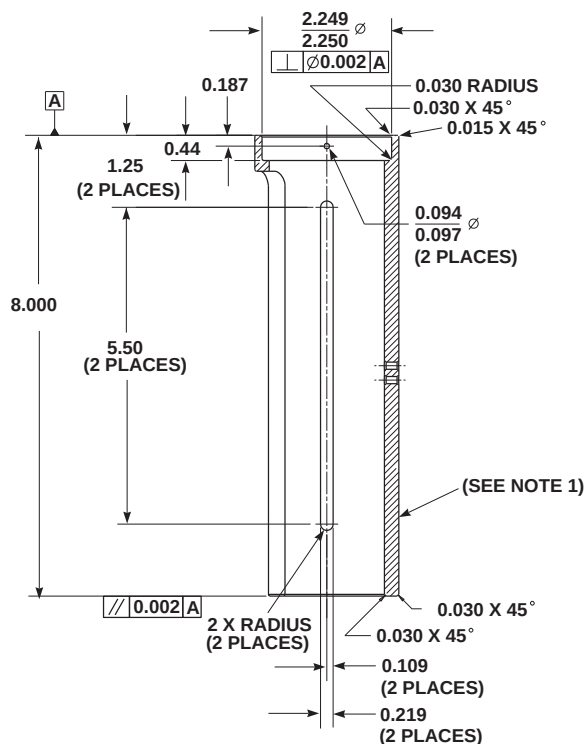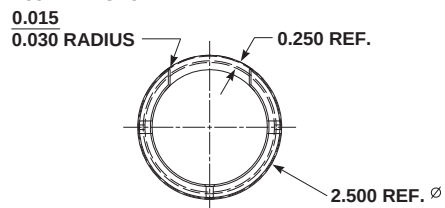


SECTION C-C

TUBE  
DETAIL D

AB4352\_3  
SA

FIGURE H-266. MAIN ROTOR BLADE SOLID PIN REMOVAL TOOL (SHEET 3 OF 6)

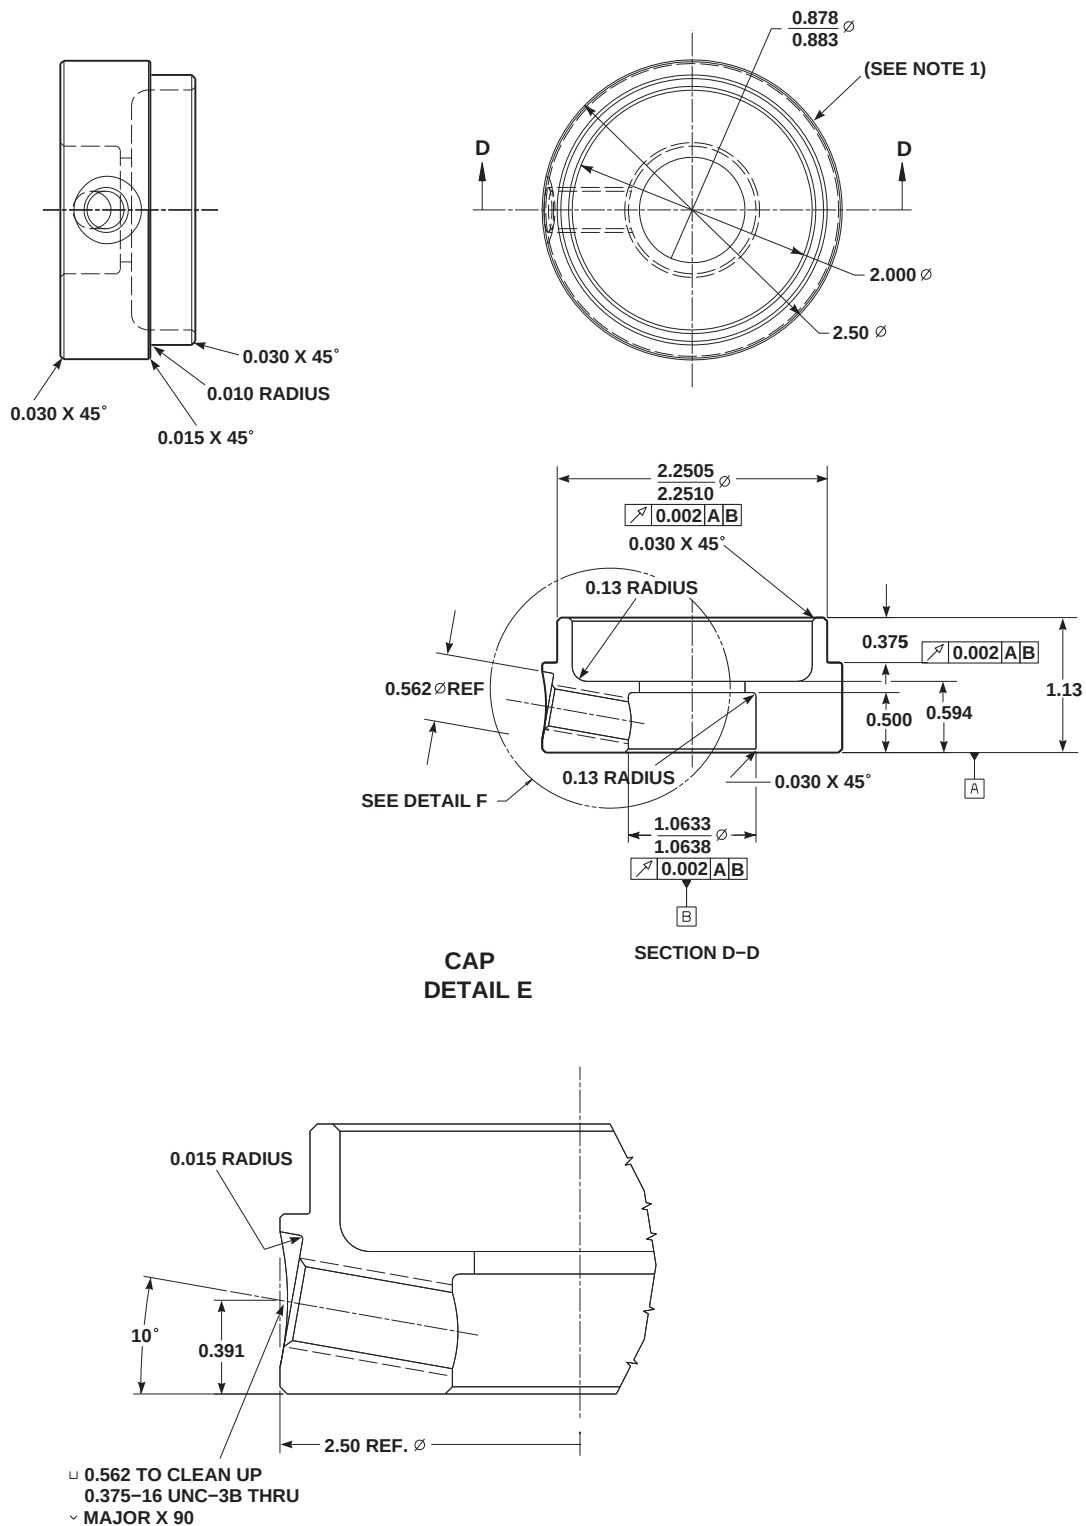


DETAIL F

AB4352\_4  
SA

FIGURE H-266. MAIN ROTOR BLADE SOLID PIN REMOVAL TOOL (SHEET 4 OF 6)



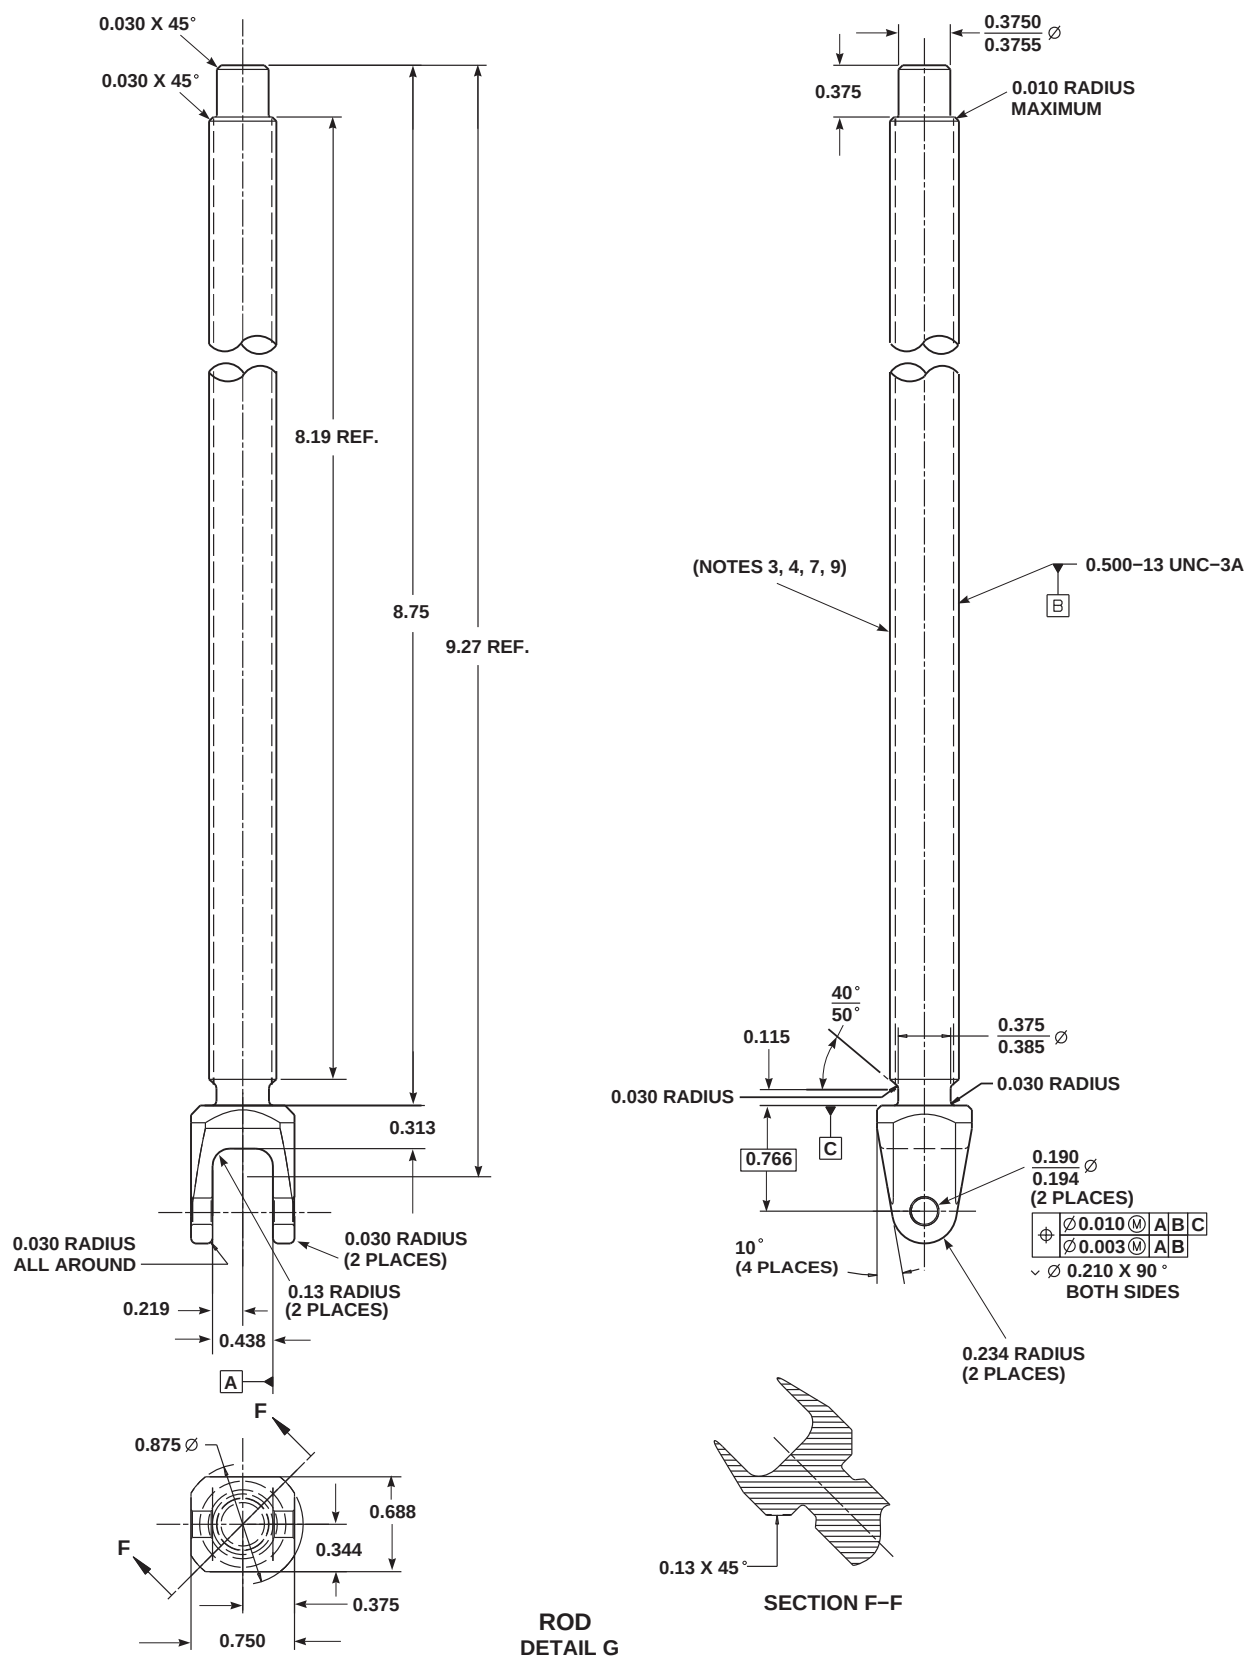

AB4352\_5  
SA

FIGURE H-266. MAIN ROTOR BLADE SOLID PIN REMOVAL TOOL (SHEET 5 OF 6)


| MAIN ROTOR BLADE REMOVAL TOOL PARTS LIST |                                                                                                                                         |          |
|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|----------|
| NOMENCLATURE                             | MATERIAL                                                                                                                                | QUANTITY |
| TUBE ASSEMBLY<br>(CONSISTS OF:)          |                                                                                                                                         | 1        |
| TUBE                                     | QQ-A-200/8 EXTRUDED SEAMLESS ALUMINUM TUBING                                                                                            | 1        |
| CAP                                      | AMS 4341 7050T73511 EXTRUSION                                                                                                           | 1        |
| SPRING PIN                               | NAS561P3-4 (CAGE 80205)                                                                                                                 | 2        |
| NUT                                      | COPPER TQ50 EXTRUSION                                                                                                                   | 1        |
| ROD                                      | AMS 6415 STEEL ALLOY                                                                                                                    | 1        |
| RING                                     | AMS 6415 STEEL ALLOY                                                                                                                    | 1        |
| BEARING                                  | M81934/2-14A014 (CAGE 81349)                                                                                                            | 1        |
| SPRING PIN                               | NAS561P4-10 (CAGE 80205)                                                                                                                | 1        |
| RETAINING RING                           | MS16624-4087 (CAGE 96906)                                                                                                               | 1        |
| T-PIN                                    | CL-1-TP (CAGE 99862)                                                                                                                    | 1        |
| LEVER BAR                                | CL-647-LVB-S (CAGE 99862)                                                                                                               | 1        |
| HANDLE                                   | CL-652-PGH (CAGE 99862)                                                                                                                 | 1        |
| CABLE ASSEMBLY                           | 3/64-INCH DIAMETER, PLASTIC COATED, 270-POUND MINIMUM BREAKING STRENGTH, 0.05-INCH OVAL SPLICE SLEEVE END LOOPS, 12.0-INCH TOTAL LENGTH | 1        |

## NOTES

1. ANODIZE PER MIL-A-8625
2. APPLY EPOXY PRIMER MIL-P-85582
3. BEFORE FINISH MACHINING, HEAT TREAT TO 150,000 PSI MINIMUM U.T.S., ROCKWELL C33-38 PER MIL-H-6875.
4. ZINC/NICKEL PLATE PER AMS 2417, TYPE 2 TO A THICKNESS RANGE OF 0.004-0.007 - INCH. BAKE IN ACCORDANCE WITH SAME REQUIREMENTS FOR CADMIUM PLATING.
5. PAINT USING MIL-C-85285, RED #11136 PER FED-STD-595
6. DO NOT PRIME OR PAINT HOLES.
7. ALL SURFACES OF REVOLUTION ON COMMON AXIS TO BE WITHIN 0.005 FIM CIRCULAR RUNOUT UNLESS INDICATED.
8. APPLY SOLID FILM LUBRICANT, MIL-L-23398 TO THREADS OF RODS.

AB4352\_6  
SA

FIGURE H-266. MAIN ROTOR BLADE SOLID PIN REMOVAL TOOL (SHEET 6 OF 6)

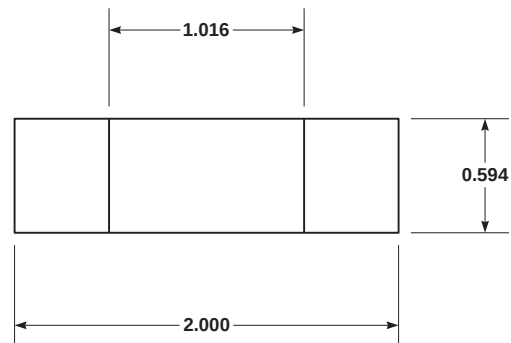**NOTES**

1. ALL DIMENSIONS ARE IN INCHES.
2. DIMENSIONAL TOLERANCES ARE  $\pm 0.010$  INCH.

AA9145  
SA**FIGURE H-267. ORIFICE ASSEMBLY GAGE**

