


Upper lid | R21 technical drawing

FILE: p4x-eye-lid-r21.stl

Quantity: 1 | Units: mm | Existing STL geometry; dimensions nominal

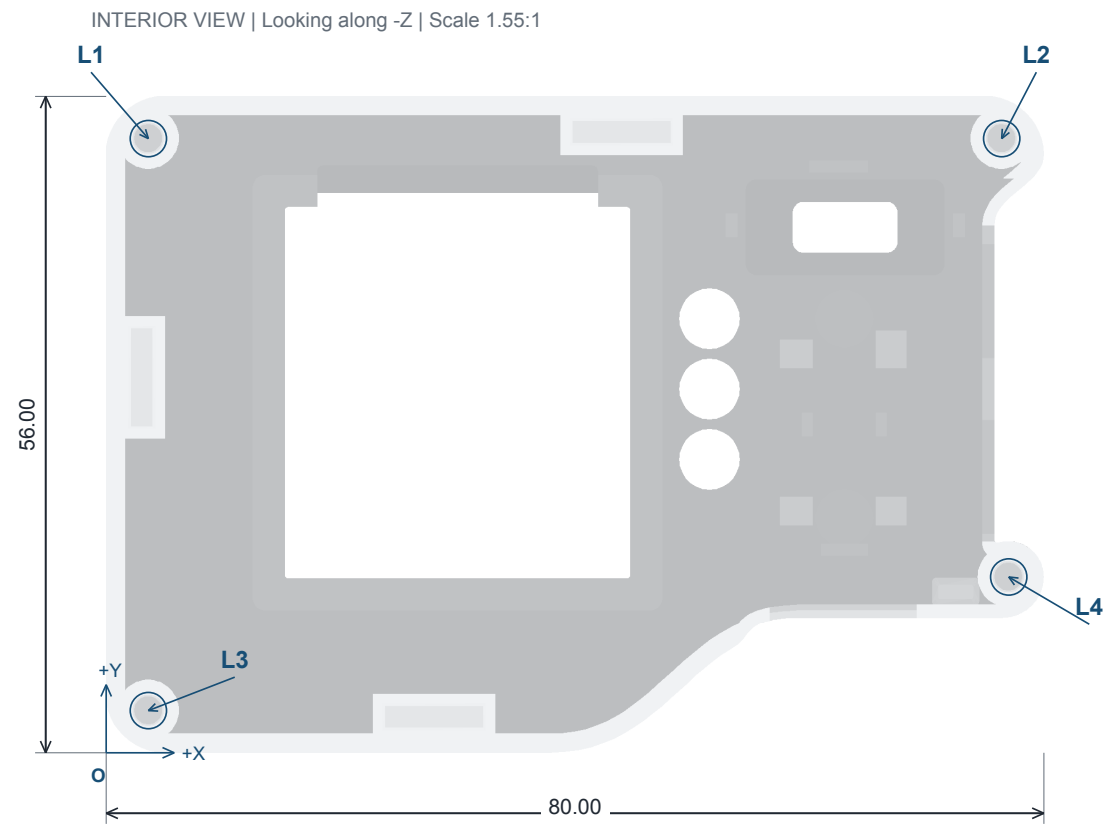

Envelope: 80.00 x 56.00 x 14.50

O / coordinates refer to the exported STL bounding box.

STL SHA-256: ea9e1a288ad7b74090aa4ff754ea1ac7b172efebec5288be108846cd4cfdbb01

4x M2 x 0.4 BONDED INSERTS

ID	X	Y	Entry Z
L1	3.60	52.40	14.50
L2	76.40	52.40	14.50
L3	3.60	3.60	14.50
L4	77.00	15.00	14.50

Insert from interior along -Z; seat flush.

EXISTING PILOT GEOMETRY

DIA 2.70 x 3.40 deep; lead-in DIA 3.10 x 0.25. DIA 2.40 tip relief to 8.00 total depth from entry face.

INSERT FIT TO BE CONFIRMED

Reference insert: DIA 3.00 x 3.20 long. Current pilots are not adhesive-fit pockets for this insert. Confirm insert, adhesive and revised pocket dimensions before printing. Do not heat-set into cured resin.

Fasteners: M2 x 8 nylon, measured under head. Keep thread and screw-tip space free of adhesive.

Keep exterior blind. Button retention ledges require no inserts. Local wheel wall 0.60; receiver web 0.80; keeper ledges 1.00. Maintain guide and LCD-seat dimensions after finish.