


Midframe | R21 technical drawing

FILE: p4x-eye-midframe-r21.stl

Quantity: 1 | Units: mm | Existing STL geometry; dimensions nominal

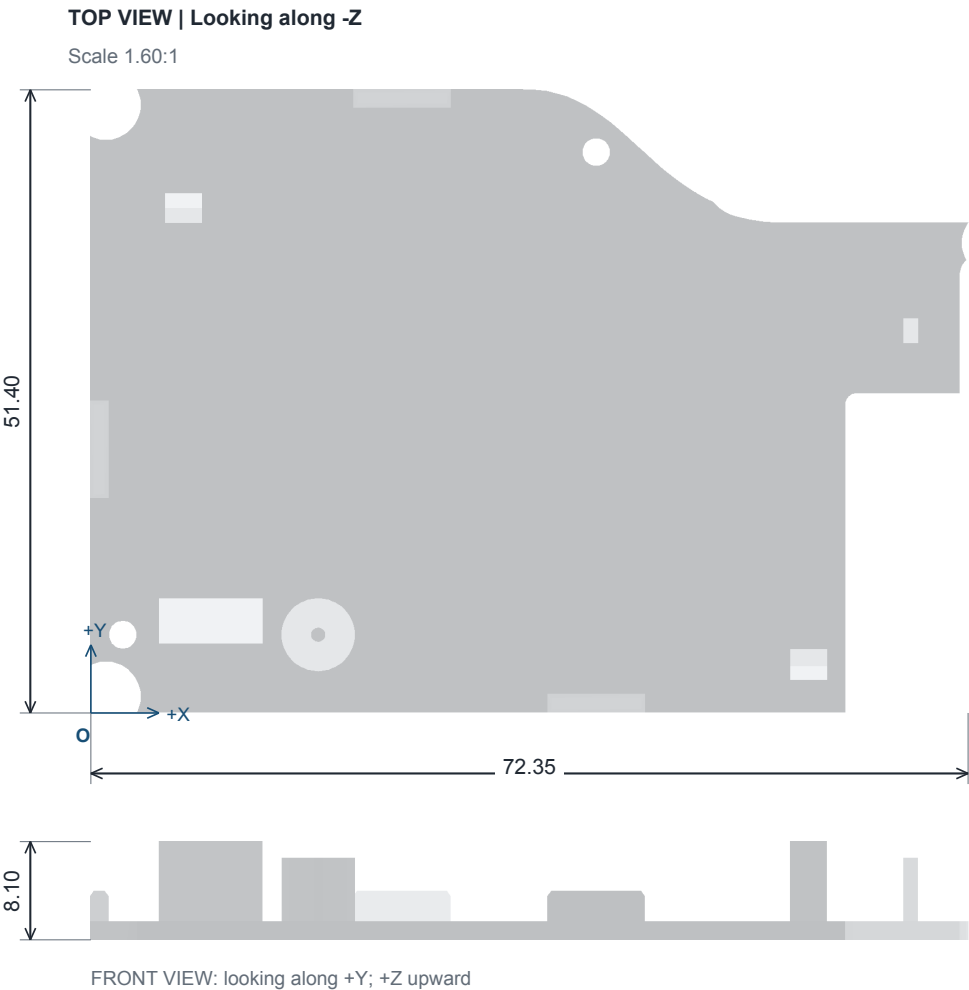

STL SHA-256: 6b338fd72d0b2ed8b6307e19eb09d51732449536974a28148f4b0e8553093e8f

PART SPECIFICATION

Dimension	Nominal
Overall X	72.35
Overall Y	51.40
Overall Z	8.10
Quantity	1
Installed inserts	None

FUNCTIONAL FEATURES

- Two DIA 2.30 clearance holes fasten to inserts in the base. Hole centers in exported XY: (2.70, 6.40), (41.70, 46.20).
- Flat battery-facing plate: 1.50 thick. Three locating keys: 1.50 thick with 2.50 engagement into the lid.
- Preserve the PCB locator, support lands and open battery-cable bay as modelled. No insert is installed in this part.
- Keep mating keys, PCB seats and screw seats free of finish buildup. Nominal lid key clearance: 0.20 per side, 0.30 at tip.