


Upper lid - four requested M2 inserts

FOR QUOTATION / INSERT FEASIBILITY REVIEW - NOT RELEASED FOR PRODUCTION

Existing R21 mesh geometry. Confirm resin-compatible M2 insert and pocket changes before manufacture.

FILE: p4x-eye-lid-r21.stl

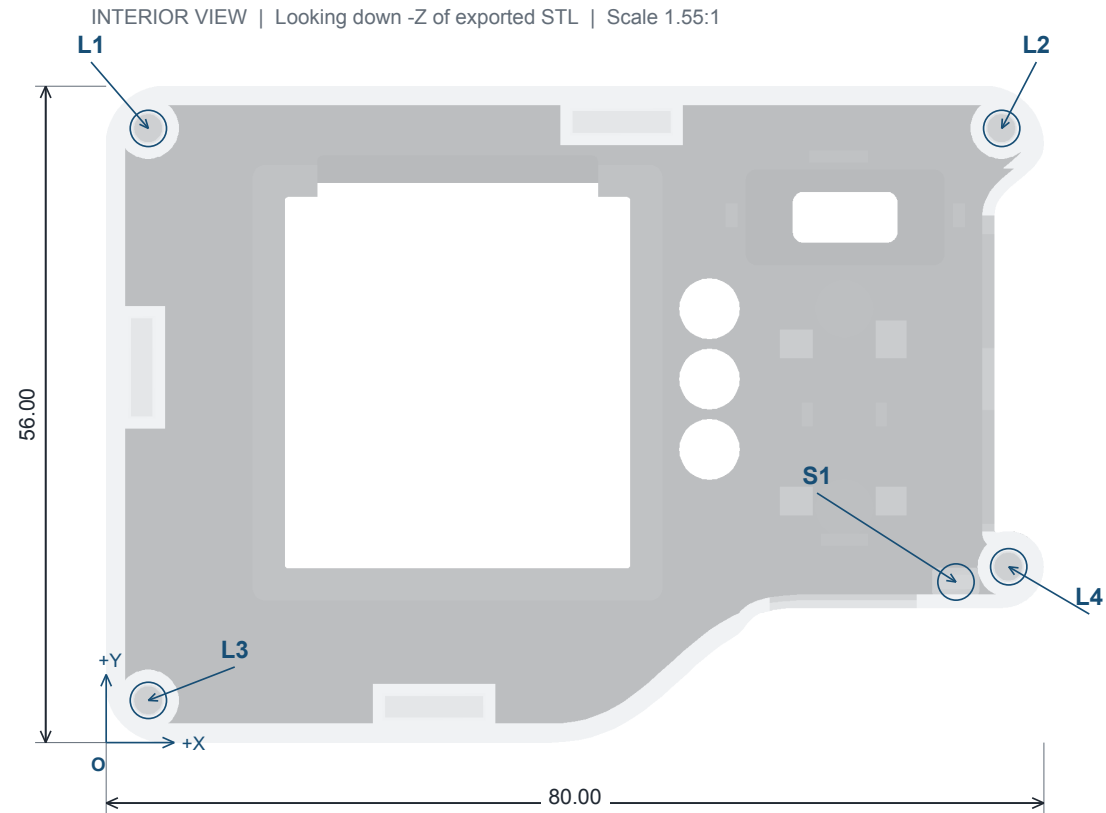

Envelope: 80.00 x 56.00 x 14.50

Origin O: exported STL X=0, Y=0. Not assembly coordinates.


STL SHA-256: ea9e1a288ad7b74090aa4ff754ea1ac7b172efebec5288be108846cd4cfd4bb01

S1 tip: X72.50 / Y13.70 / Z7.50 (exported)
3 x 1.2 contact; nominal 0.20 PCB gap in assembly.

4x M2 x 0.4 BONDED INSERTS REQUESTED

ID	X	Y	Entry Z
L1	3.60	52.40	14.50
L2	76.40	52.40	14.50
L3	3.60	3.60	14.50
L4	77.00	15.00	14.50

Installation: from interior, toward -Z in this STL.
Target: flush with each entry face; no exterior holes.

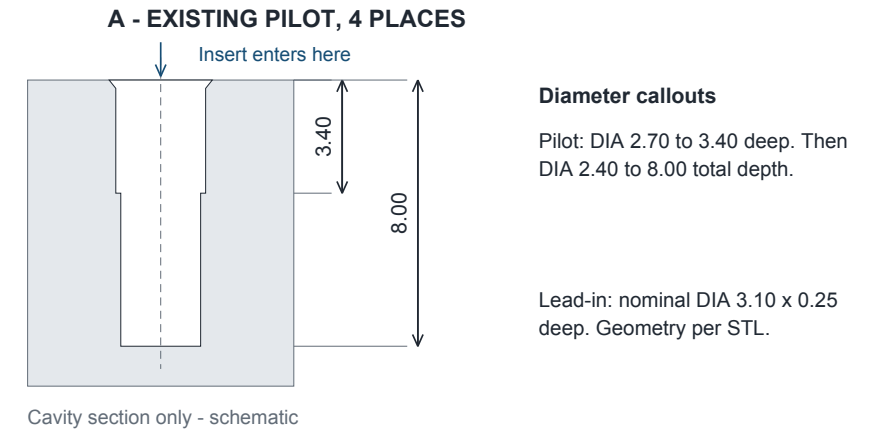


Button retention uses internal ledges; no extra inserts.

Lower case - two requested M2 inserts

FOR QUOTATION / INSERT FEASIBILITY REVIEW - NOT RELEASED FOR PRODUCTION

Existing R21 mesh geometry. Confirm resin-compatible M2 insert and pocket changes before manufacture.

FILE: p4x-eye-base-r21.stl

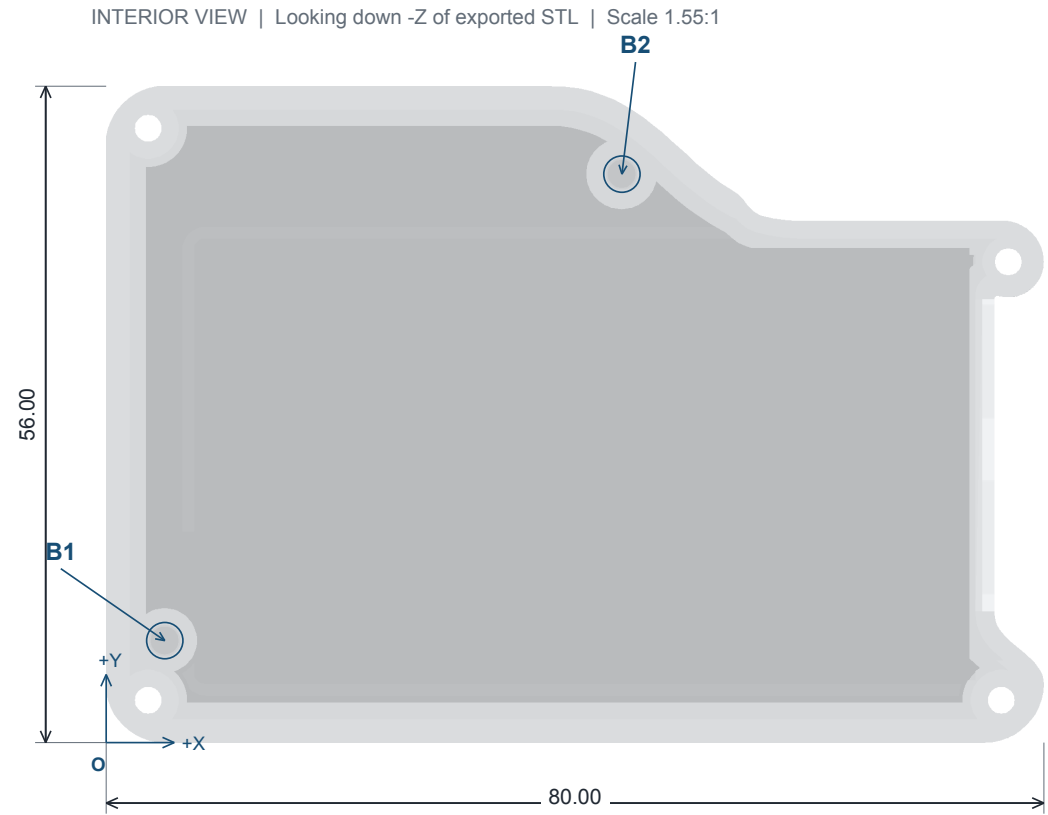

Envelope: 80.00 x 56.00 x 22.83


Origin O: exported STL X=0, Y=0; same XY as assembly.

STL SHA-256: f19430f9aaa5f246a8e07a59c4b8288e024deea481c8ded9723ba4e58b0bcf14

2x M2 x 0.4 BONDED INSERTS REQUESTED

ID	X	Y	Entry Z
B1	5.00	8.70	13.00
B2	44.00	48.50	13.00

Installation: from open case, toward -Z in this STL.
Flush post tops. B1 boss DIA 5.50; B2 boss DIA 6.00.

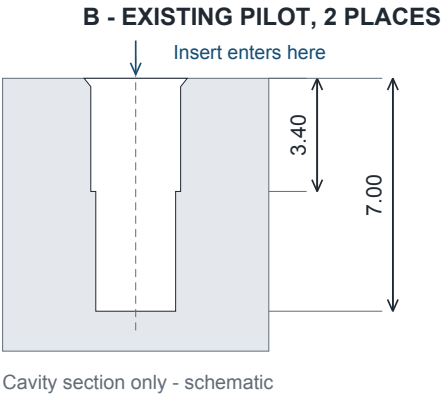

Diameter callouts

Pilot: DIA 2.70 to 3.40 deep. Then
DIA 2.40 to 7.00 total depth.

Lead-in: nominal DIA 3.10 x 0.25
deep. Geometry per STL.

The four other case fastener locations are clearance holes, not insert locations: DIA 2.30 through to interior with DIA 4.50 x 10.20 deep head wells from the underside.

Preserve the closed bottom and enclosed screw-well walls.


Button strip, keeper and supplier requirements

FOR QUOTATION / INSERT FEASIBILITY REVIEW - NOT RELEASED FOR PRODUCTION

Existing R21 mesh geometry. Confirm resin-compatible M2 insert and pocket changes before manufacture.

FILE: p4x-eye-button-strip-r21.stl

FILE: p4x-eye-button-keeper-r21.stl

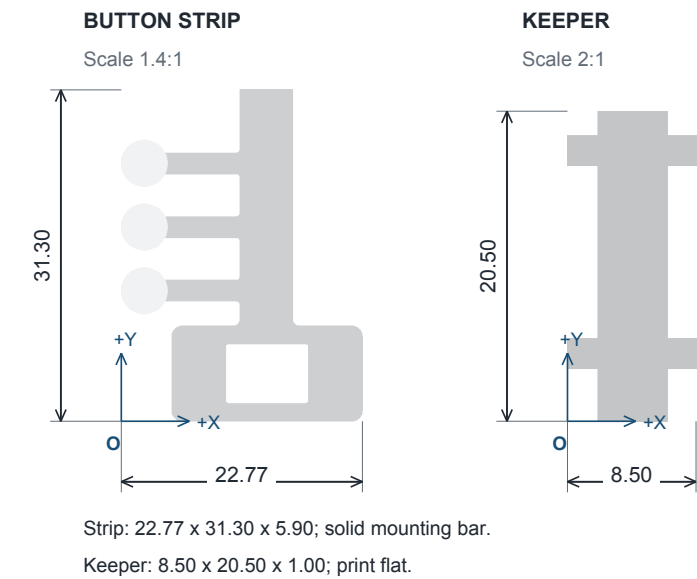

SCREWLESS RETENTION

1. Seat the strip vertically against the lid pads. Hold it there while installing the keeper.
2. Insert keeper 3.3 mm toward +Y from its seated position, then slide -Y to the stop.
3. Required: removable resin-compatible silicone bead bridging a rear keeper tab and its fixed ledge. Cure before use. Keep arms and moving controls free.

SHA-256 PREFIX Strip: 51fe0f665844da4eeb8b0f33 Keeper: ae2e127c6d4dde1122d086e5

SUPPLIER REVIEW / ORDER NOTES

1. Quantity: one each of six parts. Six inserts total, only at L1-L4 and B1-B2.
2. Request M2 x 0.4 brass inserts bonded with resin-compatible adhesive. No thermal insertion into cured resin.
3. Existing pilots are for heat-setting, not approved glue pockets. Previous hardware envelope DIA 3.00 x 3.20 long is reference only and does not fit DIA 2.70 pilots as a bonded joint.
4. Before printing, confirm insert part number, OD, length, adhesive and required hole / boss changes. Supply revised matching CAD/drawing for approval; do not silently enlarge these pockets.
5. M2 x 8 screws measured under head. Base-post screw tip has only 0.50 nominal clearance with existing stack. Keep threads and tip space free of adhesive.
6. Confirm thin-feature strength and finished fits: wheel wall 0.60; screw-well rim 0.75; button arms 0.80; receiver web 0.80; key fit 0.20 per side; button radial gap 0.40.
7. Selected online material and finish, and uploaded 3D files, take priority. Select the intended clear resin / clear finish in the order; this drawing does not override those selections.
8. Dimensions are nominal CAD references; no tighter manufacturing tolerance is imposed. Review dimensional changes from finishing. Physical fit is not verified.
9. R21: button keeper replaces the two strip screws. Its ledges carry loads; silicone prevents sliding back out. Strip float 0.15; settled button gap 0.15. No strength or physical fit validation.