


Power slider | R21 technical drawing

FILE: p4x-eye-power-slider-r21.stl

Quantity: 1 | Units: mm | Existing STL geometry; dimensions nominal

TOP VIEW | Looking along -Z

Scale 3.20:1

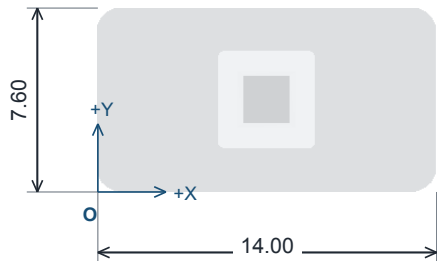

FRONT VIEW: looking along +Y; +Z upward

STL SHA-256: 0a015315a63f24862cbb357049290e7ec1ccfd520d325194817ae892d1d21d72

PART SPECIFICATION

Dimension	Nominal
Overall X	14.00
Overall Y	7.60
Overall Z	4.60
Quantity	1
Installed inserts	None

FUNCTIONAL FEATURES

- Flange: 14.00 x 7.60 x 0.80. Finger nub footprint: 6.00 x 3.80; overall height 4.60.
- Switch-handle socket: 2.00 x 2.00, with 2.40 square entry lead-in. Preserve socket and sliding surfaces.
- No holes for screws, threads or inserts. Retained inside the lid by the button-strip shelf.
- Guide clearance: 0.30 lateral and nominal 0.20 above / below flange in assembly. Keep finish off functional sliding faces.