


Upper lid - four requested M2 inserts

FOR QUOTATION / INSERT FEASIBILITY REVIEW - NOT RELEASED FOR PRODUCTION

Existing R17 mesh geometry. Confirm resin-compatible M2 insert and pocket changes before manufacture.

FILE: p4x-eye-lid-r17.stl

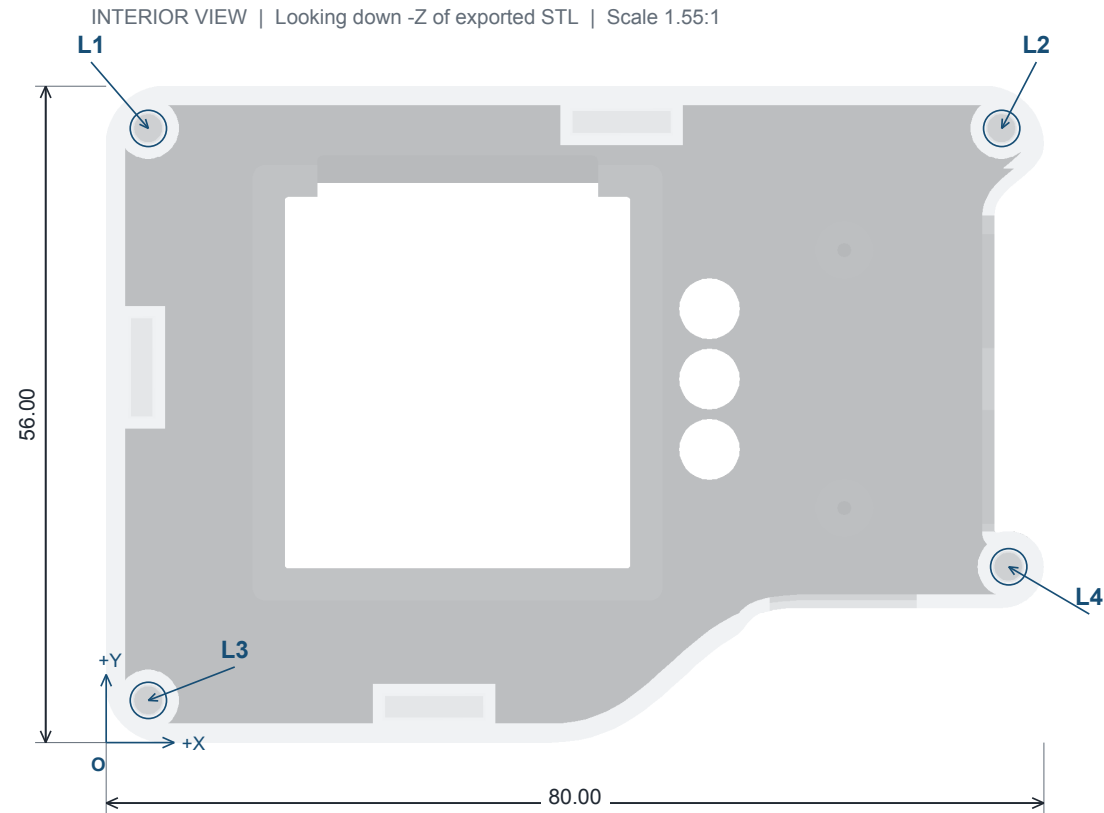

Envelope: 80.00 x 56.00 x 14.50


Origin O: exported STL X=0, Y=0. Not assembly coordinates.

STL SHA-256: 0806975ce311323940042949a5debed494ac95fd14c07ee2fbe832247bb23305

4x M2 x 0.4 BONDED INSERTS REQUESTED

ID	X	Y	Entry Z
L1	3.60	52.40	14.50
L2	76.40	52.40	14.50
L3	3.60	3.60	14.50
L4	77.00	15.00	14.50

Installation: from interior, toward -Z in this STL.
Target: flush with each entry face; no exterior holes.

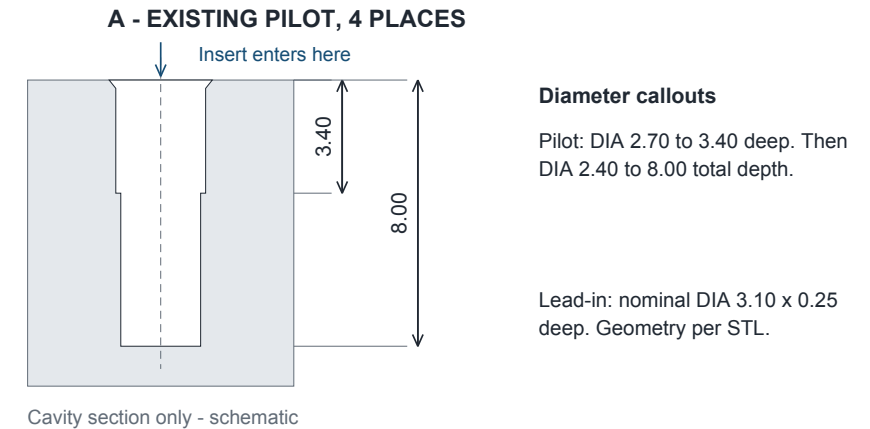


Do not add inserts to the two small button-anchor pilots.

Lower case - two requested M2 inserts

FOR QUOTATION / INSERT FEASIBILITY REVIEW - NOT RELEASED FOR PRODUCTION

Existing R17 mesh geometry. Confirm resin-compatible M2 insert and pocket changes before manufacture.

FILE: p4x-eye-base-r17.stl

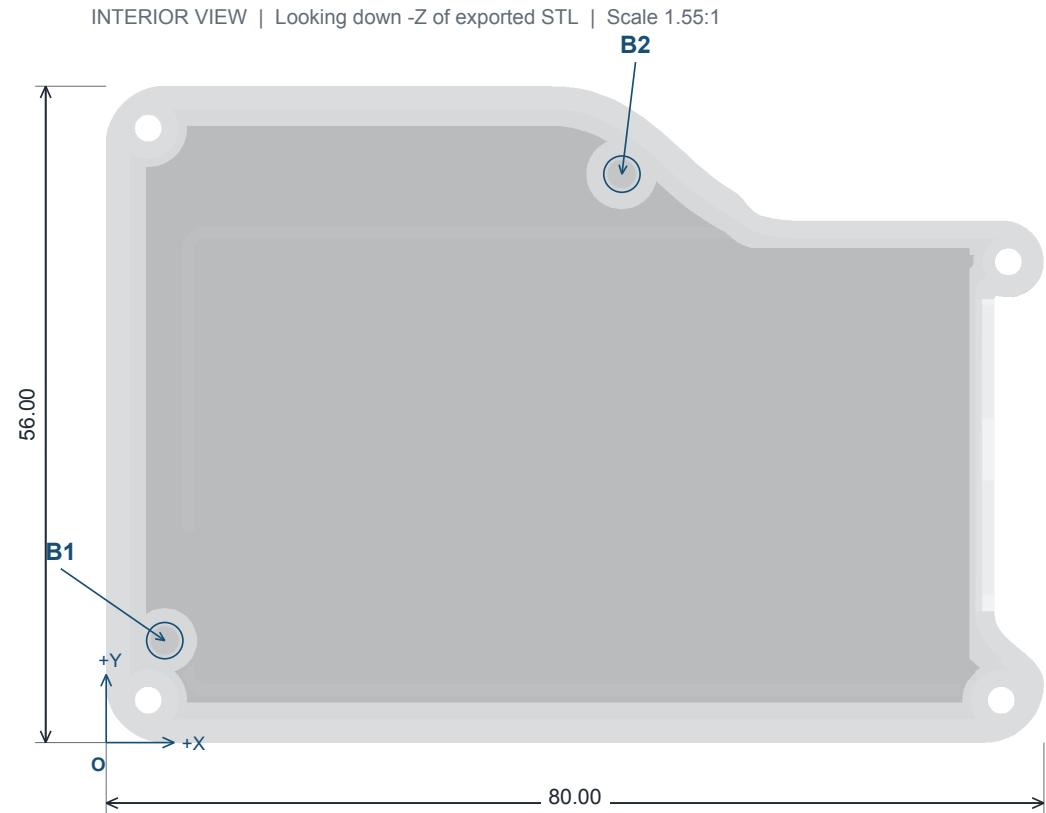

Envelope: 80.00 x 56.00 x 22.83


Origin O: exported STL X=0, Y=0; same XY as assembly.

STL SHA-256: f19430f9aaa5f246a8e07a59c4b8288e024deea481c8ded9723ba4e58b0bcf14

2x M2 x 0.4 BONDED INSERTS REQUESTED

ID	X	Y	Entry Z
B1	5.00	8.70	13.00
B2	44.00	48.50	13.00

Installation: from open case, toward -Z in this STL.
Flush post tops. B1 boss DIA 5.50; B2 boss DIA 6.00.

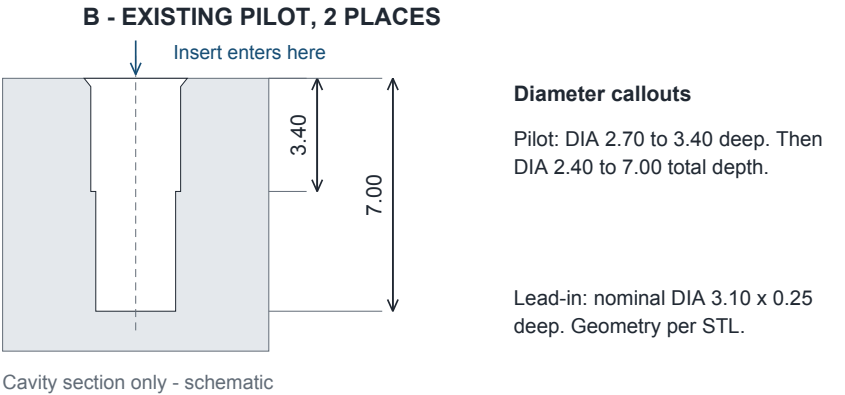

The four other case fastener locations are clearance holes, not insert locations: DIA 2.30 through to interior with DIA 4.50 x 10.20 deep head wells from the underside.


Preserve the closed bottom and enclosed screw-well walls.

Midframe, button strip and installation requirements

FOR QUOTATION / INSERT FEASIBILITY REVIEW - NOT RELEASED FOR PRODUCTION

Existing R17 mesh geometry. Confirm resin-compatible M2 insert and pocket changes before manufacture.

FILE: p4x-eye-midframe-r17.stl
FILE: p4x-eye-button-strip-r17.stl

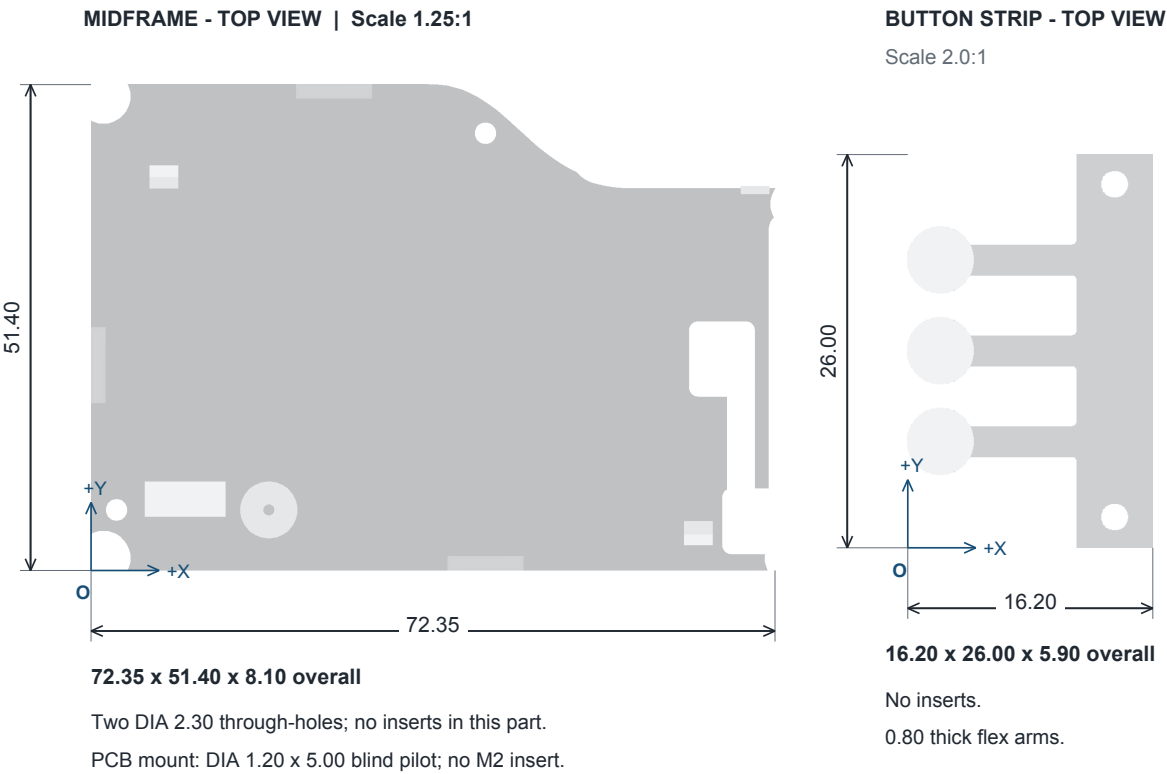

SUPPLIER REVIEW / ORDER NOTES

- Quantity: one each of four parts. Six inserts total, only at L1-L4 and B1-B2.
- Request M2 x 0.4 brass inserts bonded with resin-compatible adhesive. No thermal insertion into cured resin.
- Existing pilots are for heat-setting, not approved glue pockets. Previous hardware envelope DIA 3.00 x 3.20 long is reference only and does not fit DIA 2.70 pilots as a bonded joint.
- Before printing, confirm insert part number, OD, length, adhesive and required hole / boss changes. Supply revised matching CAD/drawing for approval; do not silently enlarge these pockets.
- M2 x 8 screws measured under head. Base-post screw tip has only 0.50 nominal clearance with existing stack. Keep threads and tip space free of adhesive.
- Confirm thin-feature strength and finished fits: wheel wall 0.60; screw-well rim 0.75; button arms 0.80; receiver web 0.80; key fit 0.20 per side; button radial gap 0.40.
- Selected online material and finish, and uploaded 3D files, take priority. Select the intended clear resin / clear finish in the order; this drawing does not override those selections.
- Dimensions are nominal CAD references; no tighter manufacturing tolerance is imposed. Review dimensional changes from finishing. Physical fit is not verified.

FILE IDENTITY - SHA-256 PREFIX (full hashes in export-manifest.json)

Midframe: 897106fece66305dd513236b Button strip: 1e8cdc7aaafc9bf07f8f8e93

Views are derived from the final R17 STL meshes. Review document; no geometry was changed to create this drawing.