

Table 4.1: Internal compression elements





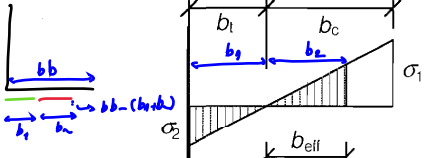


Stress distribution (compression positive)				Effective ^p width b_{eff}		
				$\psi = 1$: $b_{eff} = \rho \bar{b}$ $b_{e1} = 0,5 b_{eff}$ $b_{e2} = 0,5 b_{eff}$		
				$1 > \psi \geq 0$: $b_{eff} = \rho \bar{b}$ $b_{e1} = \frac{2}{5 - \psi} b_{eff}$ $b_{e2} = b_{eff} - b_{e1}$		
				$\psi < 0$: $b_{eff} = \rho b_c = \rho \bar{b} / (1 - \psi)$ $b_{e1} = 0,4 b_{eff}$ $b_{e2} = 0,6 b_{eff}$		
$\psi = \sigma_2 / \sigma_1 \rightarrow \text{comp}$	1	$1 > \psi > 0$	0	$0 > \psi > -1$	-1	$\frac{AC_1}{AC_1} - 1 > \psi \geq -3 \frac{AC_1}{AC_1}$
Buckling factor k_σ	4,0	$8,2 / (1,05 + \psi)$	7,81	$7,81 - 6,29\psi + 9,78\psi^2$	23,9	$5,98 (1 - \psi)^2$

Table 4.2: Outstand compression elements

Stress distribution (compression positive)		Effective ^p width b_{eff}				
		$1 > \psi \geq 0$: <i>70 bk 4.1 - b_{eff} (b, rho, ff)</i> $b_{eff} = \rho c$				
		$\psi < 0$: $b_{eff} = \rho b_c = \rho c / (1 - \psi)$				
$\psi = \sigma_2 / \sigma_1$	1	0	-1	$1 \geq \psi \geq -3$		
Buckling factor k_σ	0,43	0,57	0,85	$0,57 - 0,21\psi + 0,07\psi^2$		
		$1 > \psi \geq 0$: $b_{eff} = \rho c$				
		$\psi < 0$: $b_{eff} = \rho b_c = \rho c / (1 - \psi)$				
$\psi = \sigma_2 / \sigma_1$	1	$1 > \psi > 0$		0	$0 > \psi > -1$	-1
Buckling factor k_σ	0,43	$0,578 / (\psi + 0,34)$		1,70	$1,7 - 5\psi + 17,1\psi^2$	23,8