


HT MICRON SEMICONDUTORES S.A.

Av. Unisinos, 1550 | 93022-750 | São Leopoldo | RS | Brasil

www.htmicron.com.br



iMCP HT32SX



Sigfox System in Package

Code: iMCPHT32SX-001 – V2.1

Doc. Type: Datasheet

Date: 18/11/2019

Revision: V.03


Classification: PUBLIC

This document is a property of HT Micron and cannot be reproduced without its consent.

HT Micron does not assume any responsibility for use of what is described.


This document is subject to change without notice.

No patent licenses are implied.

	iMCP HT32SX		iMCPHT32SX-001 – V2.1
	Datasheet	18/11/2019	V.03

SUMMARY

SUMMARY	1
DOCUMENT INFO	2
REVISION.....	2
1. GENERAL DESCRIPTION	3
2. FEATURES AND BENEFITS	3
3. APPLICATIONS.....	4
4. ORDERING INFORMATION	4
5. MARKING	4
6. BLOCK DIAGRAM.....	5
7. PINNING INFORMATION	6
7.1.....	6
7.2 PIN DIAGRAM.....	6
7.3 PIN DESCRIPTION.....	6
8. STATIC CHARACTERISTICS.....	8
8.1 GENERAL OPERATING RANGE	8
8.2 POWER CONSUMPTION.....	8
8.3 CLOCK SOURCE	9
9 RF CHARACTERISTICS	10
10 PACKAGE OUTLINE.....	11
11 SUGGESTED PCB FOOTPRINT	12
12 ABBREVIATIONS.....	13


	iMCP HT32SX		iMCPHT32SX-001 – V2.1
	Datasheet	18/11/2019	V.03

DOCUMENT INFO

This document supplies information about the iMCP SiP.

REVISION

Version	History	Date	Authors
00	- Initial draft	08/10/2019	Bárbara Souza
01	Included features, pinning information, static and RF characteristics	07/11/2019	Bárbara Souza
02	Block diagram and pinning information actualization	12/11/2019	Felipe Kalinski
03	Included package outline	18/11/2019	Bárbara Souza


	iMCP HT32SX		iMCPHT32SX-001 – V2.1
	Datasheet	18/11/2019	V.03

1. GENERAL DESCRIPTION

iMCP – HT32SX is a Multicomponent Integrated Circuit (MCO) designed to provide a ready-to-use connectivity solution for Internet of Things (IoT) applications. It provides both uplink (transmit) and downlink (receive) communications, and it is the first HT Micron product in a new family of non-memory component. Its small dimensions, high performance and low power consumption targets the best experience for IoT developers. The system combines an ARM Cortex M0+ 32bit (STM32L052x8) and the ST Microelectronics S2-LP low power transceiver combining all the advantages, integration and convenience of advanced semiconductor packaging technology into a single chip.

2. FEATURES AND BENEFITS

- Key features
 - Enables operations in the SIGFOX™
 - Multizone worldwide operation – MONARCH feature
 - Integrated 50 MHz crystal
 - 32-bit ARM Cortex M0+
 - 64 KB flash - Other options will be available on demand
 - 8 KB RAM
 - TX output power up to +22 dBm
 - RX sensitivity: - 128 dBm
- Power consumption
 - 17.7 mA RX
 - 166.5 mA TX @ 20 dBm, 902.2MHz
- RF
 - S2-LP Transceiver STMicroelectronics
 - RF Front-End Module (for high efficiency in all frequency bands)
 - Frequency bands:
 - 413-479 MHz
 - 452-527 MHz
 - 826-958 MHz
 - 904-1055 MHz
 - Modulation schemes:
 - DBPSK, 2(G)FSK, OOK, ASK
 - Data Rate:
 - Up to region: 100bps or 600bps
- Interface
 - Up 21 General-Purpose Input/Output (GPIO) pins, with configurable pull-up/pull-down resistors
 - 12-bit ADC
 - 12-bit 1 channel DAC
 - 2 USART, LPUART, USB 2.0, I²C
- Single power supply: 2.7 V to 3.6 V
- Operating temperature range: -20°C to +75°C
- External antenna
- 13x13x1.35mm LGA – 32 pads package
- Part number: HT32SX

	iMCP HT32SX		iMCPHT32SX-001 – V2.1
	Datasheet	18/11/2019	V.03

3. APPLICATIONS

- Smart home
- Wireless alarm systems
- Manufacturing
- Agriculture
- Building automation
- Smart metering
- Smart lighting systems

4. ORDERING INFORMATION

TABLE 1. ORDERING INFORMATION

Type number	Package		
	Name	Description	Version
	iMCP HT32SX	SIP module in LGA package; body 13mm x 13mm	

5. MARKING

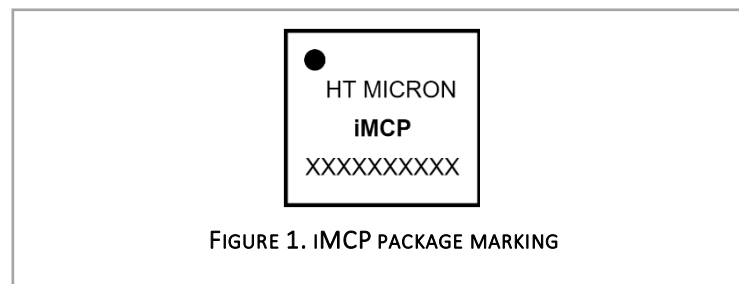



FIGURE 1. iMCP PACKAGE MARKING

	iMCP HT32SX		iMCPHT32SX-001 – V2.1
	Datasheet	18/11/2019	V.03

6. BLOCK DIAGRAM



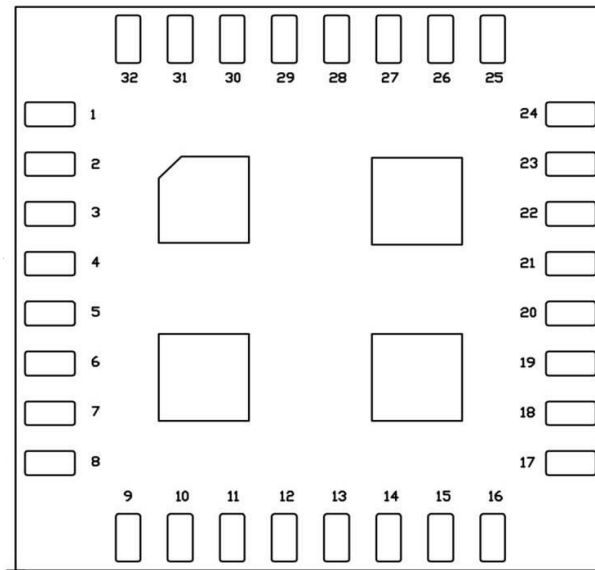


FIGURE 2. SIMPLIFIED BLOCK DIAGRAM

	iMCP HT32SX		iMCPHT32SX-001 – V2.1
	Datasheet	18/11/2019	V.03


7. PINNING INFORMATION

7.2 Pin Diagram

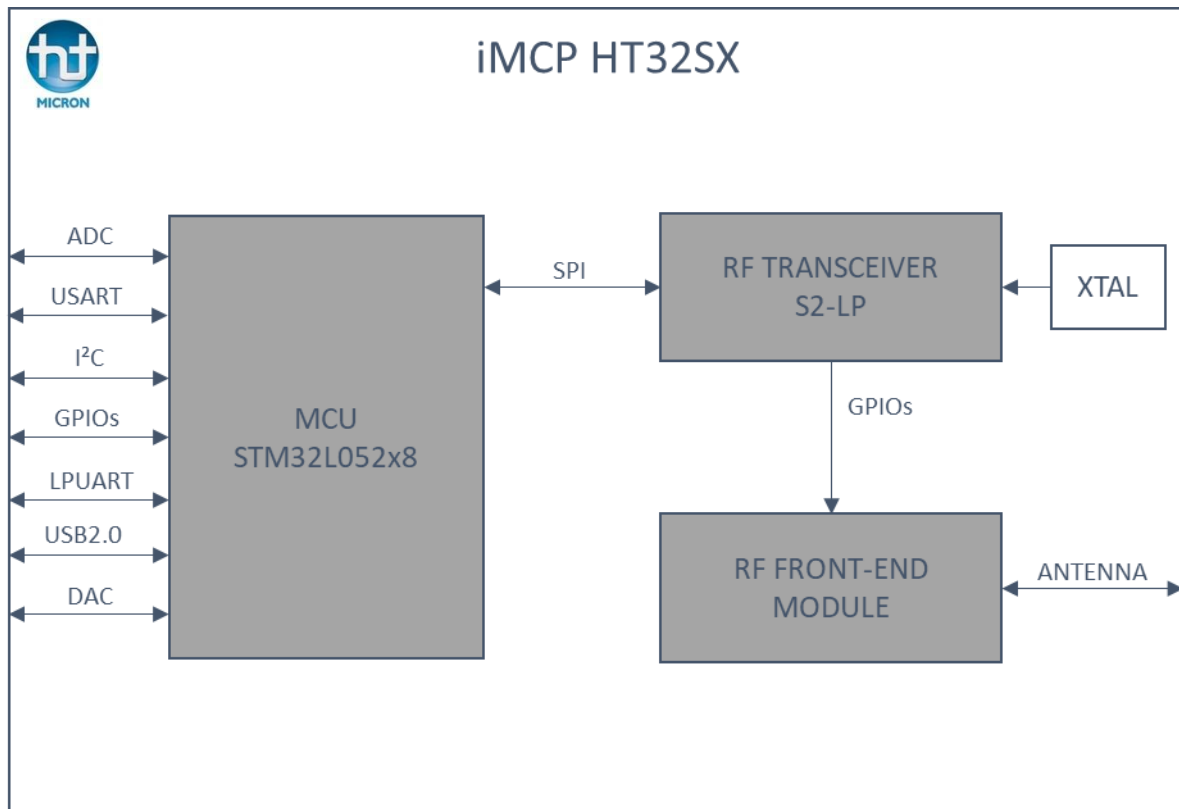

7.3 Pin description

Number	Symbol	Pin name	Pin Type	Description
1	GND	GND	Ground	Exposed pad connected to the ground of the application board
2	VDD_3.3V	VDD_3.3V	Power	3.3 V power supply
3	GND	GND	Ground	Exposed pad connected to the ground of the application board
4	MCU-PA2	USART2_TX	Digital I/O	USART interface
		ADC_IN2	Analog I	ADC external input 2
		TIM21_CH3	Digital I/O	General-purpose timer
		TIM2_CH3	Digital I/O	General-purpose timer
5	MCU-PB0	ADC_IN0	Analog I	ADC external input 2
		VREF_OUT	Analog I/O	Output reference voltage
6	MCU-PB5	I2C1_SMBA	Digital I/O	I2C interface
		LPTIM1_IN1	Digital I/O	Low-power timer
		TIM22_CH2	Digital I/O	General-purpose timer
7	MCU-PB6	USART1_TX	Digital I/O	USART interface
		I2C1_SCL	Digital I/O	I2C interface
		LPTIM1_ETR	Digital I/O	Low-power timer
8	MCU-PB7	USART1_RX	Digital I/O	USART interface
		I2C1_SDA	Digital I/O	I2C interface
		LPTIM1_IN2	Digital I/O	Low-power timer
9	OSC32OUT	OSC32OUT		External clock source pins
10	OSC32IN	OSC32IN		

	iMCP HT32SX		iMCPHT32SX-001 – V2.1
	Datasheet	18/11/2019	V.03

11	GND	GND	Ground	Exposed pad connected to the ground of the application board
12	NRESET	NRESET	I/O	Bidirectional reset pin with embedded weak pull-up resistor
13	MCU-PA14	SWCLK	Digital O	Serial wire clock output
		USART2_TX	Digital I/O	USART interface
14	MCU-PA13	SWDIO	Digital I/O	Serial wire
		USB_NOE	Digital I/O	USB
15	MCU-PA9	USART1_RX	Digital I/O	Serial wire
16	MCU-PA10	USART1_TX	Digital I/O	
17	MCU-PA12	USART1_RTS_DE	Digital I/O	USART interface
		USB_DP	Digital I/O	USB
		EVENT_OUT	Digital I/O	
18	MCU-PB1	LPUART1_RTS_DE	Digital I/O	Low-power USART interface
		ADC_IN9	Analog I	ADC external input 9
		VREF_OUT	Analog O	1.2 V VCO-LDO band-gap reference voltage decoupling
19	GND	GND	Ground	Exposed pad connected to the ground of the application board
20	MCU-PA11	USART1_CTS	Digital I/O	USART interface
		USB_DM	Digital I/O	USB
		COMP1_OUT	Analog O	Comparator output
		EVENT_OUT	Digital I/O	
21	MCU-PB11	LPUART1_RX	Digital I/O	Low-power USART interface
		TIM2_CH4	Digital I/O	General-purpose timer
		EVENTOUT	Digital I/O	
22	MCU-PA8	USART1_CK	Digital I/O	USART interface
		USB_CSR_SYNC	Digital I/O	
		EVENT_OUT	Digital I/O	
23	MCU-PB10	LPUART1_TX	Digital I/O	USART interface
		TIM2_CH3	Digital I/O	General-purpose timer
24	GND	GND	Ground	Exposed pad connected to the ground of the application board
25	ANTENNA	ANTENNA	RF I/O	RF input and output signal
26	GND	GND	Ground	Exposed pad connected to the ground of the application board
27	MCU-PB2	LPTM1_OUT	Digital I/O	Low-power timer
28	MCU-PA6	LPUART1_CTS	Digital I/O	USART interface
		ADC_IN6	Analog I	ADC external input 6
		TIM22_CH1	Digital I/O	General-purpose timer
		COMP1_OUT	Analog O	Comparator output
		EVENT_OUT	Digital I/O	
29	MCU-PA4	USART2_CK	Digital I/O	USART interface
		ADC_IN4	Analog I	ADC external input 4
		DAC_OUT	Analog O	DAC analog output
		TIM22_ETR	Digital I/O	General-purpose timer
		COMP1_INM4	Analog I	Comparator input
30	MCU-PA5	ADC_IN5	Analog I	ADC external input 5

	iMCP HT32SX		iMCPHT32SX-001 – V2.1
	Datasheet	18/11/2019	V.03

		ADC_IN3	Analog I	ADC external input 3
		TIM2_CH1	Digital I/O	General-purpose timer
		TIM2_ETR	Digital I/O	General-purpose timer
31	MCU-PA3	USART2_RX	Digital I/O	USART interface
		ADC_IN3	Analog I	ADC external input 3
		TIM2_CH4	Digital I/O	General-purpose timer
		TIM21_CH2	Digital I/O	General-purpose timer
		USART2_RTS_DE	Digital I/O	USART interface
		ADC_IN1	Analog I	ADC external input 1
32	MCU-PA1	COMP1_IMP	Analog I	Comparator input
		TIM21_ETR	Digital I/O	General-purpose timer
		EVENT_OUT	Digital I/O	
Central pins	GND	GND	Ground	Exposed pad connected to the ground of the application board

8. STATIC CHARACTERISTICS

8.1 General operating range

TABLE 2. GENERAL OPERATING CONDITIONS

Parameter	Conditions	Min	Typ.	Max	Unit
Internal XTAL frequency	-	-	-	50	MHz
Supply voltage	-	2.6	3.3	3.6	V
Operating temperature	-	-20	-	75	°C
Storage temperature	-	-	25	-	°C

8.2 Power consumption

Characteristics measured over recommended operating conditions unless otherwise specified. Typical values are referred to 25 °C temperature, VDD = 3.3 V.

TABLE 3. STATIC CHARACTERISTICS: LOW-POWER STATE POWER CONSUMPTION TA = 25 °C, VDD = 3.3 V, 50 MHz CRYSTAL OSCILLATOR.

Parameter	Conditions	Min	Typ.	Max	Unit
Supply current	Shutdown	-	-	-	nA
	Standby	-	57.6	-	mA
	Sleep	-	43.1	-	uA
	Deep sleep	-	-	8	uA

	iMCP HT32SX		iMCPHT32SX-001 – V2.1
	Datasheet	18/11/2019	V.03

TABLE 4. STATIC CHARACTERISTICS: POWER CONSUMPTION IN RECEPTION TA = 25 °C, VDD = 3.3 V, FC = 905 MHz

Parameter	Conditions	Min	Typ.	Max	Unit
Supply current	RX @ -102 sensitivity level	-	17.7	-	mA

TABLE 5. STATIC CHARACTERISTICS: POWER CONSUMPTION IN TRANSMISSION TA = 25 °C, VDD = 3.3 V, FC = 902.2 MHz

Parameter	Conditions	Min	Typ.	Max	Unit
Supply current	TX CW @ 22 dBm	-	175.1	-	mA
	TX CW @ 10 dBm	-	75.5	-	


TABLE 6. STATIC CHARACTERISTICS: POWER CONSUMPTION IN TRANSMISSION TA = 25 °C, VDD = 3.3 V, FC = 865.2MHz

Parameter	Conditions	Min	Typ.	Max	Unit
Supply current	TX CW @ 16 dBm	-	104.8	-	mA
	TX CW @ 8 dBm	-	71	-	

8.3 Clock source

TABLE 7. 50 MHz INTERNAL XTAL CLOCK SOURCE CHARACTERISTICS

Parameter	Conditions	Min	Typ.	Max	Unit
Nominal frequency	-	-	50	-	MHz
Frequency tolerance	-20°C to 75 °C	-10	-	+10	ppm
Load capacitance	-	-	6	-	pF
Motional resistance (ESR)	-	-	-	60	Ω


	iMCP HT32SX		iMCPHT32SX-001 – V2.1
	Datasheet	18/11/2019	V.03

9 RF CHARACTERISTICS


TABLE 8. TRANSCEIVER AND RECEIVER CHARACTERISTICS

TA = 25°C based on characterization; not tested in production. VDD = 3.3V; All RX measurements made at the antenna connector, to a bit error rate (BER) limit of 1%.


Parameter		Min	Typ.	Max	Unit
RF Characteristics					
RF Frequency	TX	865	902.2	924	MHz
	RX	869	905.2	923	MHz
Tx max. output power		22	-	24	dBm
Tx power variation vs. temperature	-40°C to +85°C	-	-	-	dB
Emission 2nd Harmonics (conducted)		-	-33	-	dBc
Emission 3rd Harmonics (conducted)		-	-41	-	
Emission 4th harmonic			-58		
Data Rate	TX (RC1, RC3, RC5, RC6)	-	100	-	bps
	TX (RC2, RC4)	-	600	-	bps
	RX (All RCZ)	-	600	-	bps
Load Impedance			50		Ohm
Rx Sensitivity(@600bps, GFSK)			-128		dBm
Rx Spurious Emission (30MHZ~12.75GHZ)		-	-	-	dBm
Rx Blocking at 10MHz offset		-	-	-	dB
RSSI Resolution		-	1	-	dB

	iMCP HT32SX		iMCPHT32SX-001 – V2.1
	Datasheet	18/11/2019	V.03


10 PACKAGE OUTLINE

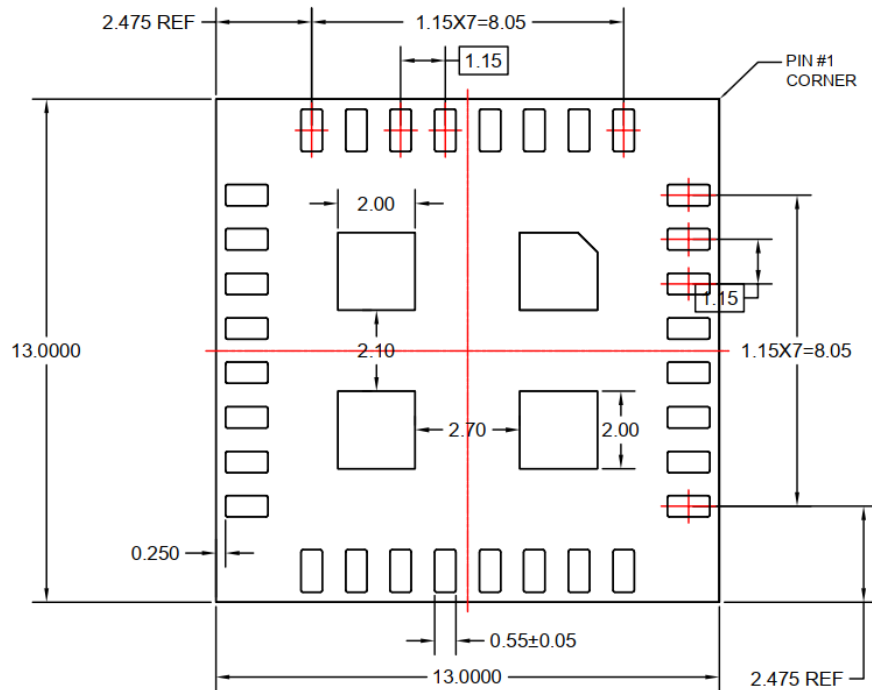


BOTTOM VIEW

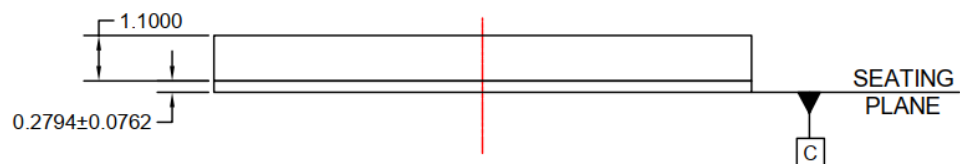


SIDE VIEW

	iMCP HT32SX		iMCPHT32SX-001 – V2.1
	Datasheet	18/11/2019	V.03

11 SUGGESTED PCB FOOTPRINT

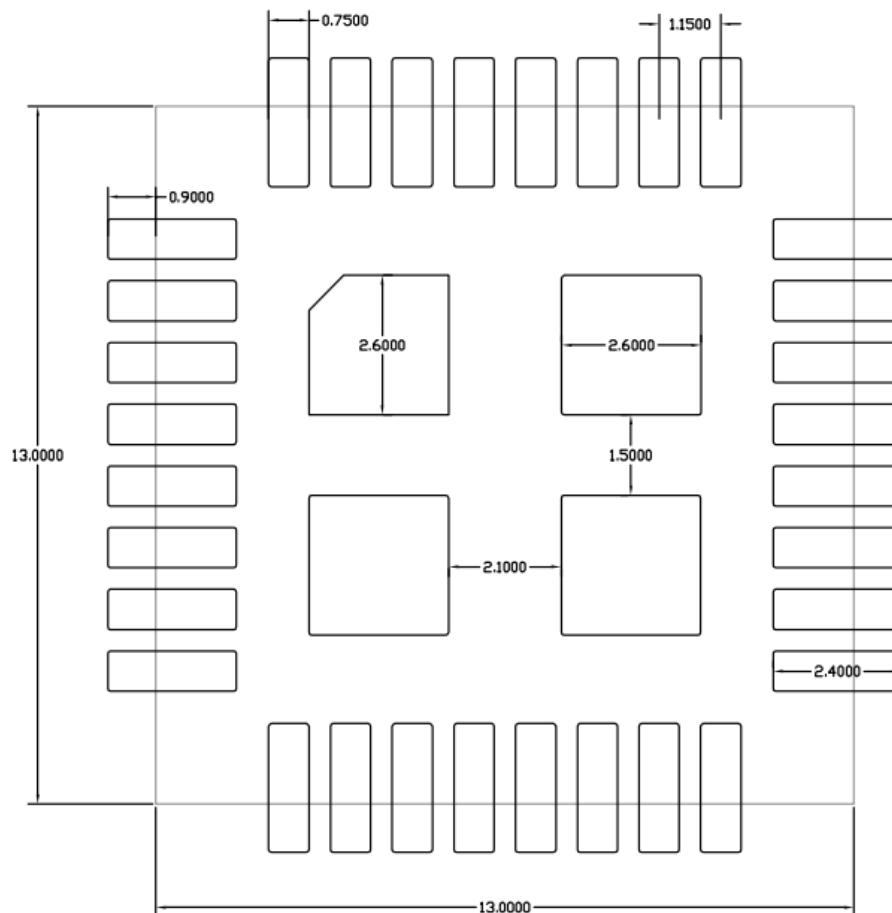

	iMCP HT32SX		iMCPHT32SX-001 – V2.1
	Datasheet	18/11/2019	V.03

12 ABBREVIATIONS

TABLE 9. ABBREVIATIONS

Acronym	Description
ADC	Analog to Digital Converter
AES	Advanced Encryption Standard
API	Application Program Interface
CLK	Clock
EEPROM	Electrically-Erasable Programmable Read Only Memory
FIFO	First In First Out
GPIO	General Purpose Input Output
ID	Identification
IF	Intermediate frequency
IO	Input Output
MSL	Moisture sensitivity level
PCB	Printed-Circuit Board
PHY	Physical
SPI-bus	Serial Peripheral Interface -bus
PWM	Pulse Width Modulation
RAM	Random Access Memory
RC	Remote Control
RF	Radio Frequency
RoHS	Restriction of Hazardous Substances
RSSI	Receive Signal Strength Indication
RX	Receiver
SCL	Serial Clock
SDA	Serial Data
TX	Transmitter