

2

1


B

B


$0.05 \times 45^\circ$
ALL CHAMFERS

$+0.10$ 0.50 0.00



**See Note Below

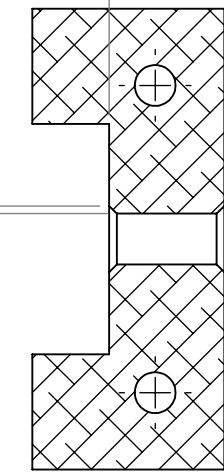

SECTION A-A

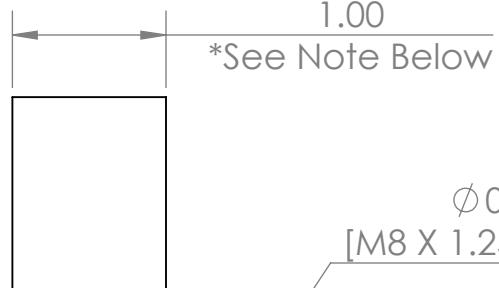

$\phi 0.33$ THRU
[M8 X 1.25 CLEARANCE]

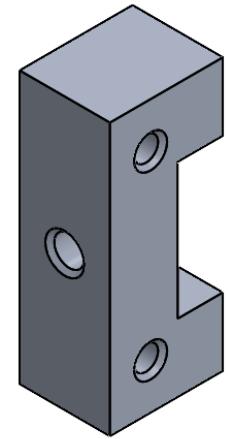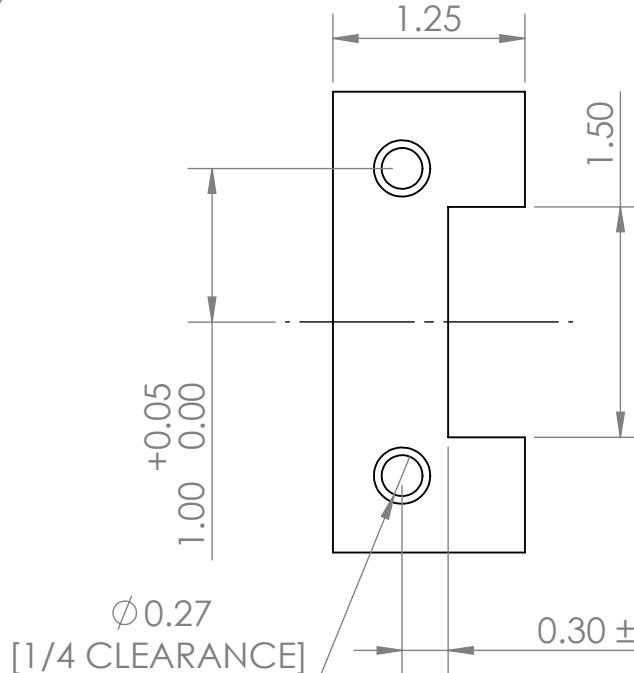**Notes:**

- *Should Use 1" X 1.25"
- Stock
- **M8 Cap Head
- Sockets usually have 8 mm thick caps

CAL AERO SAE

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CAL AERO SAE. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CAL AERO SAE IS STRICTLY PROHIBITED.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS UNITS: INCHES

TOLERANCES

ANGELS: $\pm 2^\circ$ OTHER DIMENSIONS: ± 0.05 INTERPRET TOLERANCING PER:
ASME Y14.5M-1994

MATERIAL

DRAWN

CHECKED

ENG APPR.

MFG APPR.

COMMENTS:



3RD ANGLE PROJECTION

DO NOT SCALE DRAWING

PART NAME:
Load Cell Frame Mount

SIZE	PART NO.	REV
A	PART NO.	

NEXT ASSEMBLY	SCALE: 4:5	SHEET 1 OF 1