

STATIC DIMENSIONS

Dimensions in mm	JS115 MONO				JS130 MONO				JS145 MONO				JS145 TAB				JS145 HD MONO				JS145 HD TAB			
A Track length on ground	2580				2865				2865				2865				3090				3090			
B Undercarriage overall length	3317				3605				3605				3605				3940				3940			
C Track Gauge	1990				1990				1990				1990				2200				2200			
D Width over tracks (500mm trackshoes)	2490				2490				2490				2490				2800				2800			
D Width over tracks (600mm trackshoes)	2590				2590				2590				2590				2900				2900			
D Width over tracks (700mm trackshoes)	2690				2690				2690				2690				3000				3000			
D Width over tracks (800mm trackshoes)	-				-				-				-				3100				3100			
D Width over tracks (850mm trackshoes)	-				2840				2840				2840				-				-			
D Width over tracks (900mm trackshoes)	-				-				-				-				3200				3200			
Arm lengths	1.95m	2.25m	2.8m	2.1m	2.5m	2.7m	3.0m	2.1m	2.5m	2.7m	3.0m	2.1m	2.5m	2.7m	3.0m	2.1m	2.5m	2.7m	3.0m	2.1m	2.5m	2.7m	3.0m	
E Transport length	7357	7357	7392	7515	7478	7420	7300	7515	7478	7420	7300	8120	8086	8032	7933	7515	7478	7420	7300	8120	8086	8032	7933	
F Transport height	2864	2864	2864	2867	2867	3209	3289	2867	2973	3209	3396	2867	2867	2908	3236	3014	3120	3356	3543	2867	2867	2908	3236	
G Counterweight clearance*	905				905				905				905				1050				1050			
H Tail swing radius	2135				2135				2135				2135				2135				2135			
I Width of superstructure	2410				2410				2410				2410				2410				2410			
J Height over cab*	2839				2845				2845				2845				2895				2895			
K Height over grab rail*	2864				2867				2867				2867				3014				3014			
L Ground clearance*	464				425				425				425				470				470			
M Track height	767				811				811				811				880				880			
*Height with upperstructure safety rails: 2967mm.																								

ENGINE	
Model	JCB EcoMAX 444 TCA 81 EU Stage IIIB, EPA Tier 4 interim compliant.
Type	Water cooled, 4-stroke, 4-cylinder in-line, common rail injection, turbocharged variable geometry intercooled diesel.
Rated power (ISO 14396)	81kW(109hp) at 2050rpm.
Piston Displacement	4.399 litres.
Injection	Electronic governor.
Air Filtration	Dry.
Cooling	Large capacity radiator.
Starting system	24 volt - 4kW.
Batteries	2 x 12 volt.
Alternator	24 volt 55 amp.
Refuelling pump	Electric type (optional).

SWING SYSTEM				
Swing motor	Axial piston type			
Swing brake	Hydraulic braking plus automatic spring applied disc type parking brake.			
Swing speed	JS115	JS130	JS145	JS145 HD
	12.7 rpm	13.3 rpm	13.3 rpm	13.6 rpm
Swing gear	Large diameter, internally toothed fully sealed grease bath lubricated.			
Swing lock	Multi position switchable brake			

UNDERCARRIAGE				
Recovery point	Front and rear.			
Upper & lower rollers	Heat treated, sealed and lubricated.			
Track adjustment	Grease cylinder type.			
Track type	Sealed and lubricated.			
Track idler	Sealed and lubricated, with spring cusioned recoil.			
Track shoes	JS115	JS130/145		JS145 HD
	500mm triple grouser	500mm triple grouser	500mm GEOGRIP	600mm triple grouser
	600mm triple grouser	600mm triple grouser	500mm Rubber shoes	700mm triple grouser
	700mm triple grouser	700mm triple grouser	600mm Rubber shoes	800mm triple grouser
	500mm GEOGRIP	850mm triple grouser		900mm triple grouser
Rollers and Shoes (each side)	JS115	JS130/145		JS145 HD
Upper rollers	1	2		2
Lower rollers	6	7		7
Track shoes	41	44		43

TRACK DRIVE				
Type	Fully hydrostatic, three speed with autoshift between high and medium speed.			
Travel motors	Variable swash axial piston type, fully guarded within undercarriage frame.			
Final drive	Planetary reduction, bolt-on sprockets.			
Servic brake	Hydraulic counter balance valve to prevent overspeeding on gradients.			
Park brake	Disc type, spring applied, automatic hydraulic release.			
Gradeability	70% (35 deg) continuous.			
Travel speed	JS115	JS130	JS145	JS145HD
	High - 6.3 km/h	High - 6.6 km/h	High - 5.8 km/h	High - 4.3 km/h
	Mid - 3.6 km/h	Mid - 3.8 km/h	Mid - 3.3 km/h	Mid - 2.5 km/h
	Low - 2.3 km/h	Low - 2.3 km/h	Low - 2.0 km/h	Low - 1.5 km/h
Tractive effort	87.6kN	87.5kN	99.6kN	170.7 kN

HYDRAULIC SYSTEM	
Pumps	
Main pumps	2 variable displacement axial piston type.
Maximum flow	2 x 124 L/min.
Servo pump	Gear type.
Maximum flow	20 L/min.
Control valve	
A combined four and five spool control valve with auxiliary service spool as standard	
Relief valve settings	
Boom/Arm/Bucket	314 bar.
With power boost	343 bar.
Swing circuit	279 bar.
Travel circuit	343 bar.
Pilot control	40 bar.
Filtration	
In tank	150 micron, suction strainer.
Main return line	10 micron, glass fibre element.
Pilot line	10 micron, paper element.
Hydraulic hammer return	10 micron, reinforced microform element.

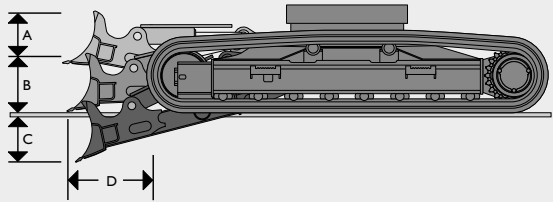
SERVICE CAPACITIES	
	Litres
Fuel tank	220
Engine coolant	19.7
Engine oil	14
Swing reduction gear	2.2
Track reduction gear (each side)	3.5
Hydraulic system	126
Hydraulic tank	73

WEIGHTS AND GROUND BEARING PRESSURES		
Shoe Width	Operating Weight	Bearing Pressure
JS115 - Machine equipped with 4.4m Monoboomb, 2.25m Dipper, Standard Excavating Bucket, operator and full fuel tank.		
500mm	12282kg	0.43kg/sq.cm
600mm	12460kg	0.36kg/sq.cm
700mm	12637kg	0.32kg/sq.cm
JS130 - Machine equipped with 4.7m Monoboomb, 2.5m Dipper, 417kg Excavating Bucket, operator and full fuel tank.		
500mm	13661kg	0.44kg/sq.cm
600mm	13768kg	0.37kg/sq.cm
700mm	13876kg	0.32kg/sq.cm
850mm	14038kg	0.27kg/sq.cm
JS145 - Machine equipped with 4.7m Monoboomb, 2.5m Dipper, 417kg Excavating Bucket, operator and full fuel tank.		
500mm	14261kg	0.46kg/sq.cm
600mm	14368kg	0.39kg/sq.cm
700mm	14476kg	0.33kg/sq.cm
850mm	14638kg	0.28kg/sq.cm
JS145 TAB - Machine equipped with 4.4m TAB, 2.5m Dipper, 417kg Excavating Bucket, operator and full fuel tank.		
500mm	14745kg	0.48kg/sq.cm
600mm	14852kg	0.40kg/sq.cm
700mm	14960kg	0.35kg/sq.cm
850mm	15122kg	0.29kg/sq.cm
JS145 HD - Machine equipped with 4.7m Monoboomb, 2.5m Dipper, 417kg Excavating Bucket, operator and full fuel tank.		
600mm	15026kg	0.38kg/sq.cm
700mm	15134kg	0.32kg/sq.cm
800mm	15242kg	0.29kg/sq.cm
900mm	15350kg	0.26kg/sq.cm
JS145 HD TAB - Machine equipped with 4.4m TAB, 2.5m Dipper, 417kg Excavating Bucket, operator and full fuel tank.		
600mm	15510kg	0.39kg/sq.cm
700mm	15618kg	0.33kg/sq.cm
800mm	15726kg	0.29kg/sq.cm
900mm	15834kg	0.26kg/sq.cm

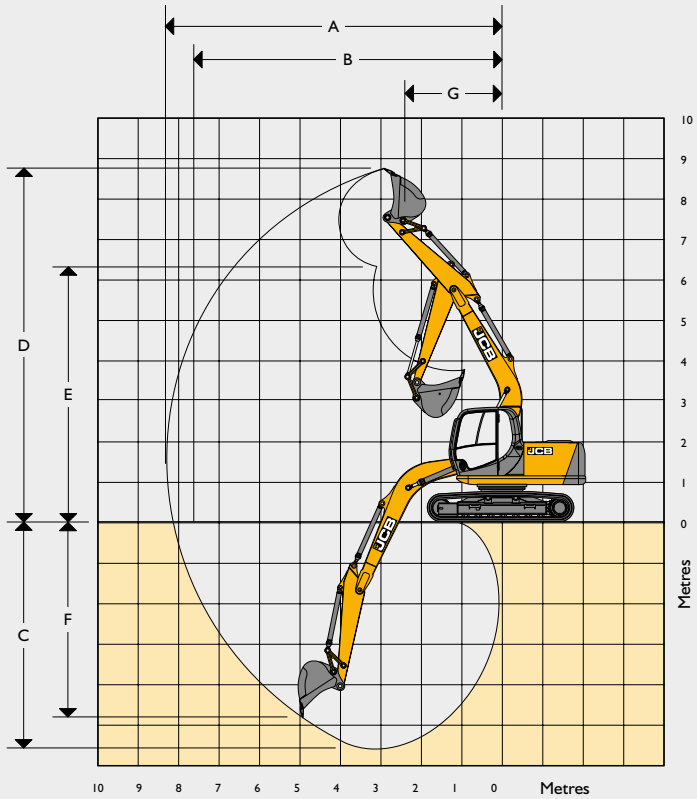
BUCKET AND ARM COMBINATION									
JS115									
	No Q/Hitch Fitted			Q/Hitch Fitted*					
Arm length	1.95m	2.25m	2.80m	1.95m	2.25m	2.80m	Bucket weight		
GP bucket 610mm. 0.34m ³	□	□	□	□	□	□	368kg		
GP bucket 762mm. 0.46m ³	□	□	□	□	■	■	460kg		
GP bucket 914mm. 0.59m ³	□	□	■	●	●	✕	511kg		
GP bucket 1067mm. 0.718m ³	□	■	■	●	✕	✕	579kg		
GP bucket 1219mm. 0.85m ³	■	■	●	✕	✕	✕	625kg		
JS130									
	No Q/Hitch Fitted				Q/Hitch Fitted*				
Arm length	2.1m	2.5m	2.7m	3.0m	2.1m	2.5m	2.7m	3.0m	Bucket weight
GP bucket 610mm. 0.34m ³	□	□	□	□	□	□	□	□	368kg
GP bucket 762mm. 0.46m ³	□	□	□	□	□	■	■	●	460kg
GP bucket 914mm. 0.59m ³	□	□	■	●	●	●	✕	✕	511kg
GP bucket 1067mm. 0.72m ³	□	■	■	✕	●	✕	✕	✕	579kg
GP bucket 1219mm. 0.85m ³	■	■	●	✕	✕	✕	✕	✕	625kg
JS145									
	No Q/Hitch Fitted				Q/Hitch Fitted*				
Arm length	2.1m	2.5m	2.7m	3.0m	2.1m	2.5m	2.7m	3.0m	Bucket weight
GP bucket 610mm. 0.34m ³	□	□	□	□	□	□	□	□	368kg
GP bucket 762mm. 0.46m ³	□	□	□	□	□	□	□	□	460kg
GP bucket 914mm. 0.59m ³	□	□	□	□	□	□	■	■	511kg
GP bucket 1067mm. 0.72m ³	□	□	■	■	■	■	■	●	579kg
GP bucket 1219mm. 0.85m ³	□	■	■	■	■	●	●	●	625kg
JS145 HD									
	No Q/Hitch Fitted				Q/Hitch Fitted*				
Arm length	2.1m	2.5m	2.7m	3.0m	2.1m	2.5m	2.7m	3.0m	Bucket weight
GP bucket 610mm. 0.34m ³	□	□	□	□	□	□	□	□	368kg
GP bucket 762mm. 0.46m ³	□	□	□	□	□	□	□	□	460kg
GP bucket 914mm. 0.59m ³	□	□	□	□	□	□	■	■	511kg
GP bucket 1067mm. 0.72m ³	□	□	■	■	■	■	■	●	579kg
GP bucket 1219mm. 0.85m ³	□	■	■	■	■	●	●	●	625kg

□ = Suitable for general excavating (materials up to 2000kg/cu.m).
■ = Suitable for light excavating (materials up to 1600kg/cu.m.)
● = Suitable for grading & loading materials up to 1200kg/cu.m).
✕ = Not recommended
* Bucket capacity using JCB quickhitch only (quickhitch = 186kg).

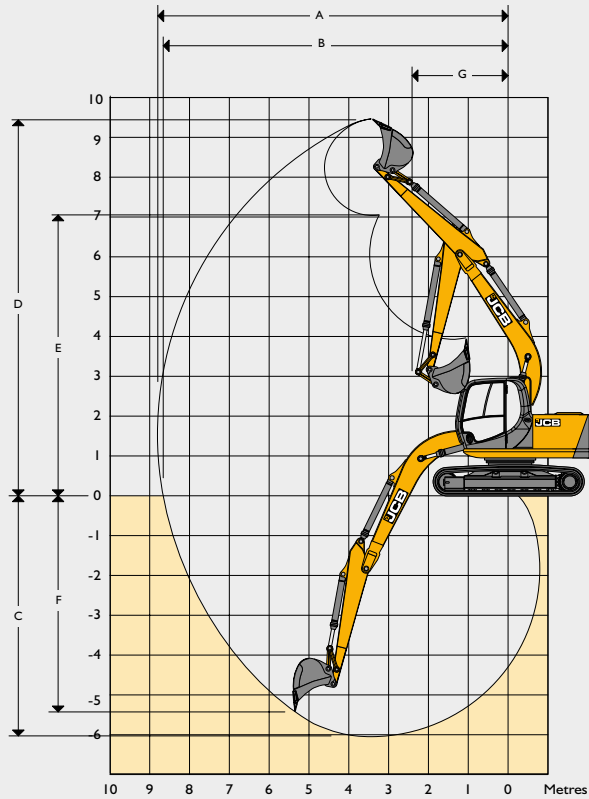
WORKING RANGE						
		JS115	JS130	JS145	JS145 TAB	JS145 HD JS145 HD TAB
Boom length:		4.40m	4.70m	4.70m	5.0m	4.70m 5.0m
Dipper length:		1.95m	2.10m	2.10m	2.10m	2.10m
A	Maximum digging reach	mm	7547	7517	8266	7517 8266
B	Maximum digging reach (on ground)	mm	7324	7356	7356	8199 7356
C	Maximum digging depth	mm	4375	4809	4809	5283 4662
D	Maximum digging height	mm	8505	8375	8375	9228 8522
E	Maximum dumping height	mm	6112	6115	6115	7005 6262
F	Maximum vertical wall cut depth	mm	4435	3219	3219	3933 3072
G	Minimum swing radius	mm	2136	2337	2337	2616 2337
Bucket rotation			182°	182°	182°	182°
Maximum dipper tearout (ISO 6015)		kgf	5546	7394	7394	7394 7394
Maximum bucket tearout (ISO 6015)		kgf	9375	9375	9375	9375 9375
Dipper length:		2.25m	2.50m	2.50m	2.50m	2.50m 2.50m
A	Maximum digging reach	mm	7822	8340	8340	8751 8340
B	Maximum digging reach (on ground)	mm	7669	8197	8197	8614 8197
C	Maximum digging depth	mm	5024	5530	5530	5786 5383
D	Maximum digging height	mm	8638	9118	9118	9653 9265
E	Maximum dumping height	mm	6331	6729	6729	7229 6876
F	Maximum vertical wall cut depth	mm	4715	3625	3625	4140 3478
G	Minimum swing radius	mm	2168	2231	2231	2746 2231
Bucket rotation			182°	182°	182°	182°
Maximum dipper tearout (ISO 6015)		kgf	5000	6589	6589	6589 6589
Maximum bucket tearout (ISO 6015)		kgf	9375	9375	9375	9375 9375
Dipper length:		2.80m	2.70m	2.70m	2.70m	2.70m 2.70m
A	Maximum digging reach	mm	8281	8522	8522	8840 8522
B	Maximum digging reach (on ground)	mm	8136	8380	8380	8700 8380
C	Maximum digging depth	mm	5571	5425	5425	5901 5278
D	Maximum digging height	mm	8843	9242	9242	9690 9389
E	Maximum dumping height	mm	6601	6855	6855	7468 7002
F	Maximum vertical wall cut depth	mm	5351	4444	4444	4518 4297
G	Minimum swing radius	mm	2558	2505	2505	3031 2505
Bucket rotation			182°	182°	182°	182°
Maximum dipper tearout (ISO 6015)		kgf	4825	6447	6447	6447 6447
Maximum bucket tearout (ISO 6015)		kgf	9375	9375	9375	9375 9375
Dipper length:			3.00m	3.00m	3.00m	3.00m 3.00m
A	Maximum digging reach	mm		8796	8796	9226 8796
B	Maximum digging reach (on ground)	mm		8660	8660	9096 8660
C	Maximum digging depth	mm		6028	6028	6281 5881
D	Maximum digging height	mm		9440	9440	10012 9587
E	Maximum dumping height	mm		7041	7041	7606 7188
F	Maximum vertical wall cut depth	mm		4050	4050	4580 3903
G	Minimum swing radius	mm		2591	2591	3162 2591
Bucket rotation				182°	182°	182°
Maximum dipper tearout (ISO 6015)		kgf		5988	5988	5988 5988
Maximum bucket tearout (ISO 6015)		kgf		9375	9375	9375 9375

OPTIONAL BLADE			
			
		JS115	JS130 JS145
A	Blade height	mm	513 490
B	Blade lift above ground	mm	439 440
C	Blade cut below ground	mm	531 510
D	Blade forward of track	mm	551 440
		Dozer width – 500mm tracks	2510 2510
		Dozer width – 600mm tracks	2610 2610
		Dozer width – 700mm tracks	2710 2710
Additional machine weight with blade			
500mm tracks		kg	747 747
600mm tracks		kg	753 753
700mm tracks		kg	759 759

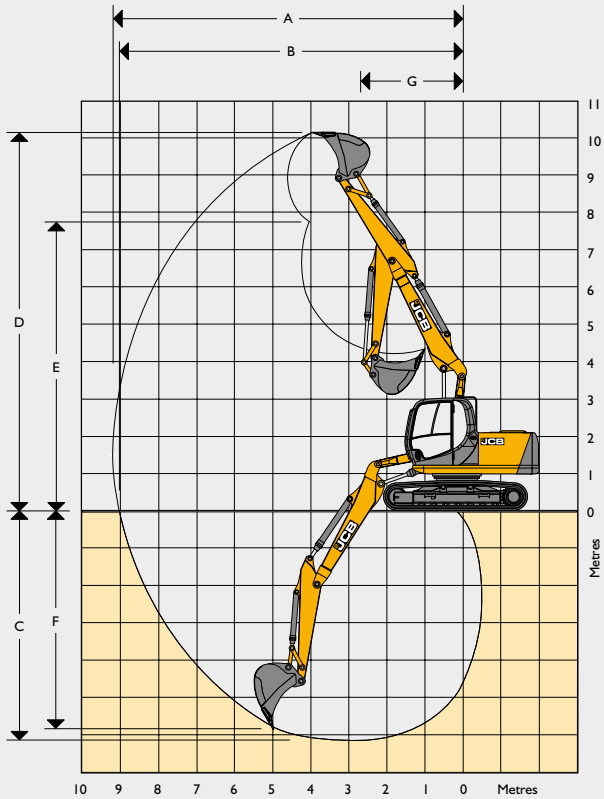
WORKING RANGE



JS115 MONOBOOM



JS130/145 MONOBOOM



JS130/145 TAB

LIFT CAPACITIES – DIPPER LENGTH: 1.95M, 4.40M MONOBOOM, TRACKSHOES: 500MM, NO BUCKET.

JS115 MONO

Reach	3m		4m		5m		6m		Capacity at Max Reach	
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m			3280*	3260					3020*	2830
5.0m	3250*	3250*	3230*	3230*	2930	2210			2760	2070
4.0m	4020*	4020*	3580*	3140	2900	2180			2290	1720
3.0m	5350*	4670	4020	2970	2810	2100	2090	1550	2050	1520
2.0m	6080	4240	3820	2780	2710	2000	2050	1510	1930	1420
1.0m	5800	3990	3650	2630	2620	1920	2000	1470	1900	1390
0m	5700	3910	3560	2540	2560	1860	1980	1440	1950	1430
– 1.0m	5700	3900	3530	2510	2540	1840			2120	1550
– 2.0m	5760	3950	3550	2530	2570	1870			2490	1810
– 3.0m	5890	4070	3650	2630					3360	2430

LIFT CAPACITIES – DIPPER LENGTH: 2.25M, 4.40M MONOBOOM, TRACKSHOES: 500MM, NO BUCKET.

JS115 MONO

Reach	3m		4m		5m		6m		Capacity at Max Reach	
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m			2920*	2920*					2470*	2470*
5.0m			2930*	2930*	2960	2230			2290*	1870
4.0m	3580*	3580*	3290*	3170	2910	2190	2120	1580	2110	1570
3.0m	4870*	4770	3910*	2990	2820	2100	2090	1550	1900	1400
2.0m	6180	4320	3840	2800	2710	2000	2040	1500	1790	1310
1.0m	5830	4010	3660	2630	2610	1900	1980	1450	1760	1280
0m	5680	3880	3540	2520	2540	1830	1950	1410	1810	1310
– 1.0m	5640	3850	3490	2470	2500	1800			1940	1410
– 2.0m	5690	3890	3500	2480	2510	1810			2240	1620
– 3.0m	5800	3990	3570	2550					2890	2090

LIFT CAPACITIES – DIPPER LENGTH: 2.80M, 4.40M MONOBOOM, TRACKSHOES: 500MM, NO BUCKET.

JS115 MONO

Reach	3m		4m		5m		6m		Capacity at Max Reach	
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m			2310*	2310*	2600*	2290			2150*	2050
5.0m			2380*	2380*	2550*	2290	2080*	1630	2040*	1620
4.0m			2760*	2760*	2730*	2240	2170	1620	1870	1390
3.0m	3950*	3950*	3380*	3080	2860	2140	2110	1570	1700	1250
2.0m	5470*	4510	3920	2860	2740	2020	2050	1510	1610	1170
1.0m	5930	4100	3690	2660	2620	1910	1980	1440	1570	1140
0m	5670	3870	3540	2510	2520	1820	1920	1390	1600	1150
– 1.0m	5570	3780	3450	2430	2460	1760	1890	1360	1700	1220
– 2.0m	5570	3770	3420	2410	2450	1750			1910	1370
– 3.0m	5640	3840	3460	2440	2490	1780			2330	1680













Lift capacity front and rear.























Lift capacity full circle.

Notes:

1. For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.
2. Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked* are based on hydraulic capacity.
3. Lift capacities assume that the machine is on firm, level ground.
4. Lift capacities may be limited by local regulations. Please refer to your dealer.

LIFT CAPACITIES – DIPPER LENGTH: 1.95M, 4.40M MONOBOOM, TRACKSHOES: 500MM, NO BUCKET, DOZER											JS115 MONO
Reach	3m		4m		5m		6m		Capacity at Max Reach		
											
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m			3280*	3280*					3020*	3010	4317
5.0m	3250*	3250*	3230*	3230*	3210	2350			2780*	2210	5174
4.0m	4020*	4020*	3580*	3330	3170	2320			2520	1840	5730
3.0m	5350*	4960	4180*	3160	3090	2240	2310	1670	2270	1630	6070
2.0m	6670	4530	4190	2970	2990	2140	2270	1630	2140	1530	6230
1.0m	6230*	4280	4030	2820	2900	2060	2220	1580	2110	1500	6224
0m	6290	4200	3930	2730	2830	2000	2190	1560	2170	1540	6052
– 1.0m	6290	4190	3900	2700	2810	1980			2350	1670	5699
– 2.0m	6350	4240	3930	2720	2840	2010			2750	1950	5125
– 3.0m	5940*	4370	4030	2820					3700	2610	4241

LIFT CAPACITIES – DIPPER LENGTH: 2.25M, 4.40M MONOBOOM, TRACKSHOES: 500MM, NO BUCKET, DOZER											JS115 MONO
Reach	3m		4m		5m		6m		Capacity at Max Reach		
											
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m			2920*	2920*					2470*	2470*	4695
5.0m			2930*	2930*	3010*	2370			2290*	2000*	5492
4.0m	3580*	3580*	3290*	3290*	3140*	2330	2310*	1690	2230	1680	6018
3.0m	4870*	4870*	3910*	3190	3090	2240	2310	1660	2100	1510	6342
2.0m	6360*	4610	4210	2990	2980	2140	2260	1610	1990	1420	6495
1.0m	6420	4300	4030	2820	2880	2040	2200	1560	1960	1390	6490
0m	6270	4170	3910	2710	2810	1980	2160	1530	2010	1420	6325
– 1.0m	6230	4140	3870	2670	2780	1940			2160	1520	5988
– 2.0m	6270	4180	3870	2670	2790	1950			2480	1750	5446
– 3.0m	6330*	4280	3950	2740					3200	2250	4625

LIFT CAPACITIES – DIPPER LENGTH: 2.80M, 4.40M MONOBOOM, TRACKSHOES: 500MM, NO BUCKET, DOZER											JS115 MONO
Reach	3m		4m		5m		6m		Capacity at Max Reach		
											
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m			2310*	2310*	2600*	2440*			2150*	2150*	5303
5.0m			2380*	2380*	2550*	2440*	2080*	1750	2040*	1740	6018
4.0m			2760*	2760*	2730*	2380	2380	1730	2010*	1490	6501
3.0m	3950*	3950*	3380*	3270	3070*	2280	2330	1680	1880	1350	6802
2.0m	5470*	4800	4140*	3050	3010	2160	2260	1620	1790	1260	6945
1.0m	6520	4390	4070	2850	2890	2050	2200	1560	1750	1230	6940
0m	6260	4160	3910	2700	2800	1960	2140	1500	1790	1250	6786
– 1.0m	6160	4070	3820	2620	2740	1900	2110	1470	1900	1320	6474
– 2.0m	6160	4060	3800	2600	2720	1819			2120	1480	5976
– 3.0m	6230	4130	3840	2640	2760	1930			2590	1810	5241













Lift capacity front and rear.























Lift capacity full circle.

Notes:

1. For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.
2. Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked* are based on hydraulic capacity.
3. Lift capacities assume that the machine is on firm, level ground.
4. Lift capacities may be limited by local regulations. Please refer to your dealer.

LIFT CAPACITIES – DIPPER LENGTH: 2.1M, 4.70M MONOBOOM, TRACKSHOES: 500MM, NO BUCKET											JS130 MONO
Reach	3m		4m		5m		6m		Capacity at Max Reach		
											
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m			3230*	3230*	3220*	3220			2960*	2960*	5044
5.0m			3380*	3380*	3340*	3240			2760*	2540	5792
4.0m	4520*	4520*	3890*	3890*	3560*	3170	3370	2390	2680*	2200	6293
3.0m	6160*	6160*	4640*	4280	3950*	3080	3330	2340	2680*	2010	6603
2.0m			5450*	4070	4290	2970	3270	2290	2740	1920	6750
1.0m			5890	3920	4190	2880	3210	2240	2710	1890	6745
0m	6120*	5880	5780	3830	4120	2810	3170	2200	2780	1940	6587
– 1.0m	8490*	5880	5750	3800	4090	2790	3160	2190	2980	2070	6264
– 2.0m	7950*	5920	5760	3810	4100	2790			3380	2340	5749
– 3.0m	6990*	6020	5410*	3870					4040*	2880	4979

LIFT CAPACITIES – DIPPER LENGTH: 2.50M, 4.70M MONOBOOM, TRACKSHOES: 500MM, NO BUCKET.											JS130 MONO
Reach	3m		4m		5m		6m		Capacity at Max Reach		
											
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m			2800*	2800*	3010*	3010*			2370*	2370*	5533
5.0m			2980*	2980*	3020*	3020*	3110*	2430	2240*	2240*	6221
4.0m	3860*	3860*	3490*	3490*	3270*	3210	3170*	2410	2190	2010	6689
3.0m	5400*	5400*	4250*	4250*	3680*	3110	3350	2360	2190*	1850	6982
2.0m	7130*	6310	5100*	4120	4150*	2990	2380	2290	2250*	1770	7121
1.0m	6370*	5990	5810*	3940	4200	2880	3210	2580	2360	1740	7116
0m	6830*	5860	5780	3820	4120	2810	3160	2180	2540*	1780	6967
– 1.0m	8630*	5820	5720	3770	4070	2760	3130	2160	2710	1880	6663
– 2.0m	8240*	5850	5720	3770	4060	2760	4140	2170	3020	2090	6181
– 3.0m	7460*	5930	5370*	3810	4100	2790			3620	2490	5474

LIFT CAPACITIES – DIPPER LENGTH: 2.70M, 4.70M MONOBOOM, TRACKSHOES: 500MM, NO BUCKET.											JS130 MONO
Reach	3m		4m		5m		6m		Capacity at Max Reach		
											
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m					2840*	2840*			2530*	2530*	5653
5.0m			2720*	2720*	2720*	2820*	2950*	2440	2390*	2240	6326
4.0m			3150*	3150*	3040*	3040*	3000*	2380	2330*	1960	6785
3.0m	4660*	4660*	3830*	3830*	3410*	2970	3190*	2290	2320*	1800	7075
2.0m	6270*	5680	4620*	3820	3850*	2830	3150	2210	2380*	1710	7210
1.0m	7520*	5440	5330*	3640	3940	2710	3070	2130	2400	1670	7205
0m	8090*	5340	5290	3520	3840	2630	3000	2070	2430	1690	7060
– 1.0m	8130*	5290	5230	3470	3790	2580	2970	2040	2560	1770	6759
– 2.0m	7800*	5270	5210	3450	3770	2560	2970	2040	2810	1940	6287
– 3.0m	7110*	5280	5240	3480	3810	2590			3300	2270	5592













Lift capacity front and rear.























Lift capacity full circle.

Notes:

1. For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.
2. Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked* are based on hydraulic capacity.
3. Lift capacities assume that the machine is on firm, level ground.
4. Lift capacities may be limited by local regulations. Please refer to your dealer.

LIFT CAPACITIES – DIPPER LENGTH: 3.00M, 4.70M MONOBOOM, TRACKSHOES: 500MM, NO BUCKET.											JSI30 MONO
Reach	3m		4m		5m		6m		Capacity at Max Reach		
											
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m					2540*	2540*	2520*	2460	2180*	2180*	6113
5.0m					2610*	2610*	2720*	2470	2070*	2010*	6741
4.0m			2960*	2960*	2890*	2890*	2840*	2430	2030*	1790	7175
3.0m	4460*	4460*	3710*	3710*	3310*	3140	3080*	2370	2040*	1660	7448
2.0m	6210*	6210*	4600*	4180	3820*	3010	3280	2290	2090*	1590	7578
1.0m	7640*	6060	5410*	3960	4210	2880	3200	2220	2190*	1570	7574
0m	7510*	5830	5770	3810	4100	2780	3140	2160	2300	1590	7434
– 1.0m	8610*	5740	5670	3720	4030	2720	3090	2120	2420	1670	7150
– 2.0m	8430*	5730	5640	3690	4000	2700	3080	2100	2650	1820	6704
– 3.0m	7880*	5780	5660	3710	4020	2710	3110	2130	3070*	2110	6060

LIFT CAPACITIES – DIPPER LENGTH: 2.10M, 4.70M MONOBOOM, TRACKSHOES: 500MM, NO BUCKET, DOZER.											JSI30 MONO
Reach	3m		4m		5m		6m		Capacity at Max Reach		
											
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m			3230*	3230*	3220*	3220*			2960*	2960*	5044
5.0m			3380*	3380*	3340*	3340*			2760*	2650	5792
4.0m	4520*	4520*	3890*	3890*	3560*	3320	3440*	2500	2680*	2310	6293
3.0m	6160*	6160*	4640*	4470	3950*	3220	3590*	2460	2680*	2120	6603
2.0m			5450*	4260*	4390*	3110	3550	2400	2760*	2020	6750
1.0m			6070*	4110	4560	3020	3500	2350	2900*	1990	6745
0m	6120*	6120*	6310	4020	4490	2960	3460	2310	3040	2040	6587
– 1.0m	8490*	6170	6270	3990	4460	2930	3440	2300	3250	2180	6264
– 2.0m	7950*	6210	6120*	4000	4470	2940			3680	2460	5749
– 3.0m	6990*	6310	5410*	4060					4040*	3030	4979

LIFT CAPACITIES – DIPPER LENGTH: 2.50M, 4.70M MONOBOOM, TRACKSHOES: 500MM, NO BUCKET, DOZER.											JSI30 LC MONO
Reach	3m		4m		5m		6m		Capacity at Max Reach		
											
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m			2800*	2800*	3010*	3010*			2370*	2370*	5533
5.0m			2980*	2980*	3020*	3020*	3110*	2540	2240*	2240*	6221
4.0m	3860*	3860*	3490*	3490*	3270*	3270*	3170*	2520	2190*	2110	6689
3.0m	5400*	5400*	4250*	4250*	3680*	3250	3370*	2470	2190*	1940	6982
2.0m	7130*	6600	5100*	4310	4150*	3130	3560	2410	2250*	1860	7121
1.0m	6370*	6280	5810*	4130	4570	3030	3500	2350	2360*	1840	7116
0m	6830*	6140	6260	4010	4480	2950	3440	2300	2540*	1870	6967
– 1.0m	8630*	6110	6240	3960	4440	2900	3420	2270	2840*	1980	6663
– 2.0m	8240*	6140	6240	3960	4430	2900	3420	2280	3290	2200	6181
– 3.0m	7460*	6210	5370*	4000	4460*	2940			3850*	2620	5474













Lift capacity front and rear.













Lift capacity full circle.

Notes:

1. For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.
2. Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked* are based on hydraulic capacity.
3. Lift capacities assume that the machine is on firm, level ground.
4. Lift capacities may be limited by local regulations. Please refer to your dealer.

LIFT CAPACITIES – DIPPER LENGTH: 2.70M, 4.70M MONOBOOM, TRACKSHOES: 500MM, NO BUCKET, DOZER.											JSI30 LC MONO
Reach	3m		4m		5m		6m		Capacity at Max Reach		
											
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m					2840*	2840*			2530*	2530*	5653
5.0m			2720*	2720*	2820*	2820*	2950*	2560	2390*	2350	6326
4.0m			3150*	3150*	3040*	3040*	3000*	2490	2330*	2060	6785
3.0m	4660*	4660*	3830*	3830*	3410*	3110	3190*	2400	2320*	1890	7075
2.0m	6270*	5940	4620*	4000	3850*	2960	3430	2320	2380*	1800	7210
1.0m	7520*	5700	5330*	3810	4270*	2840	3340	2240	2490*	1760	7205
0m	8090*	5600	5770	3700	4190	2760	3270	2180	2650*	1780	7060
– 1.0m	8130*	5550	5710	3460	4130	2710	3240	2150	2790	1860	6759
– 2.0m	7800*	5530	5690	3630	4120	2700	3240	2150	3070	2040	6287
– 3.0m	7110*	5540	5490*	3650	4150	2730			3600	2390	5592

LIFT CAPACITIES – DIPPER LENGTH: 3.00M, 4.70M MONOBOOM, TRACKSHOES: 500MM, NO BUCKET, DOZER.											JSI30 LC MONO
Reach	3m		4m		5m		6m		Capacity at Max Reach		
											
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m					2540*	2540*	2520*	2520*	2180*	2180*	6113
5.0m					2610*	2610*	2720*	2580	2070*	2070*	6741
4.0m			2960*	2960*	2890*	2890*	2840*	2540	2030	1880	7175
3.0m	4460*	4460*	3710*	3710*	3310*	3280	3080*	2480	2040*	1750	7448
2.0m	6210*	6210*	4600*	4370	3820*	3150	3380*	2410	2090*	1680	7578
1.0m	7640*	6350	5410*	4150	4310*	3020	3490	2330	2190*	1650	7574
0m	7510*	6120	5990*	4000	4470	2930	3420	2270	2350*	1680	7434
– 1.0m	8610*	6030	6200*	3910	4400	2860	3380	2230	2590*	1760	7150
– 2.0m	8430*	6020	6160	3880	4370	2840	3360	2220	2890	1920	6704
– 3.0m	7880*	6070	5970*	3900	4380	2850			3350	2220	6060













Lift capacity front and rear.























Lift capacity full circle.

Notes:

1. For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.
2. Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked* are based on hydraulic capacity.
3. Lift capacities assume that the machine is on firm, level ground.
4. Lift capacities may be limited by local regulations. Please refer to your dealer.

LIFT CAPACITIES – DIPPER LENGTH: 2.10M, 4.70M MONOBOOM, TRACKSHOES: 500MM, NO BUCKET.											JSI45 LC MONO
Reach	3m		4m		5m		6m		Capacity at Max Reach		
											
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m			3230*	3230*	3220*	3220*			2960*	2960*	5044
5.0m			3380*	3380*	3340*	3340*			2760*	2760*	5792
4.0m	4520*	4520*	3890*	3890*	3560*	3560*	3440*	2730	2680*	2530	6293
3.0m	6160*	6160*	4640*	4640*	3950*	3510	3590*	2690	2680*	2320	6603
2.0m			5450*	4660	4390*	3410*	3730	2640	2760*	2220	6750
1.0m			6070*	4500	4770*	3310	3670	2580	2900*	2200	6745
0m	6120*	6120*	6390*	4410	4710	3250	3630	2550	3150*	2250	6587
– 1.0m	8490*	6760	6410*	4380	4680	3220	3620	2530	3410	2400	6264
– 2.0m	7950*	6810	6120*	4390	4690	3230			3860	2700	5749
– 3.0m	6990*	6900	5410*	4460					4040*	3320	4979

LIFT CAPACITIES – DIPPER LENGTH: 2.50M, 4.70M MONOBOOM, TRACKSHOES: 500MM, NO BUCKET.											JSI45 LC MONO
Reach	3m		4m		5m		6m		Capacity at Max Reach		
											
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m			2800*	2800*	3010*	3010*			2370*	2370*	5533
5.0m			2980*	2980*	3020*	3020*	3110*	2780	2240*	2240*	6221
4.0m	3860*	3860*	3490*	3490*	3270*	3270*	3170*	2760	2190	2190	6689
3.0m	5400*	5400*	4250*	4250*	3680*	3540	3370	2700	2190*	2140	6982
2.0m	7130*	7130	5100*	4710	4150	3420	3640*	2640	2250*	2050	7121
1.0m	6370*	6370*	5810*	4520	4560*	3320	3670	2580	2360	2030	7116
0m	6830*	6740	6260	4410	4710	3240	3620	2530	2540*	2070	6967
– 1.0m	8630*	6710	6400*	4350	4660	3200	2590	2500	2840*	2190	6663
– 2.0m	8240*	6730	6240*	4350	4650	3190	3600	2510	3340*	2420	6181
– 3.0m	7460*	6810	5370*	4390	4460*	3230			3850*	2880	5474

LIFT CAPACITIES – DIPPER LENGTH: 2.70M, 4.70M MONOBOOM, TRACKSHOES: 500MM, NO BUCKET.											JSI45 LC MONO
Reach	3m		4m		5m		6m		Capacity at Max Reach		
											
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m					2840*	2840*			2530*	2530*	4666
5.0m			2720*	2720*	2820*	2820*	2950*	2790	2390*	2390*	6326
4.0m			3150*	3150*	3040*	3040*	3000*	2720	2330*	2260	6785
3.0m	4660*	4660*	3830*	3830*	3410*	3390	3190*	2630	2320*	2080	7075
2.0m	6270*	6270*	4620*	4360	3850*	3240	3430*	2540	2910	2060	7210
1.0m	7520*	6240	5330*	4180	4270*	3120	3500	2470	2490*	1940	7205
0m	8090*	6150	5810*	4070	4400	3040	3440	2410	2650*	1970	7060
– 1.0m	8130*	6100	5990	4010	4340	2990	3400	2370	2940	2060	6759
– 2.0m	7800*	6070	5910*	3990	4330	2970	3410	2380	3220	2260	6287
– 3.0m	7110*	6080	5490*	4020	4360	3010			3750*	2630	5592













Lift capacity front and rear.























Lift capacity full circle.

Notes:

1. For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.
2. Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked* are based on hydraulic capacity.
3. Lift capacities assume that the machine is on firm, level ground.
4. Lift capacities may be limited by local regulations. Please refer to your dealer.

LIFT CAPACITIES – DIPPER LENGTH: 3.00M, 4.70M MONOBOOM, TRACKSHOES: 500MM, NO BUCKET.											JSI45 LC MONO
Reach	3m		4m		5m		6m		Capacity at Max Reach		
											
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m					2540*	2540*	2520*	2520*	2180*	2180*	6113
5.0m					2610*	2610*	2720*	2720	2070*	2070*	6741
4.0m			2960*	2960*	2890*	2890*	2840*	2780	2030	2030	7175
3.0m	4460*	4460*	3710*	3710*	3310*	3310	3080	2720	2040*	1930	7448
2.0m	6210*	6210*	4600*	4600*	3820*	3440	3380*	2640	2090*	1850	7578
1.0m	7640*	6940	5410*	4540	4310*	3320	3660	2570	2190	1830	7574
0m	7510*	6710	5990*	4390	4690	3220	3590	2500	2350*	1860	7434
– 1.0m	8610*	6620	6280*	4300	4620	3160	3550	2460	2590*	1950	7150
– 2.0m	8430*	6620	6280*	4270	4590	3130	3540	2450	2990*	2130	6704
– 3.0m	7880*	6670	5970*	4300	4610*	3140	3570	2480	3520*	2450	6060

LIFT CAPACITIES – DIPPER LENGTH: 2.10M, 4.70M MONOBOOM, TRACKSHOES: 500MM, NO BUCKET, DOZER.											JSI45 LC MONO
Reach	3m		4m		5m		6m		Capacity at Max Reach		
											
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m			3230*	3230*	3220*	3220*			2960*	2960*	5044
5.0m			3380*	3380*	3340*	3340*			2760*	2760*	5792
4.0m	4520*	4520*	3890*	3890*	3560*	3560*	3440*	2840	2680*	2630	6293
3.0m	6160*	6160*	4640*	4640*	3950*	3650	3590*	2800	2680*	2420	6603
2.0m			5450*	4840	4390*	3550	3820*	2750	2760*	2320	6750
1.0m			6070*	4690	4770*	3450	3900	2690	2900*	2290	6745
0m	6120*	6120*	6390*	4600	5000	3390	3860	2660	3150*	2350	6587
– 1.0m	8490*	7050	6410*	4570	4970	3360	3840	2640	3550*	2510	6264
– 2.0m	7950*	7090	6120*	4580	4840*	3370			3990*	2820	5749
– 3.0m	6990*	6990*	5410*	4640					4040*	3460	4979

LIFT CAPACITIES – DIPPER LENGTH: 2.50M, 4.70M MONOBOOM, TRACKSHOES: 500MM, NO BUCKET, DOZER.											JSI45 LC MONO
Reach	3m		4m		5m		6m		Capacity at Max Reach		
											
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m			2850*	2850*	2880*	2880*	2850*	2850*	2460*	2460*	6064
5.0m			3100*	3100*	2980*	2980*	2930*	2870	2290*	2290*	6698
4.0m	4290*	4290*	3630*	3630*	3260*	3260*	3050*	2830	2210*	2130	7134
3.0m			4360*	4360*	3660*	3610	3260*	2760	2180*	1990	7409
2.0m			5140*	4750	4100*	3470	3520*	2680	2200*	1910	7540
1.0m			5750*	4550	4490*	3350	3760*	2610	2270*	1890	7535
0m			6090*	4430	4750*	3270	3780	2560	2390*	1930	7394
– 1.0m	5800*	5800*	6160*	4390	4850*	3230	3750	2530	2590*	2040	7109
– 2.0m	7790*	6840	5980*	4400	4750*	3220	3760	2530	2900*	2240	6660













Lift capacity front and rear.













Lift capacity full circle.

Notes:

1. For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.
2. Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked* are based on hydraulic capacity.
3. Lift capacities assume that the machine is on firm, level ground.
4. Lift capacities may be limited by local regulations. Please refer to your dealer.

LIFT CAPACITIES – DIPPER LENGTH: 3.00M, 4.70M MONOBOOM, TRACKSHOES: 500MM, NO BUCKET, DOZER. JSI45 LC MONO										
Reach	3m		4m		5m		6m		Capacity at Max Reach	
										
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m					2730*	2730*	2880*	2880*	2620*	6218
5.0m			2840*	2840*	2790*	2790*	2790*	2790*	2460*	6834
4.0m	3720*	3720*	3280*	3280*	3030*	3030*	2890*	2780	2360*	7263
3.0m			3940*	3940*	3390*	3390*	3080*	2680	2310*	7535
2.0m			4670*	4400	3800*	3280	3320*	2580	2330*	7663
1.0m			5290*	4210	4180*	3150	3550*	2490	1810	7659
0m			5680*	4100	4460*	3060	3590	2430	2500*	7521
– 1.0m	6790*	6230	5800*	4050	4530	3010	3550	2390	2700*	7239
– 2.0m	7440*	6220	5670*	4050	4520	3000	3550	2390	3010*	6798
– 3.0m	6760*	6230	5270*	4080	4230*	3040	3350*	2450	3170*	6167

LIFT CAPACITIES – DIPPER LENGTH: 3.00M, 4.70M MONOBOOM, TRACKSHOES: 500MM, NO BUCKET, DOZER. JSI45 LC MONO										
Reach	3m		4m		5m		6m		Capacity at Max Reach	
										
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m					2500*	2500*	2600*	2600*	2240*	6650
5.0m					2630*	2630*	2620*	2620*	2110*	7231
4.0m			3150*	3150*	2920*	2920*	2770*	2770*	2050*	7636
3.0m			3880*	3880*	3330*	3330*	3010*	2780	2040*	7893
2.0m			4690*	4690*	3800*	3500	3290*	2690	2060*	8016
1.0m			5390*	4570	4230*	3350	3570*	2600	2110*	8012
0m			5860*	4410	4570*	3240	3760	2530	2220*	7880
– 1.0m	5660*	5660*	6070*	4330	4750*	3180	3710	2490	2380*	7613
– 2.0m	7860*	6690	6030*	4310	4760*	3160	3700	2470	2640*	7196
– 3.0m	7470*	6770	5720*	4350	4540*	3180	3640*	2500	3040*	6601













Lift capacity front and rear.

















Lift capacity full circle.

Notes:

1. For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.
2. Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked* are based on hydraulic capacity.
3. Lift capacities assume that the machine is on firm, level ground.
4. Lift capacities may be limited by local regulations. Please refer to your dealer.

LIFT CAPACITIES – DIPPER LENGTH: 2.10M, 5.0M T.A.B., TRACKSHOES: 500MM, NO BUCKET, DOZER. JSI45 LC T.A.B.										
Reach	3m		4m		5m		6m		Capacity at Max Reach	
										
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m			3210*	3210*	3200*	3200*			3070*	5575
5.0m			3450*	3450*	3250*	3250*	3200*	2830	2830*	6259
4.0m	4910*	4910*	3980*	3980*	3510*	3510*	3260*	2810	2720*	6724
3.0m			4720*	4720*	3890*	3580	3450*	2750	2680*	7015
2.0m			5460*	4690	4300*	3450	3680*	2680	2700*	7154
1.0m			5980*	4520	4650*	3340	3840	2610	2780*	7149
0m			6190*	4440	4850*	3280	3800	2570	2940*	7000
– 1.0m	5710*	5710*	6150*	4430	4880*	3250	3780	2560	3210*	6697
– 2.0m	7460*	6930	5850*	4450	4680*	3270	3720*	2580	3450*	6219
– 3.0m			5220*	4530	4100*	3330			3710*	5322

LIFT CAPACITIES – DIPPER LENGTH: 2.50M, 5.0M T.A.B., TRACKSHOES: 500MM, NO BUCKET, DOZER. JSI45 LC T.A.B.										
Reach	3m		4m		5m		6m		Capacity at Max Reach	
										
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m			2800*	2800*	3010*	3010*			2370*	5533
5.0m			2980*	2980*	3020*	3020*	3110*	2890	2240*	6221
4.0m	3860*	3860*	3490*	3490*	3270*	3270*	3170*	2870	2190*	6689
3.0m	5400*	5400*	4250*	4250*	3680*	3680	3370*	2820	2190*	6982
2.0m	7130*	7130*	5100*	4890	4150*	3560*	3640*	2750	2250*	7121
1.0m	6370*	6370*	5810*	4710	4590*	3460	3890*	2690	2360*	7116
0m	6830*	6830*	6260*	4600	4900*	3380	3840	2640	2540*	6967
– 1.0m	8630*	6990	6400*	4540	4950	3340	3820	2620	2840*	6663
– 2.0m	8240*	7020	6240*	4540	4940	3330	3820	2620	3340*	6181
– 3.0m	7460*	7090	5730*	4580	4460*	3370			3850*	5474

LIFT CAPACITIES – DIPPER LENGTH: 2.70M, 5.0M T.A.B., TRACKSHOES: 500MM, NO BUCKET, DOZER. JSI45 LC T.A.B.										
Reach	3m		4m		5m		6m		Capacity at Max Reach	
										
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m					2840*	2840*			2530*	5653
5.0m			2720*	2720*	2820*	2820*	2950*	2900	2390*	6326
4.0m			3150*	3150*	3040*	3040*	3000*	2830	2330*	6785
3.0m	4660*	4660*	3830*	3830*	3410*	3410*	3190*	2740	2320*	7075
2.0m	6270*	6270*	4620*	4540	3850*	3380	3430*	2650	2380*	7210
1.0m	7520*	6500	5330*	4350	4270*	3250	3680*	2570	2490*	7205
0m	8090*	6410	5810*	4240	4600*	3170	3660	2510	2650*	7060
– 1.0m	8130*	6360	6000*	4180	4620	3120	3620	2480	2490*	6759
– 2.0m	7800*	6330	5910*	4170	4600	3110	3630	2480	3390*	6287
– 3.0m	7110*	6340	5490*	4190	4360*	3140			3750*	5592













Lift capacity front and rear.























Lift capacity full circle.

Notes:

1. For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.
2. Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked* are based on hydraulic capacity.
3. Lift capacities assume that the machine is on firm, level ground.
4. Lift capacities may be limited by local regulations. Please refer to your dealer.

LIFT CAPACITIES – DIPPER LENGTH: 3.00M, 5.0M T.A.B., TRACKSHOES: 500MM, NO BUCKET, DOZER. JSI45 LC T.A.B.										
Reach	3m		4m		5m		6m		Capacity at Max Reach	
										
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m					2540*	2540*	2520*	2520*	2180*	2180*
5.0m					2610*	2610*	2720*	2720*	2070*	2070*
4.0m			2960*	2960*	2890*	2890*	2840*	2840*	2030*	2030*
3.0m	4460*	4460*	3710*	3710*	3310*	3310*	3080*	2830	2040*	2020
2.0m	6210*	6210*	4600*	4600*	3820*	3580	3380*	2750	2090*	1940
1.0m	7640*	7230	5410*	4730	4310*	3460	3680*	2680	2190*	1910
0m	7510*	7000	5990*	4580	4700*	3360	3820	2620	2350*	1940
– 1.0m	8610*	6910	6280*	4490	4910	3300	3780	2570	2590*	2040
– 2.0m	8430*	6900	6280*	4460	4880	3270	3760	2560	2990*	2220
– 3.0m	7880*	6950	5970*	4480	4700*	3280	3670	2590	3590*	2560

LIFT CAPACITIES – DIPPER LENGTH: 2.10M, 5.0M T.A.B., TRACKSHOES: 500MM, NO BUCKET. JSI45 LC T.A.B.										
Reach	3m		4m		5m		6m		Capacity at Max Reach	
										
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m			3210*	3210*	3200*	3200*			3070*	3040
5.0m			3450*	3450*	3250*	3250*	3200*	2720	2830*	2520
4.0m	4910*	4910*	3980*	3980*	3510*	3510*	3260*	2700	2720*	2230
3.0m			4720*	4720*	3890*	3440	3450*	2630	2680*	2060
2.0m			5460*	4500	4300*	3310	3680	2560	2700*	1980
1.0m			5980*	4340	4650*	3200	3610	2500	2780*	1960
0m			6190*	4260	4630	3140	3570	2460	2890	2010
– 1.0m	5710*	5710*	6150*	4240	4600	3110	3550	2450	3070	2130
– 2.0m	7460*	6650	5850*	4270	4610	3130	3580	2470	3430	2380
– 3.0m			5220*	4340	4100*	3190			3710*	2950

LIFT CAPACITIES – DIPPER LENGTH: 2.50M, 5.0M T.A.B., TRACKSHOES: 500MM, NO BUCKET. JSI45 LC T.A.B.										
Reach	3m		4m		5m		6m		Capacity at Max Reach	
										
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m			2850*	2850*	2880*	2880*	2850*	2740	2460*	2460*
5.0m			3100*	3100*	2980*	2980*	2930*	2760	2290*	2280
4.0m	4290*	4290*	3630*	3630*	3260*	3260*	3050*	2720	2210*	2040
3.0m			4360*	4360*	3660*	3470	3260*	2650	2180*	1900
2.0m			5140*	4560	4100*	3330	3520*	2570	2200*	1830
1.0m			5750*	4360	4480*	3210	3890*	2690	2360*	2120
0m			6090*	4250	4620	3130	3550	2450	2390*	1850
– 1.0m	5800*	5800*	6160*	4200	4570	3090	3520	2420	2590*	1950
– 2.0m	7790*	6550	5980*	4210	4570	3080	3530	2420	2900*	2140
– 3.0m	7050*	6650	5500*	4270	4370*	3130	3260*	2490	3240*	2490












Lift capacity front and rear.











Notes:

1. For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.
2. Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked* are based on hydraulic capacity.
3. Lift capacities assume that the machine is on firm, level ground.
4. Lift capacities may be limited by local regulations. Please refer to your dealer.



Lift capacity full circle.

LIFT CAPACITIES – DIPPER LENGTH: 2.70M, 5.0M T.A.B., TRACKSHOES: 500MM, NO BUCKET. JSI45 LC T.A.B.										
Reach	3m		4m		5m		6m		Capacity at Max Reach	
										
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m					2730*	2730*	2880*	2810	2620*	2620*
5.0m			2840*	2840*	2790*	2790*	2790*	2760	2460*	2230
4.0m	3720*	3720*	3280*	3280*	3030*	3030*	2890*	2670	2360*	1990
3.0m			3940*	3940*	3390*	3310	3080*	2570	2310*	1840
2.0m			4670*	4230	3800*	3150	3320*	2470	2330*	1760
1.0m			5290*	4040	4180*	3020	3440	2380	2390*	1730
0m			5680*	3930	4310	2930	3370	2320	2500*	1750
– 1.0m	6790*	5970	5800*	3880	4260	2880	3330	2280	2650	1830
– 2.0m	7440*	5950	5670*	3870	4250	2870	3330	2280	2880	1990
– 3.0m	6760*	5970	5270*	3910	4230*	2900	3350*	2340	3160*	2280

LIFT CAPACITIES – DIPPER LENGTH: 3.00M, 5.0M T.A.B., TRACKSHOES: 500MM, NO BUCKET. JSI45 LC T.A.B.										
Reach	3m		4m		5m		6m		Capacity at Max Reach	
										
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m					2500*	2500*	2600*	2600*	2240*	2240*
5.0m					2630*	2630*	2620*	2620*	2110*	2020
4.0m			3150*	3150*	2920*	2920*	2770*	2750	2050*	1830
3.0m			3880*	3880*	3330*	3330*	3010*	2670	2040*	1710
2.0m			4690*	4630	3800*	3360	3290*	2570	2060*	1650
1.0m			5390*	4380	4230*	3210	3570*	2490	2110*	1630
0m			5860*	4220	4570*	3100	3530	2420	2220*	1650
– 1.0m	5660*	5660*	6070*	4140	4530	3040	3480	2370	2380*	1730
– 2.0m	7860*	6410	6030*	4130	4500	3020	3470	2360	2640*	1880
– 3.0m	7470*	6490	5720*	4160	4530	3040	3500	2390	3040*	2140













Lift capacity front and rear.











Notes:











1. For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.
2. Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked* are based on hydraulic capacity.
3. Lift capacities assume that the machine is on firm, level ground.
4. Lift capacities may be limited by local regulations. Please refer to your dealer.



Lift capacity full circle.

LIFT CAPACITIES – DIPPER LENGTH: 2.10M, 4.70M MONOBOOM, TRACKSHOES: 600MM, NO BUCKET.											JSI45 HD MONO
Reach	3m		4m		5m		6m		Capacity at Max Reach		
											
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m			3230*	3230*	3420*	3420*			2940*	2940*	5122
5.0m			3420*	3420*	3350*	3350*			2750*	2750*	5845
4.0m	4650*	4650*	3950*	3950*	3590*	3590*	3440*	3170	2680*	2680*	6327
3.0m	6320*	6320*	4710*	4710*	3990*	3990*	3610*	3130	2690*	2690	6622
2.0m			5510*	5480	4420*	3980	3840*	3070	2760*	2590	6756
1.0m			6110*	5320	4800*	3880	4050*	3020	2920*	2570	6737
0m	6340*	6340*	6400*	5240	5030*	3820	4170*	2980	3180*	2650	6565
– 1.0m	8460*	8210	6400*	5210	5060*	3800	4110*	2970	3600*	2840	6227
– 2.0m	7880*	7880*	6080*	5230	4800*	3810			4000*	3210	5692
– 3.0m	6870*	6870*	5310*	5300					4040*	4000	4896

LIFT CAPACITIES – DIPPER LENGTH: 2.50M, 4.70M MONOBOOM, TRACKSHOES: 600MM, NO BUCKET.											JSI45 HD MONO
Reach	3m		4m		5m		6m		Capacity at Max Reach		
											
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m			2800*	2800*	2990*	2990*			2360*	2360*	5604
5.0m			3020*	3020*	3030*	3030*	3110*	3110*	2230*	2230*	6271
4.0m	3980*	3980*	3550*	3550*	3300*	3300*	3180*	3180*	2180*	2180*	6722
3.0m	5560*	5560*	4320*	4320*	3720*	3720*	3400*	3140	2190*	2190*	7000
2.0m	7260*	7260*	5170*	5170*	4200*	4000	3660*	3080	2250*	2250*	7126
1.0m	6300*	6300*	5350	5350	4620*	3890	3920*	3010	2370*	2370	7109
0m	6960*	6960*	6280*	5230	4920*	3810	4090*	2970	2570*	2430	6946
– 1.0m	8610*	8150	6400*	5180	5040*	3770	4140*	2940	2870*	2580	6628
– 2.0m	8190*	8180	6210*	5180	4910*	3770	3910*	2950	3390*	2880	6129
– 3.0m	7370*	7370*	5660*	5230	4390*	3810			3860*	2450	5398

LIFT CAPACITIES – DIPPER LENGTH: 2.70M, 4.70M MONOBOOM, TRACKSHOES: 600MM, NO BUCKET.											JSI45 HD MONO
Reach	3m		4m		5m		6m		Capacity at Max Reach		
											
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m					2810*	2810*			2510*	2510*	5721
5.0m			2740*	2740*	2820*	2820*	2940*	2940*	2370*	2370*	6374
4.0m	3410*	3410*	3190*	3190*	3060*	3060*	3000*	3000*	2320*	2320*	6816
3.0m	4790*	4790*	3890*	3890*	3440*	3440*	3190*	3050	2320*	2320	7092
2.0m	6390*	6390*	4680*	4680*	3880*	3770	3440*	2950	2380*	2300	7216
1.0m	7580*	7500	5370*	4920	4300*	3650	3690*	2870	2490*	2270	7198
0m	8090*	7410	5820*	4810	4610*	3560	3880*	2810	2670*	2310	7040
– 1.0m	8100*	7360	5990*	4750	4750*	3510	3950*	2780	2970*	2430	6725
– 2.0m	7740*	7330	5870*	4740	4680*	3500	3820*	2790	3440*	2670	6237
– 3.0m	7020*	7020*	5420*	4770	4290*	3540			3740*	3150	5519



Lift capacity front and rear.



Lift capacity full circle.

Notes:

1. For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.
2. Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked* are based on hydraulic capacity.
3. Lift capacities assume that the machine is on firm, level ground.
4. Lift capacities may be limited by local regulations. Please refer to your dealer.













Lift capacity front and rear.























Lift capacity full circle.











Notes:

1. For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.
2. Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked* are based on hydraulic capacity.
3. Lift capacities assume that the machine is on firm, level ground.
4. Lift capacities may be limited by local regulations. Please refer to your dealer.

LIFT CAPACITIES – DIPPER LENGTH: 2.10M, 5.00M MONOBOOM, TRACKSHOES: 600MM, NO BUCKET.											JSI45 HD T.A.B.
Reach	3m		4m		5m		6m		Capacity at Max Reach		
											
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m			3220*	3220*	3190*	3190*			3050*	3050*	5645
5.0m	3880*	3880*	3490*	3490*	3260*	3260*	3200*	3180	2830*	2830*	6307
4.0m	5040*	5040*	4040*	4040*	3540*	3540*	3270*	3140	2720*	2590	6756
3.0m			4790*	4790*	3930*	3930*	3470*	3080	2680*	2410	7033
2.0m			5510*	5330	4340*	3890	3700*	3010	2700*	2330	7159
1.0m			6010*	5170	4670*	3780	3900*	2940	2800*	2320	7141
0m			6200*	5090	4860*	3720	4010*	2900	2950*	2380	6980
– 1.0m	6010*	6010*	6130*	5080	4870*	3690	3990*	2890	3220*	2540	6663
– 2.0m	7400*	7400*	5810*	5110	4650*	3710	3670*	2930	3450*	2840	6167
– 3.0m			5140*	5140*	4010*	3790			3850*	3660	5131

LIFT CAPACITIES – DIPPER LENGTH: 2.50M, 5.00M MONOBOOM, TRACKSHOES: 600MM, NO BUCKET.											JSI45 HD T.A.B.
Reach	3m		4m		5m		6m		Capacity at Max Reach		
											
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m			2860*	2860*	2880*	2880*	3010*	3010*	2430*	2430*	6130
5.0m			3140*	3140*	2990*	2990*	2930*	2930*	2290*	2290*	6743
4.0m	4410*	4410*	3680*	3680*	3290*	3290*	3060*	3060*	2210*	2210*	7164
3.0m			4430*	4430*	3700*	3700*	3290*	3100	2180*	2180*	7426
2.0m			5200*	5200*	4130*	3910	3540*	3020	2210*	2150	7545
1.0m			5790*	5190	4510*	3790	3780*	2940	2280*	2140	7528
0m			6110*	5080	4770*	3710	3940*	2890	2410*	2190	7375
– 1.0m	6020*	6020*	6150*	5040	4850*	3670	3990*	2860	2610*	2310	7076
– 2.0m	7740*	7740*	5950*	5050	4730*	3670	3840*	2870	2930*	2550	6612
– 3.0m	6970*	6970*	5440*	5120	4310*	3720			3270*	3000	5922

LIFT CAPACITIES – DIPPER LENGTH: 2.70M, 5.00M MONOBOOM, TRACKSHOES: 600MM, NO BUCKET.											JSI45 HD T.A.B.
Reach	3m		4m		5m		6m		Capacity at Max Reach		
											
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m					2710*	2710*	2840*	2840*	2590*	2590*	6281
5.0m			2860*	2860*	2790*	2790*	2780*	2780*	2430*	2430*	6879
4.0m	3810*	3810*	3330*	3330*	3050*	3050*	2890*	2890*	2350*	2310	7292
3.0m			3990*	3990*	3410*	3410*	3090*	2990	2300*	2150	7552
2.0m			4720*	4720*	3820*	3680	3330*	2880	2330*	2060	7668
1.0m			5330*	4790	4200*	3550	3560*	2790	2390*	2040	7652
0m			5680*	4680	4460*	3460	3730*	2730	2500*	2070	7503
– 1.0m	7000*	7000*	5780*	4630	4580*	3410	3800*	2700	2720*	2170	7207
– 2.0m	7380*	7240	5630*	4630	4500*	3410	3700*	2700	3040*	2370	6751
– 3.0m	6660*	6660*	5210*	4670	4170*	3450	3270*	2770	3150*	2720	6101

LIFT CAPACITIES – DIPPER LENGTH: 3.00M, 5.00M MONOBOOM, TRACKSHOES: 600MM, NO BUCKET.											JSI45 HD T.A.B.
Reach	3m		4m		5m		6m		Capacity at Max Reach		
											
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
6.0m					2500*	2500*	2600*	2600*	2240*	2240*	6650
5.0m					2630*	2630*	2620*	2620*	2110*	2020	7231
4.0m			3150*	3150*	2920*	2920*	2770*	2750	2050*	1830	7636
3.0m			3880*	3880*	3330*	3330*	3010*	2670	2040*	1710	7893
2.0m			4690*	4630	3800*	3360	3290*	2570	2060*	1650	8016
1.0m			5390*	4380	4230*	3210	3570*	2490	2110*	1630	8012
0m			5860*	4220	4570*	3100	3530	2420	2220*	1650	7880
– 1.0m	5660*	5660*	6070*	4140	4530	3040	3480	2370	2380*	1730	7613
– 2.0m	7860*	6410	6030*	4130	4500	3020	3470	2360	2640*	1880	7196
– 3.0m	7470*	6490	5720*	4160	4530	3040	3500	2390	3040*	2140	6601