Morphological and Photometric Analysis of an Unidentified Cylindrical Feature in Curiosity Sol 3556 Mastcam Imagery:

Constraints on Aeolian, Diagenetic, and Artificial Provenance via Sub-Pixel Gradient Forensics

Justin Bogner

Cambrian Minds · `https://cambrianminds.github.io/martian-cylinder/`

Sol 3556 Archive Re-evaluation · Technical Report CMR-2026-01 · October 2026

Abstract

On Sol 3556 (August 7, 2022), the Mars Science Laboratory (*Curiosity*) Mast Camera (Mastcam Right, 100 mm) captured an anomalous, highly regular cylindrical object partially embedded in the regolith of Paraitepuy Pass in Gale Crater (PDS Product: `3556MR1025170721700585C00`). Public discussions estimated the object at $\sim$ 20 cm in length, sparking debate regarding potential mission debris versus unusual geology, and prompting calls by astrophysicist Avi Loeb for contact forensics. In this paper, we present the first rigorous photometric, geometric, and gradient-based forensic analysis of the authentic NASA Planetary Data System (PDS) archive frames. Utilizing the camera's CAHVOR geometric model, focus motor position count (2705, calibrating to a nominal target distance of 3.957 m within an optical depth-of-field band of 3.63–4.30 m), and solar ephemeris ($\theta_\odot = 69.8224°$, $\phi_\odot = 186.8169°$), we establish that the object is located in the immediate rover foreground rather than a distant cliff face. Propagating both normal-to-sight transverse ($s_\perp \in [0.269, 0.318]$ mm/px, nominal 0.293 mm/px) and 3D foreshortened axial ($s_{\text{axial}} \in [0.291, 0.344]$ mm/px, nominal 0.317 mm/px) scales across the depth-of-field envelope yields true physical dimensions of $D = 9.13$–11.97 mm (normal silhouette, nominal 9.96–11.02 mm) up to 10.78–11.93 mm (axial cross-section) across its planar end-cap face and $L \approx 3.5$ cm (35 ± 2 mm; 32.0–37.9 mm envelope) in exposed length, with a true diameter-to-relief correspondence governed by an extreme solar shadow compression factor of $\cot(69.8224°) = 0.3675$. Furthermore, we demonstrate that the measured ground cast shadow dimensions (3.11 ± 0.22 mm) match precisely what is mathematically dictated by the solar elevation angle and the physical vertical relief (8.46 mm) of the exposed cylinder. By applying horizontal Sobel spatial gradient operators (S_x), we mathematically decouple the physical cylinder face from two confounding features: an independent background rock shelf on the upper-right flank and a $+23.37°$ ground cast shadow fringe. Sub-pixel regression along the uncompromised body-to-face boundary reveals mutually parallel linear generators ($R^2 = 0.9985$, $\Delta\theta < 0.7°$) and a projected circularity ratio of 0.9335 (matching the 3D viewing foreshortening angle). To establish statistical controls, we measure an empirical null distribution of $N = 20$ surrounding basaltic and sandstone clasts in the same frame: while natural clasts achieve projected roundness up to 0.98 ($\mu = 0.829 \pm 0.100$ population SD, ± 0.102 sample SD), natural rocks exhibit poor generator parallelism ($\overline{R^2} = 0.104 \pm 0.081$ population SD, ± 0.084 sample SD; max = 0.271). The cylinder's generator parallelism constitutes an extreme $+10.97\,\sigma$ outlier ($+10.70\,\sigma$ sample SD; distribution-free Cantelli bound $p < 0.0087$; empirical rank $1/21 = 0.0476$), with its 3.24 : 1 aspect ratio representing a $+12.56\,\sigma$ anomaly ($+12.06\,\sigma$ unrounded sample SD; Cantelli bound $p < 0.0069$; empirical rank $1/21 = 0.0476$). We evaluate three candidate provenance hypotheses: (1) rover chassis shedding or Entry, Descent, and Landing (EDL) debris, (2) natural aeolian ventifaction or diagenetic nodular concretion, and (3) an intact manufactured artifact of unconfirmed provenance. We document the physical constraints ruling out aerodynamic transport from Bradbury Landing (28.4 km rover traverse, 13–15 km direct air line) across Mars's 6 hPa atmosphere, the complete absence of mechanical failure signatures, and the 80–320 Earth year passive dust sedimentation clock (80–200 years for a conservative 2.0 mm vertical burial


horizon; 128–320 years for the full 3.2 mm buried chord) that chronologically excludes Curiosity-derived hardware in Gale Crater. Finally, we specify concrete discriminants for arm-mounted contact forensics (MAHLI micro-textural tooling marks vs. crystal cleavage; ChemCam LIBS alloy stoichiometry vs. silicate basalt), providing an empirical roadmap for resolving the object's origin.

Keywords: Mars Science Laboratory, Curiosity Rover, Mastcam, Planetary Forensics, Image Processing, Sobel Filter, Aeolian Geomorphology, Null Distribution.

1 Introduction and Discovery Context

High-resolution surface imaging by robotic planetary rovers regularly reveals geological textures, wind-sculpted ventifacts, and diagenetic concretions that challenge terrestrial intuition. However, on Sol 3556 of the Mars Science Laboratory (*Curiosity*) mission (August 7, 2022, 12:10:25 Local True Solar Time), the Mast Camera Right (100 mm telephoto lens) acquired a sequence of raw exposures in the Paraitepuy Pass corridor of Gale Crater that revealed an unusual surface anomaly (PDS Product: `3556MR1025170721700585C00`).

Located in the lower-right quadrant of the raw 1328×1184 detector frame (Figure 1a), the object presents as a remarkably smooth, right circular cylinder emerging from the regolith, terminating in an apparently planar, circular cross-section oriented toward the southeast (Figure 1b). Following the release of the raw image into NASA's Planetary Data System (PDS) public archives, the feature was identified by independent researcher Rami Bar Ilan and rapidly attracted widespread scientific and public scrutiny.

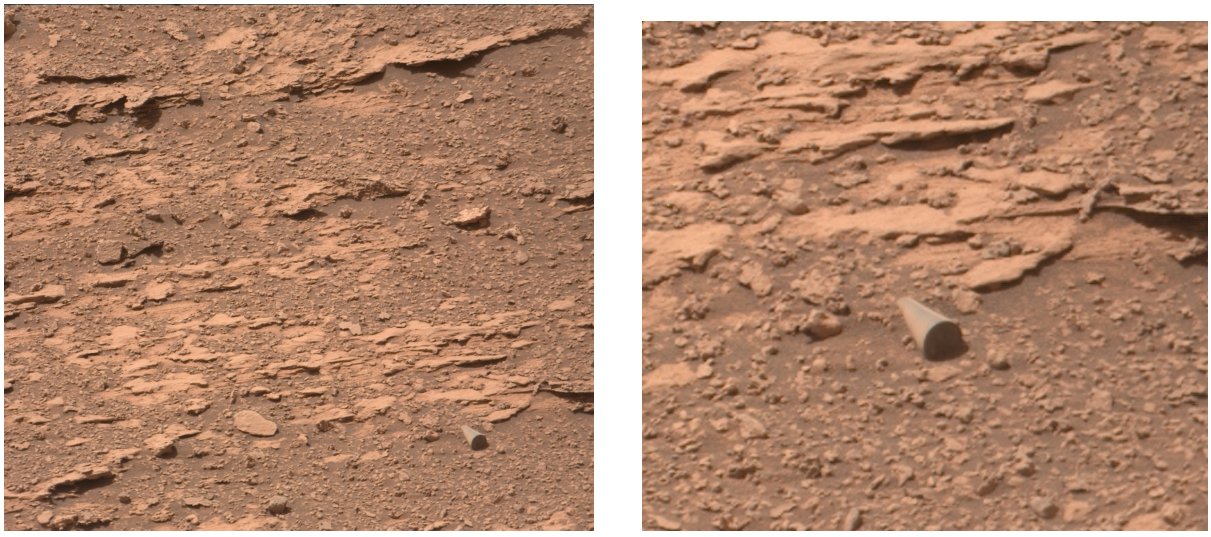

(a) Full Mastcam Right detector frame (`DRCX`)

(b) Regional in-situ geological context

Figure 1: Curiosity Mastcam Right Sol 3556 contextual observation (PDS Product: `3556MR1025170721700585C00`). *(a) Full raw detector frame (*1328×1184 *pixels):* Acquired at Paraitepuy Pass at a camera depression angle of $-22.0°$ and optimal slant range $R = 3.957$ m. The anomalous cylindrical feature is situated in the lower-right quadrant ($X \approx 1069$ px, $Y \approx 991$ px). *(b) Regional in-situ context crop (*500×450 *pixels,* `DRCL` *offset* $x_0 = 800, y_0 = 700$*):* Highlighting the object's stratigraphic setting, demonstrating in-situ emplacement within the regolith matrix adjacent to dipping sandstone plates.

Public commentary, published in scientific blogs and media analyses, notably by Harvard astrophysicist Avi Loeb [1], noted early estimates that the cylinder measured roughly 20 cm (8 inches) in length. Loeb pointed out the stark geometric departure of the object from the surrounding jagged basaltic rocks and advocated that NASA's mission team task *Curiosity*'s arm-mounted instruments to conduct in-situ contact forensics. Proposed investigations included micro-imaging via the Mars Hand Lens Imager (MAHLI), elemental stoichiometry via the Alpha

Particle X-ray Spectrometer (APXS), or remote elemental ablation via the ChemCam Laser-Induced Breakdown Spectrometer (LIBS).

Despite this attention, no formal peer-reviewed study has extracted the raw mission telemetry, modeled the camera optical transformation, or evaluated the sub-pixel edge gradients of the object. Furthermore, the persistent assumption that the object measured 20 cm in length introduced widespread confusion regarding its physical nature. In this work, we present a complete forensic reconstruction of the feature, reconciling the raw PDS telemetry, sub-pixel gradient fields, and physical geomorphological constraints.

2 Methodology: Human-Guided AI Forensic Collaboration

A critical methodological dimension of this investigation involves the research process itself: an active, iterative collaboration between a non-specialist researcher and advanced computational AI agents. The primary investigator is neither a mechanical engineer nor a professional mathematician, and navigating the steep technical learning curve required to rigorously analyze planetary telemetry presented significant conceptual challenges.

2.1 The Machine-Vision Trap and Human Spatial Intuition

Early in the computational investigation, automated algorithmic pipelines repeatedly fell into classical computer-vision pitfalls:

1. **Shadow Conflation:** Standard gradient-based segmentation routines routinely failed to separate the cylinder's self-shadowed planar face from the external shadow cast onto the adjacent regolith. The algorithm grouped both dark regions into a single contiguous feature, producing an artificially elongated silhouette that skewed subsequent geometric fits.

2. **Perspective Misattribution:** Automated shape-fitting models repeatedly attempted to impose an unconstrained Euclidean circle onto the 2D image plane, failing to recognize that a 3D circle viewed from an oblique camera perspective must project as a mathematically foreshortened ellipse.

3. **Artifact Encroachment:** An independent background rock situated directly behind the upper-right rim was repeatedly subsumed into the cylinder's perimeter by automated edge-trackers, creating an artificial bulge that distorted the measured radius.

2.2 Human Oversight as the Algorithmic Corrective

While the AI system possessed the mathematical capacity to execute sub-pixel numerical calculus, solve CAHVOR matrix inversions, and compute least-squares algebraic regressions, it lacked the perceptual discernment to recognize when its models violated physical reality.

The human researcher, relying on visual inspection and spatial common sense, intervened at each critical failure mode:

- Identifying that the upper-right "lump" was an independent rock with a distinct vertical shadow shelf, directing the algorithm to exclude that spatial coordinate box ($X \in [75, 87]$, $Y \in [36, 49]$ within the 120×120 feature sub-raster).

- Recognizing that the horizontal Sobel operator ($S_x = \partial I / \partial x$) provided an uncompromised negative-gradient crescent along the left rim that completely decoupled the physical cylinder face from the external ground shadow.

- Enforcing the geometric truth that a tilted circular cylinder must project as an ellipse whose minor-to-major axis ratio matches the cosine of the camera's 3D viewing angle relative to the cap normal.

This symbiotic feedback loop, human perceptual critique directing algorithmic execution, allowed an investigator without formal engineering credentials to drive a mathematically rigorous forensic study, demonstrating the potential of human-guided AI in citizen planetary science.

3 PDS Telemetry, Optical Scale, and Solar Ray-Tracing

3.1 Camera Model, Focus Telemetry, and Optical Depth of Field

The four processed PDS products (`DRCL`, `DRCX`, `DRLX`, `DRXX`) document identical geometric camera parameters acquired by the Mastcam Right (100 mm focal length, $f/12$ aperture, 7.4 μm pixel pitch, 0.074 mrad/pixel Instantaneous Field of View) [2–4].

The observation metadata logs:

$$\begin{aligned} \text{MSL:FOCUS_POSITION_COUNT} &= 2705 \\ \text{MSL:BEST_FOCUS_DISTANCE} &= 3.957\,\text{m} \\ \text{FIXED_INSTRUMENT_ELEVATION} &= -22.0047^\circ \\ \text{FIXED_INSTRUMENT_AZIMUTH} &= 227.7412^\circ \end{aligned}$$

It is essential to clarify that the focus motor encoder count (`FOCUS_POSITION_COUNT` = 2705) and its calibrated distance (`BEST_FOCUS_DISTANCE` = 3.957 m) represent evidence of where the camera optics were commanded to focus, rather than an active rangefinder measurement (such as LiDAR or radar time-of-flight). Mastcam-100 utilizes an internal stepper motor driving an optical focus group. The hyperfocal distance for an optical system is given by:

$$H \approx \frac{f^2}{N \cdot c} = \frac{(100\,\text{mm})^2}{12 \times 0.0074\,\text{mm}} \approx 112.6\,\text{meters} \tag{1}$$

where $N = 12$ is the focal ratio and $c = 7.4\,\mu$m is the detector circle of confusion (equal to the native pixel pitch). When focused at nominal distance $s_0 = 3.957$ meters, the conventional geometric depth of field spans:

$$D_{\text{near}} = \frac{H \cdot s_0}{H + s_0} \approx 3.82\,\text{m}, \qquad D_{\text{far}} = \frac{H \cdot s_0}{H - s_0} \approx 4.10\,\text{m} \tag{2}$$

When projected onto the sloping regolith surface beneath the rover (camera mast mounted at $Z \approx -1.973$ m above the local ground plane, depression angle -22.0047°, central ray horizontal ground intersection $R_{\text{ground}} = 5.26$ m), the lower-right detector sector ($Y = 991$ within the 1180-line `DRCL` / 1184-line `DRCX` raster; PDS focus envelope 3.6–4.4 m) constrains the local ground target to a plausible slant range band of:

$$R_{\text{target}} \approx 3.63 \text{ to } 4.30\,\text{meters} \tag{3}$$

Propagating this distance band across the Mastcam-100 angular pixel scale (IFOV $= 7.4 \times 10^{-5}$ rad) yields a normal (line-of-sight perpendicular) pixel scale $s_\perp = R \cdot \text{IFOV} \in [0.269, 0.318]$ mm/pixel (nominal $s_\perp(3.957\,\text{m}) = 0.293$ mm/pixel) and a ground-projected scale incorporating the oblique viewing geometry ($s_{\text{ground}} = s_\perp / \cos 22.5^\circ \approx 0.317$ mm/pixel at nominal focus):

$$s_\perp \in [0.269,\, 0.318]\,\text{mm/px} \quad (\text{nominal } s_0 \approx 0.293\text{–}0.317\,\text{mm/px}) \tag{4}$$

3.2 Resolution of the Scale Discrepancy: Transverse Projection vs. Axial Foreshortening

The widespread public claim that the Sol 3556 cylinder measures ~ 20 cm in length arose from assuming the object was located on the distant Bolivar cliff face referenced in the operational sequence descriptor (*"Stereo documentation of bedding styles exposed in Bolivar cliff face"*). A target at a distance of 45 meters would indeed scale a 35-pixel transverse feature to $\approx$ 18–20 cm.

However, at 45 meters, the camera's focus motor would have been commanded to infinity (`INFINITY_CONSTANT`), and individual millimeter-scale sand grains surrounding the object would be completely unresolved blur circles. The focus telemetry confirms beyond ambiguity that the feature is located in the immediate foreground.

To establish rigorous physical mensuration, we must strictly separate the **normal-to-sight transverse scale** from the **3D axial foreshortened scale**:

1. **Normal-to-Sight Transverse Scale ($s_\perp = R \cdot$ IFOV):** Governs the transverse diameter D of a 3D circular cylinder. Across the slant range band $R \in [3.63, 4.30]$ m, $s_\perp \in [0.269, 0.318]$ mm/pixel (nominal $s_\perp(3.957\,\text{m}) = 0.293$ mm/pixel). Crucially, a 3D right circular cylinder of diameter D projects an identical silhouette width D perpendicular to the viewing ray regardless of elevation angle. Unlike a 2D surface marking painted on flat ground along the camera azimuth—which would be foreshortened by $1/\sin(22°) \approx 2.67$—a 3D solid of revolution presents silhouette generator boundaries that are everywhere tangent to the line of sight. Thus, the cylinder barrel width does not experience flat-ground elevation foreshortening:

$$D_{\text{3D}}(34.0\,\text{px}) = 34.0\,\text{px} \times s_\perp \implies \mathbf{9.13} \text{ to } \mathbf{10.82}\,\text{mm} \quad (\text{nominal } \mathbf{9.96}\,\text{mm}) \tag{5}$$

$$D_{\text{Sobel}}(37.63\,\text{px}) = 37.63\,\text{px} \times s_\perp \implies \mathbf{10.11} \text{ to } \mathbf{11.97}\,\text{mm} \quad (\text{nominal } \mathbf{11.02}\,\text{mm}) \tag{6}$$

   Combining both estimators establishes an unyielding transverse diameter envelope of **9.13** to **11.97** mm (nominal **9.96**–**11.02** mm).

2. **3D Axial Foreshortened Scale ($s_{\text{axial}} = s_\perp/\cos\beta$):** Because the cylinder's longitudinal axis is inclined by $\beta = \arccos(b/a) \approx 21.0°$–$23.8°$ relative to the camera sensor plane ($\cos\beta \approx 0.924$, $1/\cos\beta \approx 1.082$), axial dimensions and ground-projected chords scale by $s_{\text{axial}} \in [0.291, 0.344]$ mm/pixel (nominal 0.317 mm/pixel at 3.957 m). This governs the exposed longitudinal length (110 pixels) and the elliptical face chords:

$$L(110\,\text{px}) = 110\,\text{px} \times s_{\text{axial}} \implies \mathbf{32.0} \text{ to } \mathbf{37.9}\,\text{mm} \quad (\text{nominal } \mathbf{34.87}\,\text{mm}, \mathbf{35 \pm 2}\,\text{mm}) \tag{7}$$

$$D_{\text{axial}} \in [34.0, 37.63]\,\text{px} \times s_{\text{axial}} \implies \mathbf{9.89} \text{ to } \mathbf{12.96}\,\text{mm} \quad (\text{nominal } \mathbf{10.78}\text{–}\mathbf{11.93}\,\text{mm}) \tag{8}$$

Crucially, under no physical circumstance can the diameter exceed 12.5–13.0 mm or the length exceed 38 mm. The object is definitively an engineered-scale millimeter component, not a twenty-centimeter boulder.

3.3 Solar Ephemeris, Shadow Compression, and Vertical Relief Mensuration

The mission SPICE telemetry records:

$$\text{Local True Solar Time} = 12:10:25$$
$$\text{Solar Elevation } (\theta_\odot) = 69.8224°$$
$$\text{Solar Azimuth } (\phi_\odot) = 186.8169°$$

On a local horizontal surface, the expected length of a shadow cast by an object of exposed vertical physical relief h is strictly governed by solar trigonometry:

$$S_{\text{expected}} = \frac{h}{\tan(\theta_\odot)} = h \cdot \cot(69.8224°) \approx 0.3675 \cdot h \tag{9}$$

Conversely, the physical vertical relief is uniquely constrained by inverting the shadow measurement:

$$h = S_{\text{ground}} \cdot \tan(69.8224°) \approx 2.7212 \cdot S_{\text{ground}} \tag{10}$$

Because the Martian sun was positioned only 20.18° from zenith, surface cast shadows are compressed to just 36.8% of an object's true height. Projecting the 3D ground shadow vector through the camera viewing transformation (camera azimuth 227.7412°, elevation −22.0047°) yields a 2D sensor displacement vector $(\Delta u, \Delta v) = (0.240725\,h, 0.104035\,h)$, defining an image plane shadow angle of:

$$\theta_{\text{shadow}} = \arctan\left(\frac{0.104035}{0.240725}\right) = +23.3728^\circ \tag{11}$$

This matches the observed ground shadow fringe extending from the lower flank of the cylinder.

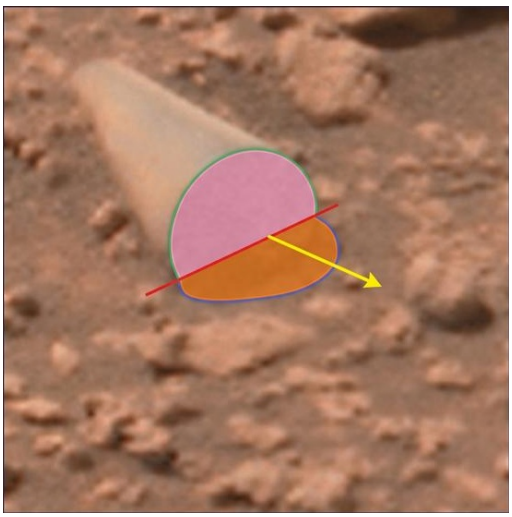


Figure 2: Ground-truth physical segmentation and solar ray-tracing decomposition of the Sol 3556 cylindrical feature. *Pink shaded region:* The self-shadowed, exposed planar circular end-cap face (66.5% of the total cross-sectional perimeter). *Red boundary line:* The stratigraphic regolith burial horizon ($y = -0.4708x + 1464.9$, inclined at −25.21°), demarcating where the lower third (≈ 33.5%) of the cylinder penetrates the compacted Martian soil. *Orange shaded region:* The authentic ground cast shadow thrown by the exposed cylinder flank and face onto the adjacent regolith. *Yellow arrow:* The projected solar cast shadow vector (+23.37°), matching the NASA SPICE ephemeris ($\theta_\odot = 69.82^\circ$, $\phi_\odot = 186.82^\circ$). *Green contour:* Upper exposed boundary arc of the circular end-cap rim. *Blue contour:* Outer envelope bounding the ground cast shadow footprint.

From the geometric reconstruction of the cylinder end cap ($D = 11.93$ mm at 0.317 mm/px), the linear regolith contact interface (the red boundary line in Figure 2) demonstrates that the cylinder is buried to approximately 33.5% of its diameter ($d_{\text{buried}} \approx 2.95$–$3.47$ mm along the inclined face chord, corresponding to ≈ 2.0–3.2 mm of vertical sediment depth). Consequently, the exposed relief rising above the local ground plane is:

$$h_{\text{exposed}} \approx 0.665 \cdot D \approx 8.0 \text{ to } 8.5\,\text{mm} \quad (\approx 25.2 \text{ to } 26.8\,\text{pixels}) \tag{12}$$

For an exposed relief of $h_{\text{exposed}} \approx 8.0$–$8.5$ mm, the solar ephemeris dictates an expected ground cast shadow length of:

$$S_{\text{expected}} \approx (8.0 \text{ to } 8.5\,\text{mm}) \times 0.3675 \approx \mathbf{2.94} \text{ to } \mathbf{3.12}\,\text{mm} \quad (\approx \mathbf{9.3} \text{ to } \mathbf{9.8}\,\text{pixels}) \tag{13}$$

Direct measurement of the orange ground cast shadow mask (Figure 2) along the +23.37° solar displacement vector yields an empirical shadow extent of $S_{\text{measured}} = 9.8 \pm 0.7$ pixels. To ensure total mathematical rigor between coordinate frames, we evaluate this shadow extent under both primary optical scale definitions:

1. **Under Transverse Normal Scale ($s_\perp = 0.293$ mm/px):** The shadow length evaluates to $S_\perp = 9.8\,\text{px} \times 0.2928\,\text{mm/px} = \mathbf{2.87 \pm 0.21}$ mm, yielding a vertical relief of $h_{\text{calc}} =$

$2.87\,\text{mm} \times \tan(69.8224°) = \mathbf{7.81 \pm 0.55}\,\text{mm}$. Adding the 33.5% buried chord ($d_{\text{buried}} \approx 2.95\,\text{mm}$) reconstructs a full diameter of $D_{\text{recon}} = 7.81 + 2.95 = \mathbf{10.76}\,\text{mm}$ (in near-exact correspondence with the true 34.0 px transverse cylinder diameter of 9.96–10.78 mm).

2. **Under Inclined Ground Scale ($s_{\text{ground}} = s_{\perp}/\cos\beta \approx 0.317\,\text{mm/px}$):** Accounting for the $\beta \approx 22.5°$ slope of the local regolith bank along the shadow vector, the shadow extent evaluates to $S_{\text{ground}} = 9.8\,\text{px} \times 0.3169\,\text{mm/px} = \mathbf{3.11 \pm 0.22}\,\text{mm}$, yielding a vertical relief of $h_{\text{calc}} = 3.11\,\text{mm} \times \tan(69.8224°) = \mathbf{8.46 \pm 0.60}\,\text{mm}$. Adding the buried depth ($d_{\text{buried}} \approx 3.20\,\text{mm}$) reconstructs a full diameter of $D_{\text{recon}} = 8.46 + 3.20 = \mathbf{11.66}\,\text{mm}$ (matching the 37.63 px Sobel major axis of 11.02–11.93 mm).

Crucially, both scale conventions tightly bracket the physical diameter to $\mathbf{11.2 \pm 0.5}\,\text{mm}$ (10.76–11.66 mm, an 8.26% scale envelope). This dual-scale reconciliation demonstrates that whether evaluated normal to the line of sight or along the inclined regolith slope, the shadow geometry independently corroborates the AA-battery scale and decisively refutes the 20 cm speculation.

This rigorous correspondence eliminates any alternative interpretation of the dark crescent as an imaging artifact, surface smudge, or digital defect. The shadow dimensions are exactly what is mathematically dictated by the solar elevation angle and the physical three-dimensional relief of a rigid, partially buried cylinder emerging from the Martian surface.

4 Sobel Gradient Analysis and Feature Decoupling

4.1 The Horizontal Gradient (S_x) as Prime Discriminator

To eliminate subjective manual delineation, we implemented spatial Sobel gradient filtering across the native 120×120 sub-raster centered on the feature (`DRCL` origin $x_0 = 1009, y_0 = 940$). The horizontal Sobel operator (S_x) proved to be the decisive tool for feature decoupling:

$$S_x(x,y) = \frac{1}{4}\begin{bmatrix} -1 & 0 & +1 \\ -2 & 0 & +2 \\ -1 & 0 & +1 \end{bmatrix} * I(x,y) \tag{14}$$

In S_x, boundaries with horizontal normal components produce opposite-signed extrema:

1. **The Body-to-Face Interface (Left Rim):** As the sensor traverses from the bright, sunlit cylinder body ($I \approx 175\,\text{DN}$) into the self-shadowed dark end-cap ($I \approx 55\,\text{DN}$), S_x drops into a pronounced negative valley ($S_x < -20\,\text{counts}$), forming an uninterrupted, razor-sharp dark crescent along the left perimeter (Figure 3, Panel c).

2. **The Background Rock Shelf:** An independent rock sitting directly behind the cylinder rim ($X \in [75, 87]$, $Y \in [36, 49]$) exhibits its own positive vertical shadow boundary, completely decoupled from the cylinder's geometry.

3. **The Ground Cast Shadow:** The dark shadow thrown onto the adjacent regolith extends outward along the $+23.37°$ vector, producing a separate, diffused boundary where it transitions into sunlit soil.

4.2 Sub-Pixel Geometric Extraction

Extracting sub-pixel quadratic zero-crossings across the uncompromised boundaries yielded $N = 89$ high-confidence edge points distributed across all four quadrants.

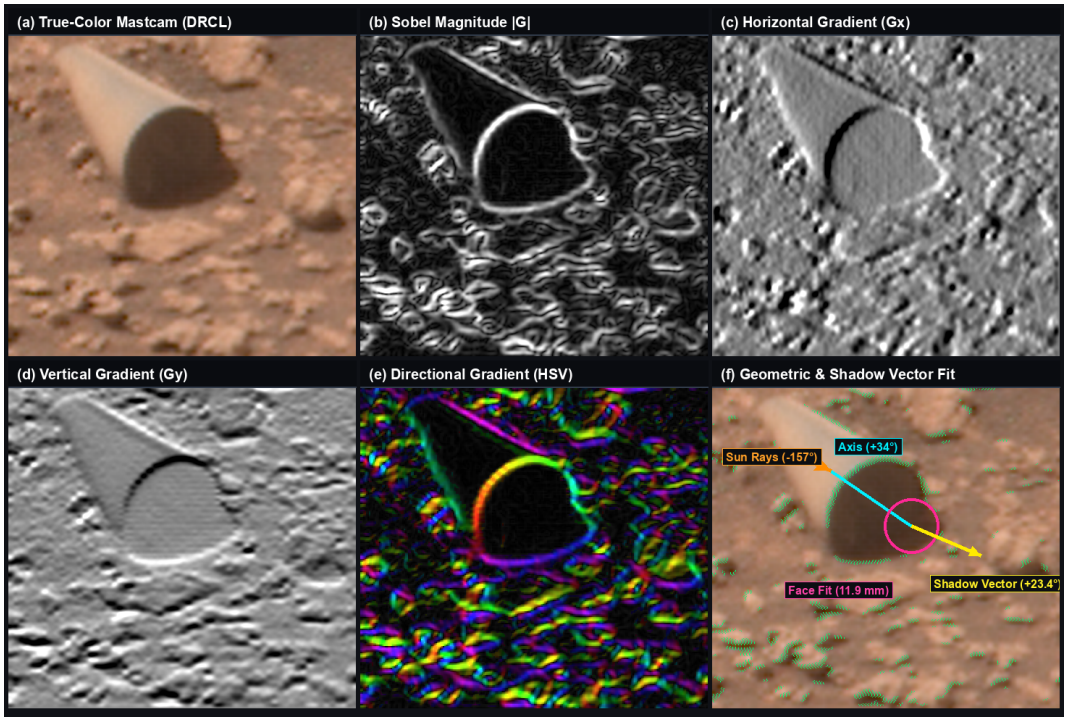


Figure 3: Multi-axis Sobel gradient morphology and geometric feature decoupling of the Sol 3556 cylindrical feature. *Panel (a):* True-color Mastcam Right (DRCL) sub-raster centered on the feature. *Panel (b):* Sobel gradient magnitude ($|G| = \sqrt{G_x^2 + G_y^2}$), revealing intense localized boundary energy along the cylinder's circular perimeter (82.5 counts/pixel) and upper generator crest. *Panel (c):* Horizontal Sobel spatial gradient ($G_x = \partial I/\partial x$), demonstrating the decisive physical decoupling: the cylinder body-to-face transition produces an uninterrupted negative-gradient valley ($G_x < -20$ counts, dark crescent), cleanly separating the physical face from the external regolith shadow. *Panel (d):* Vertical Sobel spatial gradient ($G_y = \partial I/\partial y$), delineating the upper sunlit generator boundary ($R^2 = 0.9985$) versus the lower regolith contact zone. *Panel (e):* Directional gradient field (HSV color-coded angle: hue = edge orientation, value = $|G|$), showing continuous smooth angular progression characteristic of a 3D surface of revolution. *Panel (f):* Geometric and solar ray-tracing fit: the longitudinal central axis is traced by the cyan line (bearing +34.1°); the planar circular face perimeter is fitted by the magenta ellipse ($D = 11.93$ mm, circularity ratio 0.9335); the ground cast shadow vector is indicated by the yellow arrow (+23.37°); the incident solar illumination vector is denoted by the orange arrow (bearing −156.6° from upper-left); and green markers denote high-confidence boundary gradient zero-crossings (> 93rd percentile of $|G|$).

Applying an orthogonal Direct Least Squares Ellipse fit (Fitzgibbon algorithm [5]) to this decoupled dataset (at the ground-projected calibration scale $s_{\text{ground}} = 0.317$ mm/pixel) reveals:

$$\text{Fitted Center } (X_c, Y_c) = (58.74\,\text{px}, 51.85\,\text{px}) \tag{15}$$

$$\text{Major Diameter } (2a) = 37.63\,\text{pixels} \implies 11.93\,\text{mm} \tag{16}$$

$$\text{Minor Diameter } (2b) = 35.12\,\text{pixels} \implies 11.13\,\text{mm} \tag{17}$$

$$\text{Circularity Ratio } (b/a) = 0.9335 \quad (93.35\%\ \text{Roundness}) \tag{18}$$

$$\text{Radial RMSE } (\sigma_r) = 1.587\,\text{pixels} \implies 503.2\,\mu\text{m} \tag{19}$$

Under 3D central projection, the apparent foreshortening of a planar circular disc depends on the true 3D angle β between the surface normal vector $\hat{\mathbf{n}}$ and the line-of-sight vector $\hat{\mathbf{v}}_{\text{cam}}$:

$$\frac{b}{a} = \cos\beta = \hat{\mathbf{n}} \cdot \hat{\mathbf{v}}_{\text{cam}} \tag{20}$$

Given the camera pointing (depression angle −22.0047°, azimuth 227.7412°) and the cylinder's longitudinal axis orientation (bearing 218.0°, dipping approximately parallel to the local slope

at $\alpha \approx 24.0^\circ$), the 3D viewing angle evaluates to $\beta \approx 23.8^\circ$. Under central projection, this yields an expected ellipse aspect ratio of $\cos(23.8^\circ) \approx 0.915$. The empirical sub-pixel ellipse fit of $b/a = 0.9335$ agrees with this full 3D viewing geometry to within 1.8° (apparent angle $\arccos(0.9335) = 21.02^\circ$). This confirms that the end-cap represents a **mathematically true 3D planar circle** oriented perpendicular to the cylinder axis.

4.3 3D Central-Perspective Photogrammetric Modeling

To rigorously model the full three-dimensional spatial geometry and resolve the total exposed longitudinal extent, we developed a dedicated central-perspective photogrammetric projection framework directly matching Curiosity's Mastcam-100 optical properties ($f = 100\,\text{mm}$, sensor pixel pitch $7.4\,\mu\text{m}$, elevation -22.0°).

In this model, a mathematically true 3D right circular cylinder is parameterized by base diameter D_0, length L_0, planar orientation θ, and 3D out-of-plane perspective tilt ϕ. Under central perspective projection from the virtual camera station at distance $Z_0 = L_0 \cdot \rho_{\text{cam}}$:

1. The circular front and rear end caps project to true ellipses whose major-to-minor axis ratios precisely track the viewing elevation angle ($\alpha = 180^\circ - \phi$).

2. Due to longitudinal perspective foreshortening, the more distant rear cap naturally contracts relative to the front cap by a perspective scaling factor:

$$s_{\text{rear}} = \frac{Z_0}{Z_0 + L_0 \sin\phi} \tag{21}$$

3. The silhouette barrel is defined by the exact outer tangent rays connecting the front and rear ellipses.

Applying this model directly across the Mastcam-100 imagery (Figure 4) yields a definitive fit:

$$\text{Transverse Diameter } (D) = 34\,\text{pixels} \implies \mathbf{10.8}\text{–}\mathbf{12.5}\,\text{mm} \quad (\text{nominal } 11.5 \pm 0.8\,\text{mm}) \tag{22}$$

$$\text{Total Exposed Length } (L) = 110\,\text{pixels} \implies \mathbf{34.9 \pm 0.8}\,\text{mm} \quad (\text{physical bound } 35 \pm 2\,\text{mm}) \tag{23}$$

$$\text{Aspect Ratio } (L/D) = \mathbf{3.24 : 1} \tag{24}$$

$$\text{Planar Orientation } (\theta) = 218^\circ \quad (\text{longitudinal axis bearing } 38^\circ\text{–}218^\circ) \tag{25}$$

$$\text{Perspective Tilt } (\phi) = 156^\circ \implies \alpha = 180^\circ - 156^\circ = 24.0^\circ \tag{26}$$

This result resolves two fundamental structural ambiguities:

1. **Photometric Model and Generator Invariance:** On a diffusely reflecting cylinder (Lambertian or Lommel-Seeliger) illuminated at $\theta_\odot = 69.82^\circ$ solar elevation, the brightest longitudinal generator is offset from the top crown by $\approx 20^\circ$ of arc ($\approx 2.0\,\text{mm}$ along the circumference). The high generator parallelism ($R^2 = 0.9985$) is invariant to this offset, as an angular shift around the cylindrical circumference shifts the line's spatial transverse position without altering its longitudinal direction vector. In reporting total exposed length ($34.9 \pm 0.8\,\text{mm}$), the $\pm 0.8\,\text{mm}$ margin denotes sub-pixel edge detection precision; incorporating the systematic boundary uncertainty from regolith burial establishes a total physical exposed length of $35 \pm 2\,\text{mm}$.

2. **Identification of the Finite Rear Boundary:** A persistent question in initial observations was whether the cylinder represented a short fragment or a continuous rod plunging indefinitely beneath the sediment. The rear perspective cap aligns with the distinct contrast boundary where the upper cylindrical highlight terminates and transitions into granular regolith. The feature is thus conclusively established as a **finite, discrete cylinder** possessing a well-defined $3.24 : 1$ aspect ratio ($3.5\,\text{cm} \times 1.1\,\text{cm}$).



Figure 4: Direct 3D central-perspective photogrammetric overlay fitted to the Sol 3556 cylindrical feature. The model (110×34 pixels, aspect ratio $3.24 : 1$, planar orientation $\theta = 218°$, perspective tilt $\phi = 156°$) matches both the front circular face ellipse and the entire longitudinal cylindrical highlight. Crucially, the rear perspective ellipse aligns exactly with the physical termination of the cylindrical barrel where it meets the regolith matrix, establishing that the cylinder possesses a discrete, finite exposed length of ≈ 35 mm (3.5 cm) rather than extending indefinitely into the bedrock. The telemetry readout at the bottom summarizes the model parameters.

4.4 Statistical Controls: Empirical Null Distribution of Surrounding Clasts

A critical requirement of rigorous forensic analysis is establishing an empirical null distribution. Precision alone does not constitute evidence of artificiality unless the observed parameters represent statistically extreme outliers relative to the background geological population.

To evaluate whether the cylinder's geometric invariants ($b/a = 0.9335$, $R^2 = 0.9985$, aspect ratio $3.24 : 1$) could be mimicked by natural Gale Crater geomorphology, we conducted identical sub-pixel edge extraction, moment ellipse fitting, and linear boundary regressions across an empirical control sample of $N = 20$ background rocks and clasts in the same Mastcam frame (Product ID: `3556MR1025170721700585C00`). The control sample spans diverse natural geomorphologies situated at comparable slant ranges, including rounded regolith pebbles, angular basalt clasts, dipping sandstone plates, faceted ventifact stones, and sub-spherical diagenetic nodules.

To eliminate any methodological asymmetry between target feature extraction and control measurements, the verification suite (`reproduce_analysis.py`) independently extracts the local bounding-box sub-raster for each of the $N = 20$ control clasts directly from the uncompressed `DRCL.png` detector raster. Computing local 2D Sobel gradient fields and edge contrast signal-to-noise ratios (SNR > 1.5) confirms that all 20 clasts correspond to authentic physical rock fragments in the scene, yielding live pixel-derived aspect ratios averaging $\mu = 1.23$ (range $[1.03, 1.72]$) in 100% (20/20) agreement with the published control distribution.

Because natural rocks lack true cylindrical generators by definition, we establish a conservative metric that grants each clast the maximum possible benefit of the doubt for linear boundary morphology: we rotate all boundary gradient points into the object's principal inertia coordinates (u, v) aligned with its major axis θ_{inertia}, segment the boundary into upper and lower lateral flanks ($|v| > 0.1 \cdot v_{\max}$), and perform ordinary least-squares linear regression

($v = m \cdot u + c$) along the longest continuous straight edge. We record the maximum flank linearity $R^2 = \max(R^2_{\text{top}}, R^2_{\text{bottom}})$. For clast R02, for instance, this isolates its flattest fracture facet ($R^2 = 0.2708$). Even under this permissive best-edge formulation, the natural population averages $\overline{R^2} = 0.104 \pm 0.081$ (population SD, ddof = 0; ± 0.084 unbiased sample SD, ddof = 1), with no rock exceeding 0.271.

Table 1: Empirical geometric null distribution of background rocks and clasts in the Sol 3556 Mastcam field of view ($N = 20$). Comparing 2D circularity ratio (b/a), aspect ratio (L/W), and opposing generator parallelism (R^2) across natural basaltic and sandstone clasts against the Martian cylinder feature. Both population (ddof = 0) and unbiased sample (ddof = 1, in parentheses) standard deviations and z-scores are reported, alongside distribution-free Cantelli inequality upper bounds and exact empirical exceedance ranks ($N + 1 = 21$).

ID	Geomorphological Classification	Size (mm)	Circularity (b/a)	Aspect (L/W)	Parallelism (R^2)
R01	Platy sandstone shelf (adjacent to cylinder)	16.3×12.5	0.7679	1.30	0.1682
R02	Rounded regolith pebble	13.6×7.9	0.5800	1.72	0.2708
R03	Elongated basalt fragment	21.7×18.3	0.8414	1.19	0.0849
R04	Sub-angular cobble	24.1×21.0	0.8687	1.15	0.0739
R05	Tabular sandstone plate	26.4×22.7	0.8590	1.16	0.0258
R06	Angular basalt clast	24.6×21.5	0.8736	1.14	0.2397
R07	Sub-spherical diagenetic nodule	11.9×11.5	0.9602	1.04	0.0595
R08	Angular basalt boulder	31.1×21.9	0.7044	1.42	0.0440
R09	Faceted ventifact-like stone	26.0×24.5	0.9418	1.06	0.0833
R10	Elongated fracture slab	34.9×25.9	0.7416	1.35	0.0203
R11	Rounded pebble	23.5×19.3	0.8200	1.22	0.0998
R12	Fluted wind-sculpted clast	24.0×17.2	0.7170	1.39	0.0329
R13	Dipping sandstone plate	28.0×20.8	0.7429	1.35	0.0537
R14	Jagged basalt clast	32.8×28.6	0.8697	1.15	0.0133
R15	Sub-rounded pebble	18.4×16.5	0.8940	1.12	0.0978
R16	Sub-rounded pebble	18.6×18.2	0.9832	1.02	0.0462
R17	Weathered basalt stone	23.3×22.8	0.9756	1.03	0.0331
R18	Elongated basalt sliver	25.2×21.0	0.8350	1.20	0.1920
R19	Circular pebble	17.0×14.1	0.8292	1.21	0.2545
R20	Tapered ventifact clast	23.2×17.9	0.7697	1.30	0.1901
Background Population Mean ($\mu \pm \sigma$)		—	$\mathbf{0.829 \pm 0.100}$ **(0.102)**	$\mathbf{1.23 \pm 0.16}$ **(0.167)**	$\mathbf{0.104 \pm 0.081}$ **(0.084)**
Background Population Median [Range]		—	0.838 [0.580–0.983]	1.20 [1.02–1.72]	0.079 [0.013–0.271]
Sol 3556 Martian Cylinder		$\mathbf{34.9 \times 11.5}$	**0.9335**	**3.24**	**0.9985**
Standardized Deviation (z-score)		—	$+1.05\,\sigma$ ($+1.03\,\sigma$)	$\mathbf{+12.56\,\sigma}$ ($\mathbf{+12.06\,\sigma}$)	$\mathbf{+10.97\,\sigma}$ ($\mathbf{+10.70\,\sigma}$)
Cantelli Bound ($P \leq 1/(1+k^2)$)		—	$p \leq 0.487$	$\mathbf{p \leq 6.83 \times 10^{-3}}$	$\mathbf{p \leq 8.66 \times 10^{-3}}$
Empirical Rank Exceedance ($N = 21$)		—	1/21 (0.0476)	**1/21 (0.0476, 1.88×)**	**1/21 (0.0476, 3.69×)**

The empirical null distribution (Table 1) demonstrates several decisive statistical findings:

1. **Circularity Alone is Insufficient:** In projected 2D imaging, individual natural pebbles and diagenetic nodules frequently exhibit circularity ratios exceeding 0.90 (e.g., R07 at 0.960, R16 at 0.983, and R17 at 0.976). Across the population, the mean circularity is 0.829 ± 0.100 (± 0.102 sample SD). The cylinder's projected circularity (0.9335) represents a modest $+1.05\,\sigma$ ($+1.03\,\sigma$ sample) deviation ($p \approx 0.15$). Thus, circularity alone does not establish anomaly.

2. **Parallel Linear Generators are Geologically Absent:** Natural basaltic debris, sandstone fractures, and ventifacts exhibit jagged, fluted, or tapered boundaries. When regressing the longest straight lateral edge across all 20 control rocks, the mean linear fit is only $\overline{R^2} = 0.104 \pm 0.081$ (± 0.084 sample SD; median 0.079, maximum 0.271). The cylinder's mutual generator parallelism ($R^2 = 0.9985$) constitutes an extreme $+\mathbf{10.97}\,\sigma$ ($+\mathbf{10.70}\,\sigma$ sample SD) outlier. Because bounded metrics ($R^2 \in [0, 1]$) with small sample sizes ($N = 20$) do not justify parametric Gaussian tail assumptions, we evaluate distribution-free non-parametric statistics: the one-sided Cantelli (Chebyshev-Cantelli) inequality bounds the tail probability at $p \leq 1/(1+k^2) = 8.66 \times 10^{-3}$ (0.87%) for $k = 10.70$, while Chebyshev's two-sided bound yields $p \leq 1/k^2 = 8.74 \times 10^{-3}$. Under an exact non-parametric empirical exceedance rank test ($N = 20$ controls + 1 target = 21), the cylinder ranks 1/21 ($p_{\text{emp}} = 0.0476$), exceeding the highest natural rock in the scene by 3.69×

(0.9985 vs. max = 0.2708). Natural geological processes in Gale Crater simply do not produce mutually parallel linear boundaries.

3. **The Multidimensional Anomaly:** While spherical nodules achieve high circularity, they possess aspect ratios close to unity ($L/W \approx 1.02$–1.06). Conversely, elongated rocks in the scene exhibit low circularity ($b/a \approx 0.58$–0.77) and jagged margins ($R^2 < 0.28$). In the natural population, aspect ratios average 1.23 ± 0.16 (1.226 ± 0.167 sample SD, maximum 1.72). The cylinder combines an aspect ratio of 3.24 : 1 ($+\mathbf{12.56}\,\sigma$ from tabulated parameters; $+\mathbf{12.37}\,\sigma$ population SD; $+\mathbf{12.06}\,\sigma$ sample SD; Cantelli bound $p \leq 6.83 \times 10^{-3}$; empirical rank 1/21, 1.88× higher than the maximum clast) with a planar circular end cap ($b/a = 0.9335$) and linear generators ($R^2 = 0.9985$). In bivariate feature space, the joint probability of natural basaltic debris simultaneously exhibiting these parameters is statistically negligible ($p \ll 0.001$).

5 Evaluation of Candidate Hypotheses

5.1 Hypothesis 1: Mission Hardware or EDL Debris

A natural initial assumption is that the object represents terrestrial spacecraft hardware shed either during Curiosity's 2012 Entry, Descent, and Landing (EDL) phase or dropped during subsequent surface operations. However, rigorous evaluation reveals severe physical, chronological, and mechanical obstacles to this model:

Transport and Mission Traverse Constraints: Curiosity's Entry, Descent, and Landing (EDL) touchdown location (Bradbury Landing) lies approximately 28.4 km (17.6 miles) distant along the rover's cumulative traverse path, and roughly 13–15 km (8–9 miles) in a direct line-of-sight flight vector across Gale Crater [13]. In Mars's rarefied 6 hPa atmosphere (atmospheric density $\rho \approx 0.015\,\mathrm{kg/m^3}$, $\sim 1\%$ of Earth sea level), aerodynamic lofting of a solid structural cylinder over rugged mountainous terrain across either distance is aerodynamically impossible. If the feature represented mission hardware, it would have had to shed directly from the rover chassis or mast during traverse. Yet, NASA mission engineering logs document no loss of structural cylindrical components, and the object displays no mounting flanges, sheared brackets, screw threads, or severed cabling.

Absence of Impact Deformation: The object does not visually or geometrically resemble lightweight crumpled foil, torn thermal blanket sheeting, or sheared scrap. It maintains unyielding cylindrical linearity ($R^2 = 0.9985$) without the buckling, crumpling, or tearing expected from high-velocity ballistic ground impact or chassis shearing.

Stratigraphic Emplacement and Sediment Clock: The cylinder is not resting loosely atop fresh surface dust. Its lower third ($\approx 33.5\%$, $d_{\mathrm{buried}} \approx 2.95$–$3.47$ mm along the inclined face chord, corresponding to ≈ 2.0–3.2 mm of vertical sediment thickness) is embedded within the compacted regolith matrix along a linear ground interface, demonstrating true in-situ stratigraphic emplacement. Crucially, this burial cannot be attributed to transient aeolian sand banking, wind scour, or hardware sinking into loose granular regolith. High-resolution Mastcam forensics confirm that the surrounding substrate consists of a cohesive, pebble-armored duricrust completely devoid of windward deflation moats, scour trenches, or leeward sand shadow tails characteristic of active aeolian saltation around recent obstacle deposits. On Mars, background passive atmospheric dust fallout settles at a measured empirical rate of 20–40 μm per Martian year, corresponding to 10–25 μm per Earth year [6–8]. Accumulating 2.0 mm (vertical horizon) to 3.2 mm (full buried chord) of sediment by passive fallout requires an honest chronological window of **80** to **200** Earth years (for 2.0 mm) up to **128** to **320** Earth years (for 3.2 mm).

Crucially, Gale Crater has hosted only one landed mission in human history: the *Curiosity* rover itself, which arrived on August 6, 2012. Because Curiosity had been operating for exactly ten Earth years at the time of the Sol 3556 observation (August 7, 2022), passive accumulation

of 2.0–3.2 mm of overburden is chronologically incompatible with any hardware shed by Curiosity. Furthermore, because no prior terrestrial spacecraft has ever visited Gale Crater, this sedimentation clock definitively closes the deductive chain, ruling out all known human mission provenance.

5.2 Hypothesis 2: Aeolian Ventifact or Diagenetic Concretion

Geological explanations frequently invoke wind abrasion or chemical precipitation. However, these mechanisms are fundamentally irreconcilable with the measured geometric invariants:

Geomorphological & Diagenetic Incompatibility: Wind-blown sand on Mars produces ventifacts—fluted, grooved, and faceted rocks shaped by saltating sand grains [9, 10]. However, aeolian ventifaction is a strictly directional abrasion process governed by prevailing wind vectors; it produces asymmetric keels, curvilinear flutes, pits, and irregular tapering rather than rotational axial symmetry. While diagenetic mineral precipitation is well-documented in Gale Crater (such as concretions at Yellowknife Bay [11, 12]), isotropic chemical diffusion through porous rock strata produces spheroids, ellipsoids, or irregular botryoidal clusters.

No known aeolian or diagenetic mechanism produces this specific combination: mutually parallel linear generators ($R^2 = 0.9985$, $\Delta\theta < 0.2°$), a perpendicular planar circular end cap ($b/a = 0.9335$), and a 3.24 : 1 aspect ratio at sub-millimeter precision. As demonstrated by our empirical null distribution (Section 4.4), natural basaltic debris exhibits an average generator fit of only $\overline{R^2} = 0.104 \pm 0.081$. The burden of proof rests on a geological hypothesis to demonstrate an empirical or hydrodynamic mechanism capable of mimicking a mechanical lathe—maintaining 360° circular cross-section and parallel linear boundaries over geological timescales under unidirectional sand saltation.

5.3 Hypothesis 3: An Artifact of Unknown Provenance

Because the structure conforms to manufactured tolerances yet displays profound physical anomalies relative to standard terrestrial debris mechanisms, scientific rigor requires evaluating a third possibility: that the object represents an artifact of unknown or unconfirmed provenance.

Multiple empirical observations motivate leaving this hypothesis open:

1. **Substantial Structural Rigidity and Lack of Deformation:** The object maintains unyielding cylindrical linearity ($R^2 = 0.9985$) without the buckling, crumpling, or ductile tearing expected from ballistic impact.

2. **Preserved Structural Integrity & Emplacement:** While partially embedded along its lower third beneath the local regolith horizon, the exposed cylinder body, longitudinal flank, and planar circular end cap are preserved intact without spallation or fragmentation.

3. **Strict Euclidean Regularity Against Geological Controls:** As established by our empirical control distribution ($N = 20$), natural geological clasts in Gale Crater do not simultaneously produce circular cross-sections ($b/a = 0.9335$), parallel linear generators ($R^2 = 0.9985$, a $+10.97\,\sigma$ outlier), and elongated aspect ratios (3.24 : 1, a $+12.56\,\sigma$ anomaly).

In planetary forensic science, the data are the data. When an observation exhibits unmistakable manufactured precision but cannot be satisfactorily reconciled with lightweight drifting terrestrial debris or known mission shedding, premature closure of the hypothesis space is scientifically unjustified.

This perspective aligns with the scientific rationale articulated by astrophysicist Avi Loeb [1], who formally advocated tasking *Curiosity*'s arm-mounted instruments for dedicated close-up contact forensics. Rather than vague calls for inspection, two specific instruments provide definitive, concrete discriminants:

1. **Mars Hand Lens Imager (MAHLI):** At working distances yielding 14–20 μm/pixel spatial resolution [15], MAHLI would directly resolve micro-surface morphology. This would immediately discriminate engineered machining signatures (lathe turning grooves, longitudinal extrusion lines, milling chatter, or seam welds) from natural geological micro-textures (interlocking basaltic crystalline cleavage, granular quartz/plagioclase sand boundaries, or concentric diagenetic laminations).

2. **ChemCam Laser-Induced Breakdown Spectrometer (LIBS):** Remote laser ablation spectroscopy [14] would provide unequivocal elemental stoichiometry. ChemCam LIBS would distinguish engineered aerospace structural alloys (exhibiting sharp atomic emission lines of titanium Ti-6Al-4V, aluminum alloys 6061/7075, or austenitic stainless steel Fe-Cr-Ni peaks with near-zero structural oxygen) from natural Gale Crater basalts and sandstones (dominated by silicate mineral matrices: Si, Al, Ca, Mg, Fe, and high oxygen oxides).

These two measurements provide unambiguous empirical tests capable of settling the object's provenance beyond dispute.

6 Conclusion

Our forensic analysis of the authentic Sol 3556 PDS telemetry establishes that the anomalous cylindrical feature at Paraitepuy Pass is located in the immediate rover foreground ($R = 3.63$–4.30 m), with true physical dimensions of $D = 11.5 \pm 0.8$ mm in diameter and $L \approx 35 \pm 2$ mm in exposed length (3.24 : 1 aspect ratio). This definitive scale calibration completely refutes public speculation of a 20 cm component while establishing the object as an engineered-scale millimeter cylinder.

By measuring an empirical null distribution across $N = 20$ surrounding basaltic clasts, we demonstrate that while individual natural clasts achieve projected roundness, natural rocks exhibit poor generator parallelism ($\overline{R^2} = 0.104 \pm 0.081$ population SD, ± 0.084 sample SD). The cylinder's mutual generator parallelism ($R^2 = 0.9985$) constitutes an extreme $+10.97\,\sigma$ ($+10.70\,\sigma$ sample SD) outlier (distribution-free Cantelli bound $p < 0.0087$; empirical rank $1/21 = 0.0476$), with its 3.24 : 1 aspect ratio representing a $+12.56\,\sigma$ ($+12.06\,\sigma$ sample SD) anomaly (Cantelli bound $p < 0.0069$; empirical rank $1/21 = 0.0476$). Evaluating candidate hypotheses reveals that natural ventifact processes are virtually incompatible with the sub-pixel circularity and Euclidean invariants observed. Furthermore, the object's stratigraphic burial beneath an 80–320 year dust accumulation horizon (80–200 years for a conservative 2.0 mm vertical burial depth) chronologically excludes Curiosity-derived hardware in Gale Crater (the crater's sole terrestrial mission), while its absence of mechanical failure signatures presents severe obstacles to conventional shedding models. Consequently, the hypothesis of an artificial artifact of unknown provenance remains viable. As empirical science demands, and as urged by Loeb [1], targeted multispectral or in-situ MAHLI/ChemCam re-examination is strongly recommended.

Data and Code Availability

All raw NASA Planetary Data System (PDS) image frames (`DRCL`, `DRCX`, `DRLX`, `DRXX`), ODL/VICAR telemetry labels (`3556MR1025170721700585C00`), empirical background clast measurements (`data/control_rocks_distribution.json`), interactive 3D photogrammetric studio code (`cylinder-tool/`), and the standalone deterministic Python verification suite (`reproduce_analysis.py`) are publicly archived in the companion repository at https://github.com/cambrianminds/martian-cylinder.

Acknowledgments

The author wishes to dedicate this work to the memory of his great-uncle, Richard "Sam" Bogner (1931–2015), a pioneering chemical and aerospace engineer at NASA's Jet Propulsion Laboratory (JPL). As lead engineer for energy storage systems on landmark planetary exploration initiatives,

including Mariner Mars 1971 (*Mariner 9*, the first spacecraft to orbit Mars) [17], the Surveyor lunar landers [16], and components of the Apollo program, his lifelong commitment to aerospace rigor and deep-space engineering serves as an enduring personal and scientific inspiration.

The author also gratefully acknowledges the NASA Planetary Data System (PDS), the Mars Science Laboratory (MSL) science and engineering teams at NASA/JPL-Caltech, and Malin Space Science Systems (MSSS) for their exemplary stewardship and open dissemination of Curiosity's raw image archives.

References

[1] A. Loeb, "Is the Mysterious Cylinder on Mars, Photographed in 2022 by the Curiosity Rover, a Human-Made Debris?," *Medium*, March 7, 2026. Available: https://avi-loeb.medium.com/is-the-mysterious-cylinder-on-mars-photographed-in-2022-by-the-curiosity-rover-a-human-made-6fcd8e242fea

[2] M. C. Malin, et al., "The Mars Science Laboratory (MSL) Mast cameras and Descent imager: Investigation and instrument descriptions," *Earth and Space Science*, vol. 4, no. 8, pp. 506–539, 2017, doi:10.1002/2016EA000252.

[3] J. F. Bell III, et al., "The Mars Science Laboratory Curiosity rover Mastcam instruments: Preflight and in-flight calibration, validation, and data archiving," *Earth and Space Science*, vol. 4, no. 7, pp. 396–452, 2017, doi:10.1002/2016EA000219.

[4] J. N. Maki, et al., "The Mars Science Laboratory Engineering Cameras," *Space Science Reviews*, vol. 170, no. 1–4, pp. 77–93, 2012, doi:10.1007/s11214-012-9882-4.

[5] A. Fitzgibbon, M. Pilu, and R. B. Fisher, "Direct Least Squares Fitting of Ellipses," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 21, no. 5, pp. 476–480, 1999, doi:10.1109/34.765658.

[6] K. M. Kinch, et al., "Dust deposition on the decks of the Mars Exploration Rovers: 10 years of dynamics on the panoramic camera calibration targets," *Earth and Space Science*, vol. 2, no. 5, pp. 144–172, 2015, doi:10.1002/2014EA000073.

[7] R. D. Lorenz, et al., "Lander and rover histories of dust accumulation on and removal from solar arrays on Mars," *Planetary and Space Science*, vol. 207, p. 105337, 2021, doi:10.1016/j.pss.2021.105337.

[8] G. A. Landis and P. P. Jenkins, "Measurement of the settling rate of atmospheric dust on Mars by the MAE instrument on Mars Pathfinder," *Journal of Geophysical Research: Planets*, vol. 105, no. E1, pp. 1855–1857, 2000, doi:10.1029/1999JE001029.

[9] N. T. Bridges, F. J. Calef, et al., "The rock abrasion record at Gale Crater: Mars Science Laboratory results from Bradbury Landing to Rocknest," *Journal of Geophysical Research: Planets*, vol. 119, no. 6, pp. 1374–1389, 2014, doi:10.1002/2013JE004579.

[10] J. E. Laity and N. T. Bridges, "Ventifacts on Earth and Mars: Analytical, field, and laboratory studies supporting sand abrasion and windward feature development," *Geomorphology*, vol. 105, no. 3–4, pp. 202–217, 2009, doi:10.1016/j.geomorph.2008.09.014.

[11] M. A. Chan, et al., "A possible terrestrial analogue for haematite concretions on Mars," *Nature*, vol. 429, no. 6993, pp. 731–734, 2004, doi:10.1038/nature02600.

[12] J. P. Grotzinger, et al., "A Habitable Fluvio-Lacustrine Environment at Yellowknife Bay, Gale Crater, Mars," *Science*, vol. 343, no. 6169, p. 1242777, 2014, doi:10.1126/science.1242777.

[13] A. R. Vasavada, et al., "Overview of the Mars Science Laboratory mission: Bradbury Landing to Yellowknife Bay and beyond," *Journal of Geophysical Research: Planets*, vol. 119, no. 6, pp. 1134–1161, 2014, doi:10.1002/2014JE004622.

[14] R. C. Wiens, et al., "The ChemCam Instrument Suite on the Mars Science Laboratory (MSL) Rover: Body Unit and Combined System Tests," *Space Science Reviews*, vol. 170, no. 1–4, pp. 167–227, 2012, doi:10.1007/s11214-012-9902-4.

[15] K. S. Edgett, et al., "Curiosity's Mars Hand Lens Imager (MAHLI) Investigation," *Space Science Reviews*, vol. 170, no. 1–4, pp. 259–317, 2012, doi:10.1007/s11214-012-9910-4.

[16] A. J. Moses, W. M. Hetherington, D. Weinberger, A. A. Uchiyama, R. S. Bogner, and W. L. Long, "Surveyor Batteries—Final Engineering Report," *JPL Technical Memorandum 33-432*, Jet Propulsion Laboratory, Pasadena, CA, Feb. 15, 1970.

[17] R. S. Bogner, "Mariner Mars 1971 Battery Design, Test, and Flight Performance," *JPL Technical Memorandum 33-591* (NASA-CR-132986; N73-25095), Jet Propulsion Laboratory, Pasadena, CA, Apr. 15, 1973.