


Camera ModelCanon R6 Mark II

ScenarioReal Estate

Lighting ConditionLow Light

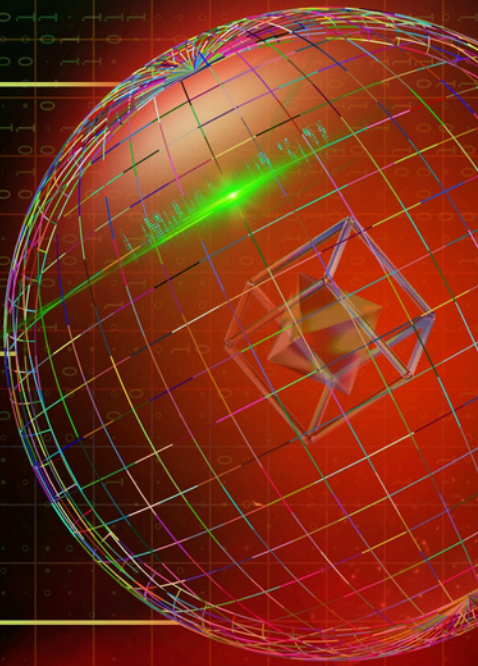

Recommended
Mode

Aperture
Priority

Shutter Speed

1/5s-1/30s

Aperture

f/8-f/11

ISO

100

Focus
Mode

Single AF

Drive Mode

Single Shot +
2-Second
Self-Timer

White
Balance

Tungsten

Key Setting Note:

The Canon R6 Mark II's exceptional low-light handling and 8-stop IBIS make it a capable real estate camera even in dim conditions. Use Focus Bracketing for rooms requiring front-to-back sharpness—the camera automatically captures a series of images at incrementally adjusted focus distances for later blending. The Electronic Level ensures perfectly straight verticals. At f/8–f/11, slow shutter speeds (often 1–10 seconds) are common—a tripod is essential. The R6 II's dual-gain sensor delivers outstanding dynamic range, allowing you to recover shadow detail and balance bright windows with darker interiors in post. Enable Long Exposure Noise Reduction to reduce hot pixels in shadow areas. For maximum quality, bracket three exposures (± 1.5 EV) and blend later.

Inner Signal Note:

"The R6 II will see what the eye cannot. It will hold the shadows, balance the windows, and deliver the frame—but it will not steady the tripod for you. The room is not moving. The light is not changing. The only variable is your willingness to wait. Use the tripod. Let the exposure run. The machine will capture the detail. You will capture the patience."