
HIGH CLUTCH INSPECTION

id051700662600

Drive Plate Inspection

1. Measure the thickness of the drive plate in four locations (each separated by 90°) and calculate the average value.

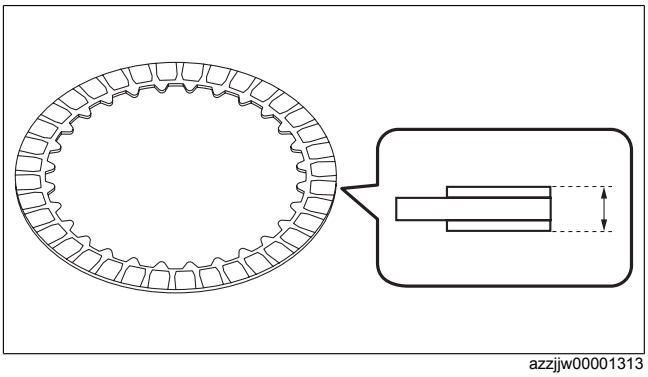

azzjjw00001313

Caution
- **When measuring the thickness of the drive plate, measure the thickness including the facing.**
- **Measure the thickness of all the drive plates.**


Note
- Drive plate size: Outer diameter approx. 111.7 mm {4.398 in}
- Recommended measuring instrument: Micrometer

- If it is the minimum specification or less, replace the drive plate with a new one.

Minimum
1.475 mm {0.05807 in}

Springs and Retainer Component Inspection

1. Measure the free length of the springs and retainer component in four locations (each separated by 90°) and calculate the average value.

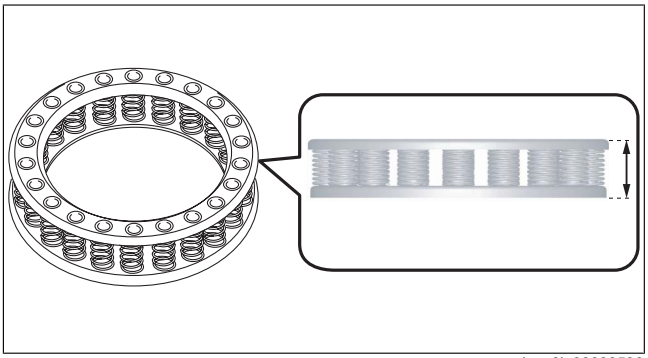

bcw6ja00000596

Note
- Springs and retainer component size: Outer diameter approx. 78.5 mm {3.09 in}
- Recommended measuring instrument: Vernier caliper

- If it is the minimum specification or less, replace the springs and retainer component with a new one.

Minimum
2.40 mm {0.0945 in}