JACKING POSITIONS, VEHICLE LIFT (2 SUPPORTS) AND SAFETY STAND (RIGID RACK) POSITIONS

id000000800500

Jacking Positions

Warning

- **Improperly jacking a vehicle is dangerous. The vehicle can slip off the jack and cause serious injury. Use only the correct front and rear jacking points and block the wheels.**


Caution

- **Use safety stands to support the vehicle after it has been lifted.**

Note


- To prevent obstruction between the jack body and front bumper when the jack body is inserted, use a low-floor type jack.

5HB

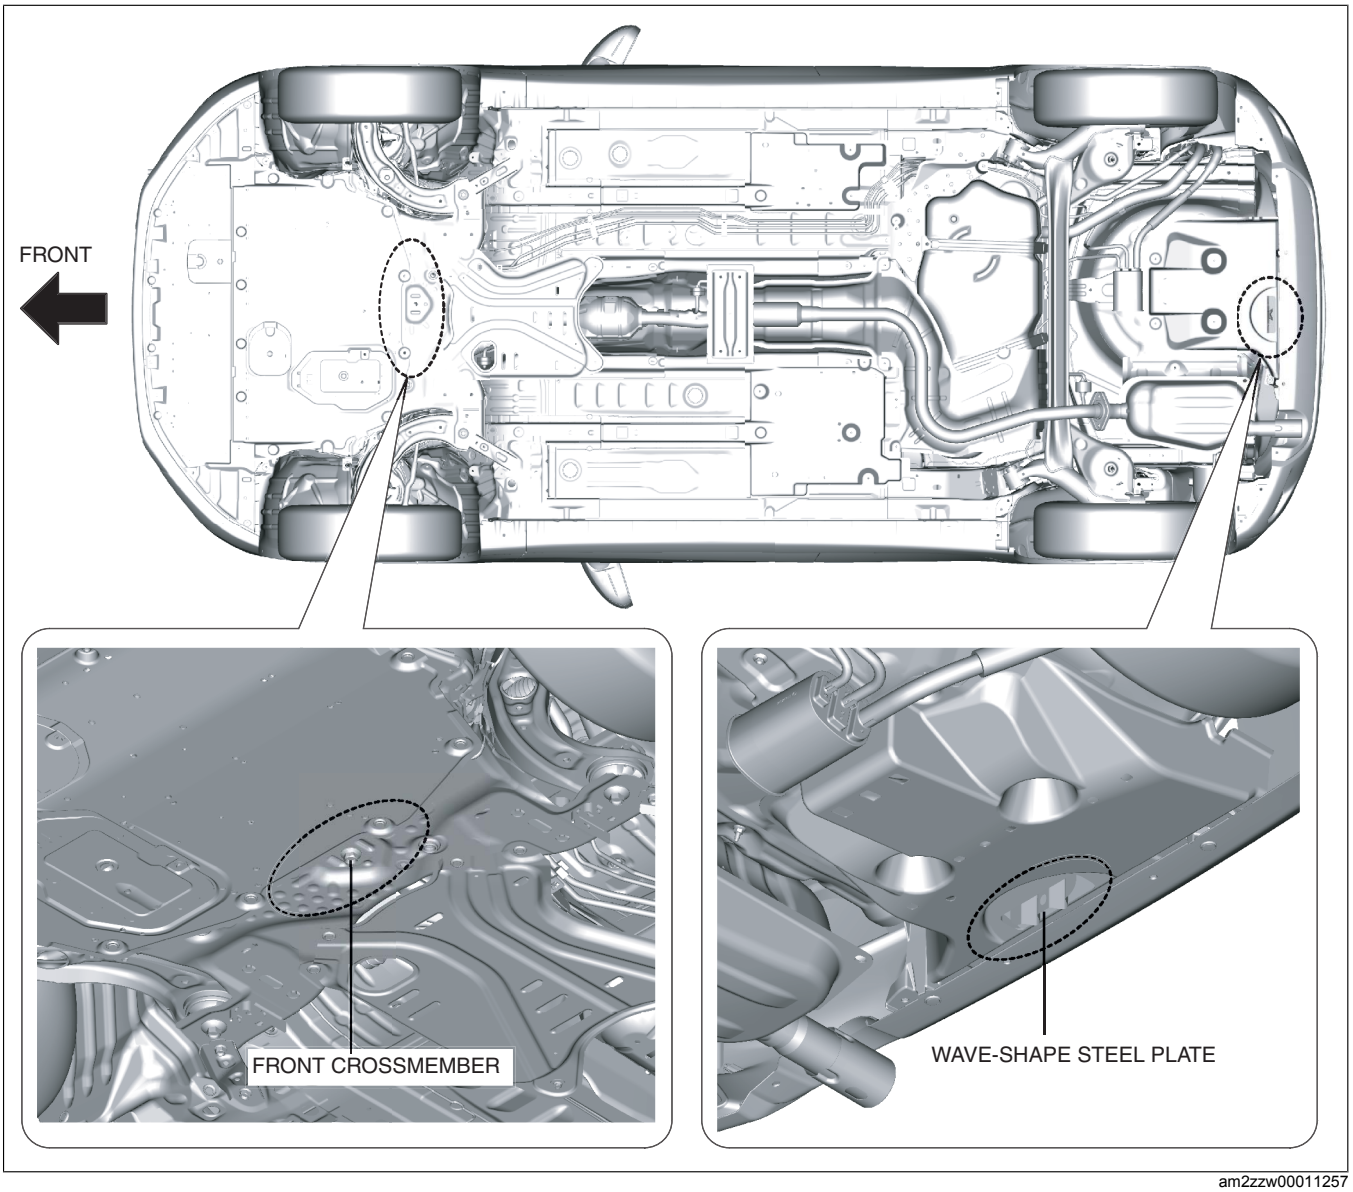

am2zzw00011257

4SD

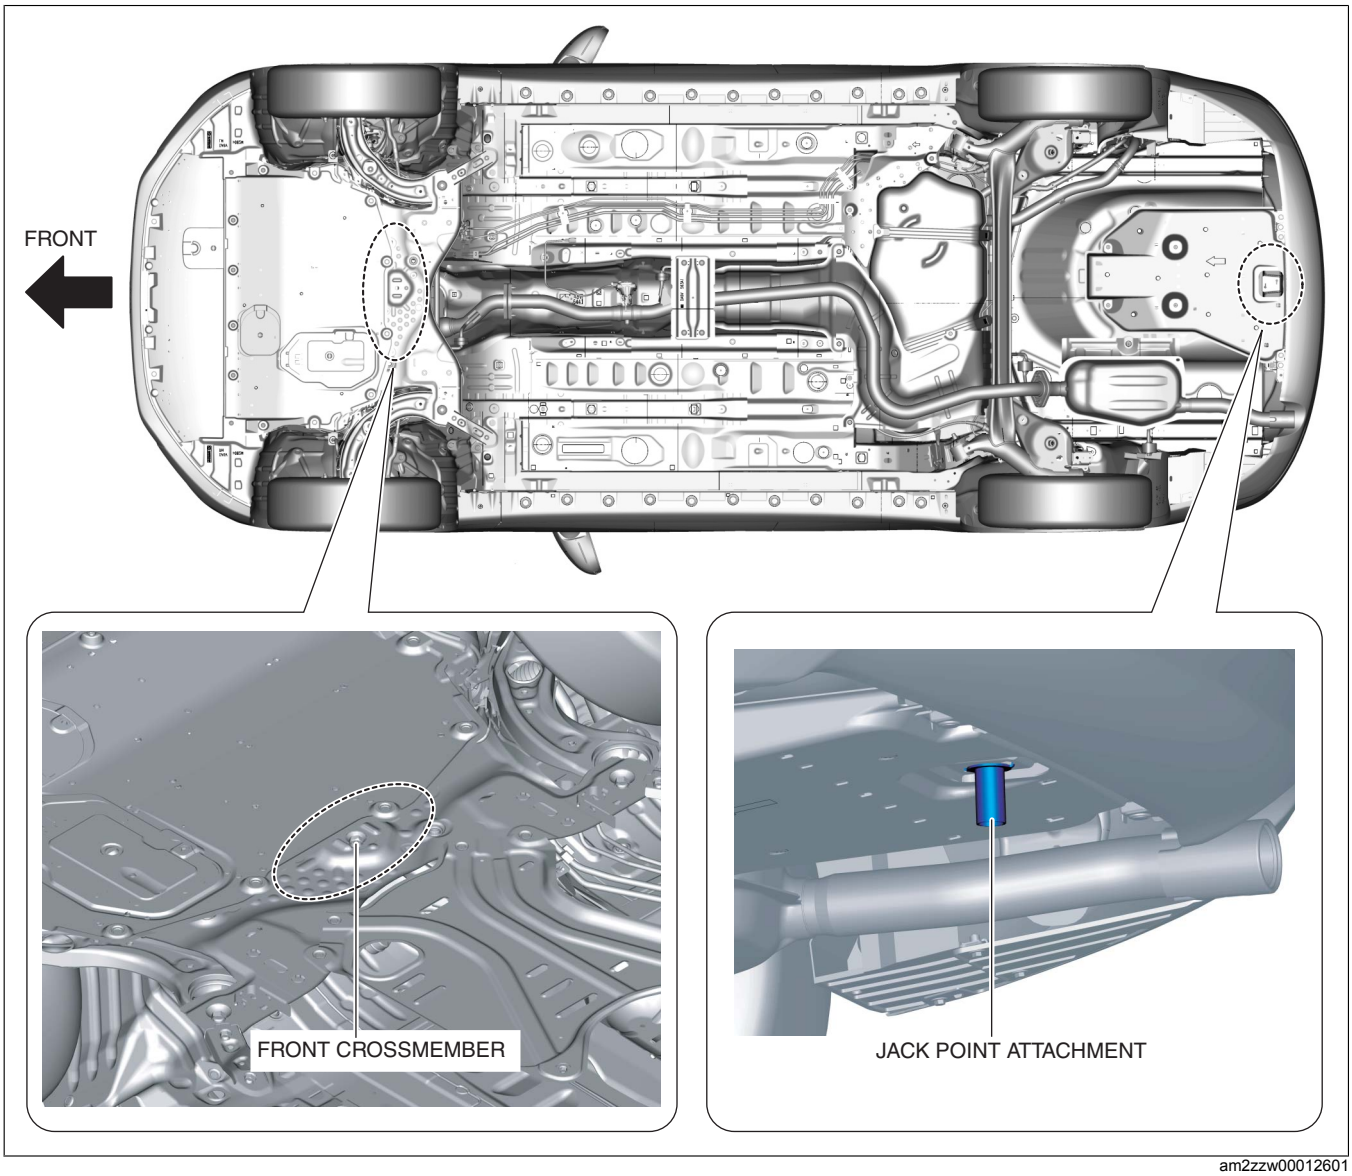


am2zzw00012601

Jack point attachment installation position (4SD)

Warning


- **If the vehicle is jacked up with the jack point attachment not installed securely, the jack point attachment could slip off and cause the vehicle to fall down. Before jacking up the vehicle, verify that the jack point attachment is installed securely.**

1. Remove the jack point attachment from the trunk compartment.

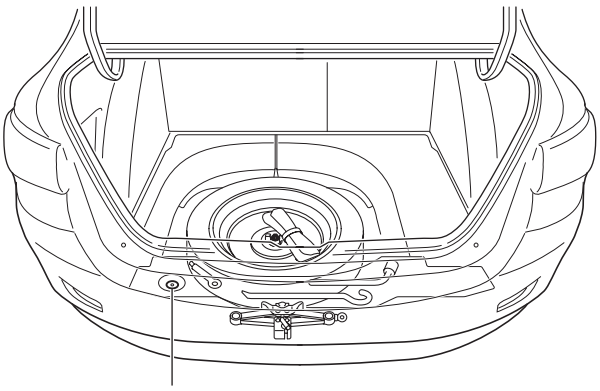


am2zzw00011259

2. Insert the jack point attachment into the installation holes shown in the figure.

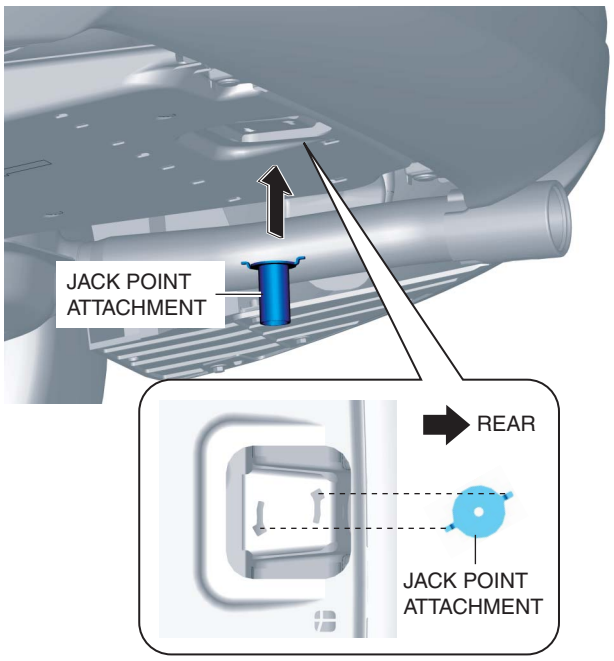

am2zzw00011260

3. Turn the jack point attachment clockwise until it reaches the stop position.

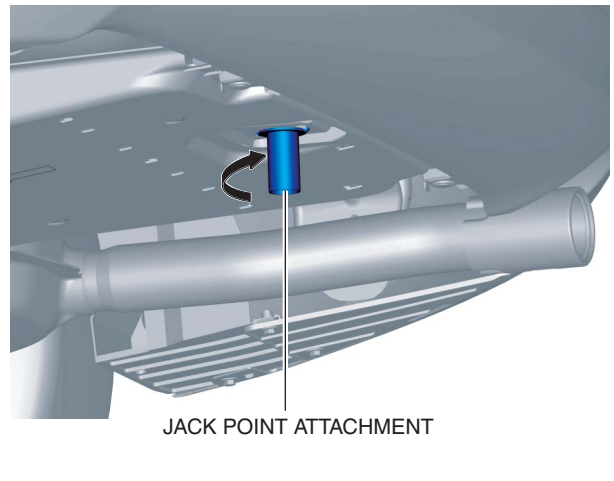

am2zzw00011261


Vehicle Lift-up Positions

Warning

- **Lifting a vehicle is dangerous. The vehicle can slip off the lift and cause serious injury and/or vehicle damage. Make sure that the vehicle is on the lift horizontally by adjusting the height of support at the end of the arm of the lift.**

Front and rear

- Both sides of the vehicle, on side sills.

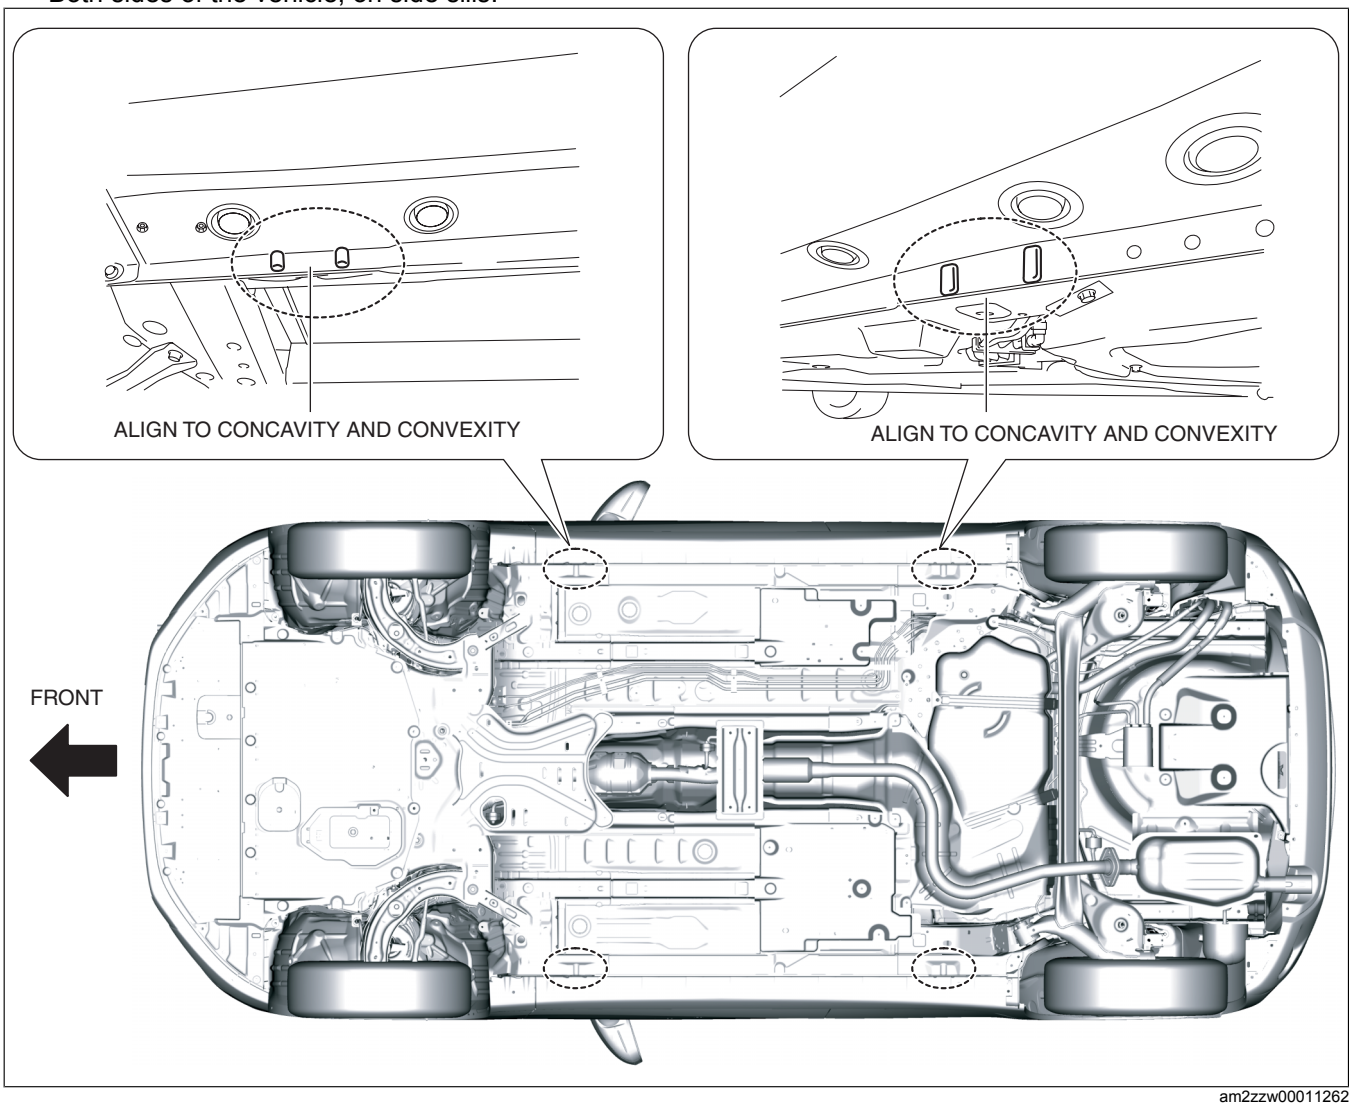

am2zzw00011262