DTC P0014:00 [SKYACTIV-G 1.3, SKYACTIV-G 1.5]

id0102q1008000


Note
- To determine the malfunctioning part, proceed with the diagnostics from “Function Inspection Using M-MDS”.

Details On DTCs

DESCRIPTION	Hydraulic variable valve timing control system: over-advanced	
DETECTION CONDITION	Determination conditions	• For the advance amount from the maximum exhaust valve retard position, a condition in which the actual advance amount is larger than the target value continues for a specified period of time.
	Preconditions	• Battery voltage: **above 11 V** *1 • Engine speed: **5,000 rpm or less***1 • Engine coolant temperature: **60 °C {140 °F} or more** *1 • Hydraulic variable valve timing control: feedback mode • The following DTCs are not detected: — P0335:00, P0365:00 *1: Value can be verified by displaying PIDs using M-MDS
	Malfunction determination period	• **5 s** period
	Drive cycle	• **2**
	Self test type	• CMDTC self test
	Sensor used	• CKP sensor • Exhaust CMP sensor
FAIL-SAFE FUNCTION	• Not applicable	
VEHICLE STATUS WHEN DTCs ARE OUTPUT	• Illuminates check engine light.	
POSSIBLE CAUSE	• OCV malfunction — Spool valve in OCV is stuck in advanced position • Hydraulic variable valve timing actuator malfunction • Timing chain malfunction — Poor assembly of timing chain — Looseness or jumping • Mis-detection of exhaust CMP sensor • Engine oil malfunction — Use of unspecified engine oil — Low engine oil level — Low engine oil pressure — Engine oil runners are clogged or have leakage • PCM malfunction	

System Wiring Diagram
- Not applicable

Function Explanation (DTC Detection Outline)
- With the preconditions met, the PCM verifies the conformity of the actual timing relative to the target valve timing. If it does not conform to the normal determination range (difference between target valve timing and actual valve timing is **20 degrees or less**) during the malfunction determination period (**approx. 5 s**), even if the target valve timing is set to the retard side, the PCM determines an excess advance malfunction condition and stores a DTC.

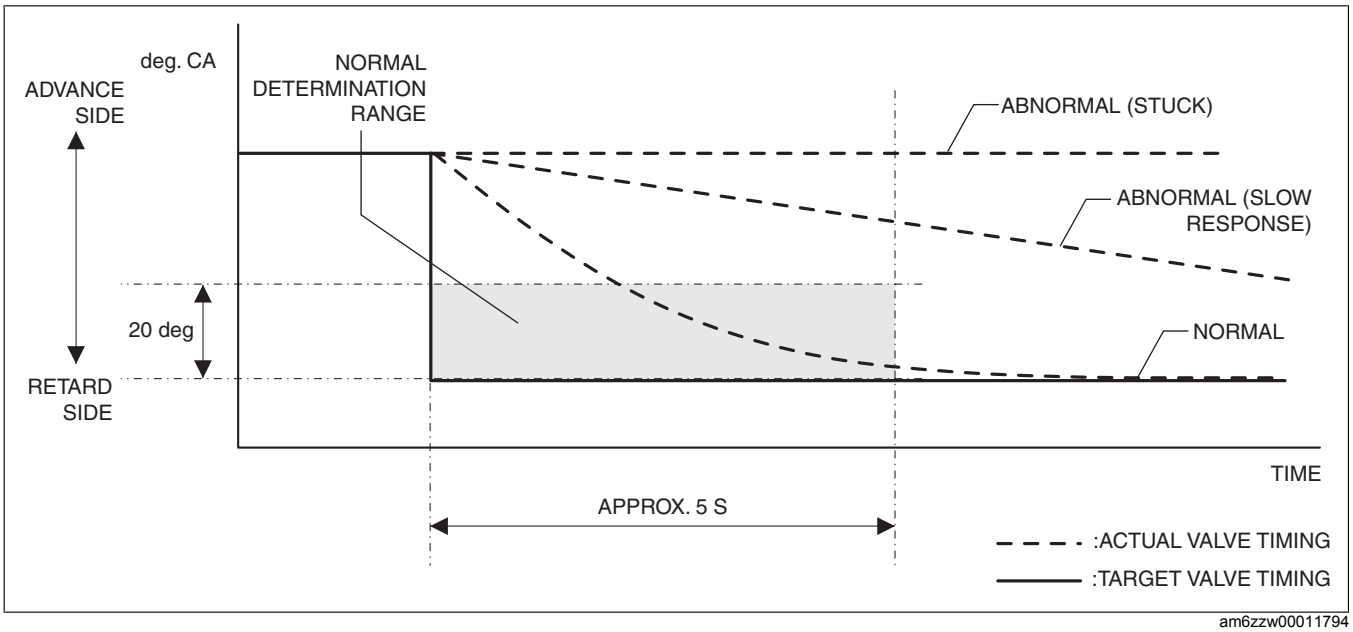

am6zzw00011794

Repeatability Verification Procedure

1. Warm up the engine to allow the engine coolant temperature to reach **80 °C {176 °F} or more**.
2. Shift to 2nd gear (MTX)/D position (ATX) and rapidly accelerate the vehicle to **50 km/h {31 mph}** (to operate hydraulic variable valve timing control).
3. Decelerate to idling.
4. Shift to 2nd gear (MTX)/D position (ATX) and rapidly accelerate the vehicle to **50 km/h {31 mph}** again.

PID Item Used In Diagnosis

PID/DATA monitor item table

Item	Definition	Unit	Condition/Specification
VT_EX_ACT	Actual exhaust variable valve timing control - Retard amount from max advance position	°	• Displays actual exhaust variable valve timing - Retard amount from max advance position
VT_EX_DES	Target exhaust variable valve timing control - Retard amount from max advance position	°	• Displays target exhaust variable valve timing - Retard amount from max advance position

Function Inspection Using M-MDS

STEP	INSPECTION	RESULTS	ACTION
1	**PURPOSE: VERIFY RELATED SERVICE INFORMATION AVAILABILITY** • Verify related Service Information availability. • Is any related Service Information available?	Yes	Perform repair or diagnosis according to the available Service Information. • If the vehicle is not repaired, go to the next step.
		No	Go to the next step.
2	**PURPOSE: RECORD VEHICLE STATUS AT TIME OF DTC DETECTION TO UTILIZE WITH REPEATABILITY VERIFICATION** **Note** • Recording can be facilitated using the screen capture function of the PC. • Record the FREEZE FRAME DATA/snapshot data on the repair order.	—	Go to the next step.

STEP	INSPECTION	RESULTS	ACTION
3	**PURPOSE: VERIFY IF DIAGNOSTIC RESULT IS AFFECTED BY OTHER RELATED DTCs OCCURRING** • Switch the ignition off, then ON (engine off). • Perform the Pending Trouble Code Access Procedure and DTC Reading Procedure. (See ON-BOARD DIAGNOSTIC TEST [SKYACTIV-G 1.3, SKYACTIV-G 1.5].) • Is the PENDING CODE/DTC P0335:00, P0365:00, P2090:00 or P2091:00 also present?	Yes	Go to the applicable PENDING CODE or DTC inspection. (See DTC P0335:00 [SKYACTIV-G 1.3, SKYACTIV-G 1.5].) (See DTC P0365:00 [SKYACTIV-G 1.3, SKYACTIV-G 1.5].) (See DTC P2090:00 [SKYACTIV-G 1.3, SKYACTIV-G 1.5].) (See DTC P2091:00 [SKYACTIV-G 1.3, SKYACTIV-G 1.5].) Go to the next step.
		No	Go to the next step.
4	**PURPOSE: VERIFY IF DIAGNOSTIC RESULT IS AFFECTED BY DTC OCCURRING FROM OIL PRESSURE SWITCH** • Perform the Pending Trouble Code Access Procedure and DTC Reading Procedure. (See ON-BOARD DIAGNOSTIC TEST [SKYACTIV-G 1.3, SKYACTIV-G 1.5].) • Is the PENDING CODE/DTC P0524:00 also present?	Yes	Go to the applicable PENDING CODE or DTC inspection. (See DTC P0524:00 [SKYACTIV-G 1.3, SKYACTIV-G 1.5].) Go to the next step.
		No	Go to the next step.
5	**PURPOSE: VERIFY CONFORMITY OF ACTUAL EXHAUST VALVE TIMING AND DETERMINE IF MALFUNCTION IS CAUSED BY OCV OR CONNECTOR RELATED** • Start the engine and idle it. • Access the following PIDs using the M-MDS: (See ON-BOARD DIAGNOSTIC TEST [SKYACTIV-G 1.3, SKYACTIV-G 1.5].) — VT_EX_ACT — VT_EX_DES • Implement the repeatability verification procedure. (See Repeatability Verification Procedure.) • Does the monitor value of the PID item VT_EX_ACT conform to the VT_EX_DES PID value?	Yes	Go to the next step.
		No	Go to the troubleshooting procedure to perform the procedure from Step 1.
6	**PURPOSE: VERIFY CONNECTOR CONNECTIONS** • Start the engine. • Access the VT_EX_ACT PID using the M-MDS. (See ON-BOARD DIAGNOSTIC TEST [SKYACTIV-G 1.3, SKYACTIV-G 1.5].) • Does the PID value fluctuate when the following connectors are shaken? — OCV — PCM	Yes	Repair or replace the applicable wiring harness or connector parts. Go to the troubleshooting procedure to perform the procedure from Step 9.
		No	Go to the troubleshooting procedure to perform the procedure from Step 1.

Troubleshooting Diagnostic Procedure
Intention of troubleshooting procedure

- Step 1
  - — Perform a unit inspection of the OCV.
- Step 2
  - — Verify engine oil level.
- Step 3—4
  - — Perform an inspection of the hydraulic variable valve timing drive parts.
- Step 5
  - — Inspect the exhaust CMP sensor detection areas for adhesion of foreign matter.
- Step 6—8
  - — Perform an engine oil related inspection.
- Step 9—10
  - — Verify that the primary malfunction is resolved and there are no other malfunctions.

STEP	INSPECTION	RESULTS	ACTION
1	**PURPOSE: VERIFY IF SPOOL VALVE IN OCV IS STUCK** • Switch the ignition off. • Remove the OCV. (See OIL CONTROL VALVE (OCV) REMOVAL/ INSTALLATION [SKYACTIV-G 1.3, SKYACTIV-G 1.5].) • Inspect the OCV. (See OIL CONTROL VALVE (OCV) INSPECTION [SKYACTIV-G 1.3, SKYACTIV-G 1.5].) • Can the spool valve in OCV operation be verified?	Yes	Go to the next step.
		No	Replace the OCV. (See OIL CONTROL VALVE (OCV) REMOVAL/ INSTALLATION [SKYACTIV-G 1.3, SKYACTIV-G 1.5].) Go to the troubleshooting procedure to perform the procedure from Step 9.
2	**PURPOSE: INSPECT ENGINE OIL LEVEL** • Inspect the engine oil level. (See ENGINE OIL LEVEL INSPECTION [SKYACTIV-G 1.3, SKYACTIV-G 1.5].) • Is the engine oil level sufficient?	Yes	Go to the next step.
		No	Add genuine motor oil, then go to Step 9. (See ENGINE OIL REPLACEMENT [SKYACTIV-G 1.3, SKYACTIV-G 1.5].)
3	**PURPOSE: DETERMINE INTEGRITY OF HYDRAULIC VARIABLE VALVE TIMING ACTUATOR** • Inspect the hydraulic variable valve timing actuator. (See HYDRAULIC VARIABLE VALVE TIMING ACTUATOR INSPECTION [SKYACTIV-G 1.3, SKYACTIV-G 1.5].) • Is there any malfunction?	Yes	Replace the hydraulic variable valve timing actuator, then go to Step 9. (See ELECTRIC VARIABLE VALVE TIMING ACTUATOR, HYDRAULIC VARIABLE VALVE TIMING ACTUATOR REMOVAL/INSTALLATION [SKYACTIV-G 1.3, SKYACTIV-G 1.5].)
		No	Go to the next step.
4	**PURPOSE: VERIFY ASSEMBLY CONDITION OF TIMING CHAIN** • Verify the condition of the timing chain assembly (exhaust valve timing, looseness, jumping). (See TIMING CHAIN REMOVAL/ INSTALLATION [SKYACTIV-G 1.3, SKYACTIV-G 1.5].) • Is there any malfunction?	Yes	Repair or replace the malfunctioning part. Assemble the timing chain using the correct timing, then go to Step 9. (See TIMING CHAIN REMOVAL/INSTALLATION [SKYACTIV-G 1.3, SKYACTIV-G 1.5].)
		No	Go to the next step.
5	**PURPOSE: VERIFY IF FOREIGN MATTER ON EXHAUST CMP SENSOR DETECTION AREA AFFECTS DIAGNOSTIC RESULTS** • Visually inspect for exhaust CMP sensor. (See CAMSHAFT POSITION (CMP) SENSOR INSPECTION [SKYACTIV-G 1.3, SKYACTIV-G 1.5].) • Is there foreign matter such as metallic dust on the exhaust CMP sensor detection area?	Yes	Remove the foreign matter, then go to Step 9.
		No	Go to the next step.
6	**PURPOSE: INSPECT IF INSUFFICIENT HYDRAULIC PRESSURE CAUSED BY USE OF UNSPECIFIED ENGINE OIL** • Is the specified engine oil being used?	Yes	Go to the next step.
		No	Replace the engine oil with genuine motor oil, then go to Step 9. (See ENGINE OIL REPLACEMENT [SKYACTIV-G 1.3, SKYACTIV-G 1.5].)
7	**PURPOSE: INSPECT ENGINE OIL PRESSURE** • Inspect the engine oil pressure. (See OIL PRESSURE INSPECTION [SKYACTIV-G 1.3, SKYACTIV-G 1.5].) • Is there any malfunction?	Yes	Go to the next step.
		No	Go to Step 9.
8	**PURPOSE: VERIFY IF MALFUNCTION RELATED TO ENGINE OIL LEAK OR RESTRICTION AFFECTS DIAGNOSTIC RESULTS** • Start the engine. • Verify if there is engine oil leakage in the oil passage or restriction. • Is there engine oil leakage in the oil passage or restriction?	Yes	Repair or replace the malfunctioning part according to the inspection results. Add genuine motor oil, then go to the next step. (See ENGINE OIL REPLACEMENT [SKYACTIV-G 1.3, SKYACTIV-G 1.5].)
		No	Go to the next step.

STEP	INSPECTION	RESULTS	ACTION
9	**PURPOSE: VERIFICATION OF VEHICLE REPAIR COMPLETION** • Always reconnect all disconnected connectors. • Clear the DTC from the PCM memory using the M-MDS. (See CLEARING DTC [SKYACTIV-G 1.3, SKYACTIV-G 1.5].) • Implement the repeatability verification procedure. (See Repeatability Verification Procedure.) • Perform the Pending Trouble Code Access Procedure. (See ON-BOARD DIAGNOSTIC TEST [SKYACTIV-G 1.3, SKYACTIV-G 1.5].) • Is the PENDING CODE for this DTC present?	Yes	Repeat the inspection from Step 1. • If the malfunction recurs, replace the PCM. (See PCM REMOVAL/INSTALLATION [SKYACTIV-G 1.3, SKYACTIV-G 1.5].) Go to the next step.
		No	Go to the next step.
10	**PURPOSE: VERIFY IF THERE IS ANY OTHER MALFUNCTION** • Is any other DTC or pending code stored?	Yes	Go to the applicable DTC inspection. (See DTC TABLE [SKYACTIV-G 1.3, SKYACTIV-G 1.5].)
		No	DTC troubleshooting completed.