
LUBRICATION SYSTEM [SKYACTIV-D 1.5]

id0111q2002100

Outline


- With the adoption of the chain drive type oil pump, oil pump drive force has been reduced.
- With the adoption of the oil shower pipe, sliding resistance has been reduced.
- With the adoption of the engine oil solenoid valve, oil pump discharge pressure can be controlled (hydraulic two-step control).

Structural View

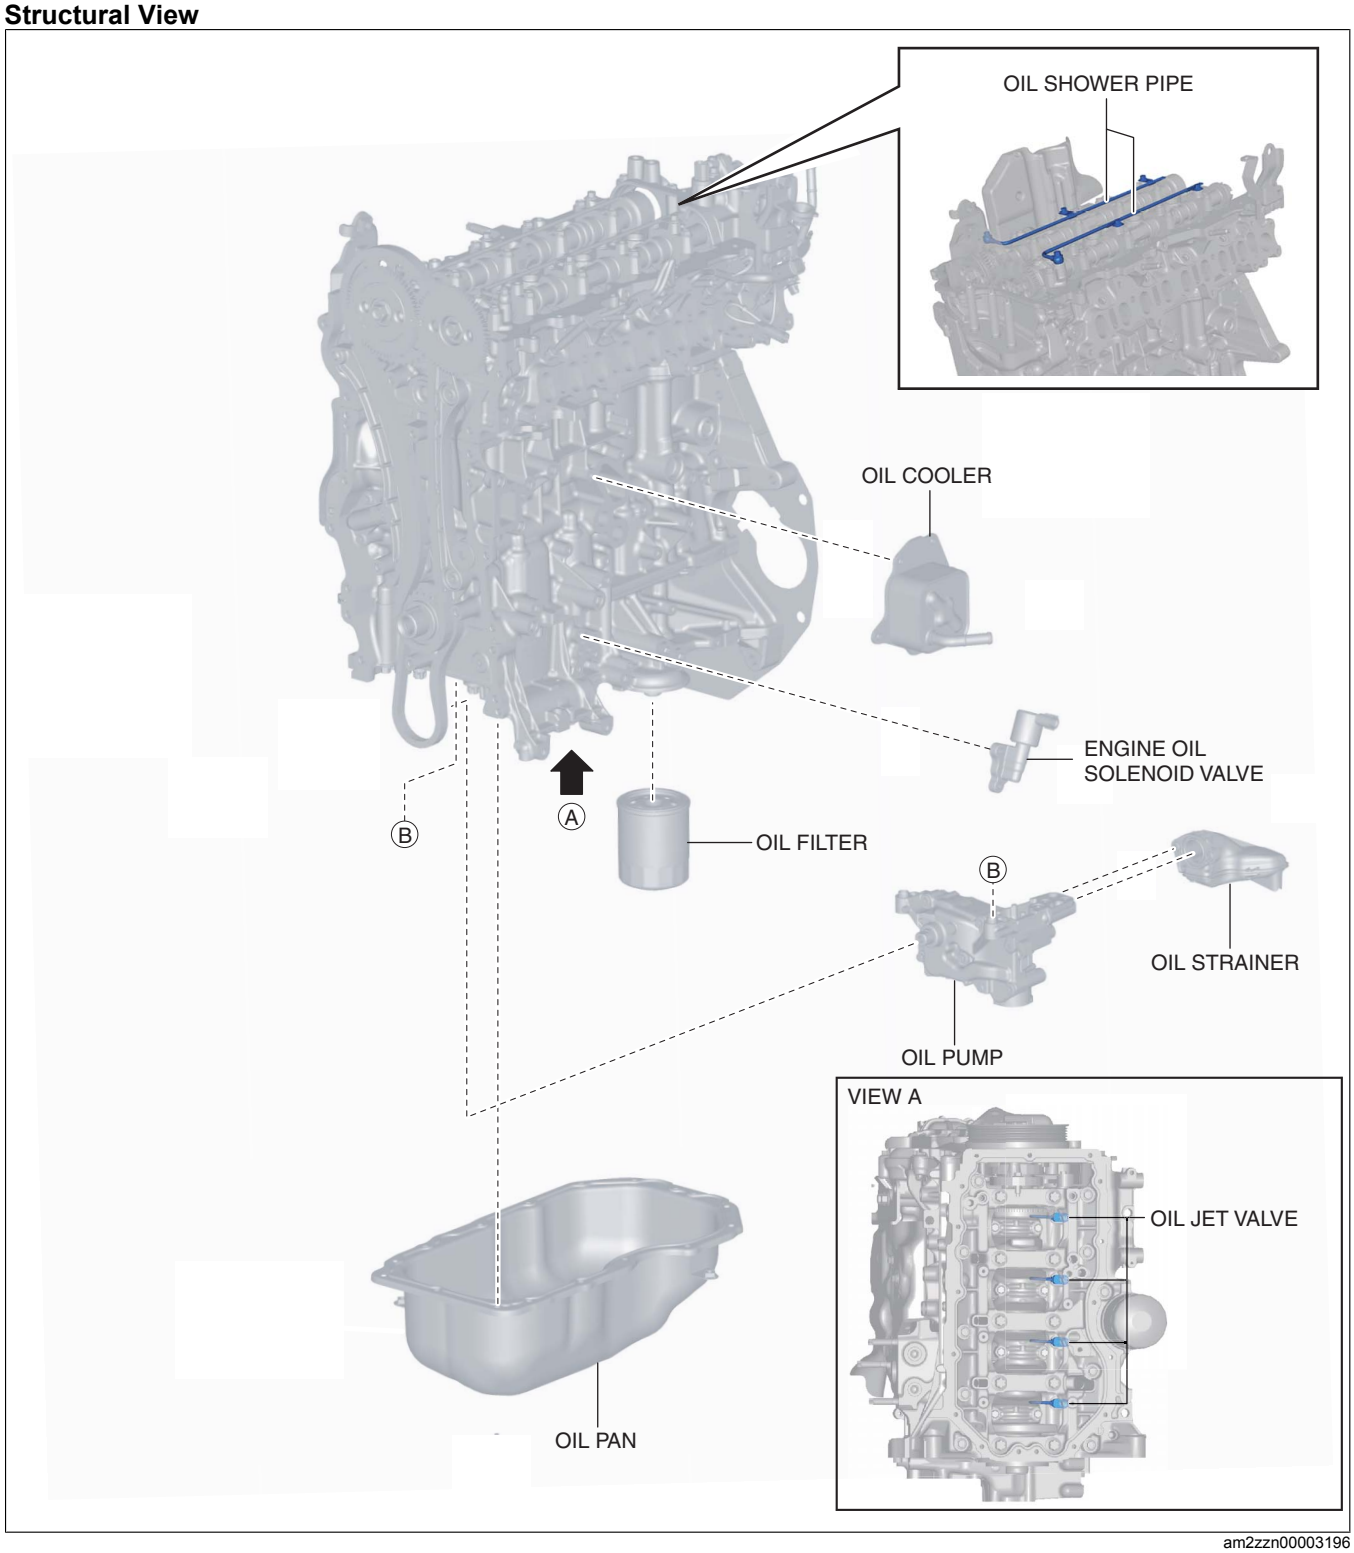

am2zzn00003196

Flow View

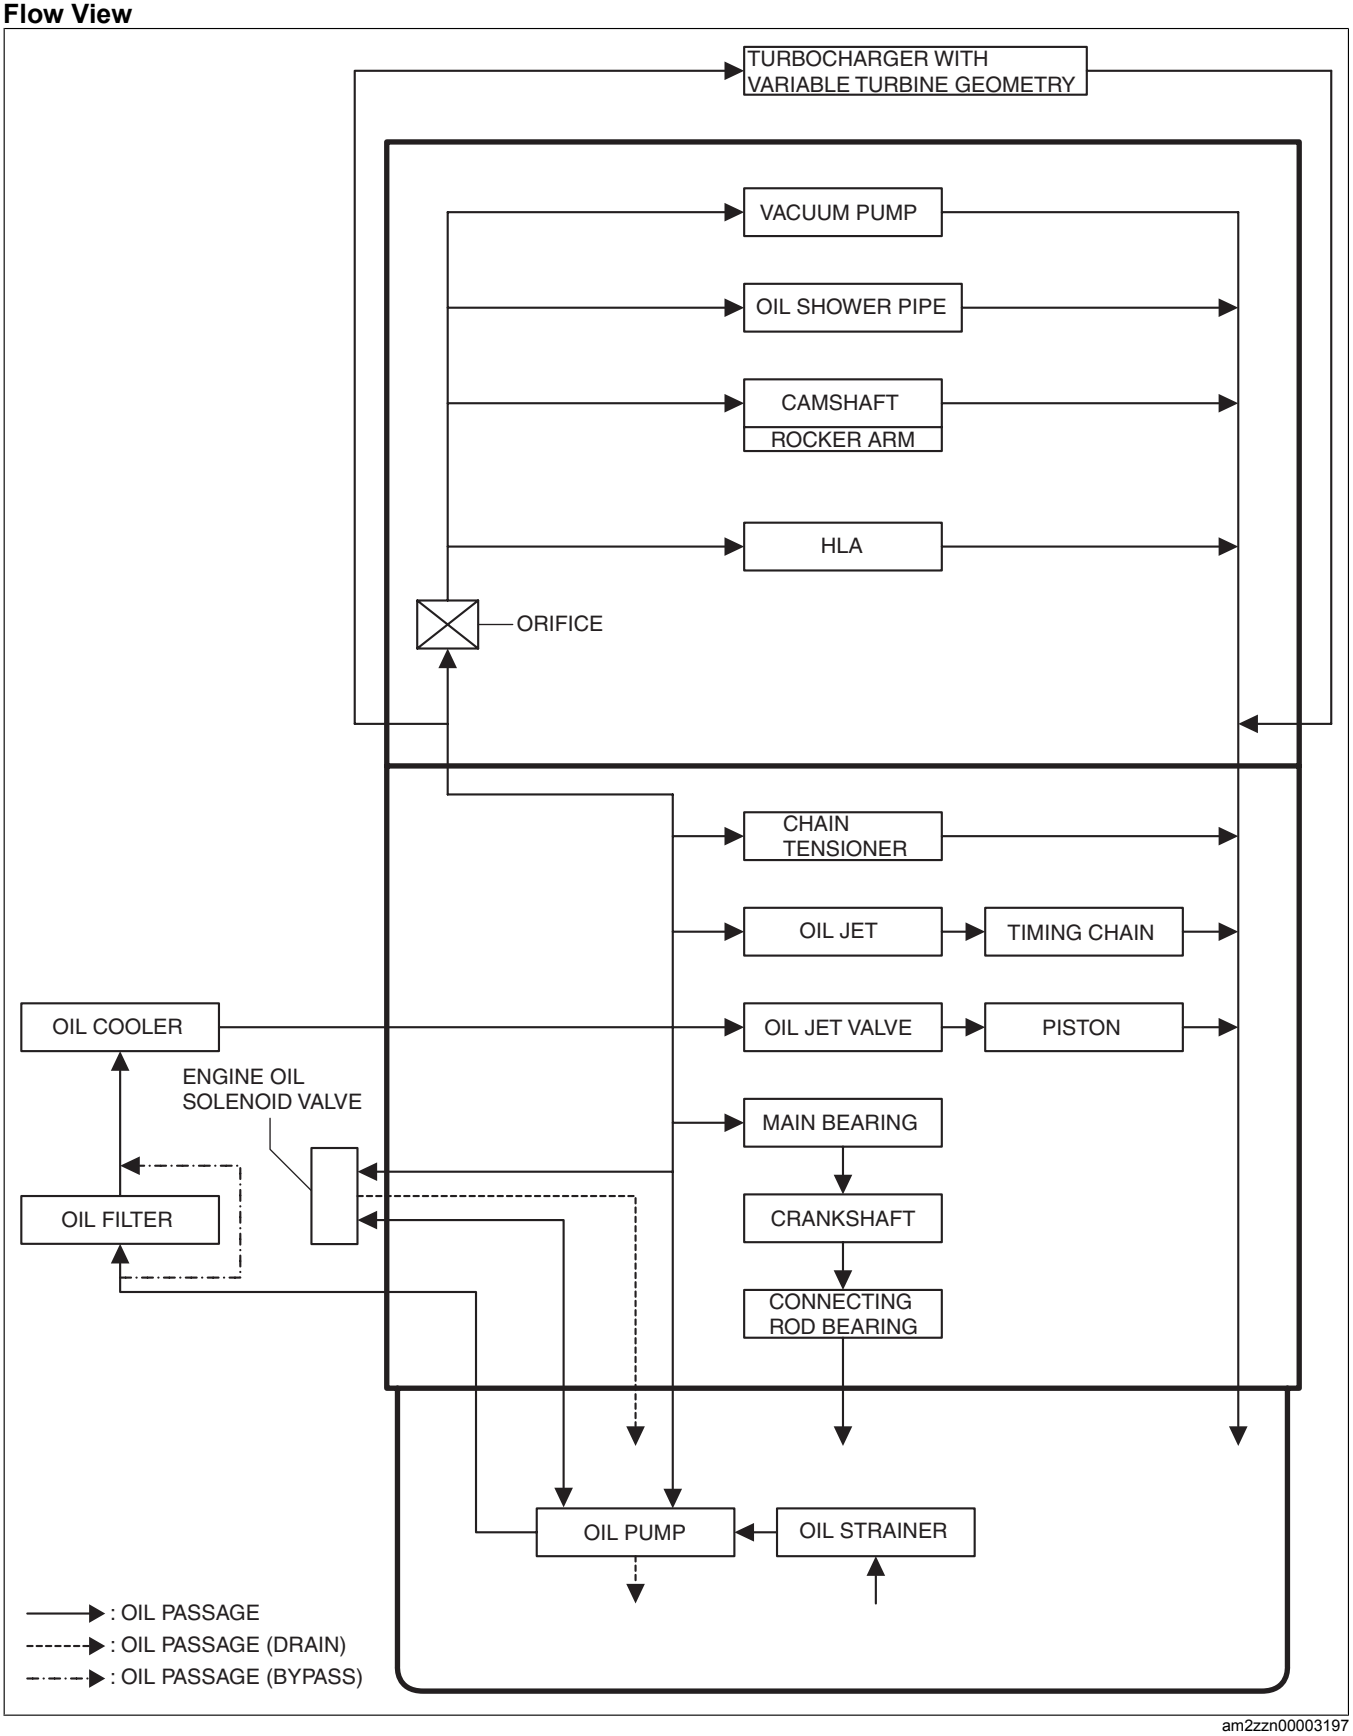

am2zzn00003197

Structure

- Consists of the following parts:

Oil shower pipe	(See OIL SHOWER PIPE [SKYACTIV-D 1.5].)

Oil jet valve	(See OIL JET VALVE [SKYACTIV-D 1.5].)
Engine oil solenoid valve	(See ENGINE OIL SOLENOID VALVE [SKYACTIV-D 1.5].)
Oil filter	(See OIL FILTER [SKYACTIV-D 1.5].)
Oil cooler	(See OIL COOLER [SKYACTIV-D 1.5].)
Oil pump	(See OIL PUMP [SKYACTIV-D 1.5].)
Oil strainer	(See OIL STRAINER [SKYACTIV-D 1.5].)
Oil pan	(See OIL PAN [SKYACTIV-D 1.5].)