LUBRICATION SYSTEM [SKYACTIV-G 1.3, SKYACTIV-G 1.5]


id0111q3002100

Outline

- Pressure loss is reduced by optimizing the oil passage.
- With the adoption of the chain drive type oil pump, oil pump drive force has been reduced.
- With the adoption of the oil shower pipe, sliding resistance has been reduced.
- With the adoption of the engine oil solenoid valve, oil pump discharge pressure can be controlled (hydraulic two-step control). (SKYACTIV-G 1.5 (with 4-2-1 exhaust system))


Structural View

SKYACTIV-G 1.3, SKYACTIV-G 1.5 (with 4-1 exhaust system)

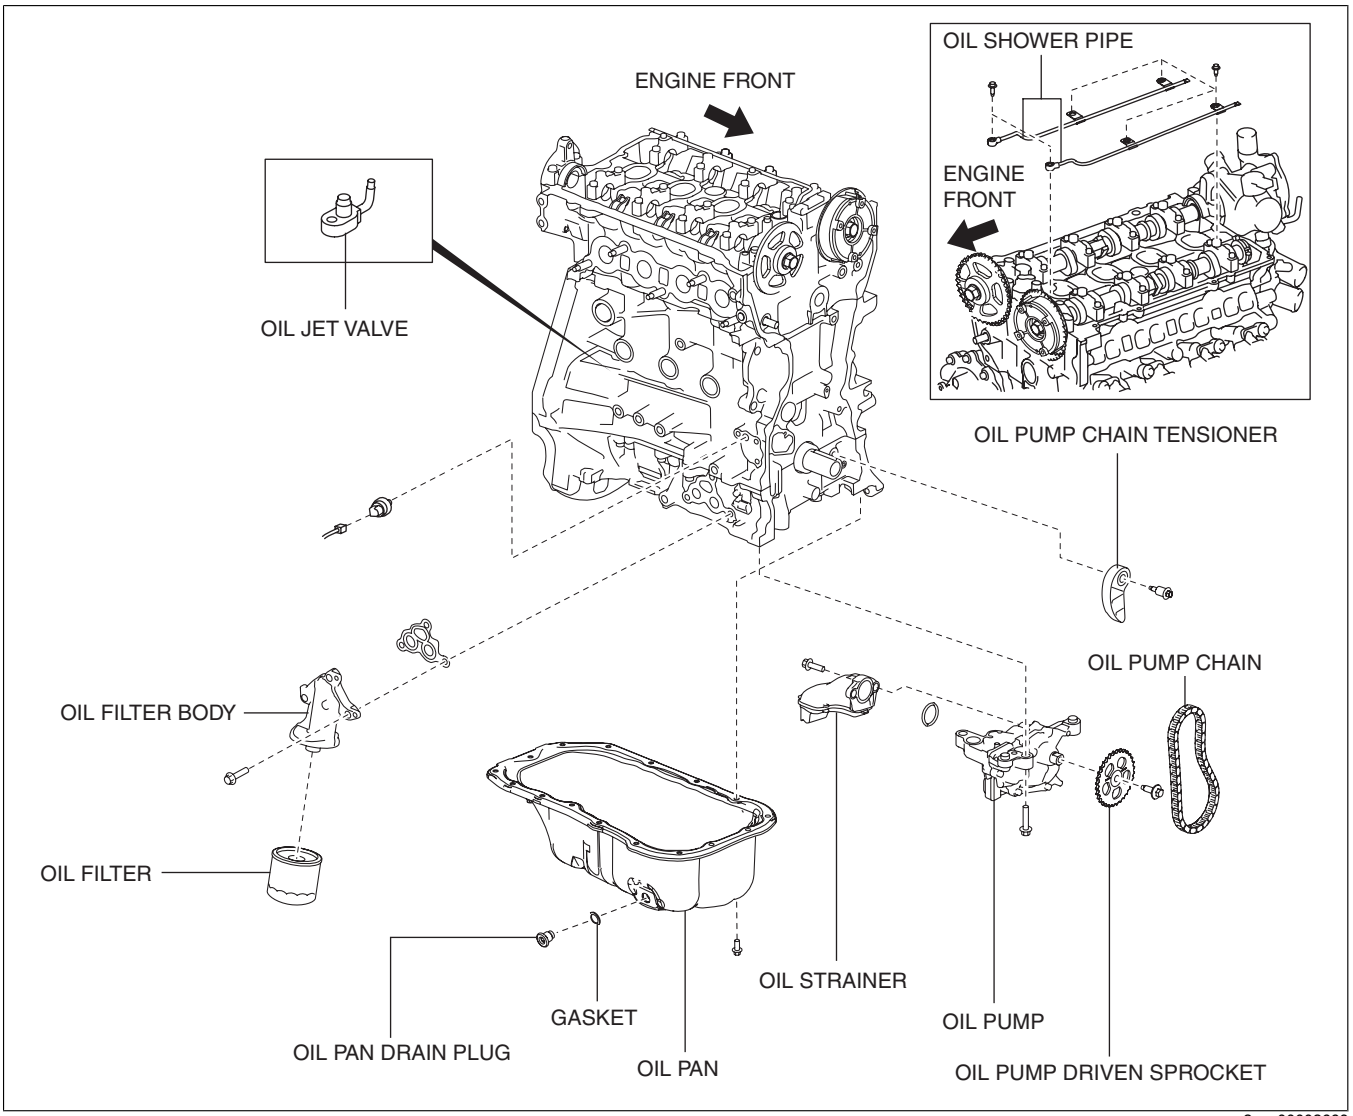

am2zzn00002663


SKYACTIV-G 1.5 (with 4-2-1 exhaust system)

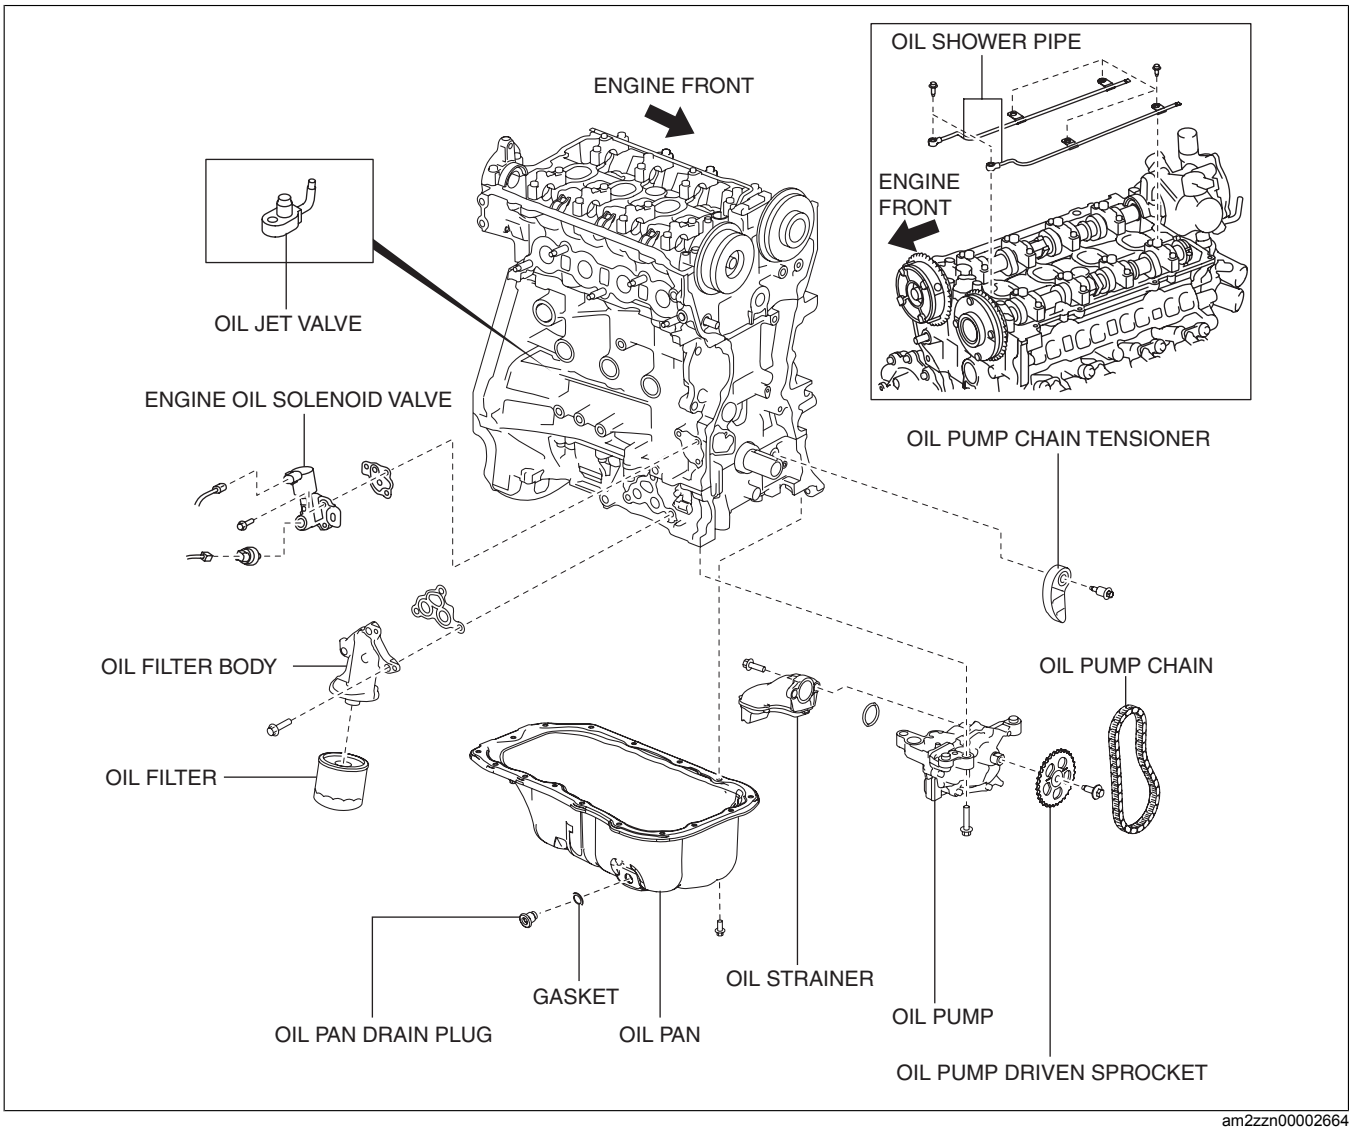

am2zzn00002664


Flow View

SKYACTIV-G 1.3, SKYACTIV-G 1.5 (with 4-1 exhaust system)

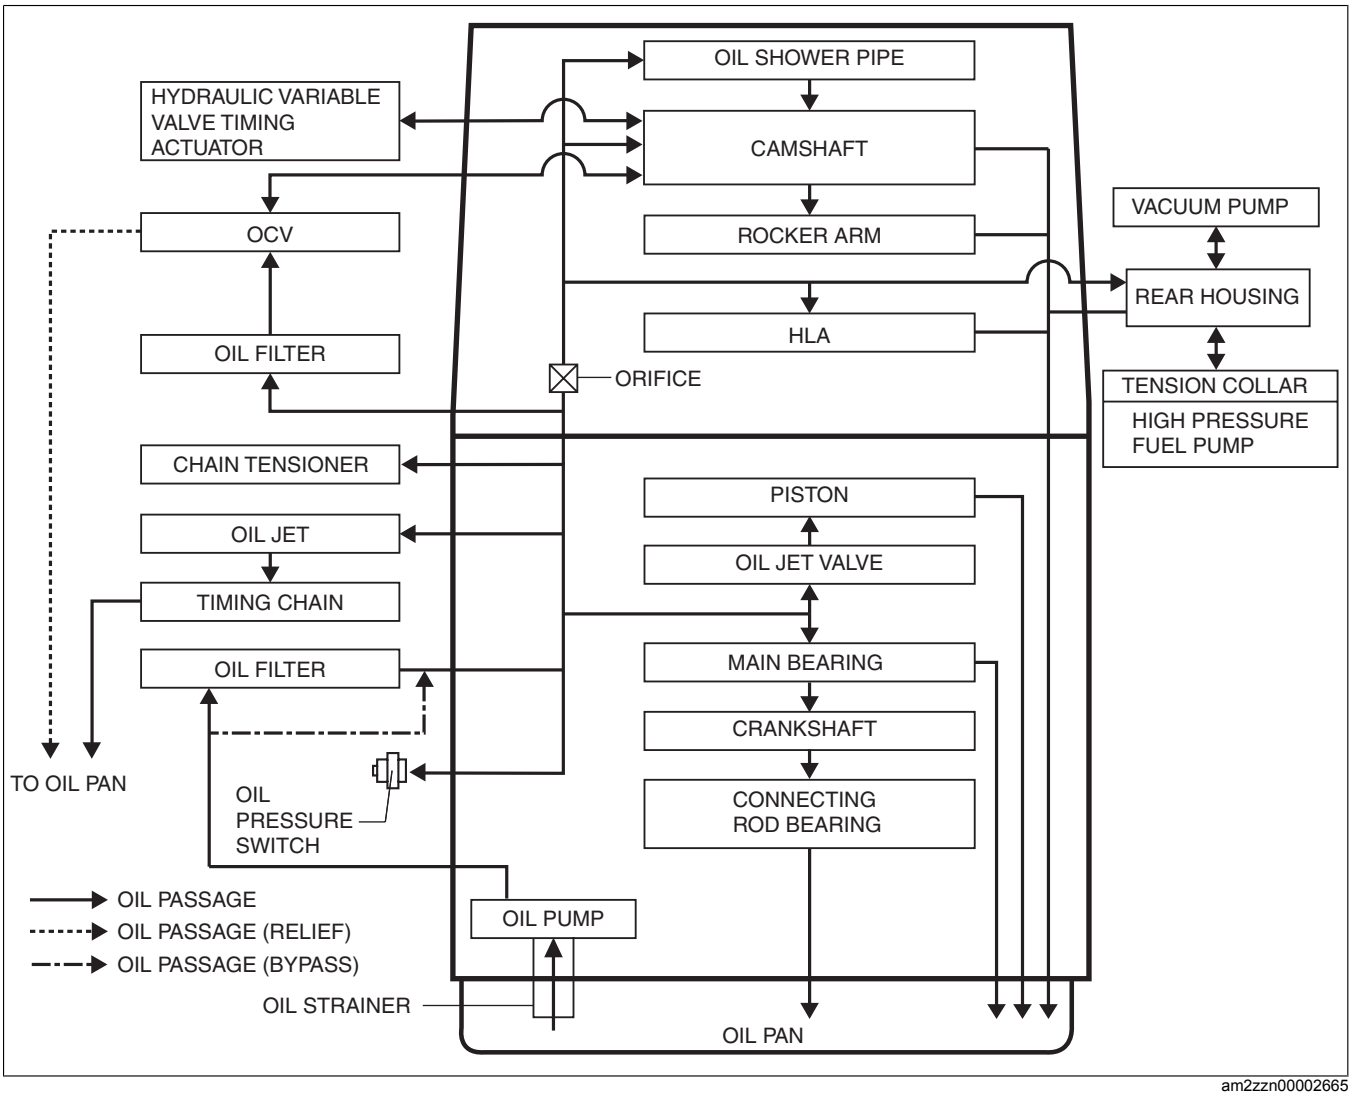

am2zzn00002665

SKYACTIV-G 1.5 (with 4-2-1 exhaust system)

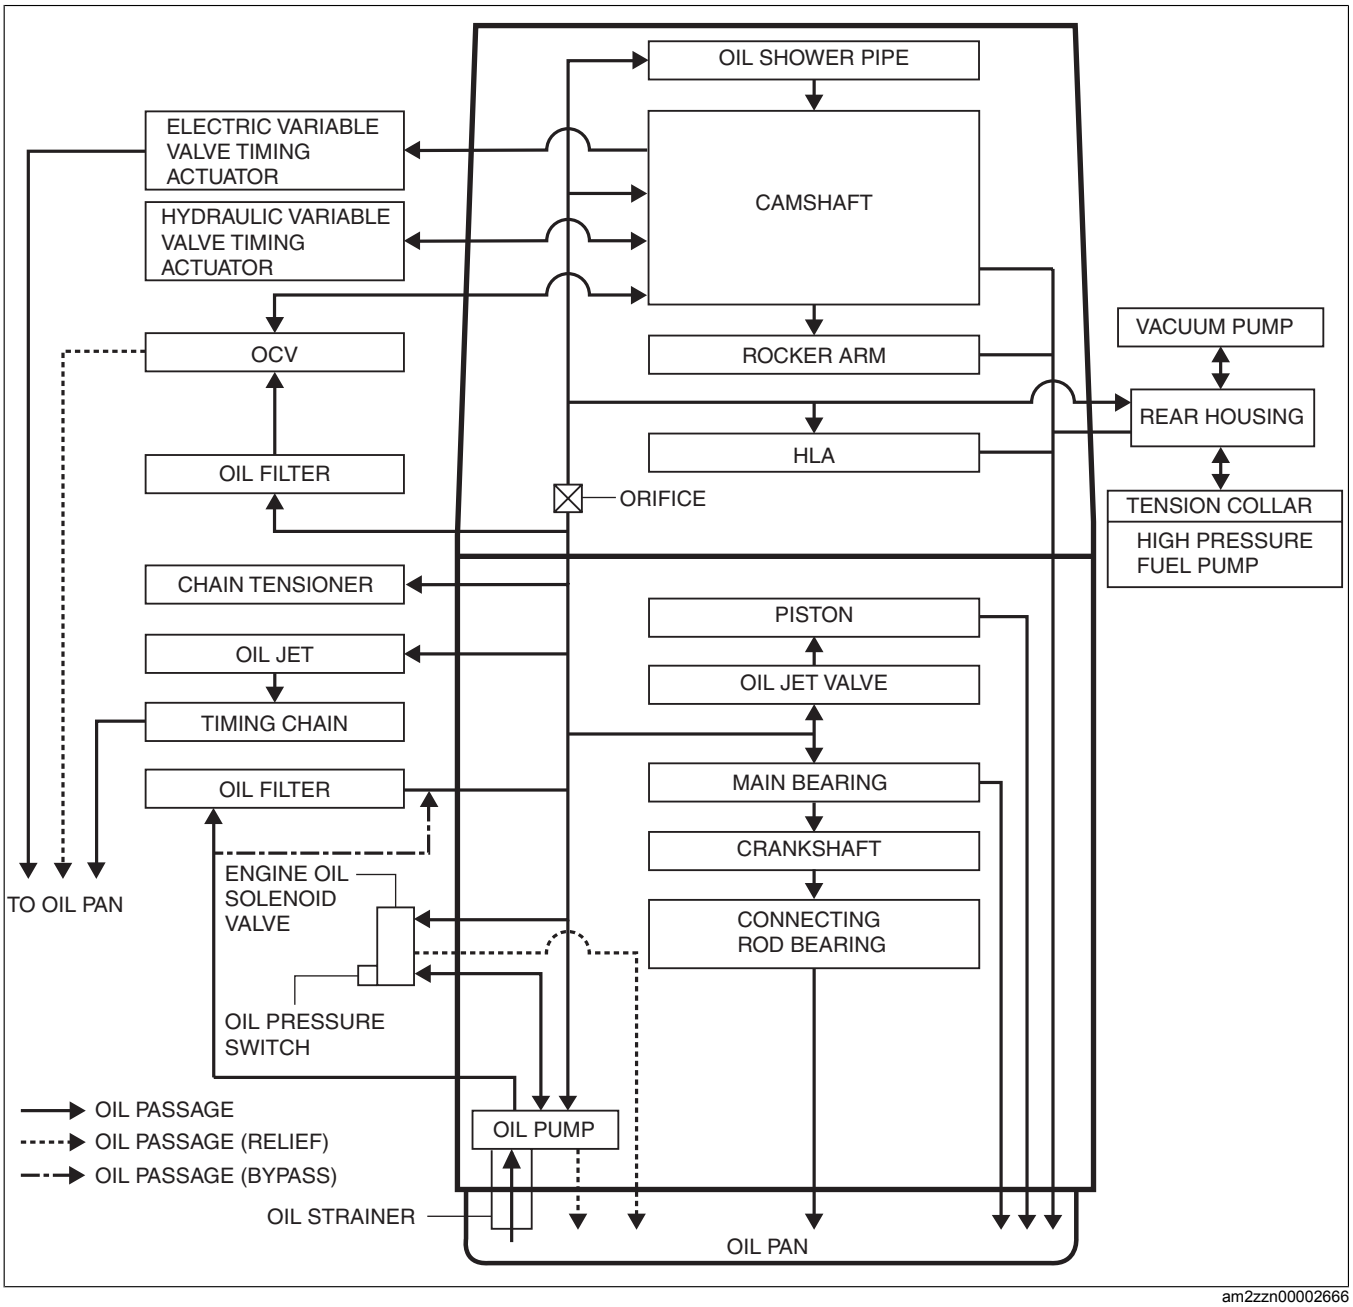

am2zzn00002666

Structure

- Consists of the following parts:

Oil filter	(See OIL FILTER [SKYACTIV-G 1.3, SKYACTIV-G 1.5].)
Oil pan	(See OIL PAN [SKYACTIV-G 1.3, SKYACTIV-G 1.5].)
Oil strainer	(See OIL STRAINER [SKYACTIV-G 1.3, SKYACTIV-G 1.5].)
Oil pump	(See OIL PUMP [SKYACTIV-G 1.3, SKYACTIV-G 1.5 (WITH 4-1 EXHAUST SYSTEM)].) (See OIL PUMP [SKYACTIV-G 1.5 (WITH 4-2-1 EXHAUST SYSTEM)].)
Oil jet valve	(See OIL JET VALVE [SKYACTIV-G 1.3, SKYACTIV-G 1.5].)
Engine oil solenoid valve	(See ENGINE OIL SOLENOID VALVE [SKYACTIV-G 1.5 (WITH 4-2-1 EXHAUST SYSTEM)].)
Oil shower pipe	(See OIL SHOWER PIPE [SKYACTIV-G 1.3, SKYACTIV-G 1.5].)