BAROMETRIC PRESSURE (BARO) SENSOR INSPECTION [SKYACTIV-G 1.3, SKYACTIV-G 1.5]


id0140q1801100

Voltage Inspection

Note
- Because the BARO sensor is integrated in the PCM, replacing the BARO sensor includes replacement of the PCM.

1. Connect the **M-MDS** to the DLC-2.
2. Switch the ignition ON (engine off).
3. Verify that the BARO sensor output voltage (PID: BARO) is within the specification. (See ON-BOARD DIAGNOSTIC TEST [SKYACTIV-G 1.3, SKYACTIV-G 1.5].) (See PCM INSPECTION [SKYACTIV-G 1.3, SKYACTIV-G 1.5].)
   - If not as specified, replace the PCM. (See PCM REMOVAL/INSTALLATION [SKYACTIV-G 1.3, SKYACTIV-G 1.5].)

Specification (Reference)

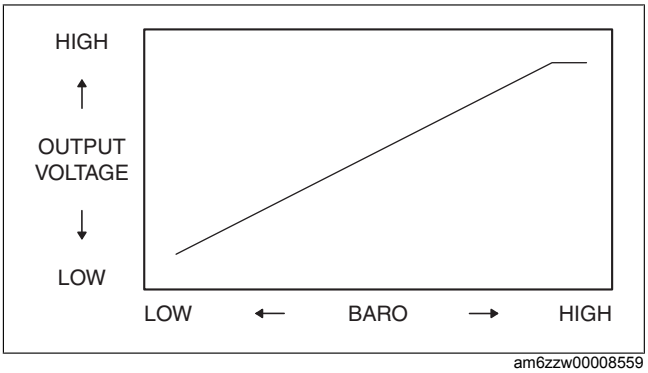

am6zzw00008559