THROTTLE POSITION (TP) SENSOR INSPECTION [SKYACTIV-G 1.3, SKYACTIV-G 1.5]

id0140q1802700

Voltage Inspection

Caution


- **The inspection cannot be performed with this method correctly if there is a malfunction of the APP sensor or throttle valve actuator. Verify that no DTCs related to the APP sensor or throttle valve actuator are stored before the inspection.**

Note

- The TP sensor cannot be removed as a single unit. When replacing the TP sensor, replace it together with the throttle body as a single unit.

1. Connect the **M-MDS** to the DLC-2.
2. Switch the ignition ON (engine off).
3. Verify that the TP sensor output voltage (PID: TP1, TP2) varies according to the accelerator opening angle when the accelerator opening angle is gradually increased. (See ON-BOARD DIAGNOSTIC TEST [SKYACTIV-G 1.3, SKYACTIV-G 1.5].)
   - If verified, go to the next step.
   - If not as verified, replace the throttle body. (See INTAKE-AIR SYSTEM REMOVAL/INSTALLATION [SKYACTIV-G 1.3, SKYACTIV-G 1.5].)
4. Verify that the TP sensor output voltage (PID: TP1, TP2) is within the specification when the accelerator pedal is depressed and not depressed. (See ON-BOARD DIAGNOSTIC TEST [SKYACTIV-G 1.3, SKYACTIV-G 1.5].) (See PCM INSPECTION [SKYACTIV-G 1.3, SKYACTIV-G 1.5].)
   - If not as specified, replace the throttle body. (See INTAKE-AIR SYSTEM REMOVAL/INSTALLATION [SKYACTIV-G 1.3, SKYACTIV-G 1.5].)

Specification (Reference)

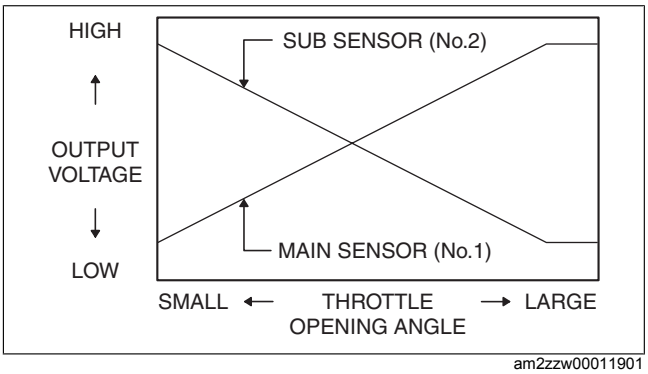

am2zzw00011901