
FRONT DRIVE SHAFT

id031300100600

Purpose, Function

- A bell joint has been adopted for the wheel-side constant velocity joint, reducing vibration and noise.
- For ATX vehicles, to absorb idling vibration occurring while the vehicle is stopped in the D position and to reduce booming noise during high-speed driving, a tripod-shaped joint has been adopted for the differential-side constant velocity joint.
- For MTX vehicles, to reduce booming noise during high-speed driving, a low noise and vibration double offset joint with low slide resistance has been adopted for the differential-side constant velocity joint.
- An extremely durable plastic has been adopted for the wheel side boot.
- By integrating the drive shaft on the right side with the joint shaft, vibration and noise during driving, which occurred from the previous spline connection construction, has been reduced.

Structural View

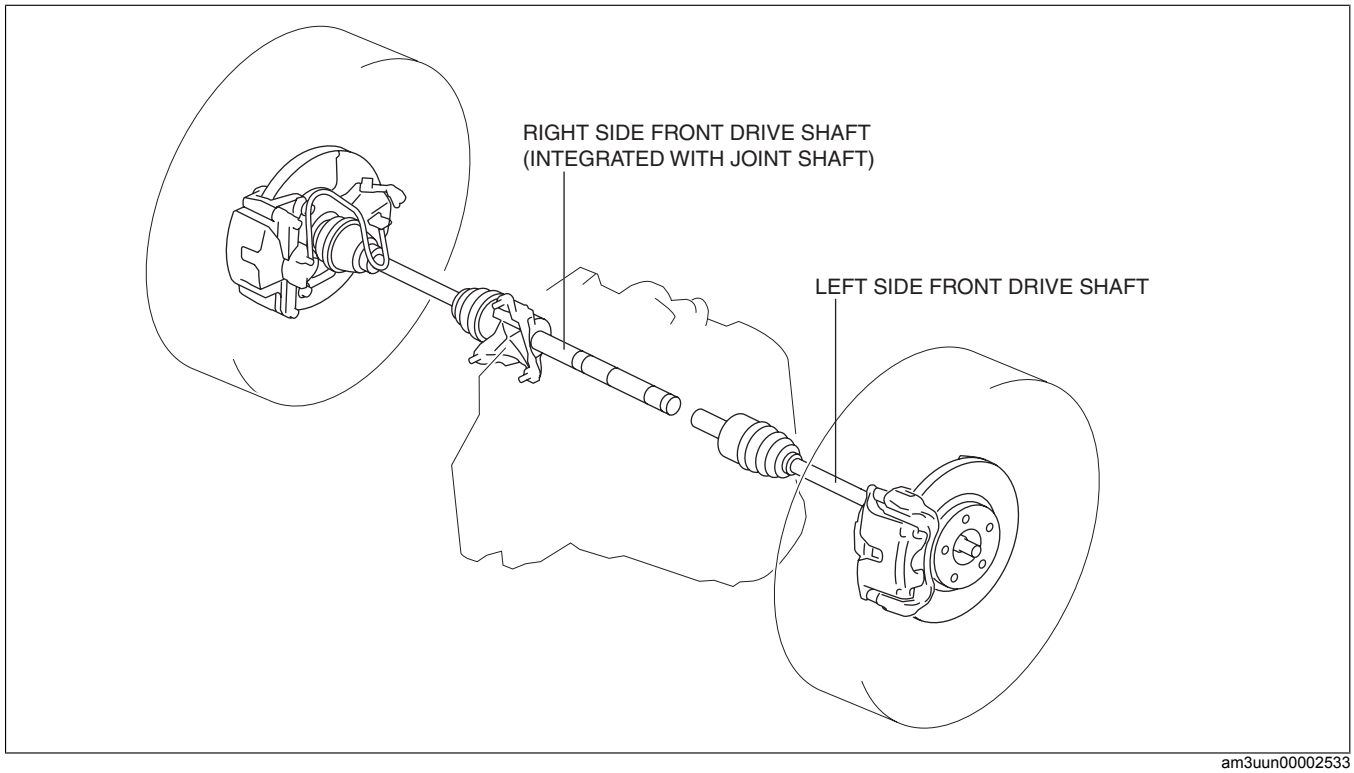

am3uun00002533