
REAR BRAKE (DRUM)

id041100201200

Purpose/Function

- A leading/trailing type rear drum brake with a **200 mm {7.87 in}** drum inner diameter and **17.5 mm {0.689 in}** wheel cylinder inner diameter has been adopted. (Except European (L.H.D. U.K.) specs.)
- A leading/trailing type rear drum brake with a **200 mm {7.87 in}** drum inner diameter and **19.1 mm {0.752 in}** wheel cylinder inner diameter has been adopted. (European (L.H.D. U.K.) specs.)
- Braking stability is ensured by use of **30.0 mm {1.18 in}** width linings.
- An auto-adjuster has been adopted which maintains a fixed clearance between the brake drum and brake shoe.

Construction

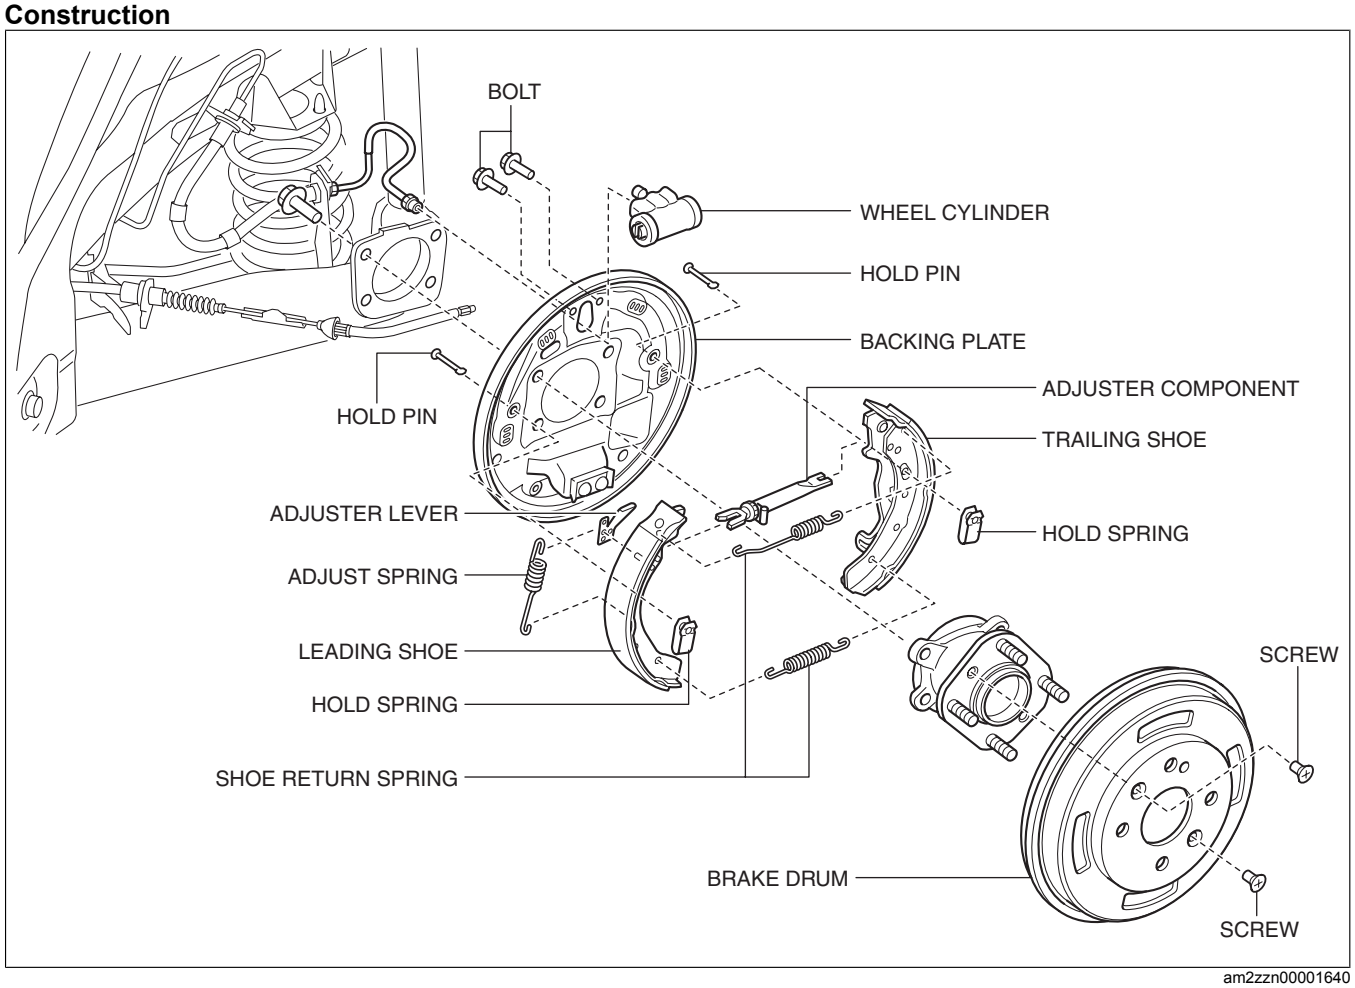

am2zzn00001640

Operation

- When the brake fluid is pressurized, the wheel cylinder pistons are pushed out. As a result, the brake shoes on the leading side and trailing side are pressed against the brake drum simultaneously and the brake is applied.