
CLUTCH FLUID INSPECTION [F65M-R]

id0510q1156400

Note
- A common reserve tank is used for the clutch system and brake system.

1. Verify that the clutch fluid is between the MIN mark and the MAX mark.

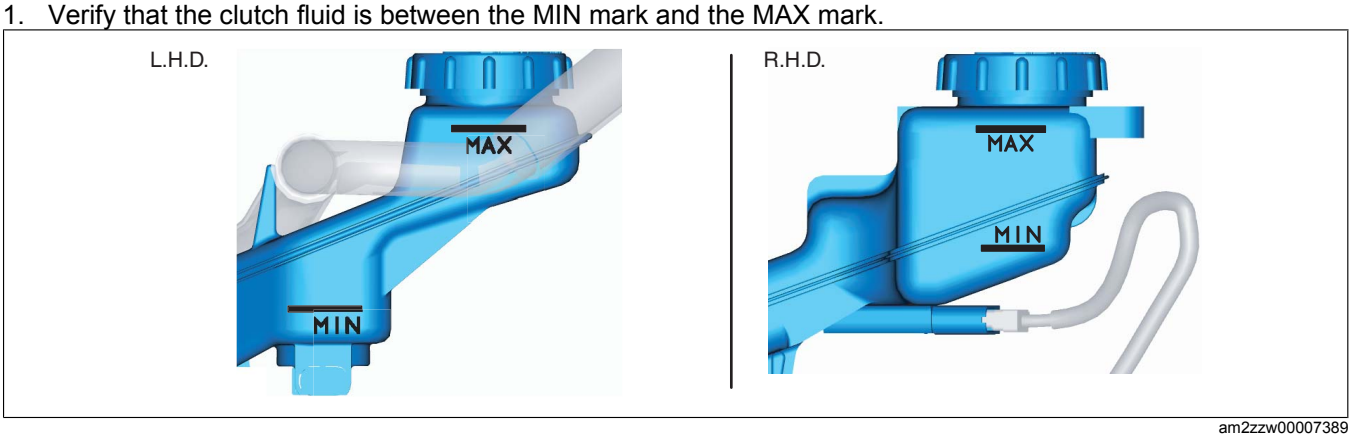

am2zzw00007389

- If fluid level is lower than MIN mark, perform the following procedure:
  1. Verify that there is no fluid leakage. (See CLUTCH FLUID LEAKAGE INSPECTION [F65M-R].)
  2. Add fluid to the level between MIN mark and the MAX mark.

Clutch fluid
SAE J1703 or FMVSS116 DOT-3 or DOT-4