
CLUTCH PEDAL POSITION SWITCH REMOVAL/INSTALLATION [F65M-R]


id0510q1160000

1. Disconnect the negative battery cable. (See NEGATIVE BATTERY CABLE DISCONNECTION/ CONNECTION.)
2. Disconnect the clutch pedal position switch connector.
3. Rotate the clutch pedal position switch 45° counterclockwise.

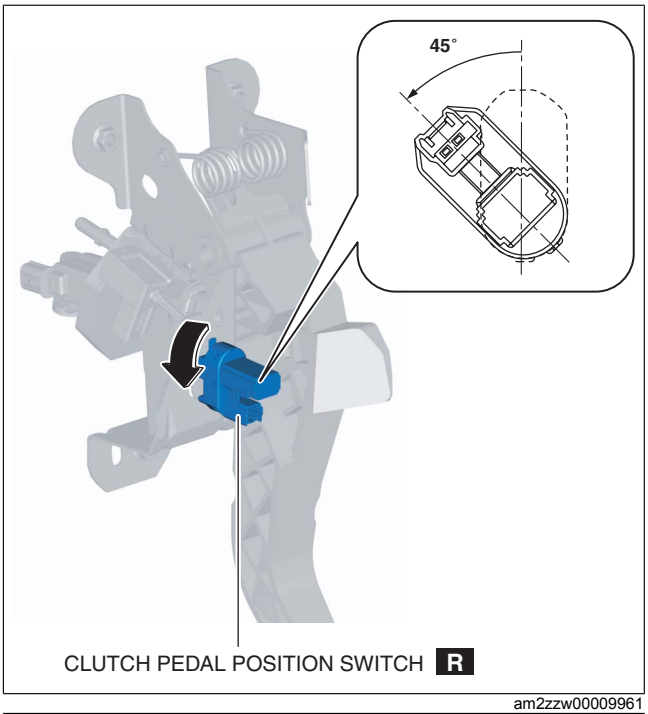


am2zzw00009961

4. Remove the clutch pedal position switch from the clutch pedal.
5. Insert a new clutch pedal position switch into the clutch pedal hole until the switch stops.

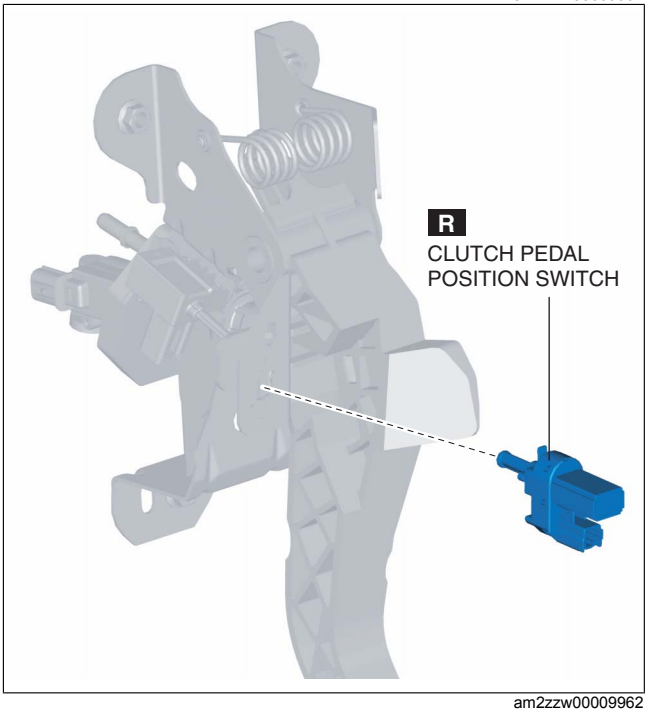

am2zzw00009962

6. Rotate the clutch pedal position switch 45° clockwise.
7. Verify that the clutch pedal position switch is locked securely.
8. Install in the clutch pedal position switch connector.
9. Connect the negative battery cable. (See NEGATIVE BATTERY CABLE DISCONNECTION/CONNECTION.)

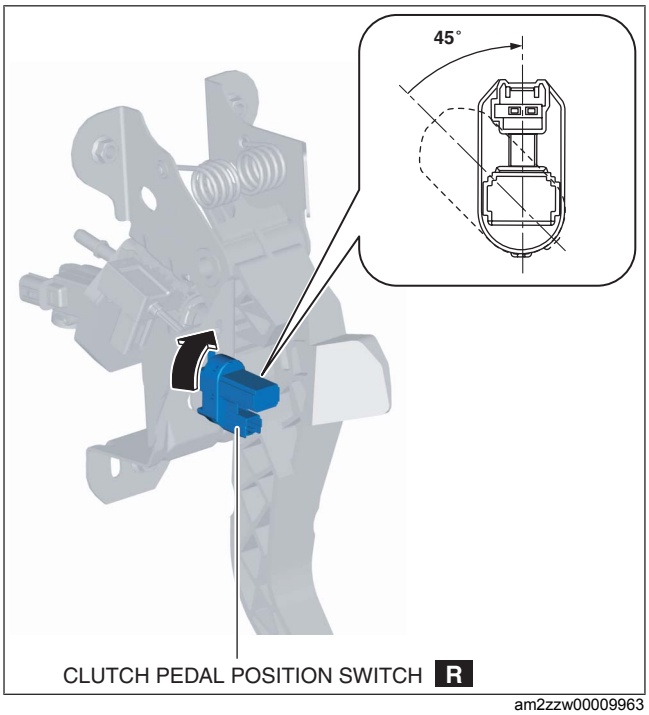

am2zzw00009963