
CLUTCH FLUID INSPECTION [F66M-R]

id0510q2156400

Note
- A common reserve tank is used for the clutch system and brake system.

1. Verify that the clutch fluid is between the MIN mark and the MAX mark.

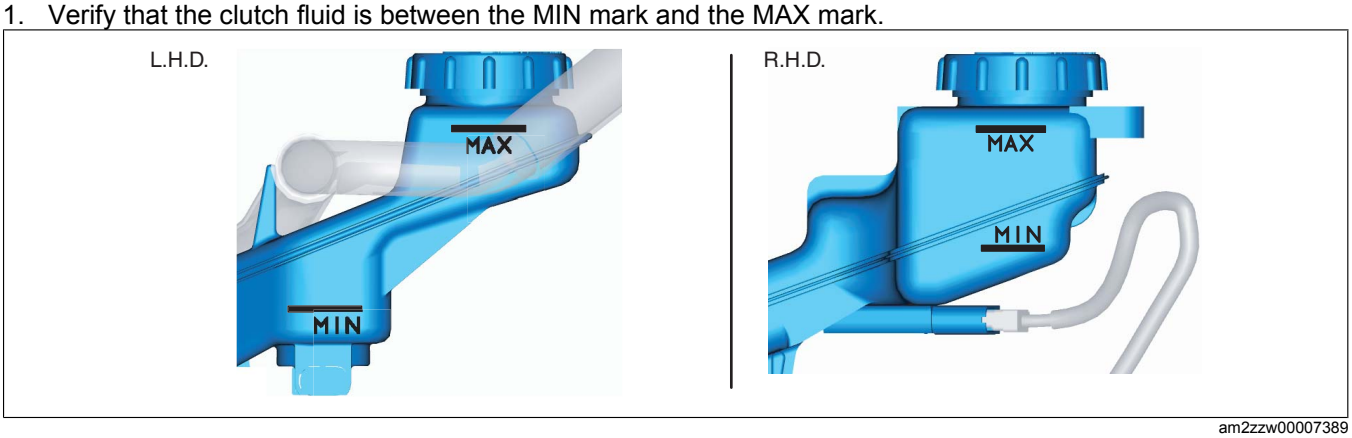

am2zzw00007389

- If fluid level is lower than MIN mark, perform the following procedure:
  1. Verify that there is no fluid leakage. (See CLUTCH FLUID LEAKAGE INSPECTION [F66M-R].)
  2. Add fluid to the level between MIN mark and the MAX mark.

Clutch fluid
SKYACTIV-G 1.5: SAE J1703 or FMVSS116 DOT-3 or DOT-4
SKYACTIV-D 1.5: SAE J1703 or FMVSS116 DOT-4