
BONNET REMOVAL/INSTALLATION

id091000407200

Warning


- **Always perform the procedure with at least another person to prevent the bonnet from falling. Otherwise, the bonnet may fall and cause injury.**

1. Remove the bolts.

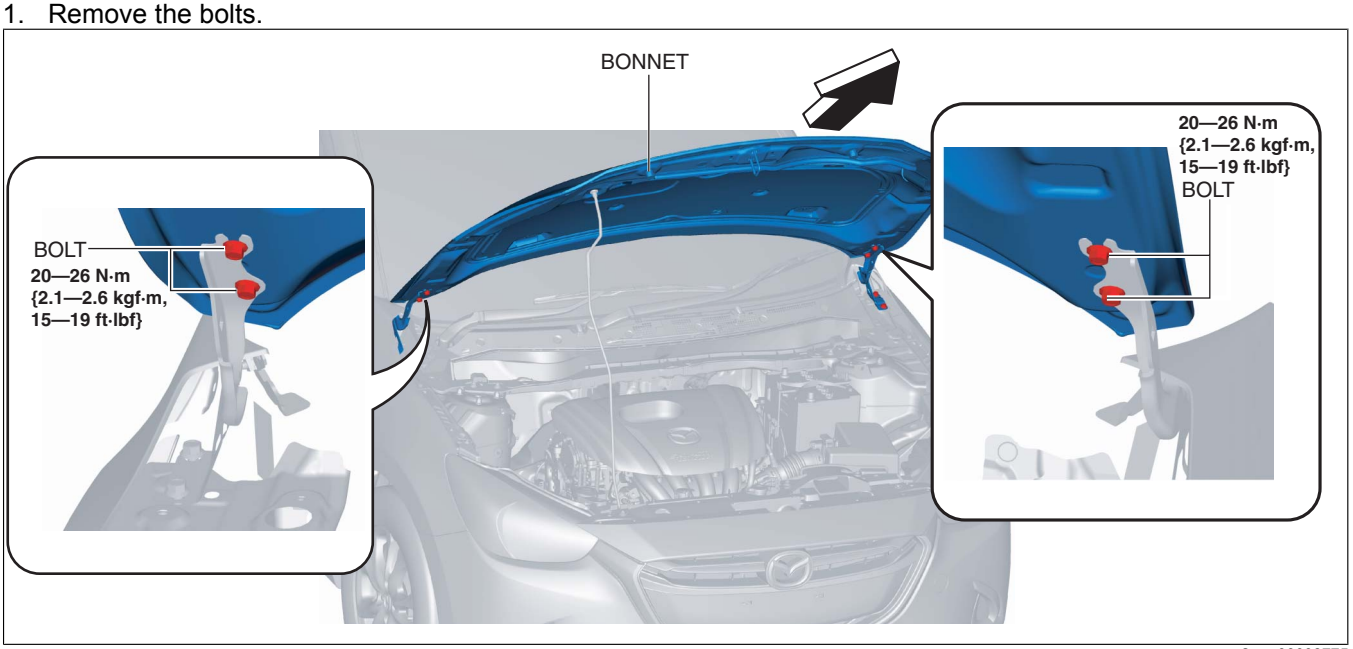

am2zzw00008775

2. Remove the bonnet.
3. Remove the front fender molding. (See FRONT FENDER MOLDING REMOVAL/INSTALLATION.)
4. Remove the bolts.
5. Remove the bonnet hinge.
6. Install in the reverse order of removal.
7. Perform the bonnet adjustment. (See BONNET ADJUSTMENT.)

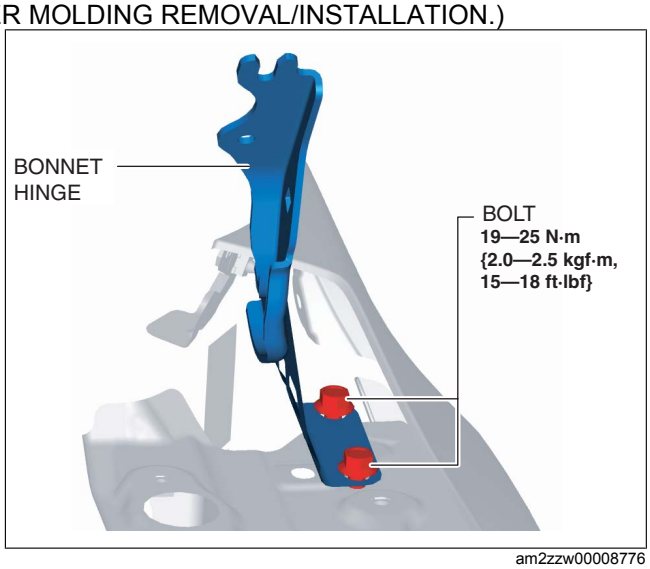

am2zzw00008776