
FRONT FENDER INSULATOR No.2 REMOVAL/INSTALLATION

id091000804400

1. Disconnect the negative battery cable. (See NEGATIVE BATTERY CABLE DISCONNECTION/ CONNECTION.)
2. Remove the following parts:
   (1) Front bumper (See FRONT BUMPER REMOVAL.) (See FRONT BUMPER INSTALLATION.)
   (2) Front combination light (See FRONT COMBINATION LIGHT REMOVAL/INSTALLATION.)
   (3) Front bumper Slider (See BUMPER SLIDER REMOVAL/INSTALLATION.)
   (4) Front fender molding (See FRONT FENDER MOLDING REMOVAL/INSTALLATION.)
   (5) Front fender panel (See FRONT FENDER PANEL REMOVAL/INSTALLATION.)
3. Remove the fastener.

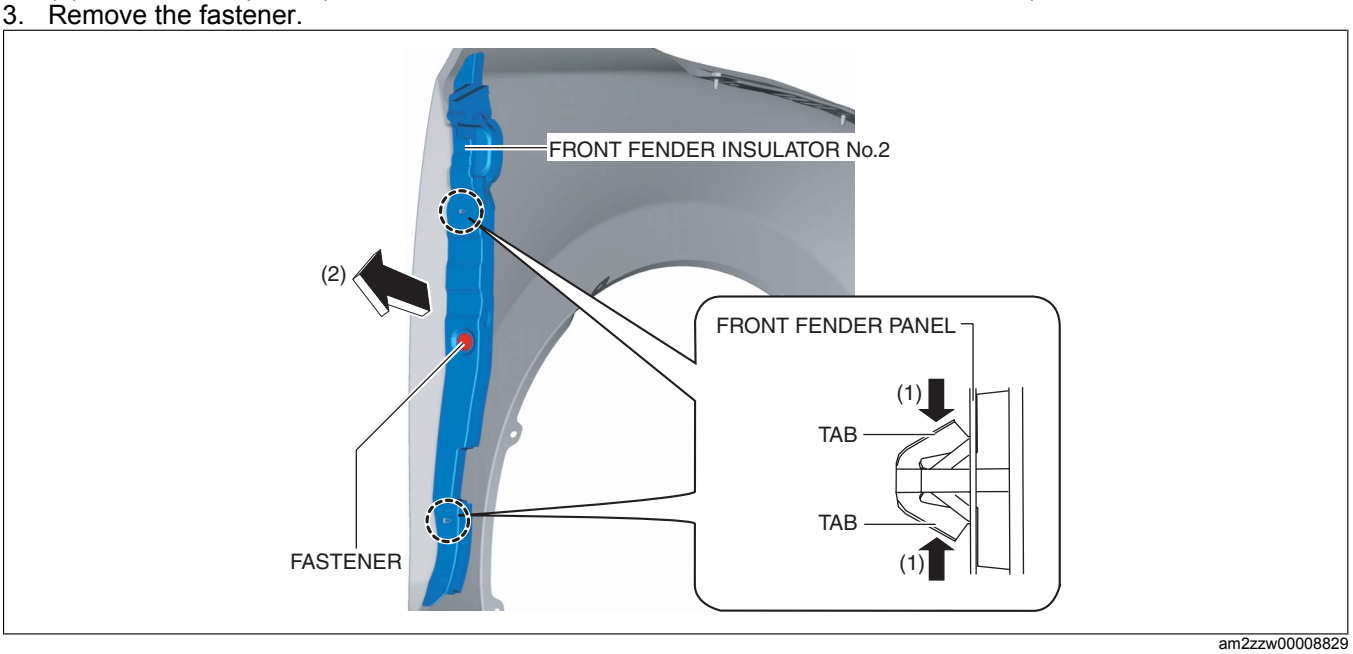

am2zzw00008829

4. Press the tab in the direction of the arrow shown in the figure and detach the front fender insulator No.2 from the front fender panel.
5. Remove the front fender insulator No.2 in the direction of the arrow (2) shown in the figure.
6. Install in the reverse order of removal.