
FRONT DOOR CHECKER REMOVAL/INSTALLATION


id091100520400

1. Fully close the front door glass.
2. Disconnect the negative battery cable. (See NEGATIVE BATTERY CABLE DISCONNECTION/CONNECTION.)
3. Remove the following parts:
   (1) Power window main switch (Driver's side) (See POWER WINDOW MAIN SWITCH REMOVAL/INSTALLATION.)
   (2) Power window subswitch (Passenger's side) (See POWER WINDOW SUBSWITCH REMOVAL/INSTALLATION.)
   (3) Front door trim (See FRONT DOOR TRIM REMOVAL/INSTALLATION.)
   (4) Front door speaker (See FRONT DOOR SPEAKER REMOVAL/INSTALLATION.)
4. Remove the bolt.

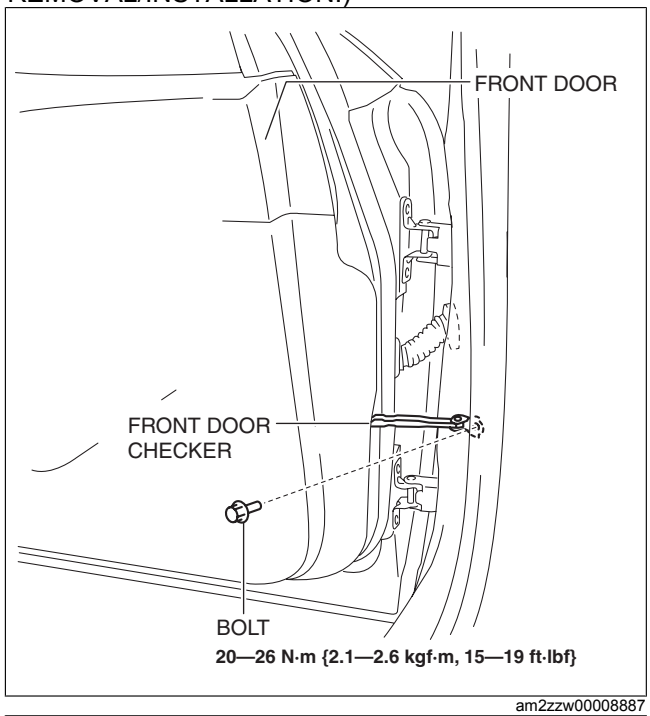

am2zzw00008887

5. Remove the bolts.
6. Pull out the front door checker from the front speaker installation hole.
7. Install in the reverse order of removal.

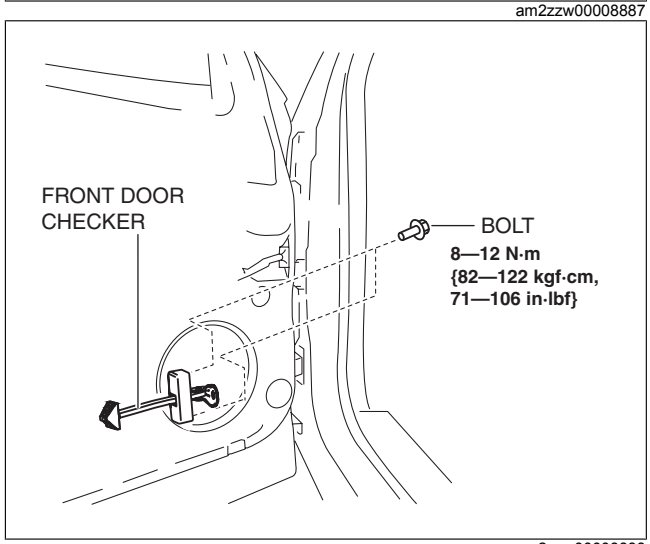

am2zzw00008888