
REAR DOOR CHECKER REMOVAL/INSTALLATION


id091100520700

1. Fully close the rear door glass.
2. Disconnect the negative battery cable. (See NEGATIVE BATTERY CABLE DISCONNECTION/CONNECTION.)
3. Remove the following parts:
   (1) Power window subswitch (Rear door) (See POWER WINDOW SUBSWITCH REMOVAL/INSTALLATION.)
   (2) Rear door trim (See REAR DOOR TRIM REMOVAL/INSTALLATION.)
   (3) Rear door speaker (See REAR DOOR SPEAKER REMOVAL/INSTALLATION.)
4. Remove the bolt.

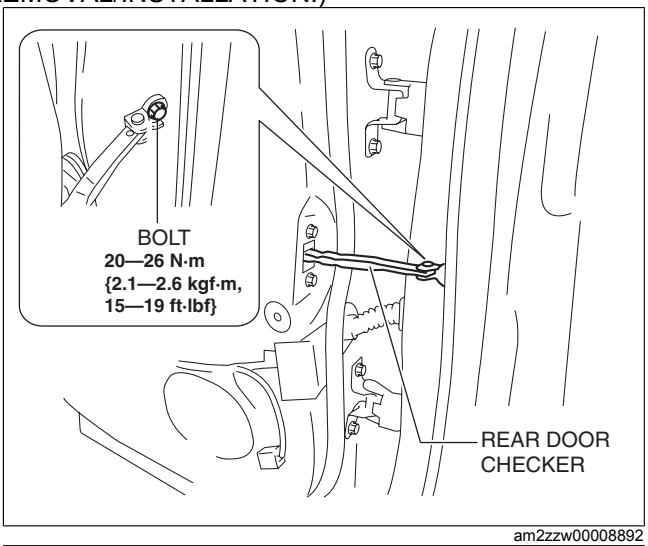

am2zzw00008892

5. Remove the bolts.
6. Pull out the rear door checker from the rear speaker installation hole.
7. Install in the reverse order of removal.

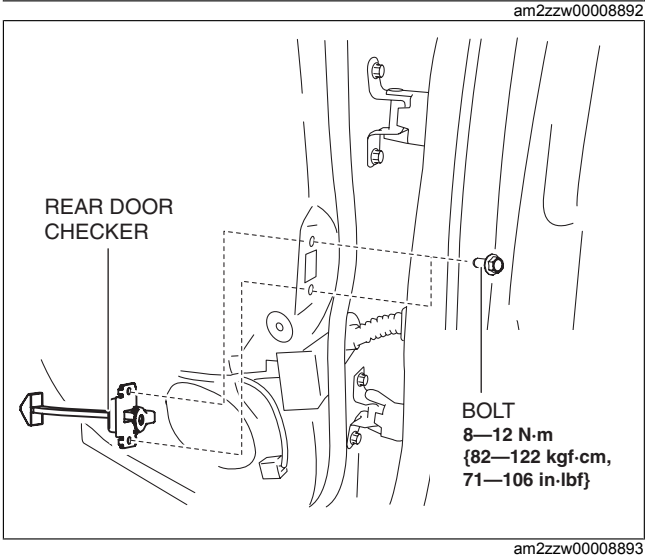

am2zzw00008893