FRONT SEAT REMOVAL/INSTALLATION


id091300800200

Warning

- **Handling a front seat equipped with a side air bag improperly can accidentally operate (deploy) the air bag, which may seriously injure you. Read the service warnings/cautions in the Workshop Manual before handling the front seat (side air bag integrated). (See AIR BAG SYSTEM SERVICE WARNINGS [TWO-STEP DEPLOYMENT CONTROL SYSTEM].) (See AIR BAG SYSTEM SERVICE WARNINGS [STANDARD DEPLOYMENT CONTROL SYSTEM].) (See AIR BAG SYSTEM SERVICE CAUTIONS [TWO-STEP DEPLOYMENT CONTROL SYSTEM].) (SeeAIR BAG SYSTEM SERVICE CAUTIONS [STANDARD DEPLOYMENT CONTROL SYSTEM].)**
- **If the sliding mechanisms on both sides are not locked after assembling the front seat, the front seat will operate accidentally while the vehicle is driven, which could result in serious injury. After assembling the front seat, shake it up and down and verify that the sliding mechanism on the both sides are locked.**

Caution

- **After the front seat has been removed, if the slider lever is operated and the front seat is reinstalled with the left/right slide positions deviated, the adjuster unit could be damaged. After removing a front seat, do not operate the slider lever.**
- **Verify that there are no malfunctions in the forward/back slide of the seat and in the adjuster unit after installing a front seat.**
- **When performing the procedure with a front seat removed from the vehicle, perform the procedure on a clean cloth so as not to damage or dirty the seat.**

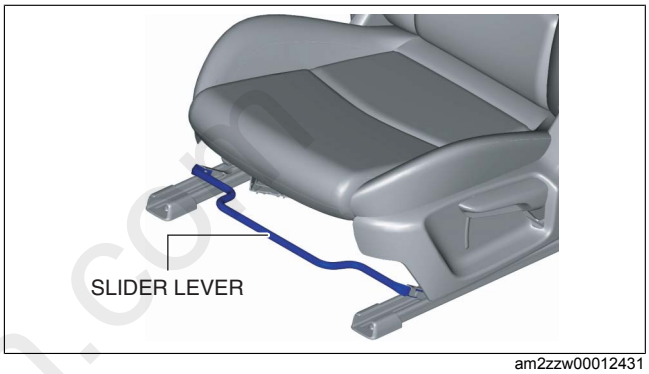


am2zzw00012431

Note

- When removing the front seat from the vehicle or putting it back in, it can be performed smoothly by removing the head restraint.


1. Slide the front seat to the positions where the bolts shown in the figure can be removed.

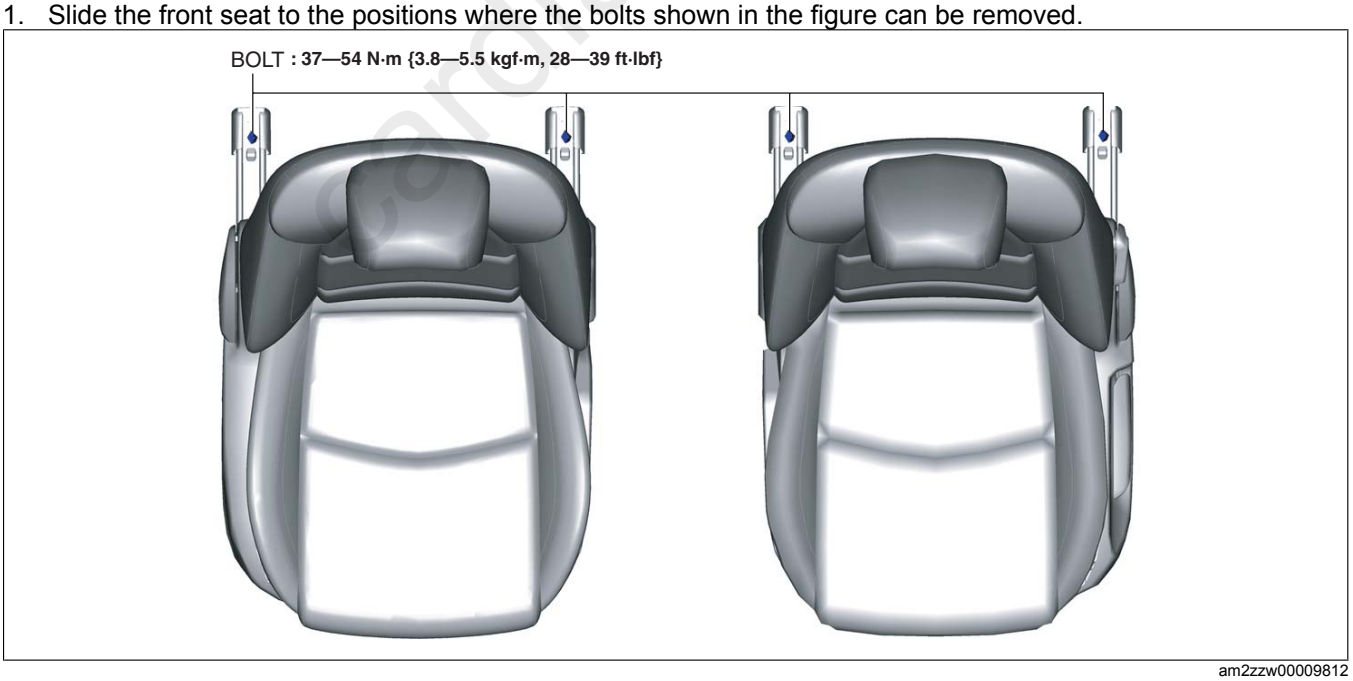

am2zzw00009812


2. Remove the bolts. (See Bolt Installation Note.)
3. Slide the front seat to the positions where the bolts shown in the figure can be removed.

cardiagn.com

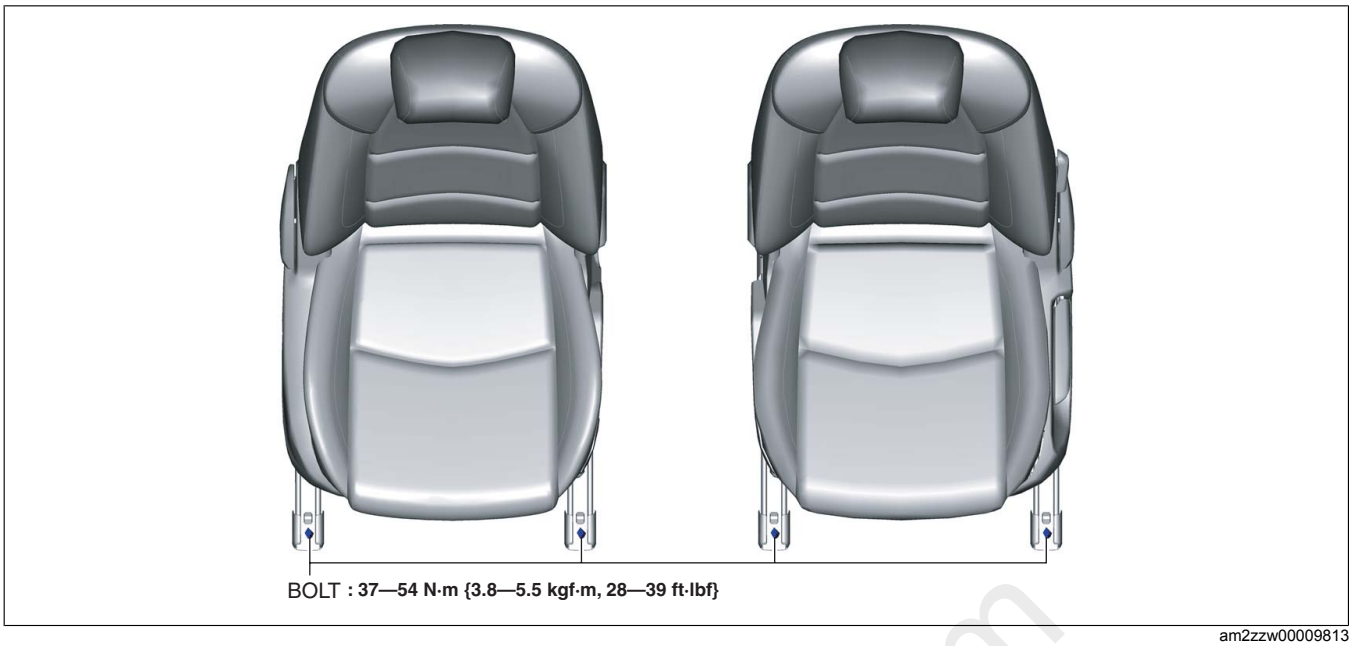

am2zzw00009813

4. Remove the bolts. (See Bolt Installation Note.)
5. Switch the ignition off.
6. Disconnect the negative battery cable and wait for **1 min or more**. (See NEGATIVE BATTERY CABLE DISCONNECTION/CONNECTION.)
7. Slide the lock in the direction of arrow (1) shown in the figure, and while pressing the tab in the direction of arrow (2), disconnect the connector in the direction of arrow (3).

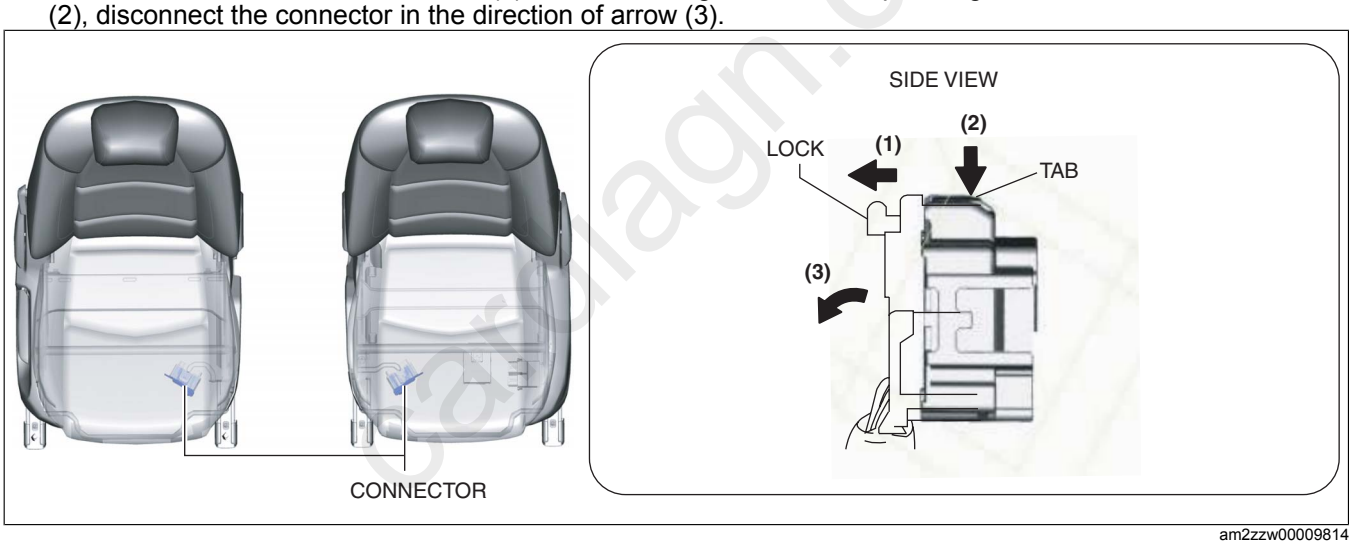


am2zzw00009814


8. Remove the front seat.
9. Install in the reverse order of removal.

Bolt Installation Note

1. Install the bolts in the order shown in the figure.

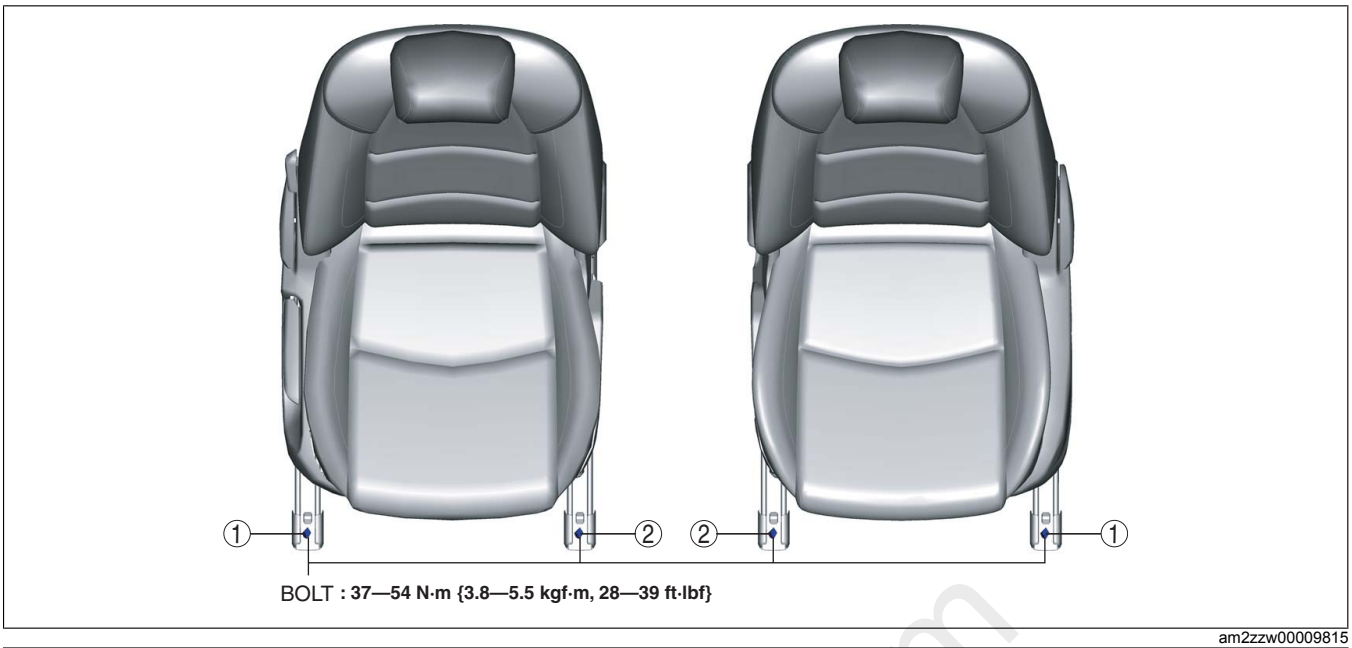

am2zzw00009815

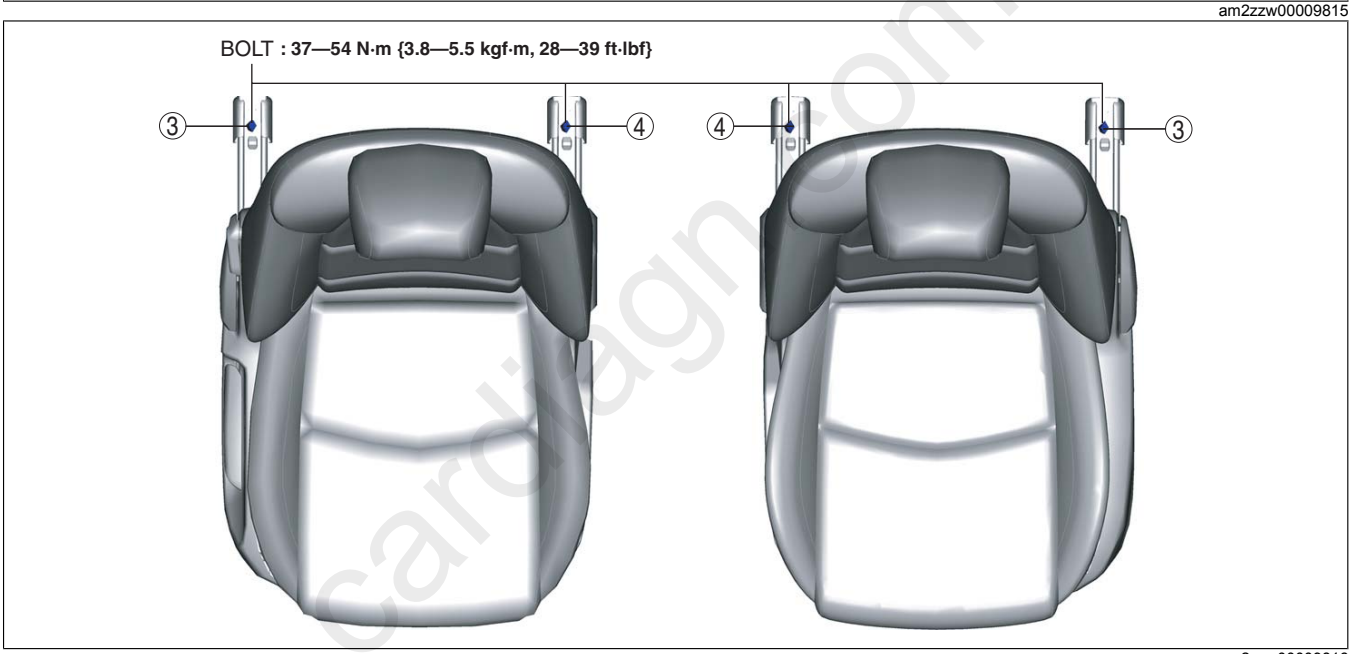

am2zzw00009816

cardiagn.com