
CHILD-RESTRAINT SEAT ANCHOR REMOVAL/INSTALLATION

id091300999600

Top Tether Anchor
4SD

Note
- When removing the top tether anchor from the vehicle or putting it back in, it can be performed easier by removing the head restraint. (Except head restraint-integrated rear seat)

1. Open the cover.
2. Remove the bolts.
3. Remove the top tether anchors.
4. Install in the reverse order of removal.

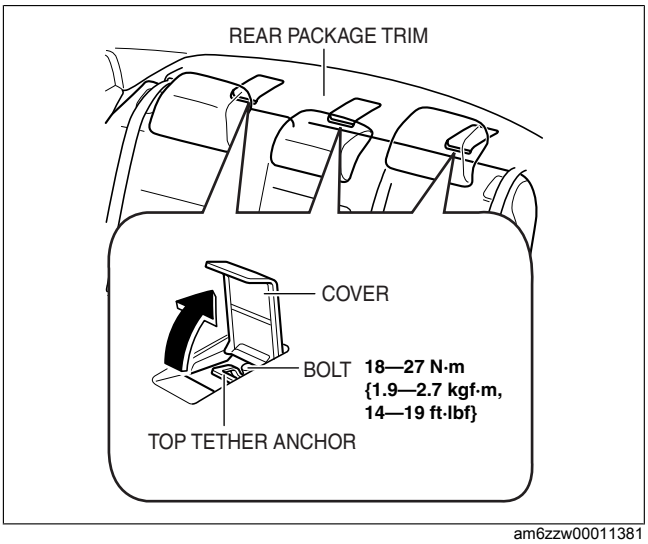


am6zzw00011381

5HB

Note
- The top tether anchors are integrated into the rear seat back frame.
- For the top tether anchor removal/installation, refer to the rear seat back frame removal/installation. (See REAR SEAT BACK FRAME REMOVAL/INSTALLATION.)

ISOFIX Anchor

Note
- ISOFIX anchors are integrated with the body.

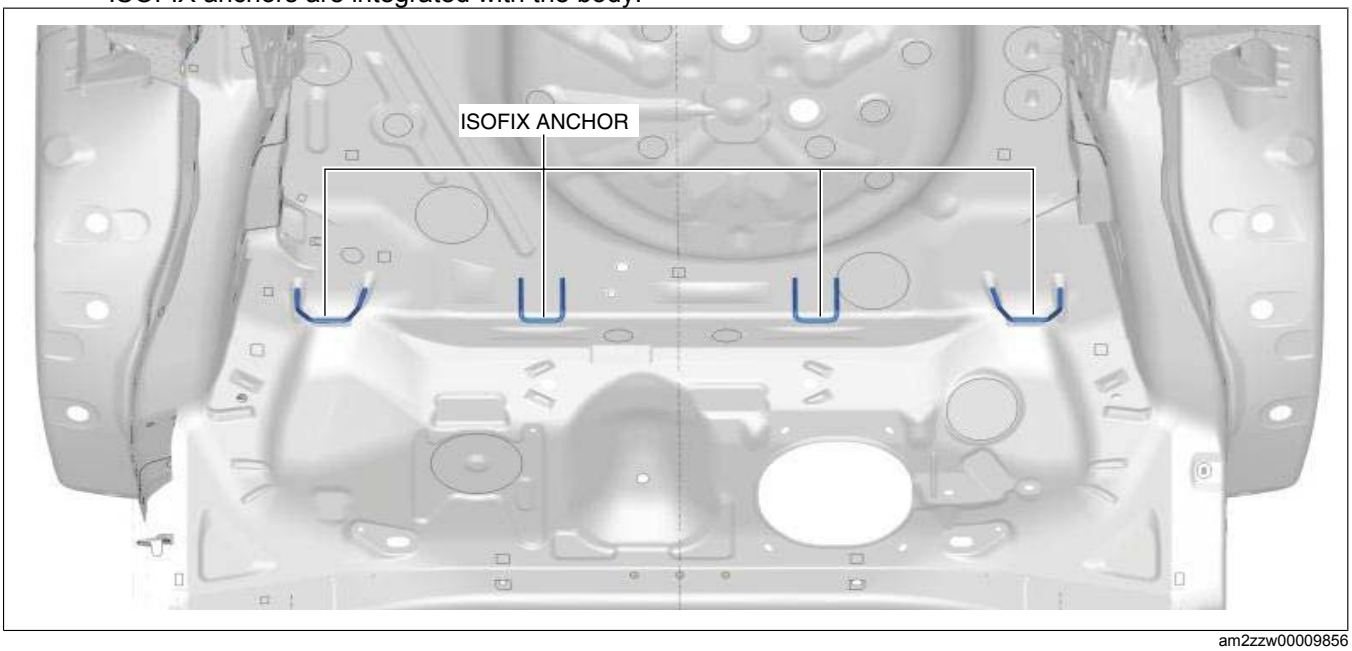

am2zzw00009856