
THEFT-DETERRENT HORN REMOVAL/INSTALLATION

id091400517500

5HB

1. Disconnect the negative battery cable. (See NEGATIVE BATTERY CABLE DISCONNECTION/ CONNECTION.)
2. Remove the following parts:
   (1) Rear package tray (See REAR PACKAGE TRAY REMOVAL/INSTALLATION.)
   (2) Trunk covering (See TRUNK COVERING REMOVAL/INSTALLATION.)
   (3) Trunk board (See TRUNK BOARD REMOVAL/INSTALLATION.)
   (4) Trunk end trim (See TRUNK END TRIM REMOVAL/INSTALLATION.)
3. Partially peel back the trunk side trim (LH) to the position allowing removal of the theft-deterrent horn.(See TRUNK SIDE TRIM REMOVAL/INSTALLATION.)
4. Disconnect the connector.
5. Remove the bolts.
6. Remove the theft-deterrent horn.
7. Install in the reverse order of removal.

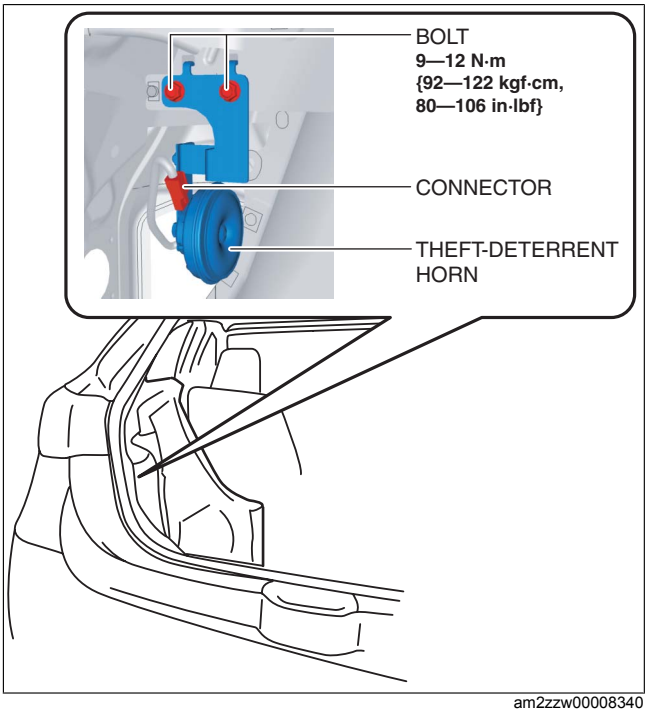


am2zzw00008340

4SD

1. Disconnect the negative battery cable. (See NEGATIVE BATTERY CABLE DISCONNECTION/ CONNECTION.)
2. Remove the following parts:
   (1) Trunk covering (See TRUNK COVERING REMOVAL/INSTALLATION.)
   (2) Trunk board (See TRUNK BOARD REMOVAL/INSTALLATION.)
   (3) Trunk end trim (See TRUNK END TRIM REMOVAL/INSTALLATION.)
3. Partially peel back the trunk side trim (RH) to the position allowing removal of the theft-deterrent horn.(See TRUNK SIDE TRIM REMOVAL/INSTALLATION.)

4. Disconnect the connector.
5. Remove the bolts.
6. Remove the theft-deterrent horn.
7. Install in the reverse order of removal.

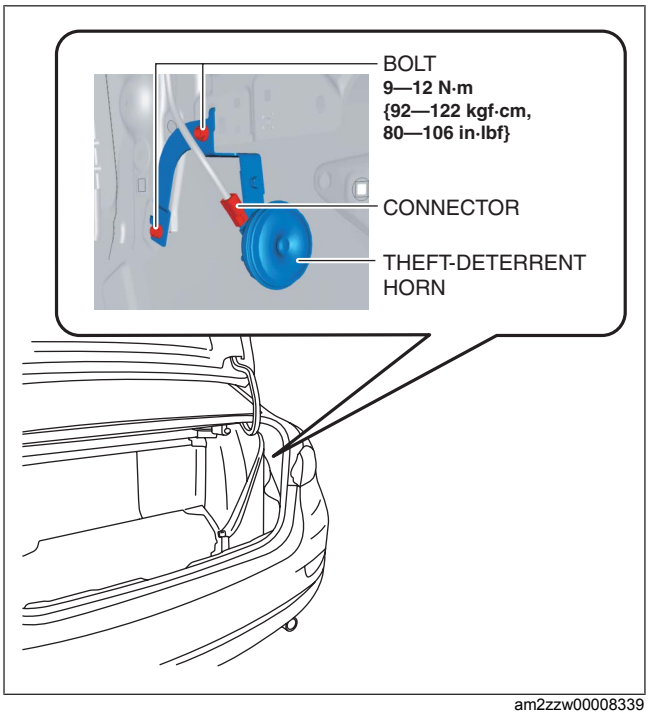

am2zzw00008339