
CENTER SPLASH SHIELD REMOVAL/INSTALLATION

id091600530000

1. Lift up the vehicle.
2. Remove the fasteners and bolt.

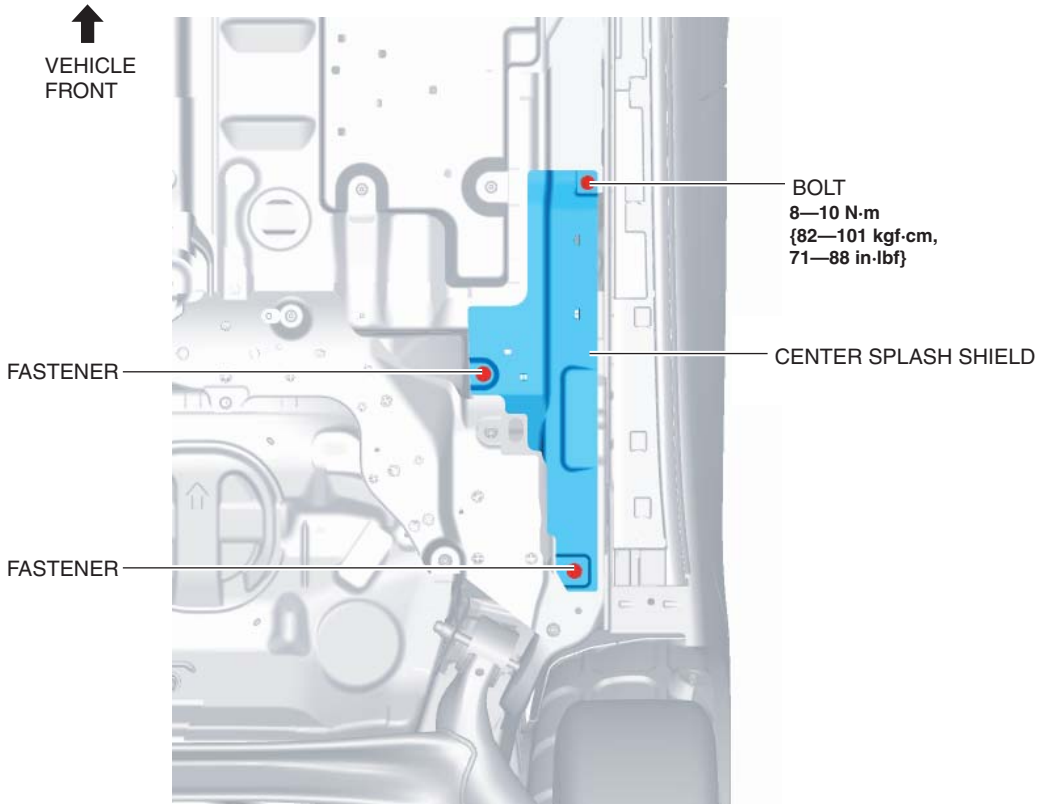

am2zzw00008949

3. Install in the reverse order of removal.