
FRONT FENDER MOLDING REMOVAL/INSTALLATION


id091600802100

1. Press the shaded area shown in the figure in the direction of the arrow and detach hook A from the front fender panel.

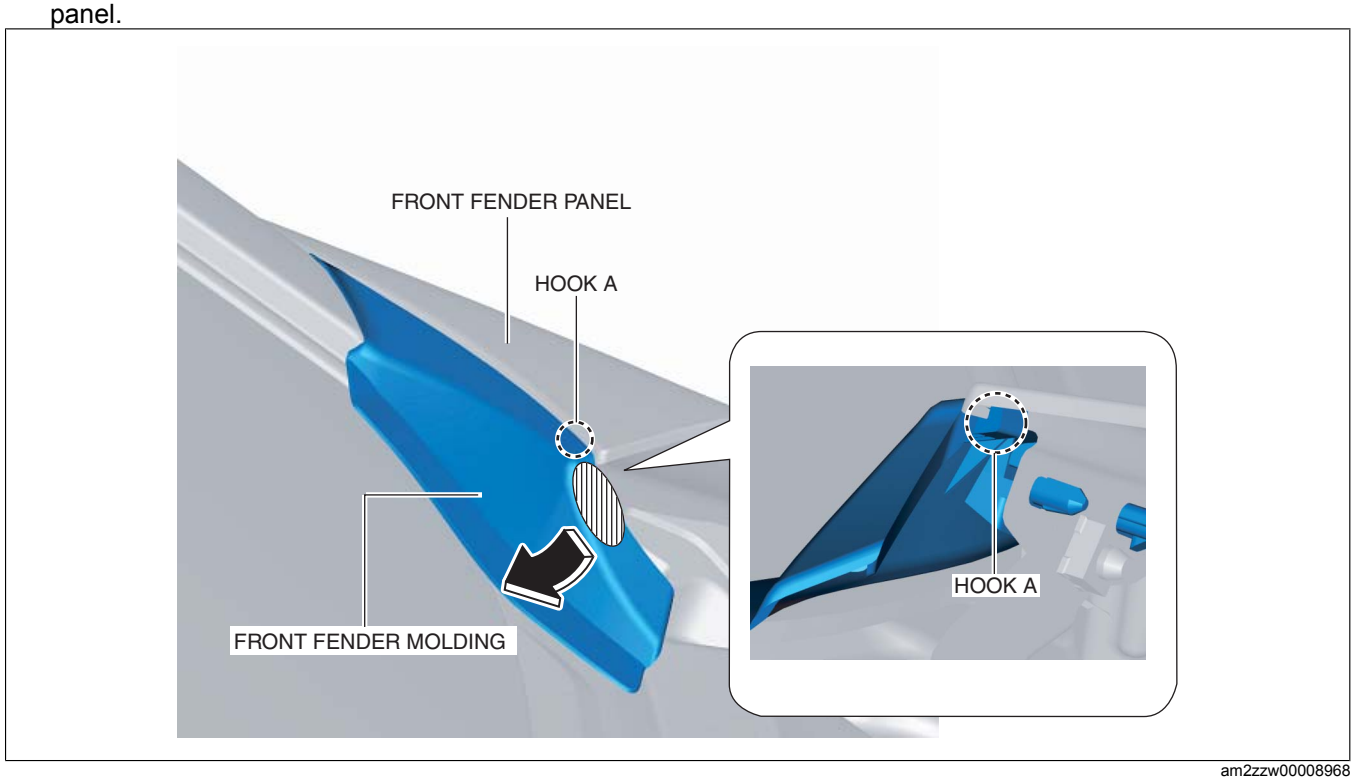


am2zzw00008968

2. Press the shaded area shown in the figure in the direction of the arrow and detach hook B from the front fender panel.

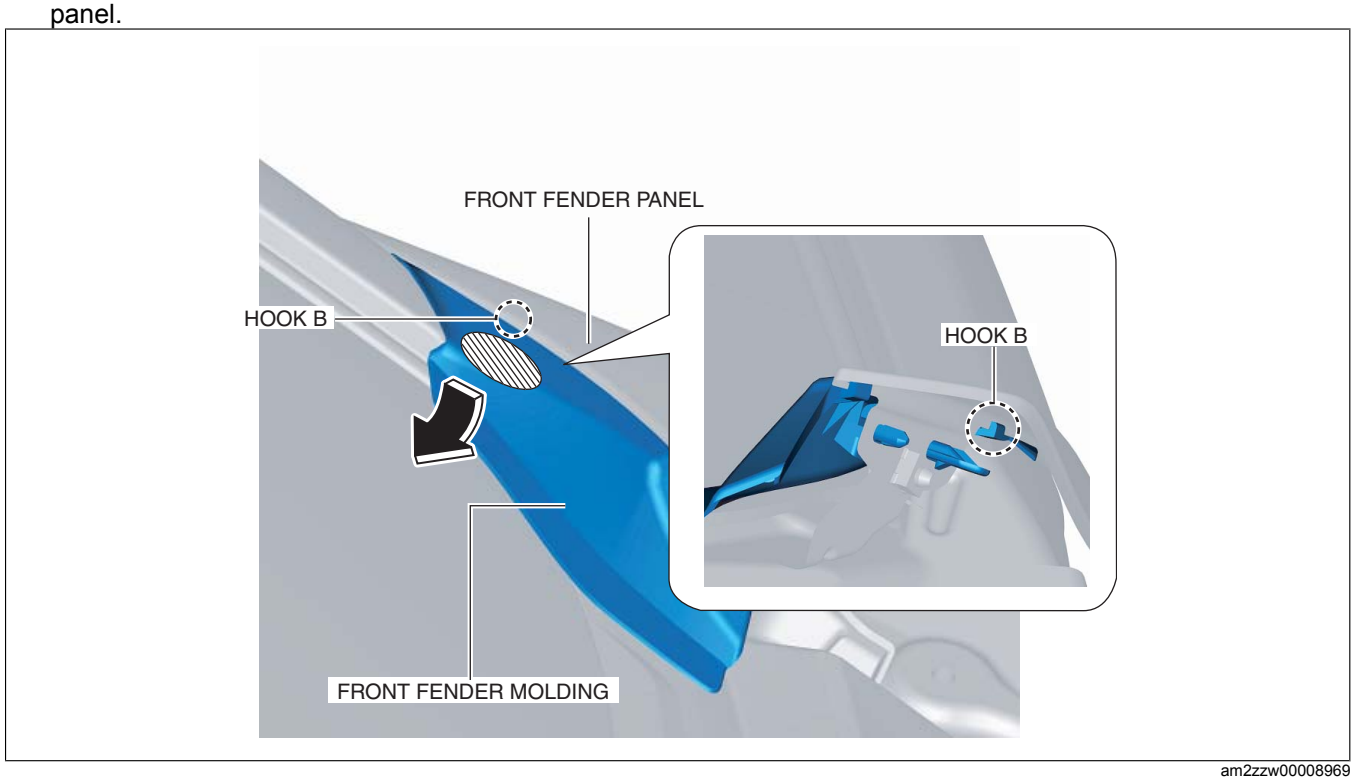

am2zzw00008969

3. While releasing the tab in the direction of arrow (1) shown in the figure using the remover tool, move the front fender molding in the direction of arrow (2) and remove it.

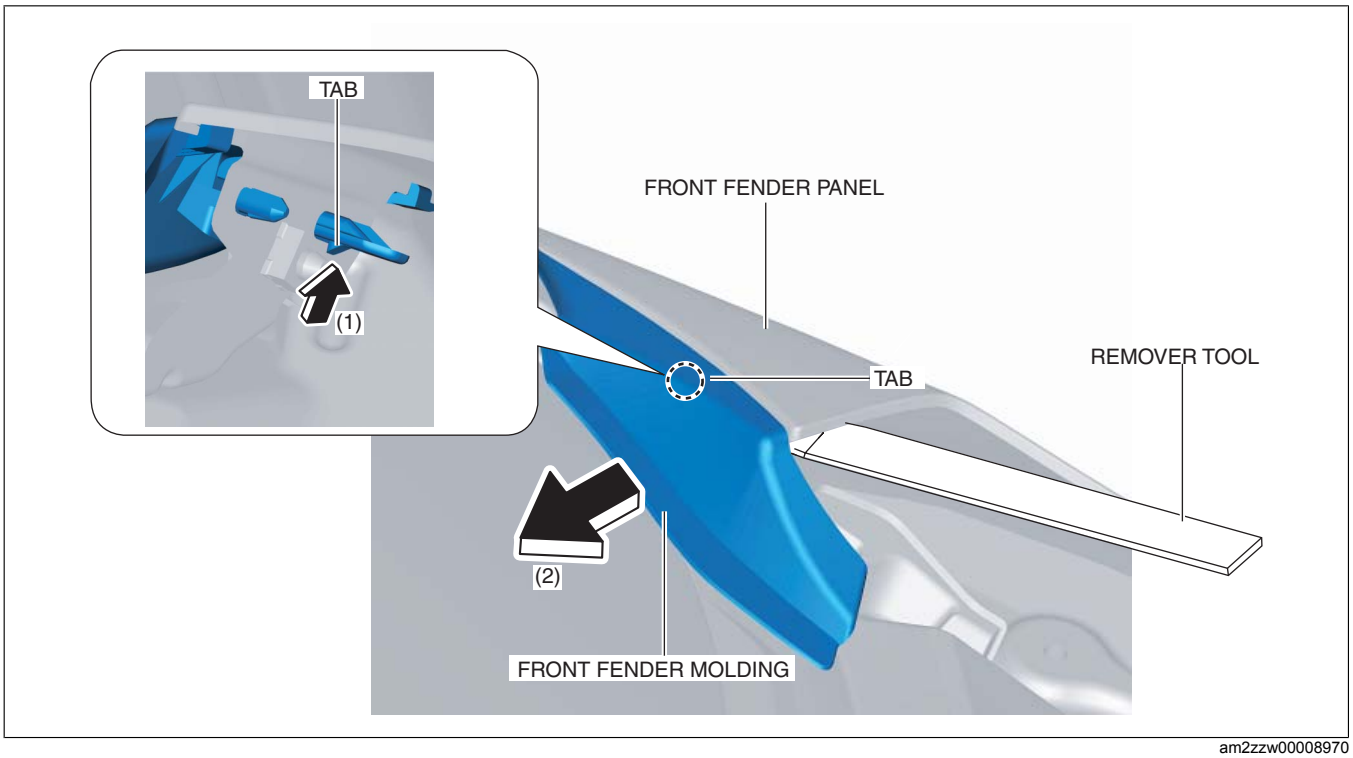

am2zzw00008970

4. Install in the reverse order of removal.