
REAR BELTLINE MOLDING REMOVAL/INSTALLATION


id091600804700

1. Affix the protective tape to the position shown in the figure to prevent scratches and damage.

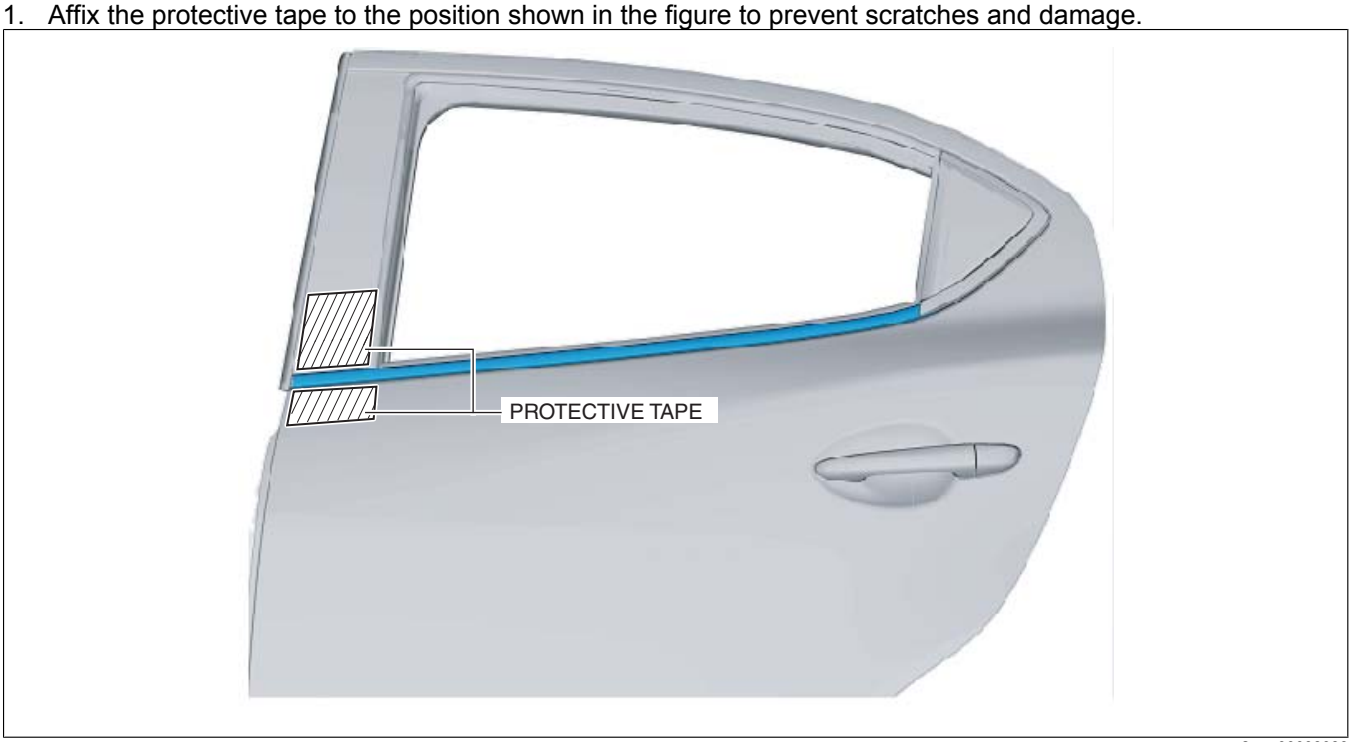

am2zzw00008983


2. Fully open the rear door glass.
3. Insert the remover tool in the position shown in the figure.

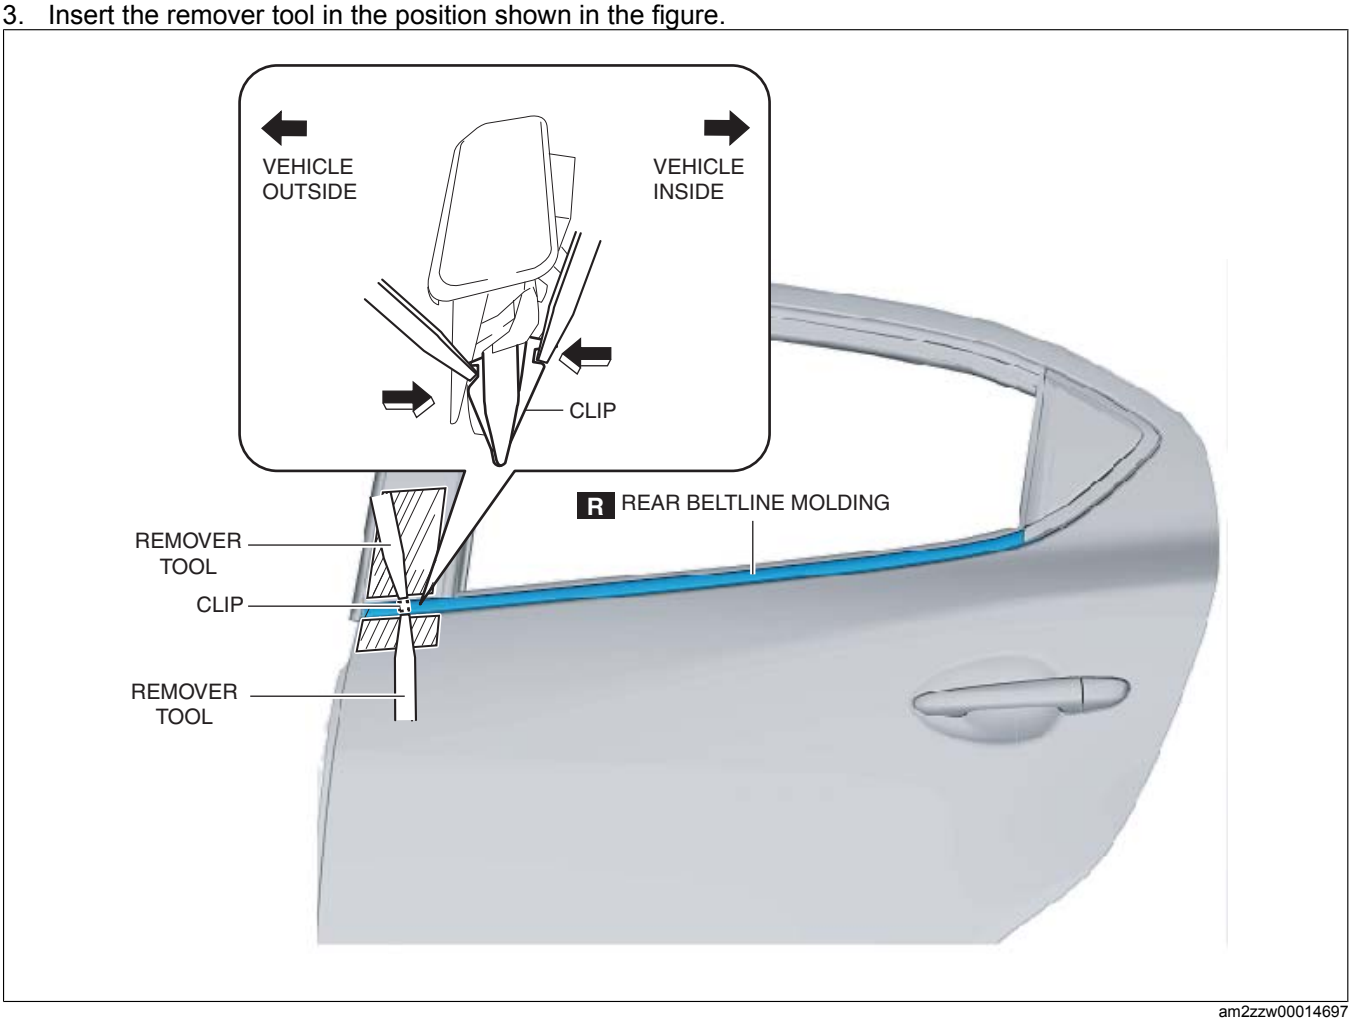

am2zzw00014697


4. Move the remover tool in the direction of the arrow shown in the figure and detach the clip of the rear beltline molding from the rear door panel.

5. Pull the rear beltline molding up in the direction of the arrow shown in the figure.

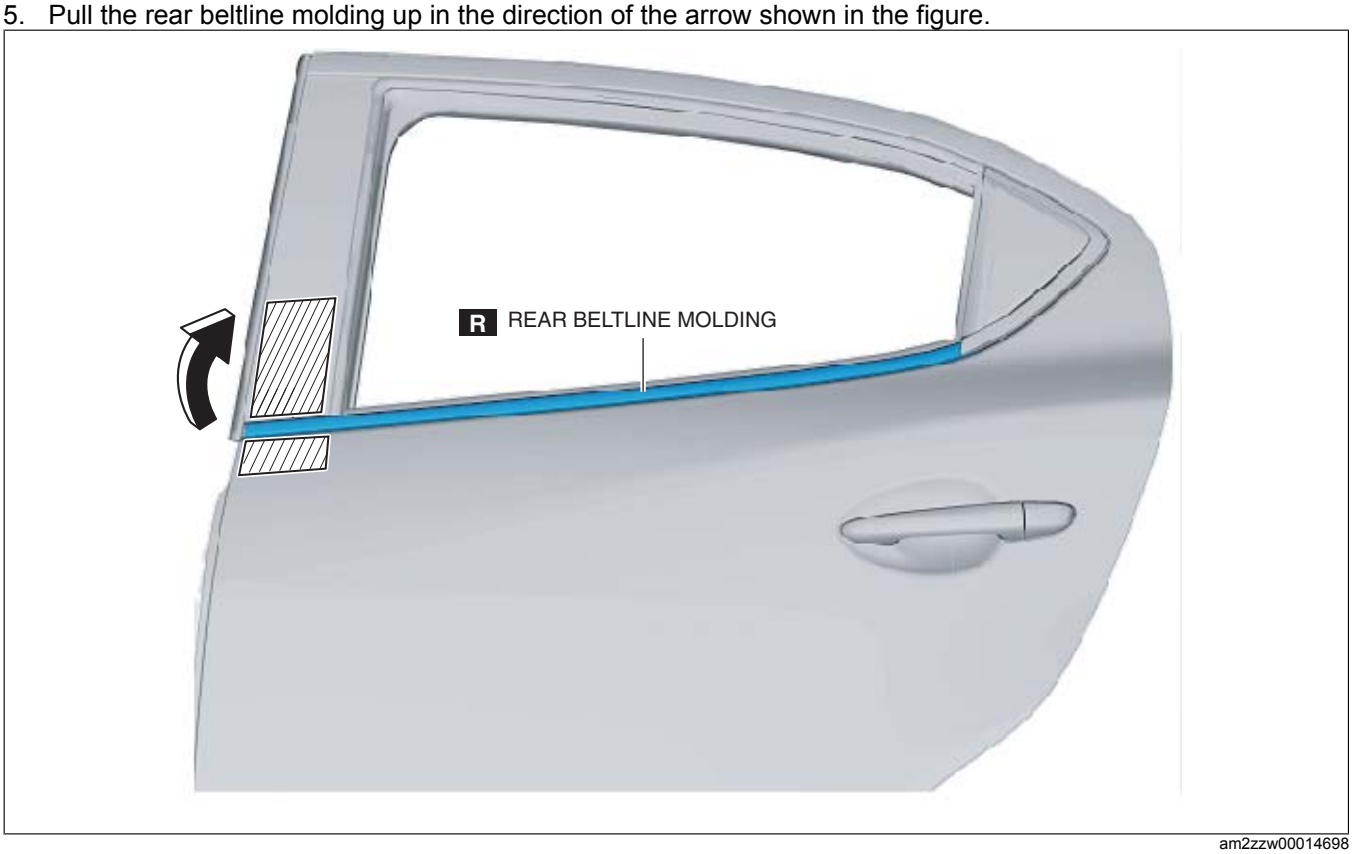


am2zzw00014698

6. Rotate the rear beltline molding in the direction of the arrows shown in the figure and detach the rear beltline molding libs from the rear door panel.

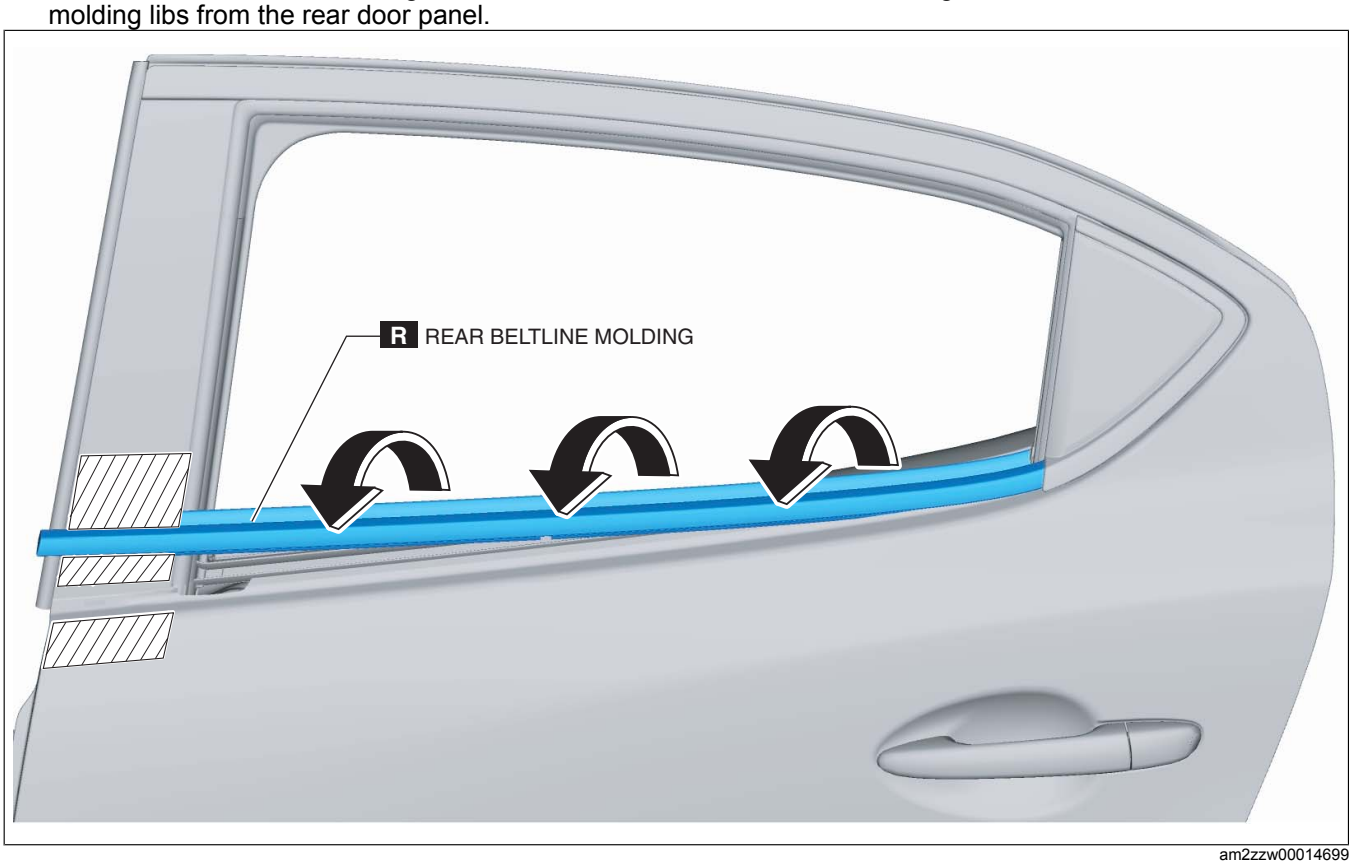

am2zzw00014699

7. Pull out the rear beltline molding in the direction of the arrow shown in the figure and remove it.

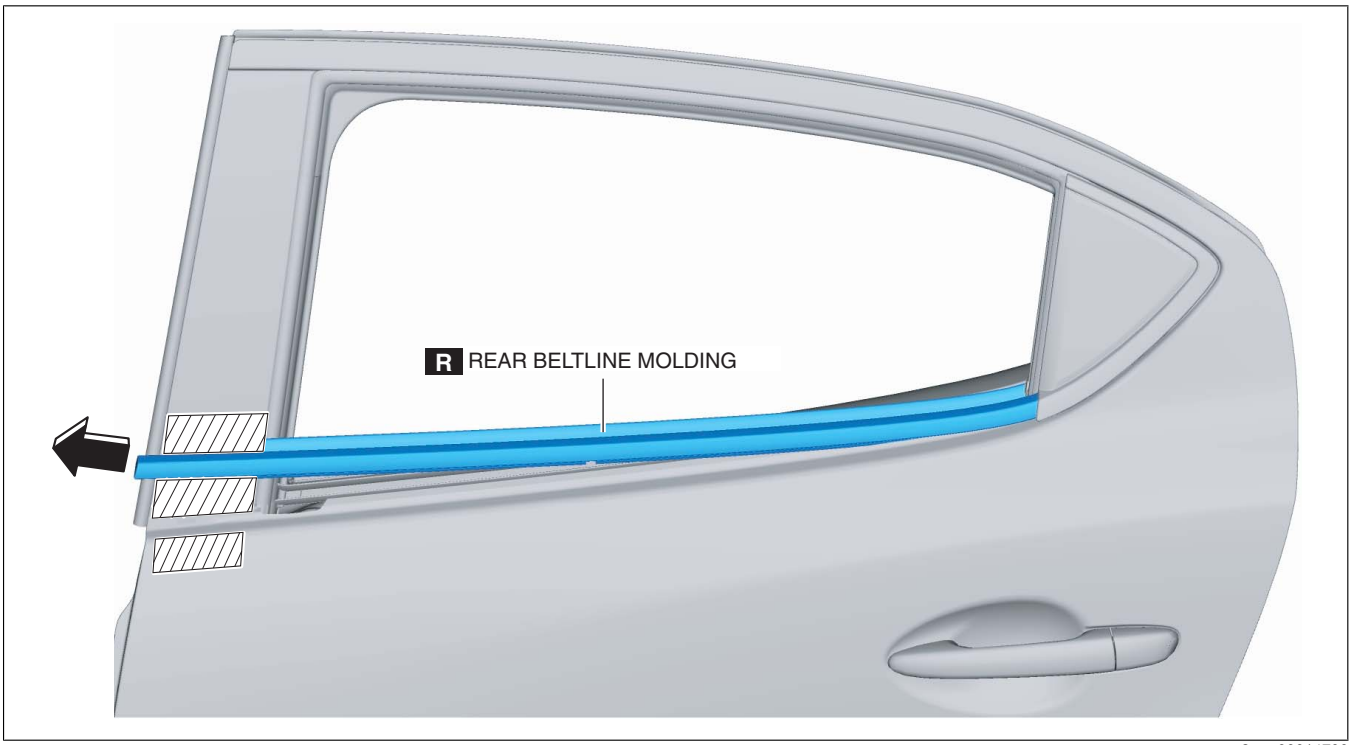

am2zzw00014700

8. Install in the reverse order of removal.