
FRONT BELTLINE MOLDING REMOVAL/INSTALLATION


id091600804800

1. Affix the protective tape to the position shown in the figure to prevent scratches and damage.

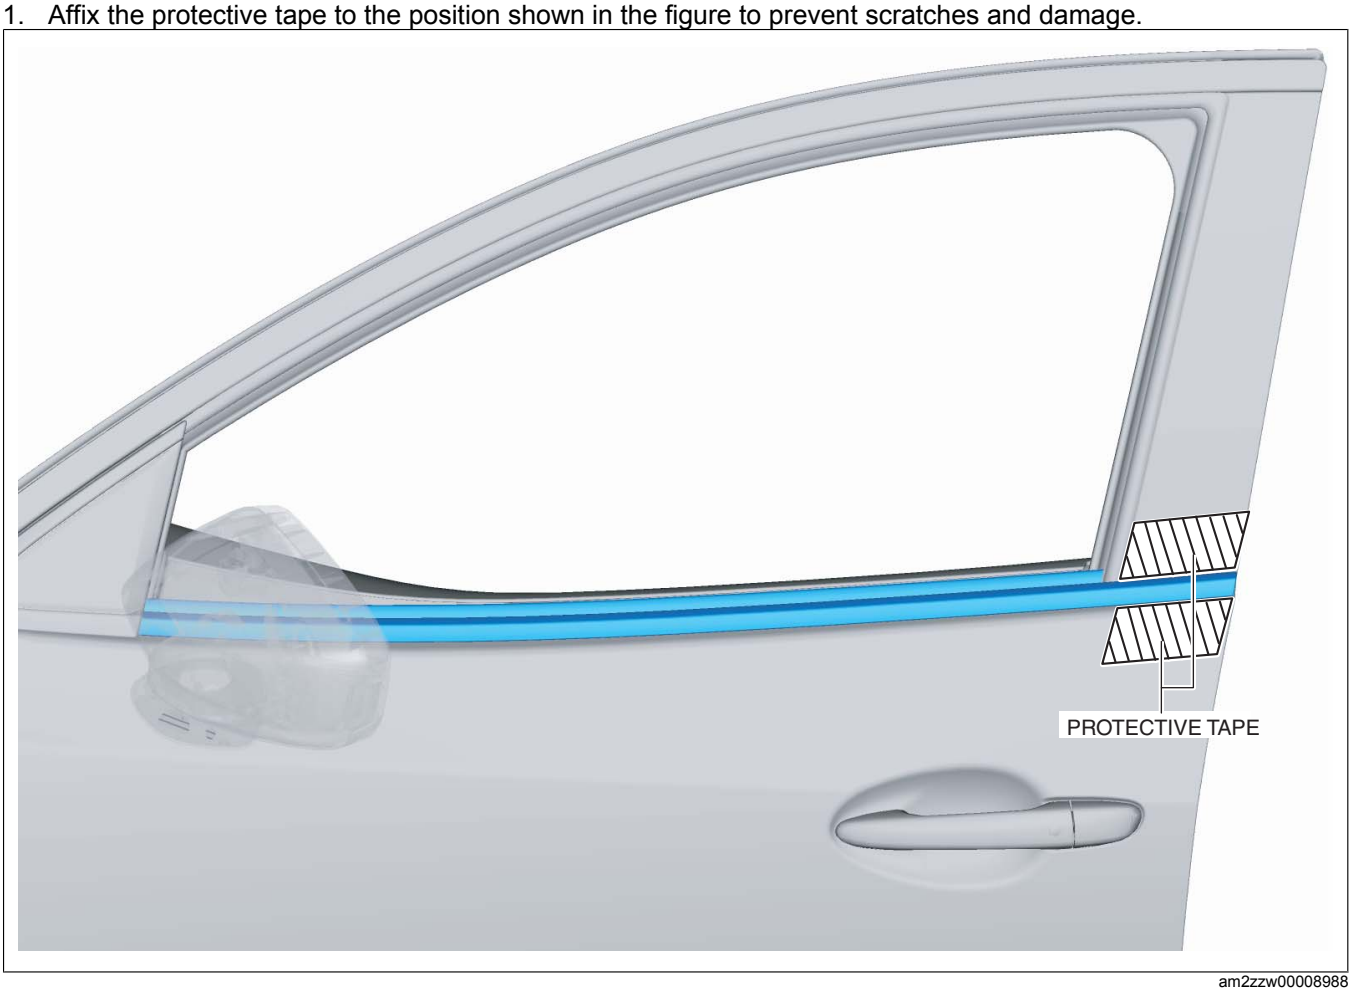


am2zzw00008988

2. Fully open the front door glass.
3. Insert the remover tool in the position shown in the figure.

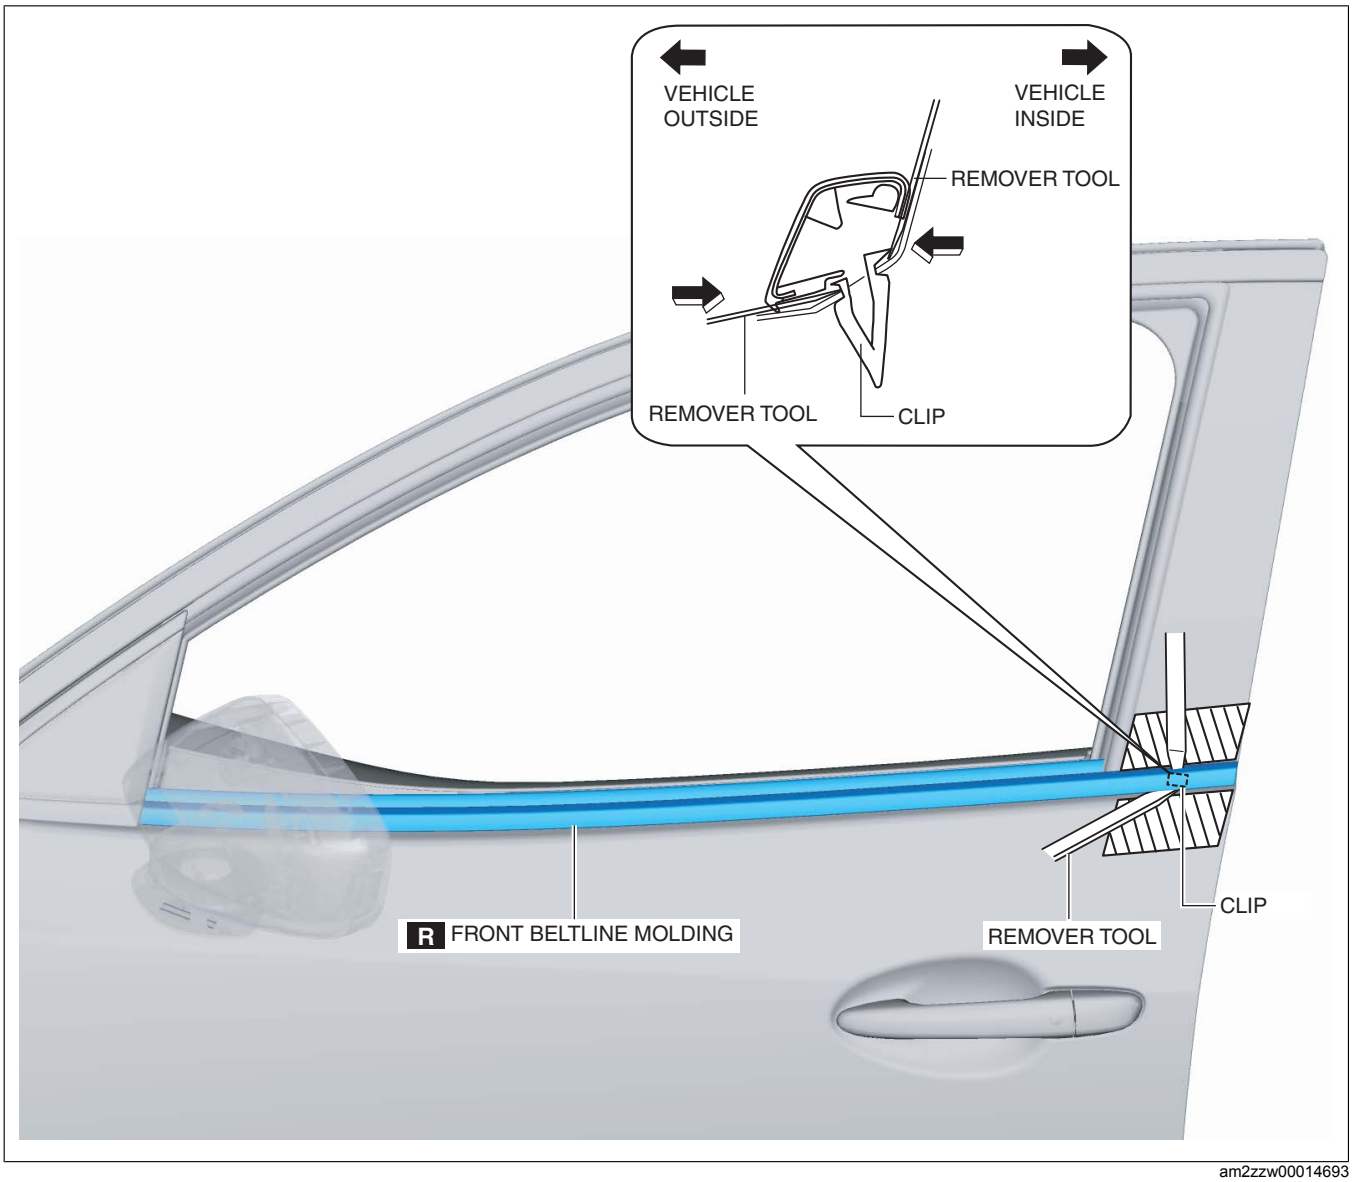


am2zzw00014693

4. Move the remover tool in the direction of the arrow shown in the figure and detach the clip of the front beltline molding from the front door panel.
5. Pull the front beltline molding up in the direction of the arrow shown in the figure.

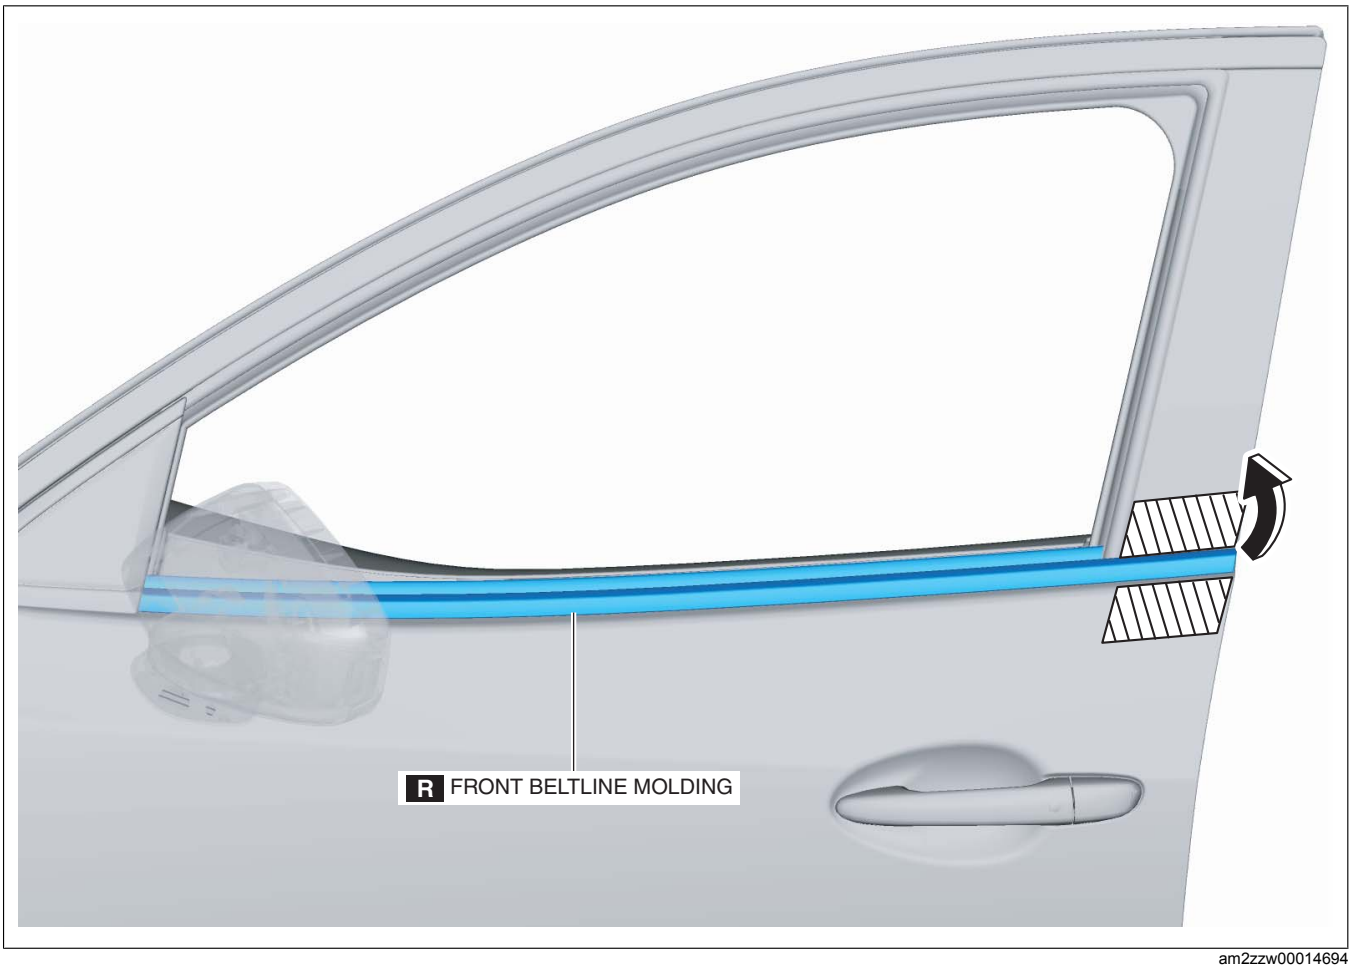


am2zzw00014694

6. Rotate the front beltline molding in the direction of the arrows shown in the figure and detach the front beltline molding libs from the front door panel.

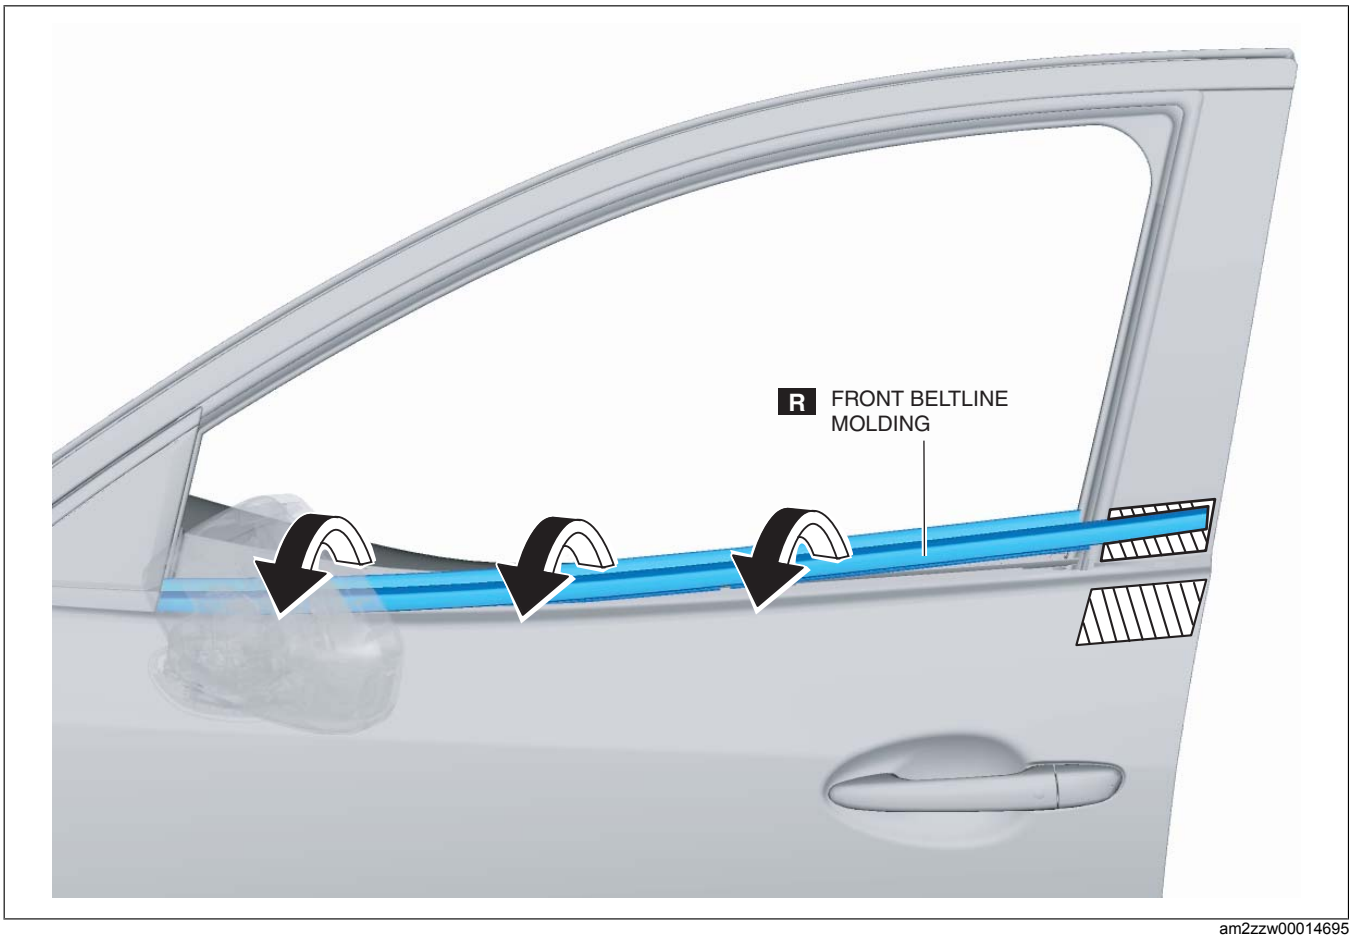

am2zzw00014695

7. Pull out the front beltline molding in the direction of the arrow shown in the figure and remove it.

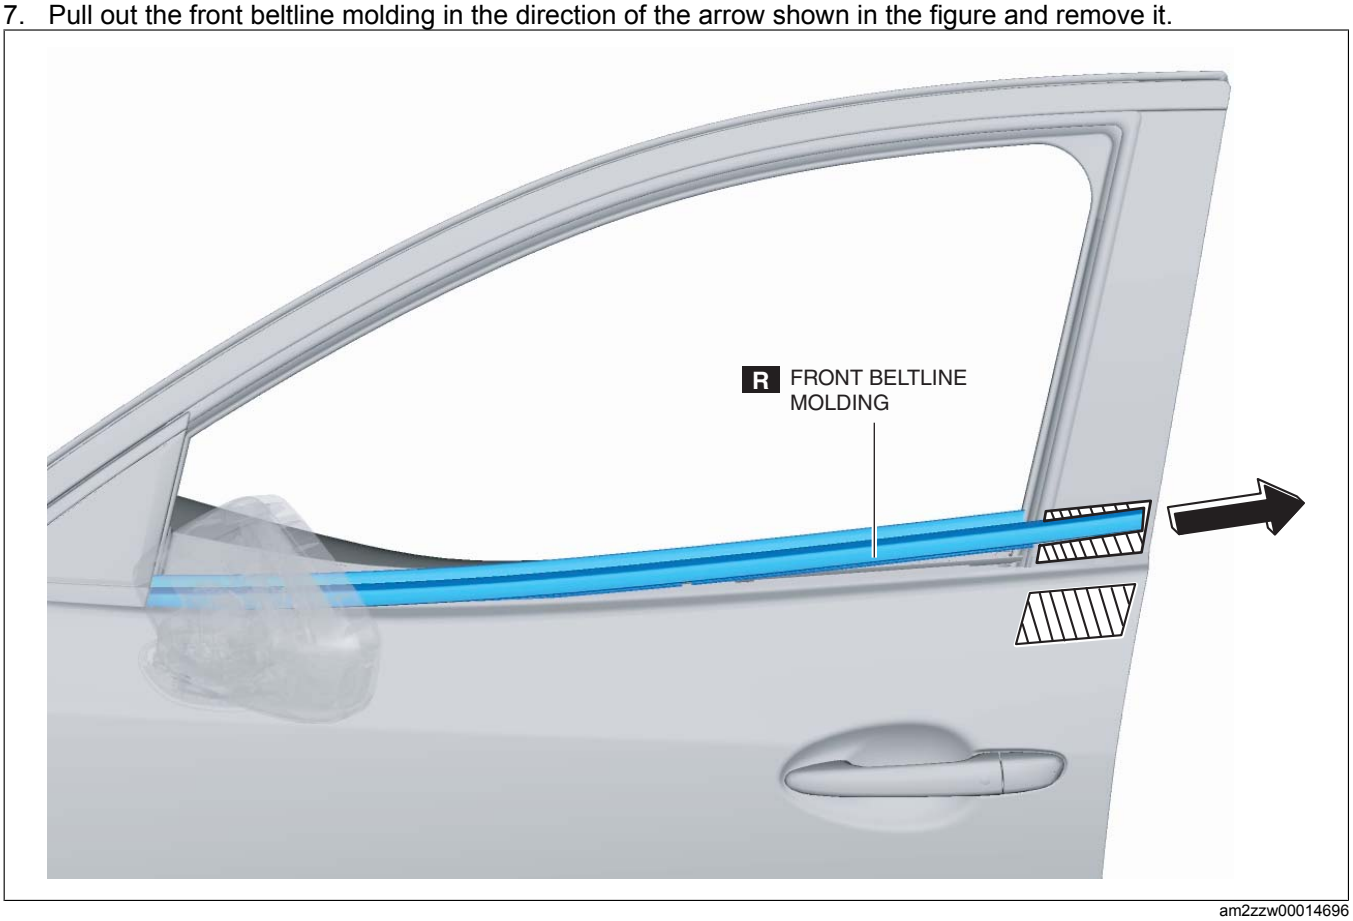

am2zzw00014696

8. Install in the reverse order of removal.