
DEFLECTOR REMOVAL/INSTALLATION

id091600900500


Front Deflector

1. Remove the fastener and screws.

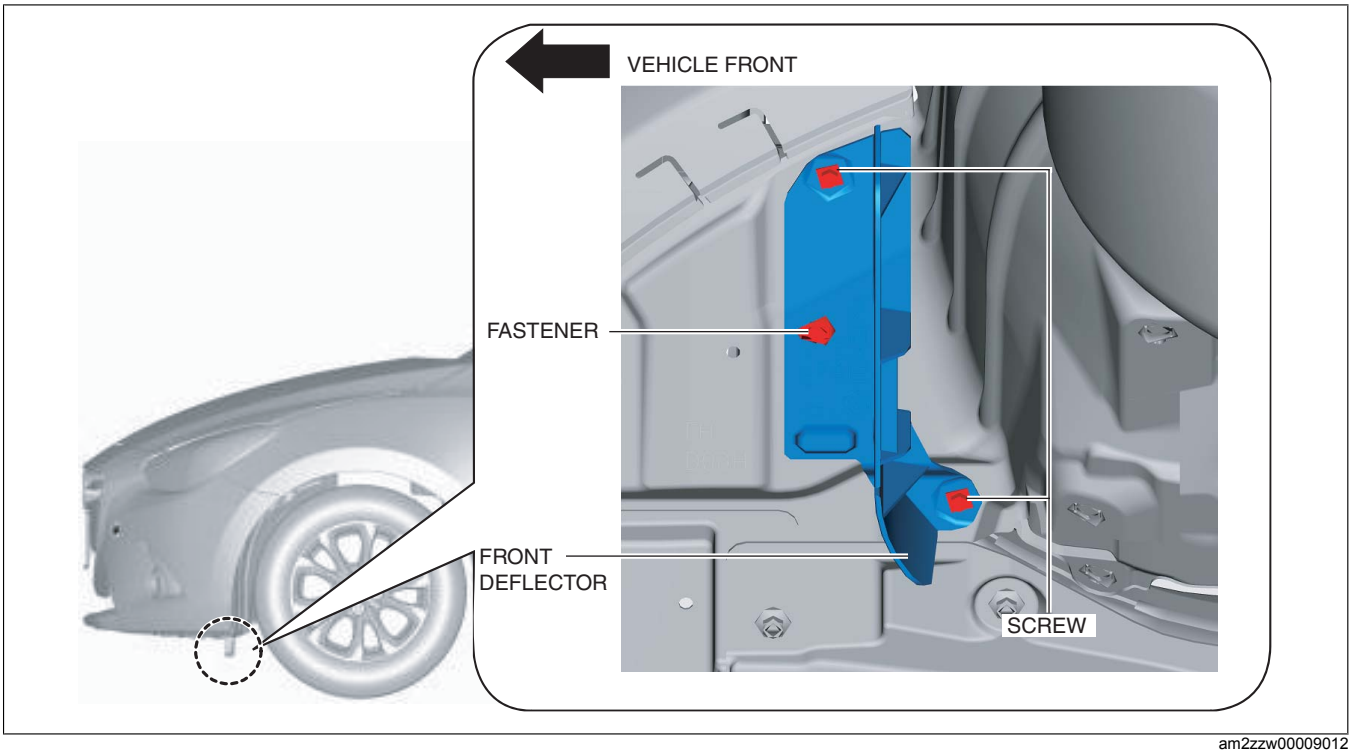

am2zzw00009012

2. Move the front deflector in the direction of the arrow shown in the figure and remove it while detaching the hook from the front mudguard.

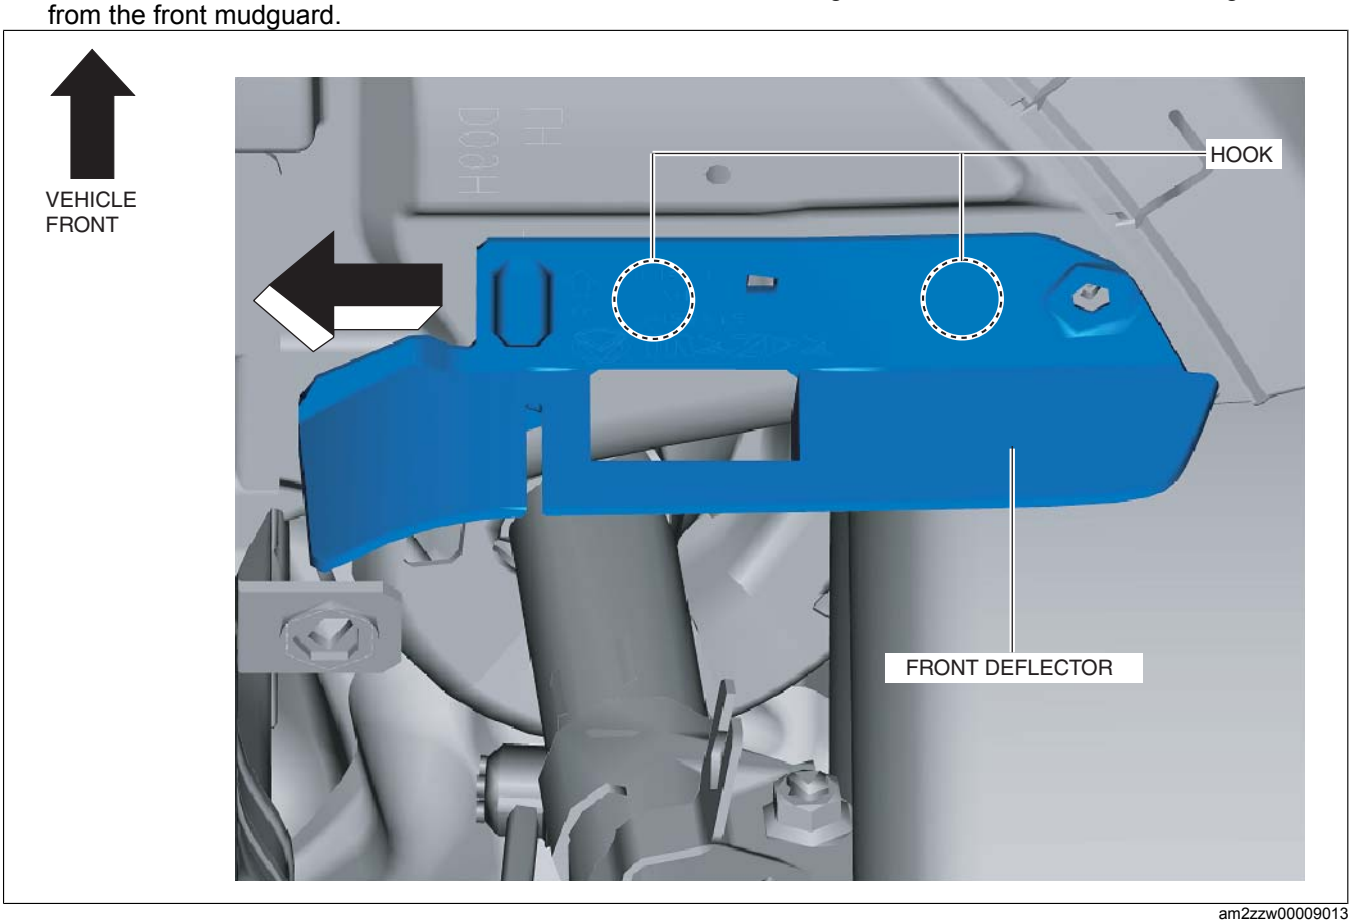


am2zzw00009013

3. Install in the reverse order of removal.


Rear Deflector

1. Remove the fasteners.

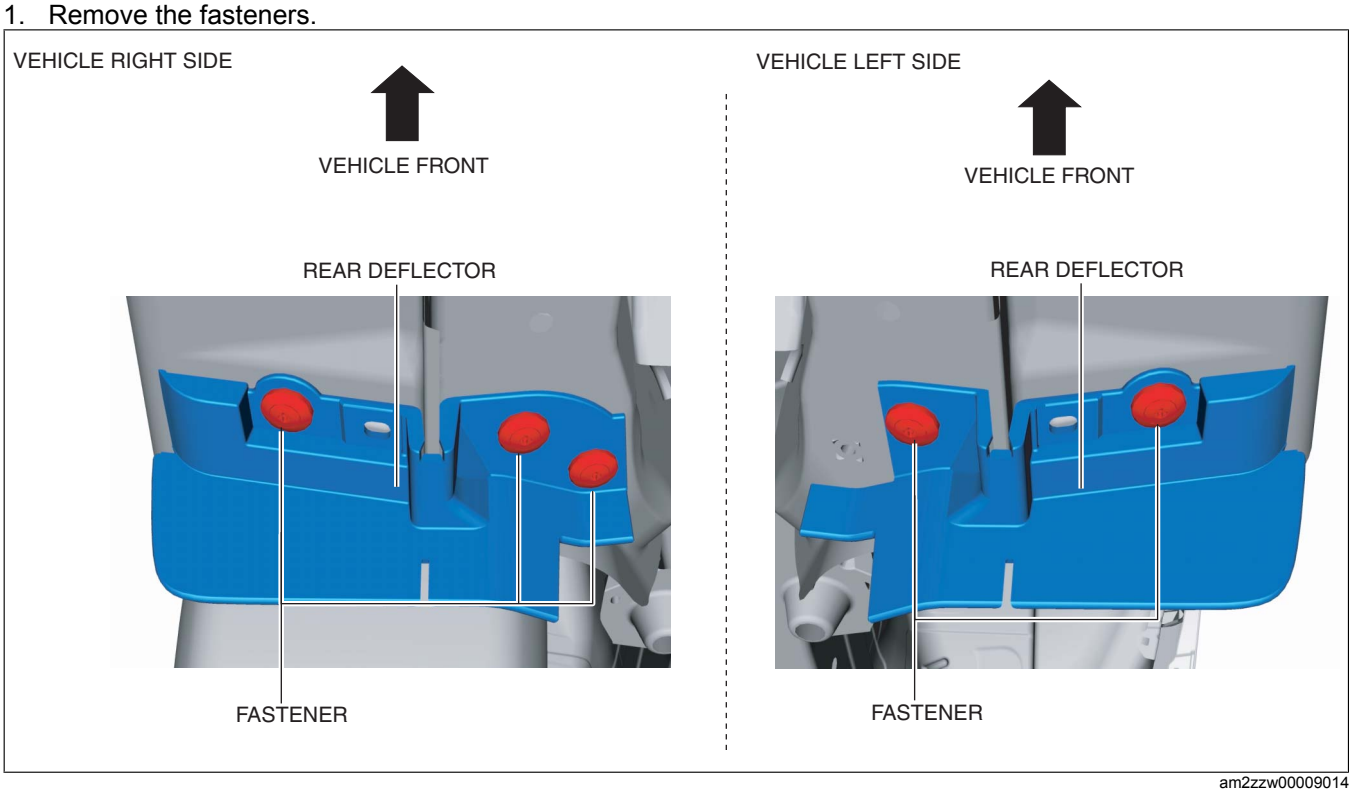

am2zzw00009014

2. Move the rear deflector in the direction of the arrow shown in the figure and remove it.

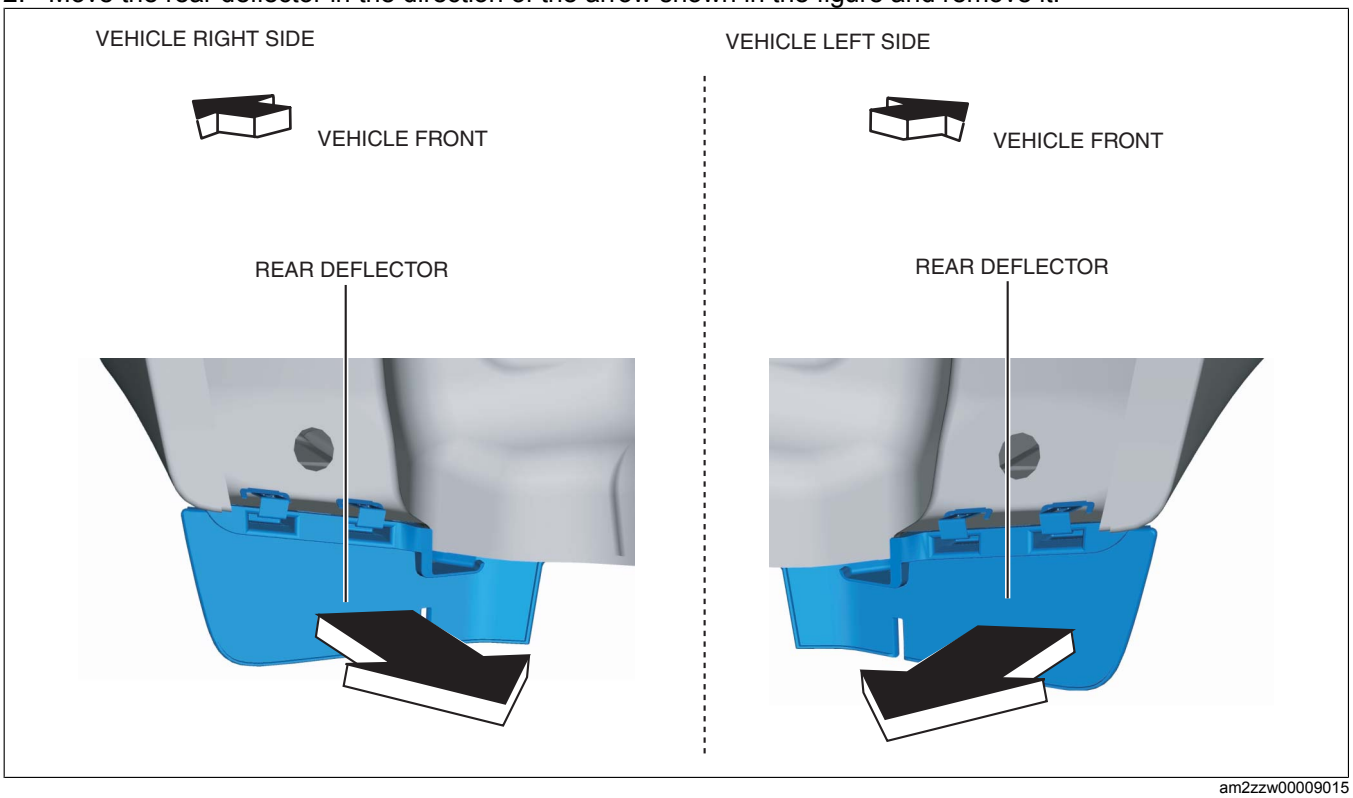

am2zzw00009015

3. Install in the reverse order of removal.